DELTALIGHT®

the
lighting
bible®


10


pure

lighting pleasure



Download the Lighting Bible® 10 app for mobile use.
More information at www.deltalight.com/LB10

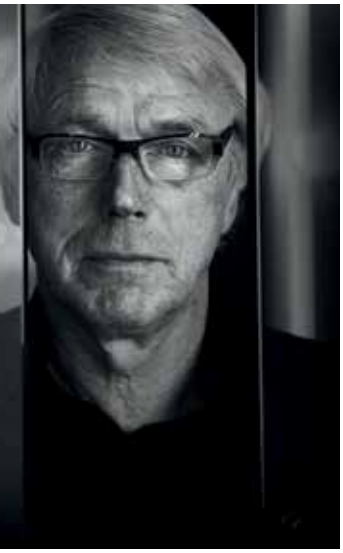

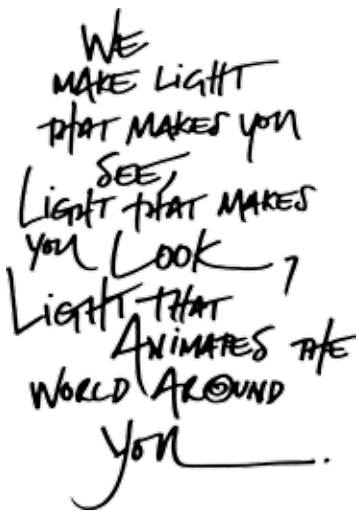

Paul Ameloot

Incorporated in 1987 by business manager and designer Paul Ameloot, today Delta Light® has developed to become a market leader and trendsetter in architectural lighting. Presenting innovative lighting designs, the company is recognised throughout the world for its subtle blend of ambiance, elegance, functionality, outstanding quality and design, both in interior and exterior lighting.

Headquarters

As well as office space and a production department, the architectural headquarters in Belgium includes a spacious showroom, warehouses, laboratories for in-house testing and certification, and a training centre, The House of Light®.


Global

Today, Delta Light® services its global clientele through a carefully chosen network of partners in over 120 countries. The success of Delta Light® relies on a continuous search for perfection and innovation, in product design as well as in manufacturing techniques, quality control and customer support. A key element in Delta Light's service approach is its extensive training program, with lighting experts demonstrating the latest installations methods, industry trends and product developments.

Services

Each project requires a customized approach, as such Delta Light® distinguishes itself with an exceptional package of services and design tools. Via a team of in-house lighting experts spread throughout its network, each Delta Light® office is able to provide its clients with detailed lighting studies and expert product knowledge, helping architects and professional users worldwide to make light shine to the best possible effect.



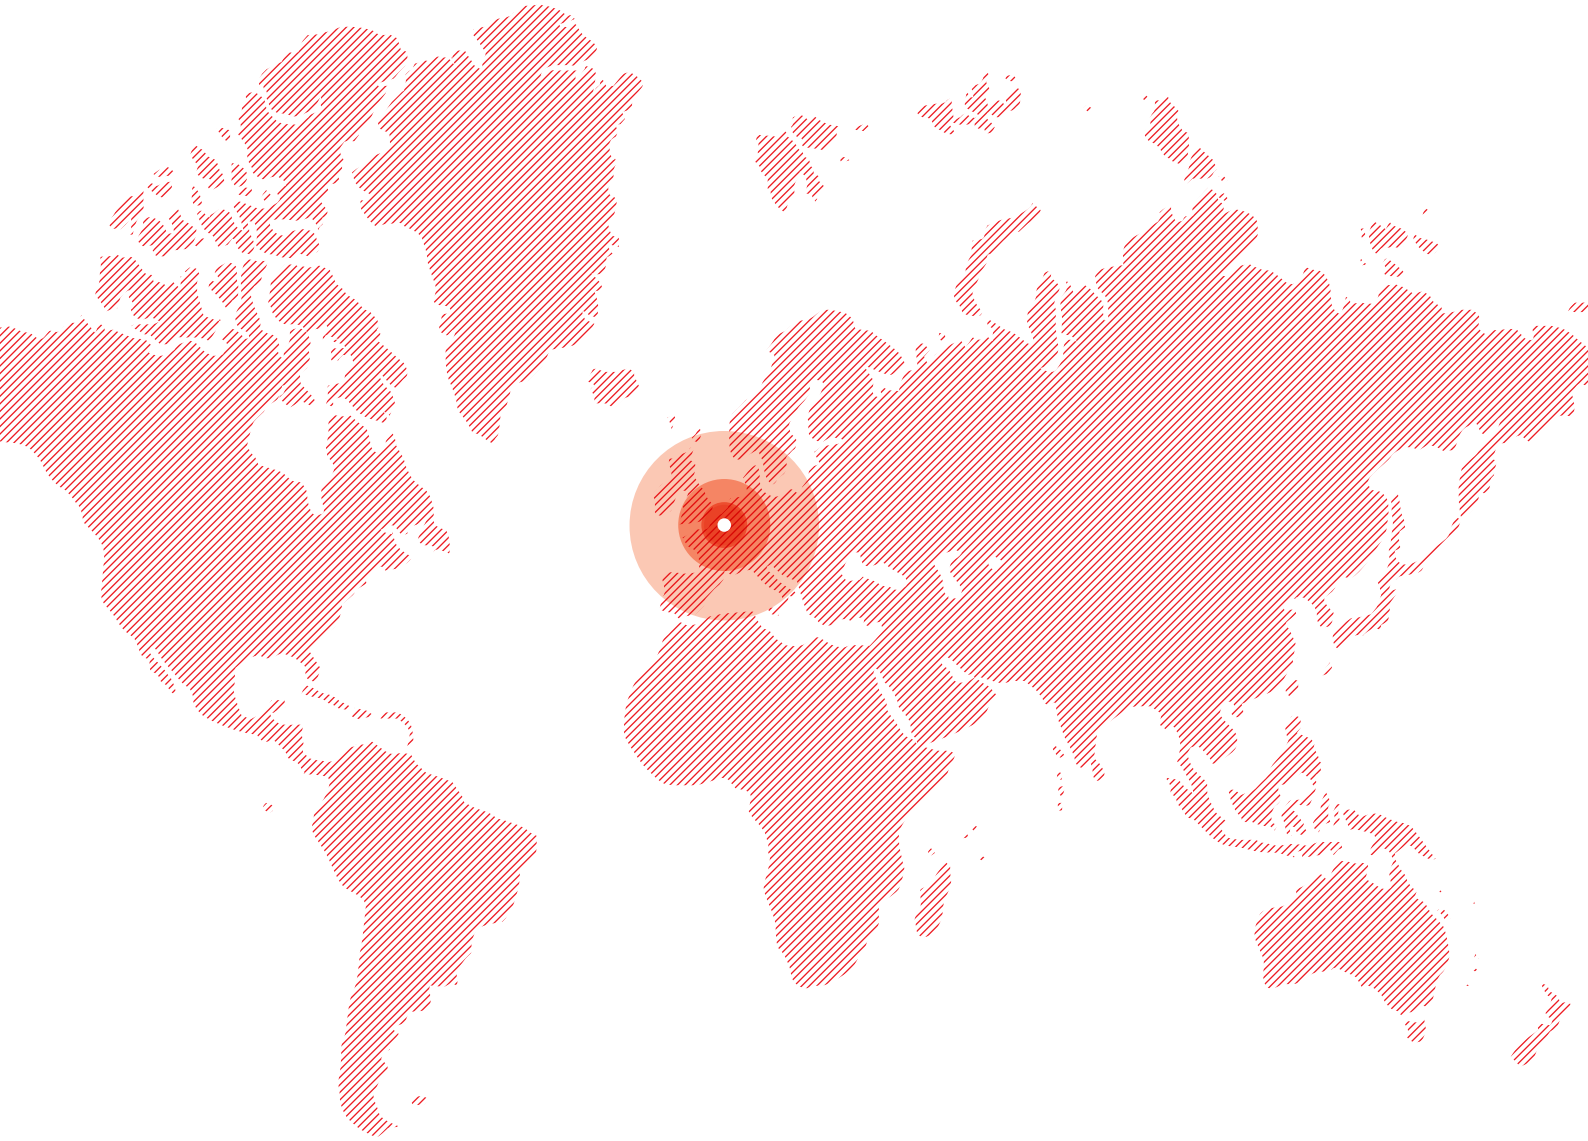

The future

Delta Light's aim for the future is on further refining its product portfolio and building brand value on a global scale, with imagination, originality and creativity as top priorities, aiming to offer people the products they will need tomorrow. Quality, innovation, sustainability and service have been the key values of the company for the past two decades, and will always remain the foundations for every next step. New materials, new technologies, revolutionary designs... never leave Delta Light® out of your sight.

Eco

Delta Light® realizes that its business activities are associated with responsibility for ecological awareness, health and sustainability, and handles these issues as a priority. Delta Light® operates according to the principle that the company - as lighting manufacturers - have an obligation to show its best endeavours to preserve the environment, within the context of its business, through the company's environmental management and by working in harmony with suppliers, clients, partners and employees.







welcome to our world

In-house design

An essential tribute in Delta Light's creative process is the extensive in-house design, development, testing, engineering and manufacturing of all products. This enables the company to realize its short idea-to-market philosophy, resulting in extensive new collections on a very regular basis.

Design Awards


Delta Light's extensive R&D team is constantly on the look-out for the trends of the future, both in terms of design and use of materials, without losing sight for the power of imagination. Its creative statement is confirmed by the opinion of several expert panels, resulting in a number of prestigious awards such as IF Design Award, Good Design Award, Red Dot Design Award and many others.

An important feature in Delta Light's creative process is the use of state of the art development techniques. The intensive use of 3D printing, early stage FMEA (Failure Mode and Effect analysis) and in-house testing result in a fast, cost effective and first time right development process.







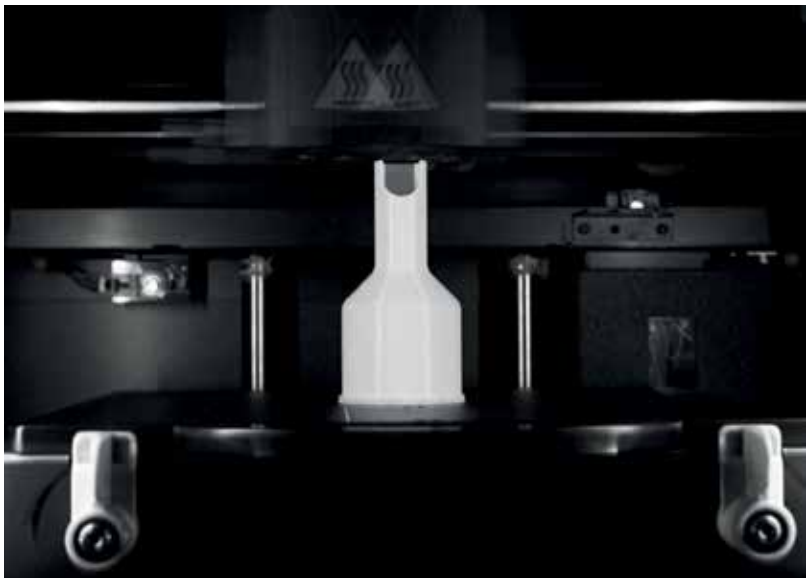

Quality & testing

Throughout the entire production process Delta Light distinguishes itself by handling the strictest quality parameters, to ensure products and services are designed and produced to exceed customer requirements. Every step in the production process has a routine quality procedure, covering both product quality and testing. As such, each product that leaves Delta Light, has been inspected and tested thoroughly, resulting in minimal returns and maximum efficiency.

Product quality and safety testing according to the international IEC standards is done in our company owned accredited Delta Light Laboratory. The close cooperation with our certifying partner SGS-CEBEC leads to CE, ENEC and CB certifications for Europe and IEC member countries (http://members.iecee.org/). The laboratory also covers the testing of products for the North American market by being certified as a level 4 laboratory for INTERTEK. This allows us to easily obtain the cETLus listing for our products.





LED: Focus on energy & efficiency

The continued advancement in LED technology provides new opportunities for energy-efficient lighting. Delta Light® plays a leading role in implementing this new technology, designing and manufacturing its own LED lamps, developing innovative LED products and tailor-made solutions. The true measure of cost goes beyond just the initial cost of purchase, but also includes intelligent lighting control, lifetime, maintainability and operational costs. Combining extensive product knowledge with a vast range of energy efficient product solutions and industry specific experience, Delta Light® is able to guide you through a green, cost-effective and sustainable selection process - without compromising the quality of light.

REO

Delta Light's Reo LED technology guarantees a perfect balance between lighting quality and energy efficiency. Using carefully selected high performance leds ranging from 500 to 2000 lm, the Reo LED technology is implemented in various products throughout the collection, in both new design and longstanding classics.





Optical performance

Delta Light's team of LED engineers are on a continuous quest to match the company's credo for design with energy-efficiency and optimal quality of light. Through extensive in-house testing, advanced product development knowledge and continuous optimization of materials used, Delta Light® is able to provide architectural lighting which excels in optical performance, durability and efficiency. The collection enables designers to create different lighting scenes, from accentuation to ambient, wallwashing, endless light lines or open area lighting, selecting from an extensive range of beams, filters, lenses and other accessories.



Return on investment

Due to the massive energy reduction, minimal heat output, low maintenance and long lifespan, LEDs have proven to provide the best return on investment. Delta Light's LED lamps and luminaires were developed to set standards in watts consumed per square meter, while the company's extensive manufacturing abilities allow to focus on a high price/ quality ratio. A combination that facilitates quick ROI. Delta Light's team of experts is available to help you with ROI calculations for your projects.

service & solution driven

Residential



Building on its impeccable reputation as manufacturer of architectural lighting for homes, Delta Light® has grown to become a household name and trendsetter when it comes to lighting designs for commercial and professional environments.

Delta Light® has catered for some of the world's most well-known brands and architects, providing sophisticated and value adding lighting solutions. Ranging from retail to residential, office, public, showrooms to hospitality and landscape projects, small to very large scale, Delta Light® has the product range, experience and knowledge to meet the functional and aesthetic needs of your projects.

Each project requires a customized approach, as such Delta Light® distinguishes itself with an exceptional package of services and design tools. The global team works with all stakeholders involved to get the best possible result. Starting with lighting design services all the way down to the installation process and direction of lighting as a function of its environment. Be it for technical or application questions, performance and energy saving studies, a LEED assessment process, custom designs and made-to-measure solution, rendering or graphics needs, or any other lighting design related issue... Delta Light® provides a one-stop-shopping solution for your projects.



Hotel



Office

Hospitality



Public





Retail



Showroom

10 to look for in The Lighting Bible® 10




3. Eyecatching new shapes and materials to upgrade your project.



4. New levels in flexibility, both in movement as in lighting application.




7. More colour finishes than ever before, and brand-new colour options in the outdoor collection.

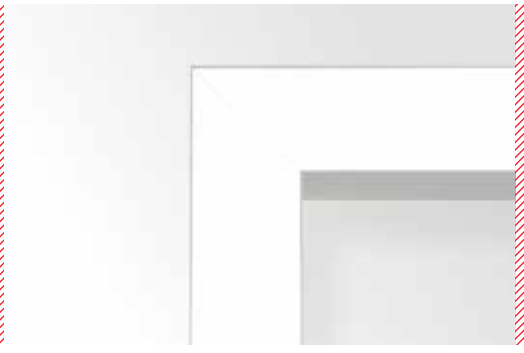

8. New made-to-measure led profile solutions with superior efficiency and light output results.



1. New generation of leds with same characteristics of many conventional light sources (up to 3000 lm).

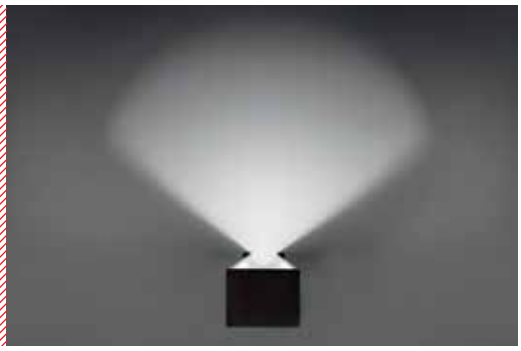


2. Led + lens combinations in the interior and exterior collections, resulting in intense light effects.



5. Use of unique segmented reflector providing superior reflection abilities and upgraded performance and efficiency.



6. The widest, most diverse and balanced exterior lighting collection in the history of the company.

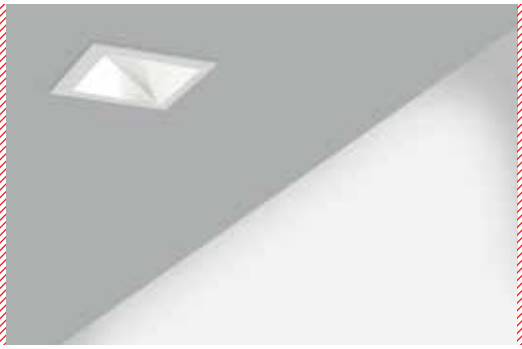

9. New wallwash and downlight solutions for both residential and commercial projects.



10. Extension of the very versatile Supernova range, resulting in track, recessed, surface mounted and stand-alone luminaires.





INTERIOR CEILING RECESSED INT 4

INTERIOR CEILING SURFACE INT 220

INTERIOR WALL RECESSED INT 426

INTERIOR WALL SURFACE INT 446

INTERIOR STAND ALONE INT 510

INTERIOR TRACK LIGHTING t INT 528

PROFILES p PRO 4

EXTERIOR CEILING RECESSED EXT 4

EXTERIOR CEILING SURFACE EXT 18

EXTERIOR WALL RECESSED EXT 30

EXTERIOR WALL SURFACE EXT 42

EXTERIOR FLOOR RECESSED EXT 96


EXTERIOR FLOOR SURFACE EXT 118

TECHNICAL INFO tech TEC 2

INDEX index IND 2

INTERIOR
CEILING RECESSED

Delta Light offers a very extensive range of ceiling recessed lighting solutions for a wide range of ceiling conditions. Be it for general lighting, wall wash, accent, flood or diffused lighting, all recessed luminaires are designed to combine the light source with the best optics, reflectors and lenses to combine light quality and energy efficiency, helping you to apply the best lighting solutions for the intended purpose of the space.

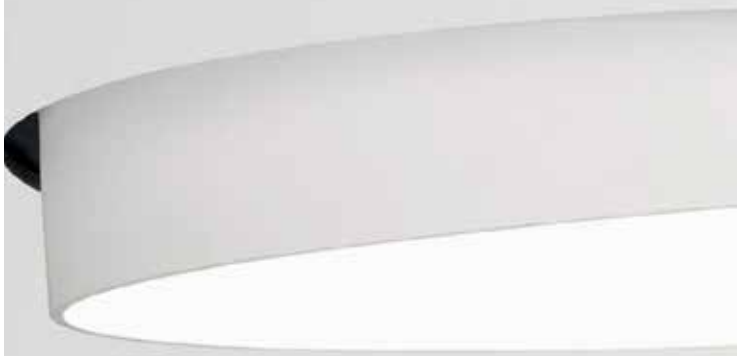





TWEETER
INT 8



DIRO
INT 34



DEEP RINGO S
INT 69



DEEP IRIS
INT 78



ULTRA SPY
INT 89



OREO
INT 19




GRAND DIRO
INT 50



RINGO
INT 72



LEDS SWING
INT 78



HOLE IN ONE S
INT 93



REO
INT 21



RODI
INT 58



CIRCLE
INT 73



MZ 35
INT 79



HOLE IN ONE R
INT 93



REO S
INT 26




RODI S
INT 63



CIRCLE S
INT 73




RB 35/50
INT 79



MINI CARREE
INT 101



MINI DIRO
INT 33



C-MAX
INT 65



LUX
INT 77



YOU-TURN
INT 81



CARREE
INT 102



MINI DIRO II
INT 33



DEEP RINGO
INT 66



LUXOR
INT 77



ULTRA IN TRIMLESS
INT 89



GRAND CARREE
INT 119



MINIGRID IN
INT 125



DOWNFORCE R
INT 197



SUPERNOVA
INT 213



GRID IN
INT 147



DOWNFORCE S
INT 199




MICROLINE 50 1154
INT 218



MAESTRO R
INT 184



CIRCA
INT 203



B-LINER 70 430
INT 219



MAESTRO S
INT 185




SUPERNOVA XS RECESSED
INT 207



HEADLINER 95 1154
INT 219



STREAMER W
INT 188



SUPERNOVA TRIMLESS
INT 209



STREAMER
INT 192



SUPERNOVA SEMI
INT 211


B-LINER 70 430	INT 219
CARREE	INT 102
CIRCA	INT 203
CIRCLE	INT 73
CIRCLE S	INT 73
C-MAX	INT 65
DEEP IRIS	INT 78
DEEP RINGO	INT 66
DEEP RINGO S	INT 69
DIRO	INT 34
DOWNFORCE R	INT 197
DOWNFORCE S	INT 199
GRAND CARREE	INT 119
GRAND DIRO	INT 50
GRID IN	INT 147
HEADLINER 95 1154	INT 219
HOLE IN ONE R	INT 93
HOLE IN ONE S	INT 93
LEDS SWING	INT 78
LUX	INT 77
LUXOR	INT 77
MAESTRO R	INT 184
MAESTRO S	INT 185
MICROLINE 50 1154	INT 218
MINI CARREE	INT 101
MINI DIRO	INT 33
MINI DIRO II	INT 33
MINIGRID IN	INT 125
MZ35	INT 79
OREO	INT 19
RB 35/50	INT 79
REO	INT 21
REO S	INT 26
RINGO	INT 72
RODI	INT 58
RODI S	INT 63
STREAMER	INT 192
STREAMER W	INT 188
SUPERNOVA	INT 213
SUPERNOVA SEMI	INT 211
SUPERNOVA TRIMLESS	INT 209
SUPERNOVA XS RECESSED	INT 207
TWEETER	INT 8
ULTRA IN TRIMLESS	INT 89
ULTRA SPY	INT 89
YOU-TURN	INT 81

FULL INFO / PAG TEC

Requirements

MOUNTING KIT TWEETER TRIMLESS
202 15 61 971

152 x 100 max.25

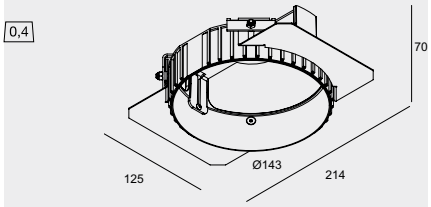


FULL INFO / PAG TEC

Options


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21


Tweeter Trimless



new led

Tweeter Trimless Reo

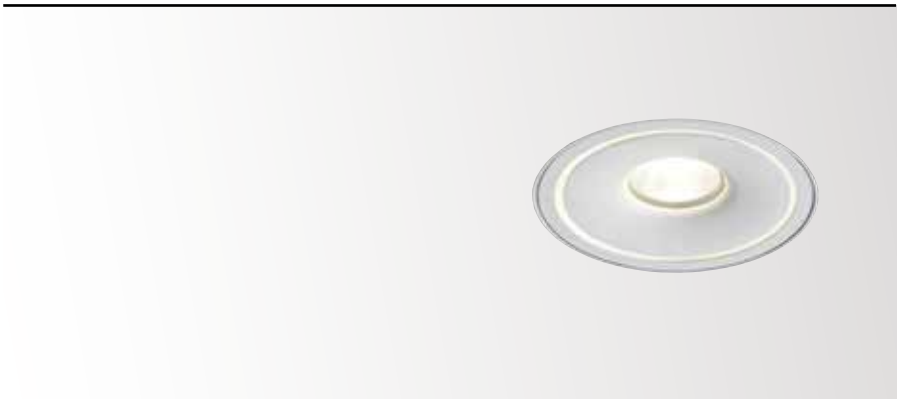



Ø KIT x 100

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm (7W) 920 lm (10W)	580 lm (7W) 810 lm (10W)
REFLECTOR FL-33°	**TWEETER TRIMLESS REO 3033 ◇** **206 21 28122 ◇** ◇ = B-W / W-W	**TWEETER TRIMLESS REO 3033-9 ◇** **206 21 29122 ◇** ◇ = B-W / W-W
REFLECTOR WFL-50°	**TWEETER TRIMLESS REO 3050 ◇** **206 21 28132 ◇** ◇ = B-W / W-W	**TWEETER TRIMLESS REO 3050-9 ◇** **206 21 29132 ◇** ◇ = B-W / W-W
2700K	620 lm (7W) 865 lm (10W)	525 lm (7W) 735 lm (10W)
REFLECTOR FL-33°	**TWEETER TRIMLESS REO 2733 ◇** **206 21 28123 ◇** ◇ = B-W / W-W	**TWEETER TRIMLESS REO 2733-9 ◇** **206 21 29123 ◇** ◇ = B-W / W-W
REFLECTOR WFL-50°	**TWEETER TRIMLESS REO 2750 ◇** **206 21 28133 ◇** ◇ = B-W / W-W	**TWEETER TRIMLESS REO 2750-9 ◇** **206 21 29133 ◇** ◇ = B-W / W-W

ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,7 IP20 IP23

REQUIREMENTS
MOUNTING KIT TWEETER TRIMLESS
202 15 61 971

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

PATENTED EX-CENTRIC ROTATION SYSTEM®


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali



new

Tweeter Trimless 111





Ø KIT x 100

TWEETER TRIMLESS 111 ◇
206 21 11 ◇
◇ = B-B / B-W / W-W
ADJUSTABLE 0-45° / 355°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W

CE 0,6 IP20 1,0

REQUIREMENTS
MOUNTING KIT TWEETER TRIMLESS
202 15 61 971

OPTIONS
TRANSFO

PATENTED EX-CENTRIC ROTATION SYSTEM®

top design award 2013
reddot design award winner 2013
interior innovation award 2013 Winner


FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 118 **202 56 99 01**	280 x 280	220 x 220

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37


Tweeter ST D



Fixation S1

Tweeter ST D Reo





160 x 115 max.25

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm (7W) 920 lm (10W)	580 lm (7W) 810 lm (10W)
REFLECTOR FL-33°	**TWEETER ST D REO 3033 S1** ◇ **206 11 28122** ◇ ◇ = W-W	**TWEETER ST D REO 3033-9 S1** ◇ **206 11 29122** ◇ ◇ = W-W
REFLECTOR WFL-50°	**TWEETER ST D REO 3050 S1** ◇ **206 11 28132** ◇ ◇ = W-W	**TWEETER ST D REO 3050-9 S1** ◇ **206 11 29132** ◇ ◇ = W-W
2700K	620 lm (7W) 865 lm (10W)	525 lm (7W) 735 lm (10W)
REFLECTOR FL-33°	**TWEETER ST D REO 2733 S1** ◇ **206 11 28123** ◇ ◇ = W-W	**TWEETER ST D REO 2733-9 S1** ◇ **206 11 29123** ◇ ◇ = W-W
REFLECTOR WFL-50°	**TWEETER ST D REO 2750 S1** ◇ **206 11 28133** ◇ ◇ = W-W	**TWEETER ST D REO 2750-9 S1** ◇ **206 11 29133** ◇ ◇ = W-W

ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,9 IP20

OPTIONS
PLASTERKIT 118
LED POWER SUPPLY 350-500mA-DC / DIM


PATENTED EX-CENTRIC ROTATION SYSTEM®


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Tweeter ST D





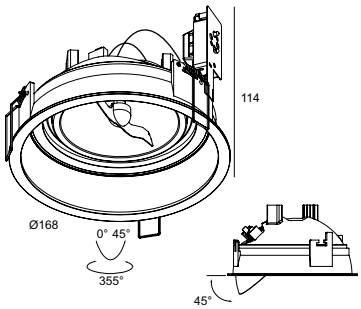

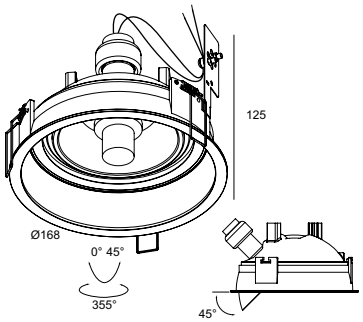

160 x 115 max.25

TWEETER ST D 111 ◇
206 11 11 ◇
◇ = W-B / W-W
ADJUSTABLE 0-45° / 355°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W

CE 0,8 IP20 1,0

OPTIONS
PLASTERKIT 118
TRANSFO

160 x 130 max.25

TWEETER ST D H111 ◇
206 11 88 ◇
◇ = W-B / W-W
ADJUSTABLE 0-45° / 355°
GX8.5 / EXCL.EVG
1 x HIR111-CE-P max.70W

CE 0,8 IP20 1,0

OPTIONS
PLASTERKIT 118
BALLASTSET HID


PATENTED EX-CENTRIC ROTATION SYSTEM®


www.deltalight.com/Tweeter








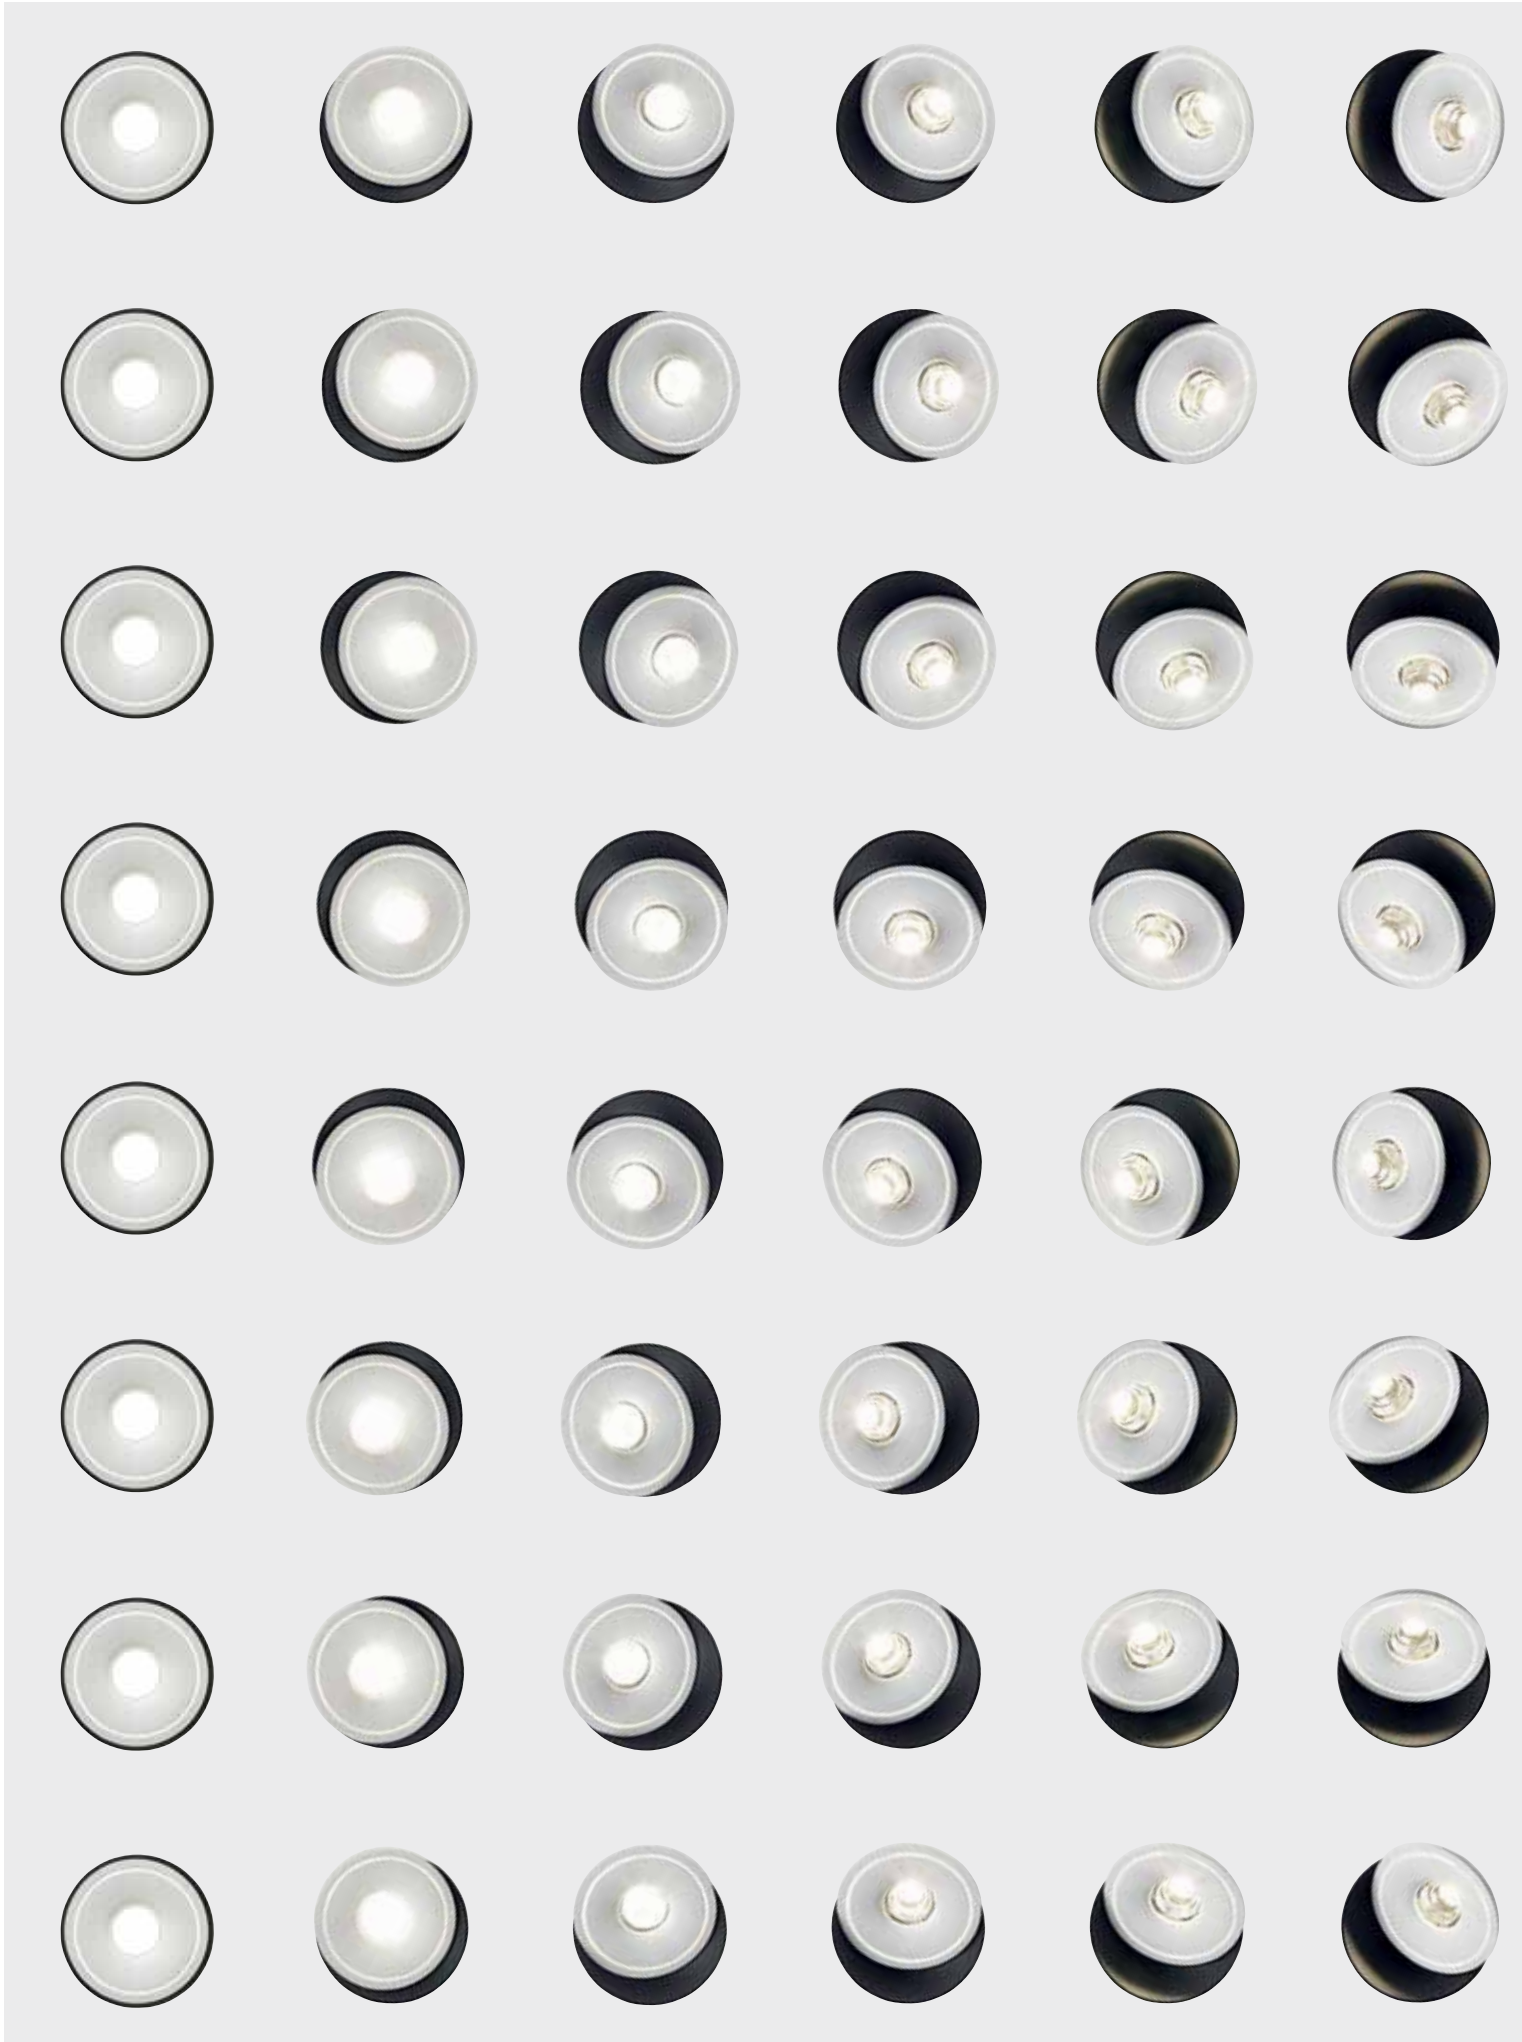

PATENT PENDING



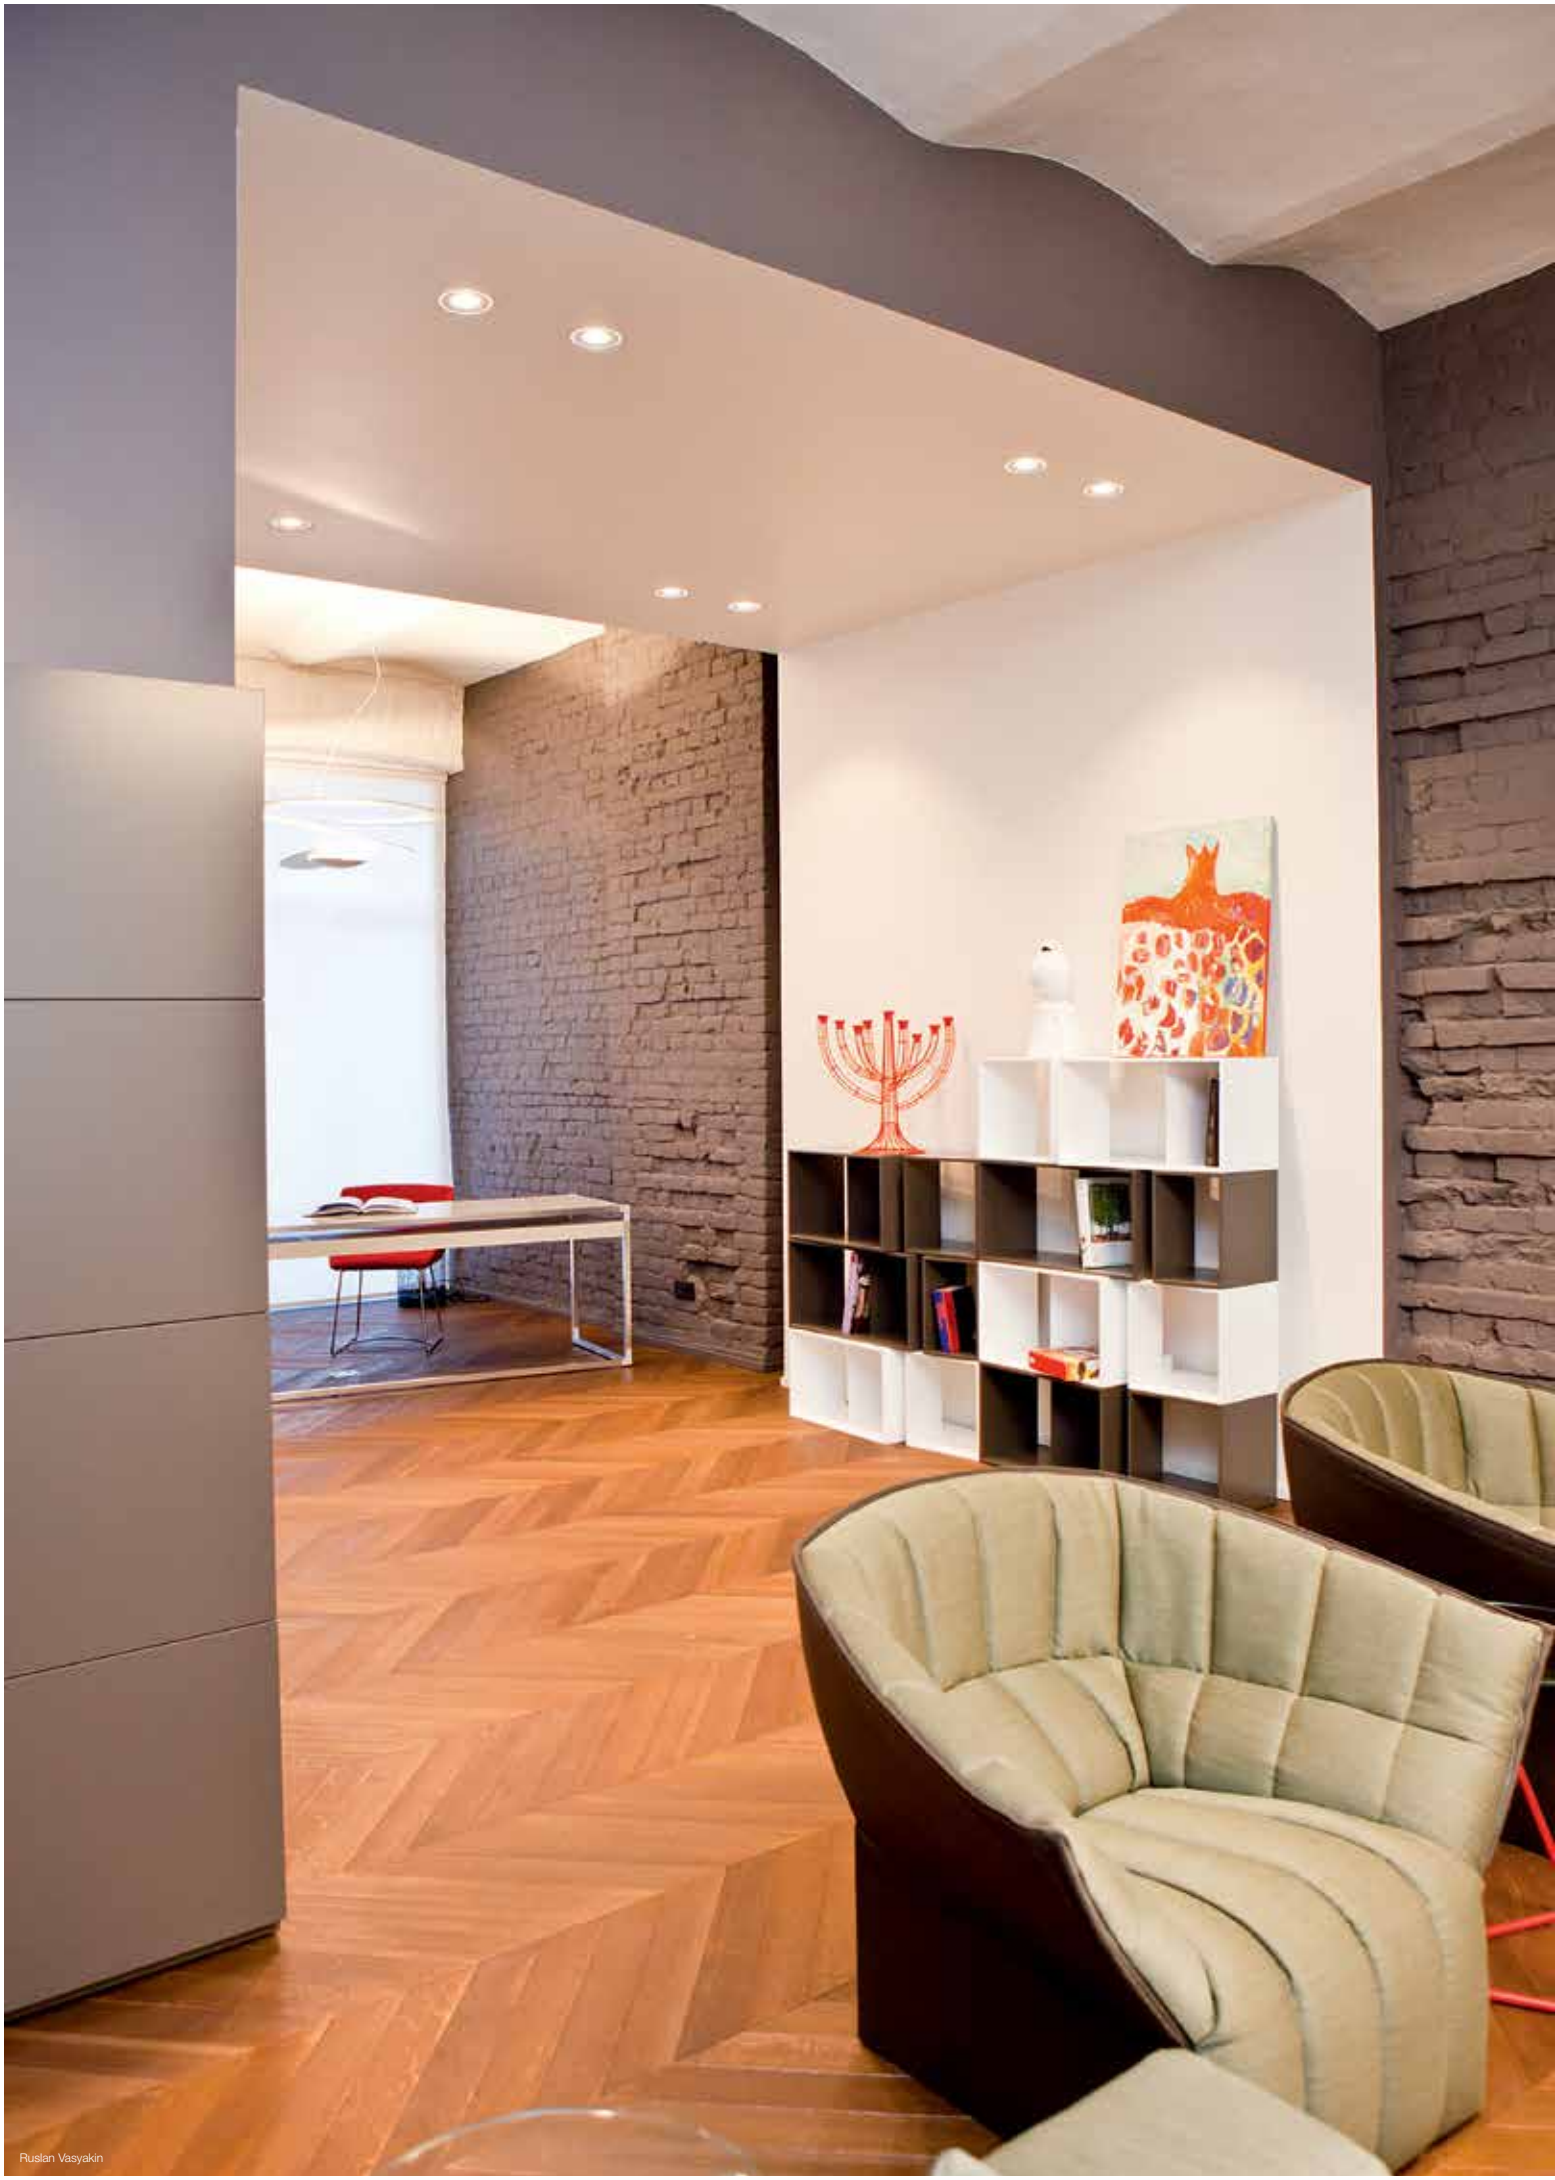

Ruslan Vasyakin


FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 170 **207 01 170**	230 x 230	100 x 220

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Fixation S1




new

led

Oreo





98 x 65 max.22

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**OREO 3033 S1** ◇ **206 06 28122** ◇ ◇ = W	**OREO 3033-9 S1** ◇ **206 06 29122** ◇ ◇ = W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**OREO 2733 S1** ◇ **206 06 28123** ◇ ◇ = W	**OREO 2733-9 S1** ◇ **206 06 29123** ◇ ◇ = W

FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC

IP20 IP23 IP20 IP20

OPTIONS
PLASTERKIT 170
LED POWER SUPPLY 350mA-DC / DIM

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali




FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 170 **207 01 170**	230 x 230	100 x 220

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Fixation S1




Fixation S2




DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Reo OK







	98 x 80 max.30		98 x 80	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K	750 lm		750 lm	
REFLECTOR FL-33°	**REO OK 4033 S1 ◇** **202 37 28124 ◇** ◇ = A / W		**REO OK 4033 S2 ◇** **202 372 28124 ◇** ◇ = A / W	
REFLECTOR WFL-50°	**REO OK 4050 S1 ◇** **202 37 28134 ◇** ◇ = A / W		**REO OK 4050 S2 ◇** **202 372 28134 ◇** ◇ = A / W	
3000K	660 lm	580 lm	660 lm	580 lm
REFLECTOR FL-33°	**REO OK 3033 S1 ◇** **202 37 28122 ◇** ◇ = A / W	**REO OK 3033-9 S1 ◇** **202 37 29122 ◇** ◇ = A / W	**REO OK 3033 S2 ◇** **202 372 28122 ◇** ◇ = A / W	**REO OK 3033-9 S2 ◇** **202 372 29122 ◇** ◇ = A / W
REFLECTOR WFL-50°	**REO OK 3050 S1 ◇** **202 37 28132 ◇** ◇ = A / W	**REO OK 3050-9 S1 ◇** **202 37 29132 ◇** ◇ = A / W	**REO OK 3050 S2 ◇** **202 372 28132 ◇** ◇ = A / W	**REO OK 3050-9 S2 ◇** **202 372 29132 ◇** ◇ = A / W
2700K	620 lm	525 lm	620 lm	525 lm
REFLECTOR FL-33°	**REO OK 2733 S1 ◇** **202 37 28123 ◇** ◇ = A / W	**REO OK 2733-9 S1 ◇** **202 37 29123 ◇** ◇ = A / W	**REO OK 2733 S2 ◇** **202 372 28123 ◇** ◇ = A / W	**REO OK 2733-9 S2 ◇** **202 372 29123 ◇** ◇ = A / W
REFLECTOR WFL-50°	**REO OK 2750 S1 ◇** **202 37 28133 ◇** ◇ = A / W	**REO OK 2750-9 S1 ◇** **202 37 29133 ◇** ◇ = A / W	**REO OK 2750 S2 ◇** **202 372 28133 ◇** ◇ = A / W	**REO OK 2750-9 S2 ◇** **202 372 29133 ◇** ◇ = A / W
	ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,4 IP20 IP23 IP20 IP20 OPTIONS PLASTERKIT 170 LED POWER SUPPLY 350mA-DC / DIM		ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,4 IP20 IP23 IP20 IP20 OPTIONS PLASTERKIT 170 LED POWER SUPPLY 350mA-DC / DIM	


FULL INFO / PAG TEC


Options


INSTALLATION		
PLASTERKIT 101 **202 11 19**	205 x 205	80 x 180

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Reo

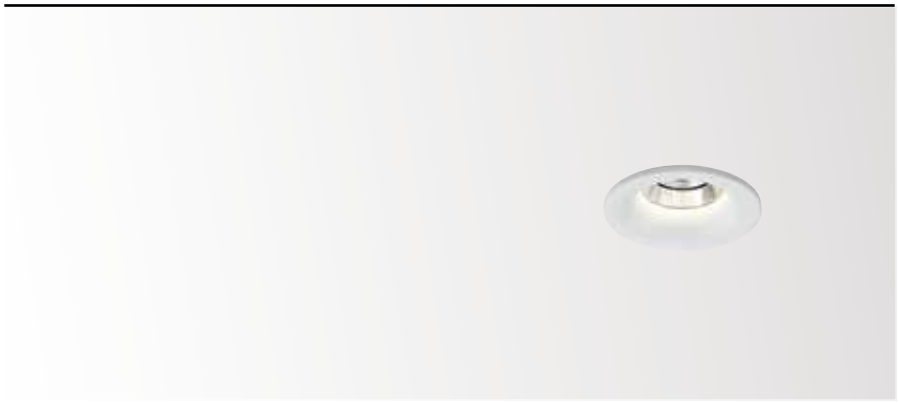








	76 x 55 / max.22		76 x 55	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K	750 lm		750 lm	
REFLECTOR FL-33°	**REO 4033 S1 ◇** **202 26 28124 ◇** ◇ = C / MMAT / W		**REO 4033 S2 ◇** **202 262 28124 ◇** ◇ = MMAT / W	
REFLECTOR WFL-50°	**REO 4050 S1 ◇** **202 26 28134 ◇** ◇ = C / MMAT / W		**REO 4050 S2 ◇** **202 262 28134 ◇** ◇ = MMAT / W	
3000K	660 lm	580 lm	660 lm	580 lm
REFLECTOR FL-33°	**REO 3033 S1 ◇** **202 26 28122 ◇** ◇ = C / MMAT / W	**REO 3033-9 S1 ◇** **202 26 29122 ◇** ◇ = C / MMAT / W	**REO 3033 S2 ◇** **202 262 28122 ◇** ◇ = MMAT / W	**REO 3033-9 S2 ◇** **202 262 29122 ◇** ◇ = MMAT / W
REFLECTOR WFL-50°	**REO 3050 S1 ◇** **202 26 28132 ◇** ◇ = C / MMAT / W	**REO 3050-9 S1 ◇** **202 26 29132 ◇** ◇ = C / MMAT / W	**REO 3050 S2 ◇** **202 262 28132 ◇** ◇ = MMAT / W	**REO 3050-9 S2 ◇** **202 262 29132 ◇** ◇ = MMAT / W
2700K	620 lm	525 lm	620 lm	525 lm
REFLECTOR FL-33°	**REO 2733 S1 ◇** **202 26 28123 ◇** ◇ = C / MMAT / W	**REO 2733-9 S1 ◇** **202 26 29123 ◇** ◇ = C / MMAT / W	**REO 2733 S2 ◇** **202 262 28123 ◇** ◇ = MMAT / W	**REO 2733-9 S2 ◇** **202 262 29123 ◇** ◇ = MMAT / W
REFLECTOR WFL-50°	**REO 2750 S1 ◇** **202 26 28133 ◇** ◇ = C / MMAT / W	**REO 2750-9 S1 ◇** **202 26 29133 ◇** ◇ = C / MMAT / W	**REO 2750 S2 ◇** **202 262 28133 ◇** ◇ = MMAT / W	**REO 2750-9 S2 ◇** **202 262 29133 ◇** ◇ = MMAT / W
	FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 101 LED POWER SUPPLY 350mA-DC / DIM		FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC IP20 IP43 IP20 IP20 OPTIONS LED POWER SUPPLY 350mA-DC / DIM	

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali



REO


REO HD (Half Deep)


REO D (Deep)


Reo HD






Reo D






	76 x 65 max.22		76 x 90 max.22	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K	750 lm		750 lm	
REFLECTOR FL-33°	**REO HD 4033 S1** ◇ **202 142 28124** ◇ ◇ = B-MMAT / W-W		**REO D 4033 S1** ◇ **202 143 28124** ◇ ◇ = W-W	
3000K	660 lm	580 lm	660 lm	580 lm
REFLECTOR FL-33°	**REO HD 3033 S1** ◇ **202 142 28122** ◇ ◇ = B-MMAT / W-W	**REO HD 3033-9 S1** ◇ **202 142 29122** ◇ ◇ = B-MMAT / W-W	**REO D 3033 S1** ◇ **202 143 28122** ◇ ◇ = W-W	**REO D 3033-9 S1** ◇ **202 143 29122** ◇ ◇ = W-W
2700K	620 lm	525 lm	620 lm	525 lm
REFLECTOR FL-33°	**REO HD 2733 S1** ◇ **202 142 28123** ◇ ◇ = B-MMAT / W-W	**REO HD 2733-9 S1** ◇ **202 142 29123** ◇ ◇ = B-MMAT / W-W	**REO D 2733 S1** ◇ **202 143 28123** ◇ ◇ = W-W	**REO D 2733-9 S1** ◇ **202 143 29123** ◇ ◇ = W-W
	FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,5 IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 101 LED POWER SUPPLY 350mA-DC / DIM		FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,6 IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 101 LED POWER SUPPLY 350mA-DC / DIM	


Fixation S1



Fixation S2





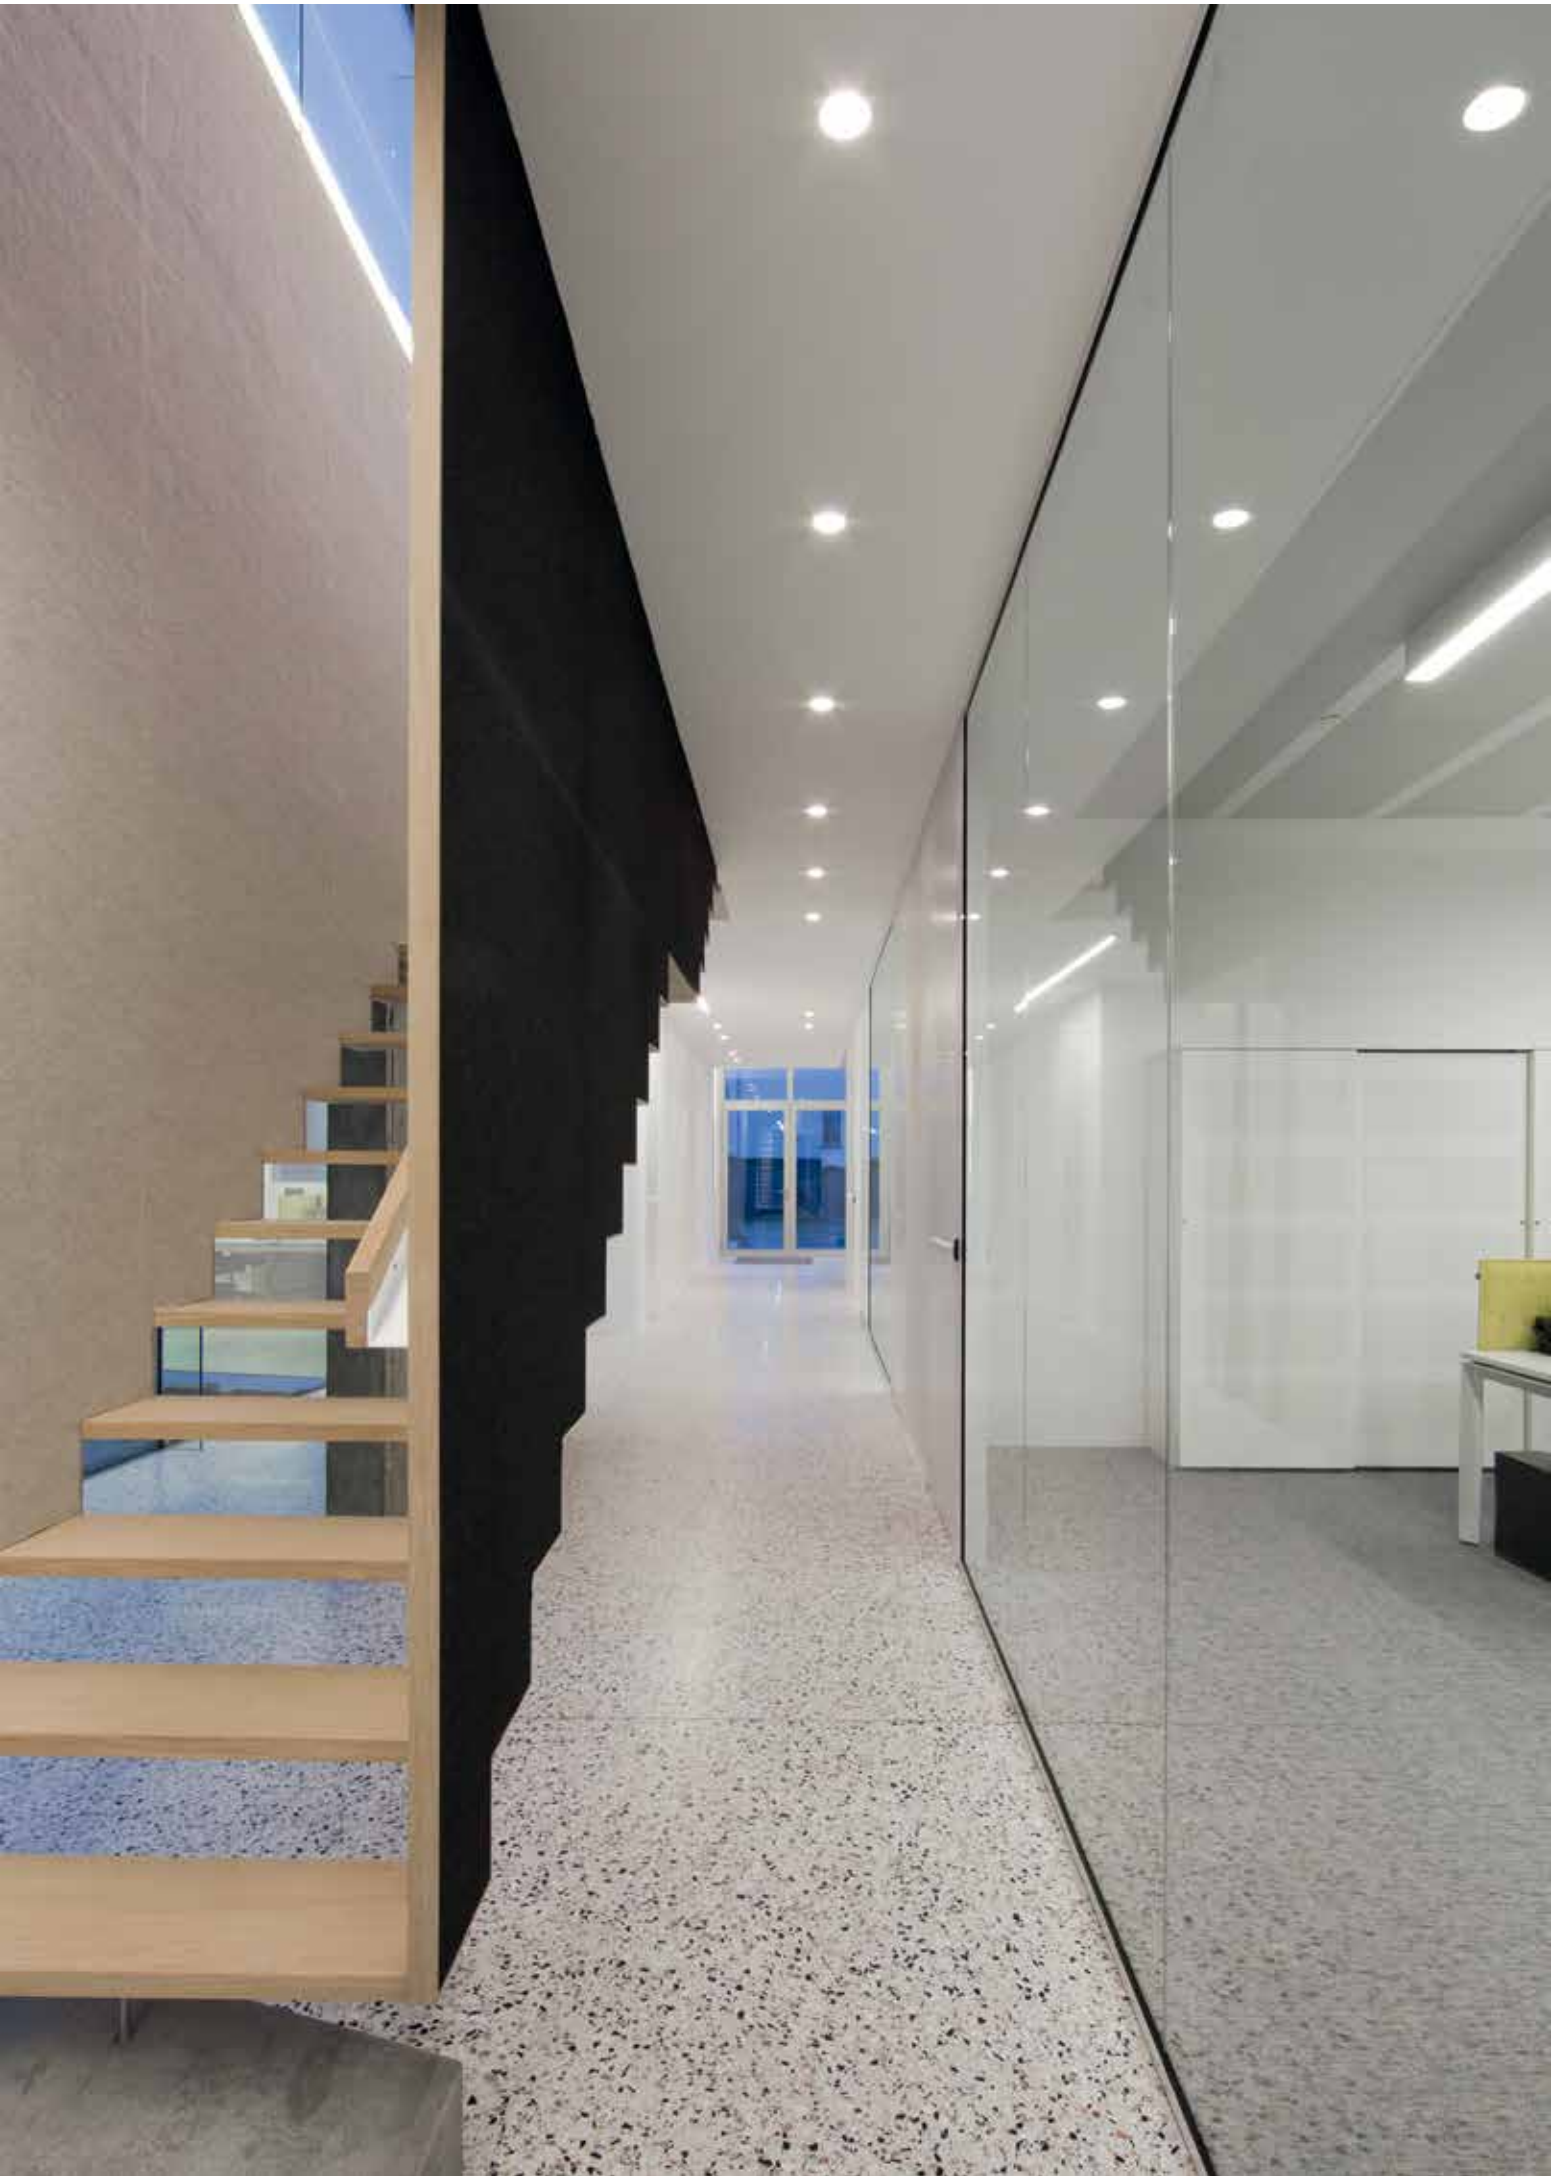

FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 101 **202 11 19**	205 x 205	80 x 180
PLASTERKIT 170 **207 01 170**	230 x 230	100 x 220


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Reo S OK








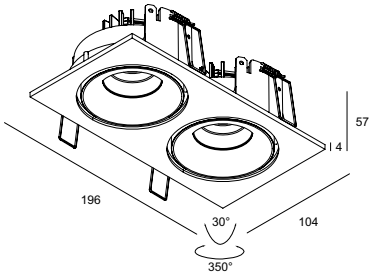

	98 x 55 max.30		190 x 98 x 55 max.30	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K	750 lm		2x 750 lm	
REFLECTOR FL-33°	**REO S OK 4033 S1** ◇ **202 38 28124** ◇ ◇ = A / W		**REO 2 S OK 4033 S1** ◇ **202 38 28224** ◇ ◇ = A / W	
REFLECTOR WFL-50°	**REO S OK 4050 S1** ◇ **202 38 28134** ◇ ◇ = A / W		**REO 2 S OK 4050 S1** ◇ **202 38 28234** ◇ ◇ = A / W	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**REO S OK 3033 S1** ◇ **202 38 28122** ◇ ◇ = A / W	**REO S OK 3033-9 S1** ◇ **202 38 29122** ◇ ◇ = A / W	**REO 2 S OK 3033 S1** ◇ **202 38 28222** ◇ ◇ = A / W	**REO 2 S OK 3033-9 S1** ◇ **202 38 29222** ◇ ◇ = A / W
REFLECTOR WFL-50°	**REO S OK 3050 S1** ◇ **202 38 28132** ◇ ◇ = A / W	**REO S OK 3050-9 S1** ◇ **202 38 29132** ◇ ◇ = A / W	**REO 2 S OK 3050 S1** ◇ **202 38 28232** ◇ ◇ = A / W	**REO 2 S OK 3050-9 S1** ◇ **202 38 29232** ◇ ◇ = A / W
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**REO S OK 2733 S1** ◇ **202 38 28123** ◇ ◇ = A / W	**REO S OK 2733-9 S1** ◇ **202 38 29123** ◇ ◇ = A / W	**REO 2 S OK 2733 S1** ◇ **202 38 28223** ◇ ◇ = A / W	**REO 2 S OK 2733-9 S1** ◇ **202 38 29223** ◇ ◇ = A / W
REFLECTOR WFL-50°	**REO S OK 2750 S1** ◇ **202 38 28133** ◇ ◇ = A / W	**REO S OK 2750-9 S1** ◇ **202 38 29133** ◇ ◇ = A / W	**REO 2 S OK 2750 S1** ◇ **202 38 28233** ◇ ◇ = A / W	**REO 2 S OK 2750-9 S1** ◇ **202 38 29233** ◇ ◇ = A / W
	ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,4 IP20 IP23 IP20 IP20 OPTIONS PLASTERKIT 170 LED POWER SUPPLY 350mA-DC / DIM		ADJUSTABLE 0°- 30° / 350° INCL.2 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,8 IP20 IP23 IP20 IP20 OPTIONS LED POWER SUPPLY 350mA-DC / DIM	

Fixation S1





DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Reo S










	66 x 55 max.22		144 x 66 x 55 max.22	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K	750 lm		2x 750 lm	
REFLECTOR FL-33°	**REO S 4033 S1** ◇ **202 141 28124** ◇ ◇ = C-B / W-C / W-W		**REO 2 S 4033 S1** ◇ **202 141 28224** ◇ ◇ = C-B / W-C / W-W	
REFLECTOR WFL-50°	**REO S 4050 S1** ◇ **202 141 28134** ◇ ◇ = C-B / W-C / W-W		**REO 2 S 4050 S1** ◇ **202 141 28234** ◇ ◇ = C-B / W-C / W-W	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**REO S 3033 S1** ◇ **202 141 28122** ◇ ◇ = C-B / W-C / W-W	**REO S 3033-9 S1** ◇ **202 141 29122** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 3033 S1** ◇ **202 141 28222** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 3033-9 S1** ◇ **202 141 29222** ◇ ◇ = C-B / W-C / W-W
REFLECTOR WFL-50°	**REO S 3050 S1** ◇ **202 141 28132** ◇ ◇ = C-B / W-C / W-W	**REO S 3050-9 S1** ◇ **202 141 29132** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 3050 S1** ◇ **202 141 28232** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 3050-9 S1** ◇ **202 141 29232** ◇ ◇ = C-B / W-C / W-W
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**REO S 2733 S1** ◇ **202 141 28123** ◇ ◇ = C-B / W-C / W-W	**REO S 2733-9 S1** ◇ **202 141 29123** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 2733 S1** ◇ **202 141 28223** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 2733-9 S1** ◇ **202 141 29223** ◇ ◇ = C-B / W-C / W-W
REFLECTOR WFL-50°	**REO S 2750 S1** ◇ **202 141 28133** ◇ ◇ = C-B / W-C / W-W	**REO S 2750-9 S1** ◇ **202 141 29133** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 2750 S1** ◇ **202 141 28233** ◇ ◇ = C-B / W-C / W-W	**REO 2 S 2750-9 S1** ◇ **202 141 29233** ◇ ◇ = C-B / W-C / W-W
	FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,3 IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 101 LED POWER SUPPLY 350mA-DC / DIM		FIXED INCL.2 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,6 IP20 IP43 IP20 IP20 OPTIONS LED POWER SUPPLY 350mA-DC / DIM	

Fixation S1








OVERVIEW DIRO

Mini Diro



Ø 26

Ø 50 (KIT)


FIXED

led

PAG INT 33

Mini Diro II

new



Ø 57


Ø 66 (KIT)

FIXED

QR-C51

PAG INT 33

Diro Duo ST

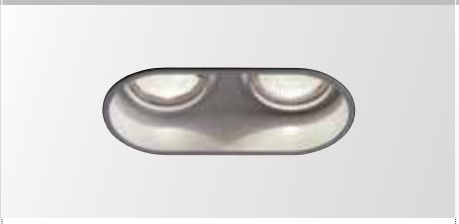

Ø 79 x 157

Ø 153 x 75

ADJUSTABLE 20-40°

QR-C51

PAG INT 39

Diro Duo



Ø 81 x 159

Ø 153 x 75

ADJUSTABLE 20-40°

QR-C51

PAG INT 43

Diro ST OK



Ø 81


Ø 76

ADJUSTABLE 0-20°

new led / QR-C51

PAG INT 38-39

Diro OK

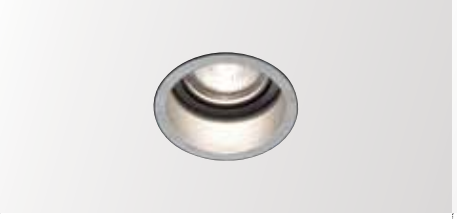

Ø 85

Ø 76

ADJUSTABLE 0-20°

QR-C51 / QPAR51

PAG INT 43

Diro GT

new



Ø 85

Ø 76

FIXED

led / QR-C51

PAG INT 46-47

Grand Diro ST



Ø 162

Ø 152

ADJUSTABLE 0-50° / 360°

new led / QR-LP111

PAG INT 52-53

Grand Diro ST D



Ø 162

Ø 152

ADJUSTABLE 0-50° / 360°

led / QR-LP111

PAG INT 52-53

Diro 126 SBL



Ø 163

Ø 156

FIXED

led / TC-DEL

PAG INT 48-49

Diro Trimless



Ø 81


Ø 105 (KIT)

FIXED

led / QR-C51

PAG INT 34-35

Diro Trimless OK

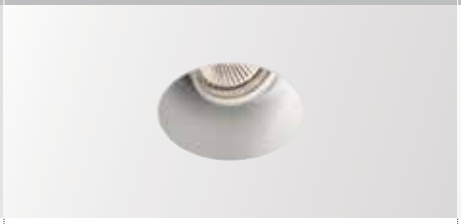

Ø 81

Ø 105 (KIT)

ADJUSTABLE 0-20°

QR-C51

PAG INT 35

Diro 130



Ø 81

Ø 76

FIXED

QR-C51

PAG INT 42

Diro ST OK QR



Ø 110

Ø 105

ADJUSTABLE 0-20°

QR-LP70

PAG INT 39

Grand Diro Trimless



Ø 142


Ø 152 (KIT)

ADJUSTABLE 0-50° / 360°

new led / QR-LP111

PAG INT 50-51

Grand Diro Trimless D

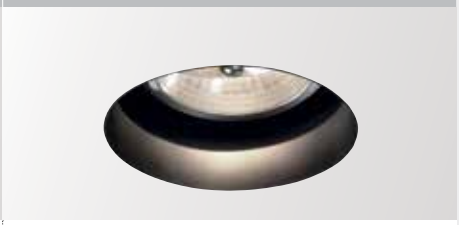

Ø 142

Ø 152 (KIT)

ADJUSTABLE 0-20° / 360°

new led / QR-LP111

PAG INT 50-51

Diro 226 SBL



Ø 223

Ø 216

FIXED

TC-DEL

PAG INT 49



TRIMLESS



ST (Small Trim)




ST



ST **D** (Deep)



Diro (Fixed)



Diro **OK** (Adjustable)




FULL INFO / PAG TEC

Requirements

MOUNTING KIT R30 TRIMLESS
202 41 30 00

Ø50


0,1



MOUNTING KIT MINI DIRO II 12
202 41 58 12

Ø66 12/24


0,1



MOUNTING KIT MINI DIRO II 15
202 41 58 15

Ø66 15

0,1



FULL INFO / PAG TEC

Options

CONTROL GEAR

LED POWER SUPPLY 240mA/10W 115 x 34 x 19
300 90 250 max. 2 x MINI DIRO LED / 300 90 250


TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

led

Mini Diro






ØKIT x 140

MINI DIRO LED ◇
202 41 30 15102 ◇
◇ = W
FIXED
INCL.1 x POWERLED WHITE 5W / 3000K
EXCL.LED POWER SUPPLY 240mA-DC

0,1 IP20

REQUIREMENTS
MOUNTING KIT R30 TRIMLESS
202 41 30 00

OPTIONS
LED POWER SUPPLY 240mA-DC

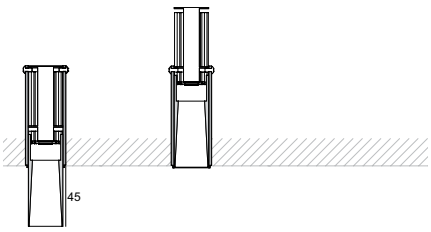


POSITION FOR INSTALLATION

CRI >80 - 380 lm (5W)

new

Mini Diro II





Ø KIT x 150

MINI DIRO II ◇
202 41 58 51 ◇
◇ = W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.35W


0,2 IP20 0,5


REQUIREMENTS
MOUNTING KIT MINI DIRO II 12
202 41 58 12
or
MOUNTING KIT MINI DIRO II 15
202 41 58 15

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Diro Trimless LED

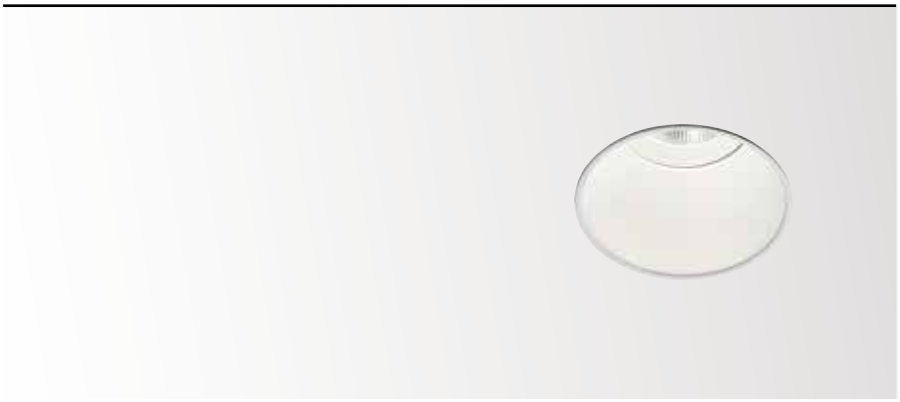



Ø KIT x 95

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**DIRO TRIMLESS LED 3033 S1 ◇** **202 14 28122 ◇** ◇ = C / W	**DIRO TRIMLESS LED 3033-9 S1 ◇** **202 14 29122 ◇** ◇ = C / W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**DIRO TRIMLESS LED 2733 S1 ◇** **202 14 28123 ◇** ◇ = C / W	**DIRO TRIMLESS LED 2733-9 S1 ◇** **202 14 29123 ◇** ◇ = C / W

FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC

0,3 IP20 IP43


REQUIREMENTS
MOUNTING KIT R82 TRIMLESS
202 11 82
or
MOUNTING KIT R82 TRIMLESS O.F.A.
202 11 82 OFA
or
CONCRETE PACK TMK R82
207 02 9123 TMK

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

Requirements

FULL INFO / PAG TEC


MOUNTING KIT R82 TRIMLESS
202 11 82



105 x 135 max. 22

0,1


MOUNTING KIT R82 TRIMLESS O.F.A.
202 11 82 OFA



122

0,2

CONCRETE PACK TMK R82
207 02 9123 TMK



1,0

Options

FULL INFO / PAG TEC


CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

Accessories

FULL INFO / PAG TEC

	A B C
ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63

Fixation S1




DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali



Diro Trimless OK + Anti Glare Tube

Diro Trimless





Ø KIT x 135

DIRO TRIMLESS S1 ◇
202 14 91 ◇
◇ = W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


IP20 0,5

REQUIREMENTS
MOUNTING KIT R82 TRIMLESS
202 11 82
or
MOUNTING KIT R82 TRIMLESS O.F.A.
202 11 82 OFA
or
CONCRETE PACK TMK R82
207 02 9123 TMK

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

Diro Trimless OK





Ø KIT x 135

DIRO TRIMLESS OK S1 ◇
202 14 90 ◇
◇ = A / B / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,5

REQUIREMENTS
MOUNTING KIT R82 TRIMLESS
202 11 82
or
MOUNTING KIT R82 TRIMLESS O.F.A.
202 11 82 OFA
or
CONCRETE PACK TMK R82
207 02 9123 TMK

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE



Vandecandelaere



Diro Trimless OK + Anti Glare Tube

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 101 **202 11 19**	205 x 205	80 x 180
PLASTERKIT 104 **202 14 29**	219 x 225	160 x 190
PLASTERKIT 164 **207 01 164**	230 x 230	200 x 200


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET C50 20 4,0 kV **200 44 21**	140 x 67 x 31
BALLASTSET C50 35 4,0 kV **200 44 36**	140 x 67 x 31

FULL INFO / PAG TEC

Accessories

ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W

Fixation S1




DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

new

led

Diro ST OK LED





76 x 115 min.5

	CRI > 80	CRI > 90
4000K ●		
	ON REQUEST	
3000K ●	660 lm	580 lm
REFLECTOR FL-33°	**DIRO ST OK LED 3033 ◇** **202 292 28122 ◇** ◇ = MMAT / W	**DIRO ST OK LED 3033-9 ◇** **202 292 29122 ◇** ◇ = MMAT / W
2700K ●	620 lm	525 lm
REFLECTOR FL-33°	**DIRO ST OK LED 2733 ◇** **202 292 28123 ◇** ◇ = MMAT / W	**DIRO ST OK LED 2733-9 ◇** **202 292 29123 ◇** ◇ = MMAT / W

ADJUSTABLE 0°-20° / 350°
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC

0,4 IP20 IP23

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM





DIRO ST OK LED MMAT

Diro ST OK









76 x 100 max.22

DIRO ST OK S1 ◇
202 14 61 ◇
◇ = ALU / B / C / MMAT / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

105 x 100 max.22

DIRO ST OK QR S1 ◇
202 36 52 ◇
◇ = ALU / W
ADJUSTABLE 0°- 20°
BA15d / 12V / EXCL.TRANSFO
1 x QR-LP70 max.50W

IP20 1,0

OPTIONS
PLASTERKIT 164
TRANSFO



76 x 180 max.22


DIRO ST OK C50 S1 ◇
202 32 51 ◇
◇ = ALU / W
ADJUSTABLE 0°-20°
GX10 / EXCL.EVG
1 x HIPAR51 max.35W

IP20 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
BALLASTSET C50

Diro Duo ST





153 x 75 x 132 max.22


DIRO DUO ST S1 ◇
202 14 71 ◇
◇ = ALU / MMAT / W
2 x ADJUSTABLE 20°- 40°
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 104
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50


Kartell
Kartell
Kartell
Kartell
Modernist Kartell
Modernist Kartell
Tokyo Pop Boys
Tokyo Pop Boys
ROYAL OAK
ROYAL OAK
BVLGARI

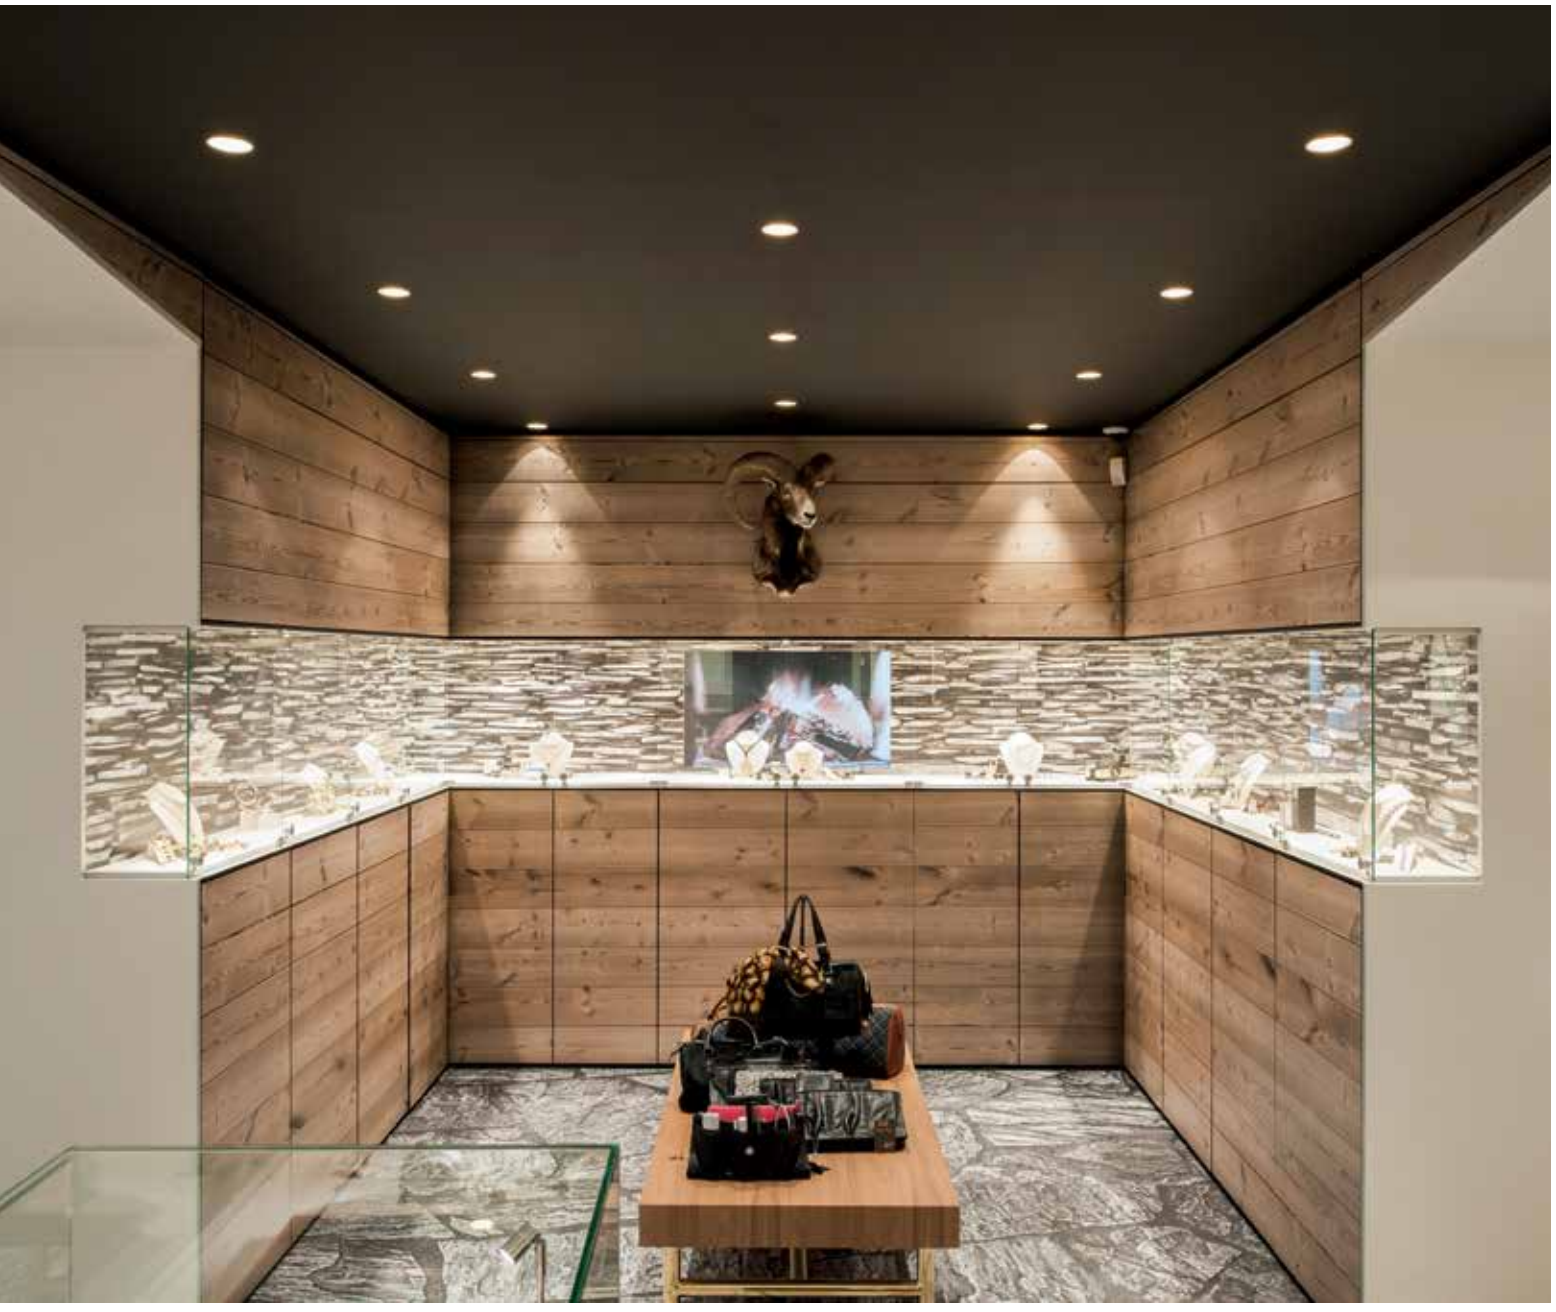



FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 101 **202 11 19**	205 x 205	80 x 180
PLASTERKIT 104 **202 14 29**	219 x 225	160 x 190


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC


Accessories

ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W

Fixation S1





Fixation S2



Diro 130







76 x 125 max.25


DIRO 130 S1 ◇
202 14 80 ◇
◇ = W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,2 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
TRANSFO

Diro OK






76 x 100 max.22

DIRO OK S1 ◇
202 14 11 ◇
◇ = ALU-ALU / B-MMAT / C-B / W-B / W-W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 101
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50




76 x 100

DIRO OK Hi S2 ◇
202 14 1210 ◇
◇ = ALU-ALU / W-W
ADJUSTABLE 0°- 20°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W

IP20 0,5

OPTIONS
LED SOLUTION - PAG TEC 4-5



76 x 100

DIRO OK S2 ◇
202 14 12 ◇
◇ = ALU-ALU / W-W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


IP20 0,5

OPTIONS
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

Diro Duo





153 x 75 x 132 max.22

DIRO DUO S1 ◇
202 14 21 ◇
◇ = ALU-ALU / B-MMAT / W-W
2 x ADJUSTABLE 20°- 40°
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 104
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50







FULL INFO / PAG TEC


Options

CONTROL GEAR	C A B
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Diro GT LED





76 x 90 min.5

	CRI > 80
4000K	
	ON REQUEST
3000K	660 lm
REFLECTOR FL-33°	**DIRO GT LED 3033** ◇ **202 342 28122** ◇ ◇ = A / W
2700K	620 lm
REFLECTOR FL-33°	**DIRO GT LED 2733** ◇ **202 342 28123** ◇ ◇ = A / W

FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC


IP20
IP44

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM



Diro GT





76 x 115 min.5

DIRO GT ◇
202 34 12 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP44 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO


FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 169 **207 01 169**	270 x 270	230 x 270
PLASTERKIT 174 **207 01 174**	280 x 280	220 x 260


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Fixation S1



Diro LED +





156 x 90 max.25

	CRI > 80
4000K	
	ON REQUEST
3000K	660 lm (7W) 920 lm (10W)
REFLECTOR FL-33°	**DIRO LED + S1 WW ◇** **202 29 28102 ◇** ◇ = ALU/ W
2700K	620 lm (7W) 865 lm (10W)
REFLECTOR FL-33°	**DIRO LED + S1 HW ◇** **202 29 28103 ◇** ◇ = ALU/ W

FIXED
INCL.1 x PC SBL
INCL.1 x POWERLED WHITE 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC


IP20
IP43

OPTIONS
PLASTERKIT 169
LED POWER SUPPLY 350-500mA-DC / DIM

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Diro 126 SBL





156 x 100 max.25

DIRO 126 SBL S1 ◇
202 29 26 ◇
◇ = ALU / W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG


1 x TC-DEL 26W

0,9 IP20 IP43 0,1

OPTIONS
PLASTERKIT 169

Diro 126 SBL +





156 x 125 max.25

DIRO 126 SBL + S1 ◇
202 29 27 ◇
◇ = W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG


1 x TC-DEL 26W

0,9 IP20 IP44 0,1

OPTIONS
PLASTERKIT 169

Diro 226 SBL





216 x 125 max.25

DIRO 226 SBL S1 ◇
202 29 226 ◇
◇ = ALU / W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG

2 x TC-DEL 26W

0,9 IP20 IP43 0,1

OPTIONS
PLASTERKIT 174


FULL INFO / PAG TEC

Requirements

MOUNTING KIT R143 TRIMLESS
202 15 61 97

152 x 125 / 140 / 150 max.25

0,4



FULL INFO / PAG TEC

Options


	C A B
CONTROL GEAR	
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

new

led

Grand Diro Trimless Opto





Ø KIT x 140

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	1570 lm	1295 lm
REFLECTOR SP-10°	**GRAND DIRO TRIMLESS OPTO 203010 ◇** **202 15 61 20112 ◇** ◇ = W	**GRAND DIRO TRIMLESS OPTO 203010-9 ◇** **202 15 61 209112 ◇** ◇ = W
REFLECTOR FL-20°	**GRAND DIRO TRIMLESS OPTO 203020 ◇** **202 15 61 20122 ◇** ◇ = W	**GRAND DIRO TRIMLESS OPTO 203020-9 ◇** **202 15 61 209122 ◇** ◇ = W
REFLECTOR WFL-45°	**GRAND DIRO TRIMLESS OPTO 203045 ◇** **202 15 61 20132 ◇** ◇ = W	**GRAND DIRO TRIMLESS OPTO 203045-9 ◇** **202 15 61 209132 ◇** ◇ = W
2700K	1475 lm	1284 lm
REFLECTOR SP-10°	**GRAND DIRO TRIMLESS OPTO 202710 ◇** **202 15 61 20113 ◇** ◇ = W	**GRAND DIRO TRIMLESS OPTO 202710-9 ◇** **202 15 61 209113 ◇** ◇ = W
REFLECTOR FL-20°	**GRAND DIRO TRIMLESS OPTO 202720 ◇** **202 15 61 20123 ◇** ◇ = W	**GRAND DIRO TRIMLESS OPTO 202720-9 ◇** **202 15 61 209123 ◇** ◇ = W
REFLECTOR WFL-45°	**GRAND DIRO TRIMLESS OPTO 202745 ◇** **202 15 61 20133 ◇** ◇ = W	**GRAND DIRO TRIMLESS OPTO 202745-9 ◇** **202 15 61 209133 ◇** ◇ = W

FIXED
INCL.1 x POWERLED WHITE 18W
INCL.1 x EFT FILTER*
EXCL.LED POWER SUPPLY 500mA-DC

0,7 IP20

REQUIREMENTS
MOUNTING KIT R143 TRIMLESS
202 15 61 97

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

*EFT / EQUALISING FILTER TECHNOLOGY


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali




Grand Diro Trimless









Ø KIT x 125

GRAND DIRO TRIMLESS 111 ◇
202 15 61 01 ◇
◇ = W-B / W-W
ADJUSTABLE 0°- 50° / 360°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
CE 0,5 IP20 1,0

REQUIREMENTS
MOUNTING KIT R143 TRIMLESS
202 15 61 97

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

Ø KIT x 150

GRAND DIRO TRIMLESS D 111 ◇
202 15 61 00 ◇
◇ = B / W
ADJUSTABLE 0°- 20° / 360°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
CE 0,3 IP20 1,0

REQUIREMENTS
MOUNTING KIT R143 TRIMLESS
202 15 61 97

OPTIONS
TRANSFO

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 181 **207 01 181**	250 x 250	170 x 170


CONTROL GEAR	
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

new

led

Grand Diro ST Opto





152 x 170 max.25

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	1570 lm	1295 lm
REFLECTOR SP-10°	**GRAND DIRO ST OPTO 203010 ◇** **202 15 62 20112 ◇** ◇ = W	**GRAND DIRO ST OPTO 203010-9 ◇** **202 15 62 209112 ◇** ◇ = W
REFLECTOR FL-20°	**GRAND DIRO ST OPTO 203020 ◇** **202 15 62 20122 ◇** ◇ = W	**GRAND DIRO ST OPTO 203020-9 ◇** **202 15 62 209122 ◇** ◇ = W
REFLECTOR WFL-45°	**GRAND DIRO ST OPTO 203045 ◇** **202 15 62 20132 ◇** ◇ = W	**GRAND DIRO ST OPTO 203045-9 ◇** **202 15 62 209132 ◇** ◇ = W
2700K	1475 lm	1284 lm
REFLECTOR SP-10°	**GRAND DIRO ST OPTO 202710 ◇** **202 15 62 20113 ◇** ◇ = W	**GRAND DIRO ST OPTO 203010-9 ◇** **202 15 62 209113 ◇** ◇ = W
REFLECTOR FL-20°	**GRAND DIRO ST OPTO 202720 ◇** **202 15 62 20123 ◇** ◇ = W	**GRAND DIRO ST OPTO 203020-9 ◇** **202 15 62 209123 ◇** ◇ = W
REFLECTOR WFL-45°	**GRAND DIRO ST OPTO 202745 ◇** **202 15 62 20133 ◇** ◇ = W	**GRAND DIRO ST OPTO 203045-9 ◇** **202 15 62 209133 ◇** ◇ = W

FIXED
INCL.1 x POWERLED WHITE 18W
INCL.1 x EFT FILTER*
EXCL.LED POWER SUPPLY 500mA-DC

0,9 IP20


OPTIONS
PLASTERKIT 181
LED POWER SUPPLY 500mA-DC / DIM

*EFT / EQUALISING FILTER TECHNOLOGY

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali








152 x 130 max.25

GRAND DIRO ST 111 ◇
202 15 62 01 ◇
◇ = W-W
ADJUSTABLE 0°- 50° / 360°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
CE 1,3 IP20 1,0

OPTIONS
PLASTERKIT 181
led LED SOLUTION - PAG TEC 4-5
TRANSFO





152 x 150 max.25

GRAND DIRO ST D 111 ◇
202 15 62 00 ◇
◇ = B / W
ADJUSTABLE 0°- 20° / 360°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
CE 1,1 IP20 1,0

OPTIONS
PLASTERKIT 181
TRANSFO

GRAND DIRO ST 111 W-W + REO 111 W




United Clothing of Belgium



Obumex





FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 170 **207 01 170**	230 x 230	100 x 220
PLASTERKIT 171 **207 01 171**	230 x 230	220 x 220
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32	
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37	

FULL INFO / PAG TEC


Accessories

CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
DICROIC FILTER 50 **201 30 11** **201 30 12** **201 30 13** **201 30 14**	Ø50 max. 20W
COLOUR FILTER 111 **201 27 11** **201 27 12** **201 27 13** **201 27 14**	Ø100
FRONTGLASS 111 **201 17 00**	Ø100
LENS 111 **201 47 11**	Ø100

Fixation S1








98 x 90 max.30

RODI 50 S1 ◇
202 37 20 ◇
◇ = A / W
ADJUSTABLE 0°- 30° / 350°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 170
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50



98 x 90 max.30

RODI 50 Hi S1 ◇
202 37 21 ◇
◇ = A / W
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

CE 0,3 IP20 0,5


OPTIONS
PLASTERKIT 170
led LED SOLUTION - PAG TEC 4-5







up to 93% efficiency




146 x 100 max.30

RODI 111 S1 ◇
202 37 12 ◇
◇ = A / W
ADJUSTABLE 0°- 30° / 350°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
CE 0,4 IP20 1,0

OPTIONS
PLASTERKIT 171
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111




146 x 120 max.30

RODI H111 S1 ◇
202 37 19 ◇
◇ = A / W
ADJUSTABLE 0°- 30° / 350°
GX8.5 / EXCL.EVG
1 x HIR-CE111 max.70W
CE 0,3 IP20 1,0

OPTIONS
PLASTERKIT 171
BALLASTSET HID

ACCESSORIES
CONE 111



new

146 x 180 max.30

RODI HIC SP15 S1 ◇
202 37 17 SP15 ◇
◇ = A / W
INCL.1 x REFLECTOR SP-15° + GLASS

RODI HIC FL24 S1 ◇
202 37 17 FL 24 ◇
◇ = A / W
INCL.1 x REFLECTOR FL-24° + GLASS

RODI HIC WFL43 S1 ◇
202 37 17 WFL43 ◇
◇ = A / W
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30° / 350°
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
CE 0,5 IP20 1,0

OPTIONS
PLASTERKIT 171
BALLASTSET HID









RODI S HIT W-B / RODI S HANDLE

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 170 **207 01 170**	230 x 230	100 x 220
PLASTERKIT 171 **207 01 171**	230 x 230	220 x 220


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

FULL INFO / PAG TEC

Accessories

CONE 111◇ **201 28 00◇** ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 50◇ **201 30 98◇** ◇ = A / B / W	Ø50 / H12
CLIP 111◇ **201 27 99 A◇** ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W
COLOUR FILTER 111 **201 27 11** ● **201 27 12** ● **201 27 13** ● **201 27 14** ●	Ø100
LENS 111 **201 47 11**	Ø100
RODI HIT **REFLECTOR SP-15°** **202 37 1615**	Ø111 x 75
RODI HIT **REFLECTOR WFL-55°** **202 37 1655**	Ø111 x 78


Fixation S1












98 x 120 max.35

RODI S 50 S1 ◇
202 38 20 ◇
◇ = A-A / W-B
ADJUSTABLE 0°- 30° / 350°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
0,3 IP20 0,5

OPTIONS
PLASTERKIT 170
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50




146 x 120 max.30

RODI S 111 S1 ◇
202 38 12 ◇
◇ = A-A / W-B
ADJUSTABLE 0°- 30° / 350°
INCL.RODI S HANDLE
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
0,4 IP20 1,0

OPTIONS
PLASTERKIT 171
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111




146 x 120 max.30

RODI S H111 S1 ◇
202 38 19 ◇
◇ = A-A / W-B
ADJUSTABLE 0°- 30° / 350°
INCL.RODI S HANDLE
GX8.5 / EXCL.EVG
1 x HIR111-CE-P max.70W
0,4 IP20 1,0

OPTIONS
PLASTERKIT 171
BALLASTSET HID

ACCESSORIES
CONE 111



146 x 160 max.30

RODI S HIT S1 ◇
202 38 16 ◇
◇ = A-A / W-B
ADJUSTABLE 0°- 30° / 350°
INCL.1 x REFLECTOR FL-28° + GLASS
INCL.RODI S HANDLE
G12 / EXCL.EVG
1 x HIT max.70W
0,6 IP20 1,0

OPTIONS
PLASTERKIT 171
BALLASTSET HID


ACCESSORIES
RODI HIT - REFLECTOR SP-15°
RODI HIT - REFLECTOR WFL-55°




Options

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21


Fixation S1




Fixation S2



C-Max

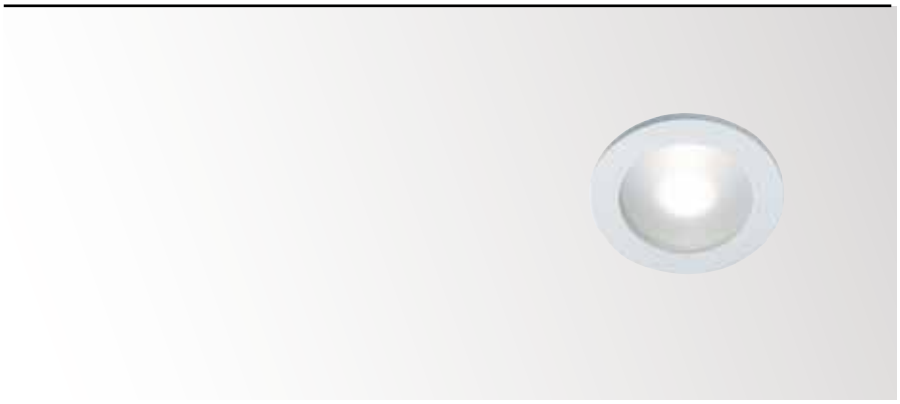




S1

82 x 100 max.35

C-MAX S1 ◇
202 23 05 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO




S1

82 x 100 max.35

C-MAX Hi S1 ◇
202 23 25 ◇
◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5




S2

82 x 100 max.35

C-MAX S2 ◇
202 23 15 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO



S2

82 x 100 max.35

C-MAX Hi S2 ◇
202 23 35 ◇
◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5


FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 101 **202 11 19**	205 x 205	80 x 180

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

Fixation S1




Fixation S2



new

Deep Ringo LED





76 x 90 min.5

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**DEEP RINGO LED 3033 ◇** **202 272 28122 ◇** ◇ = B / MMAT / W	**DEEP RINGO LED 3033-9 ◇** **202 272 29122 ◇** ◇ = B / MMAT / W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**DEEP RINGO LED 2733 ◇** **202 272 28123 ◇** ◇ = B / MMAT / W	**DEEP RINGO LED 2733-9 ◇** **202 272 29123 ◇** ◇ = B / MMAT / W

FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC

IP20 IP43 IP20 IP20


OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali



Deep Ringo






76 x 100 max.15

DEEP RINGO S1 ◇
202 11 16 ◇
◇ = ALU / B / C / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
TRANSFO

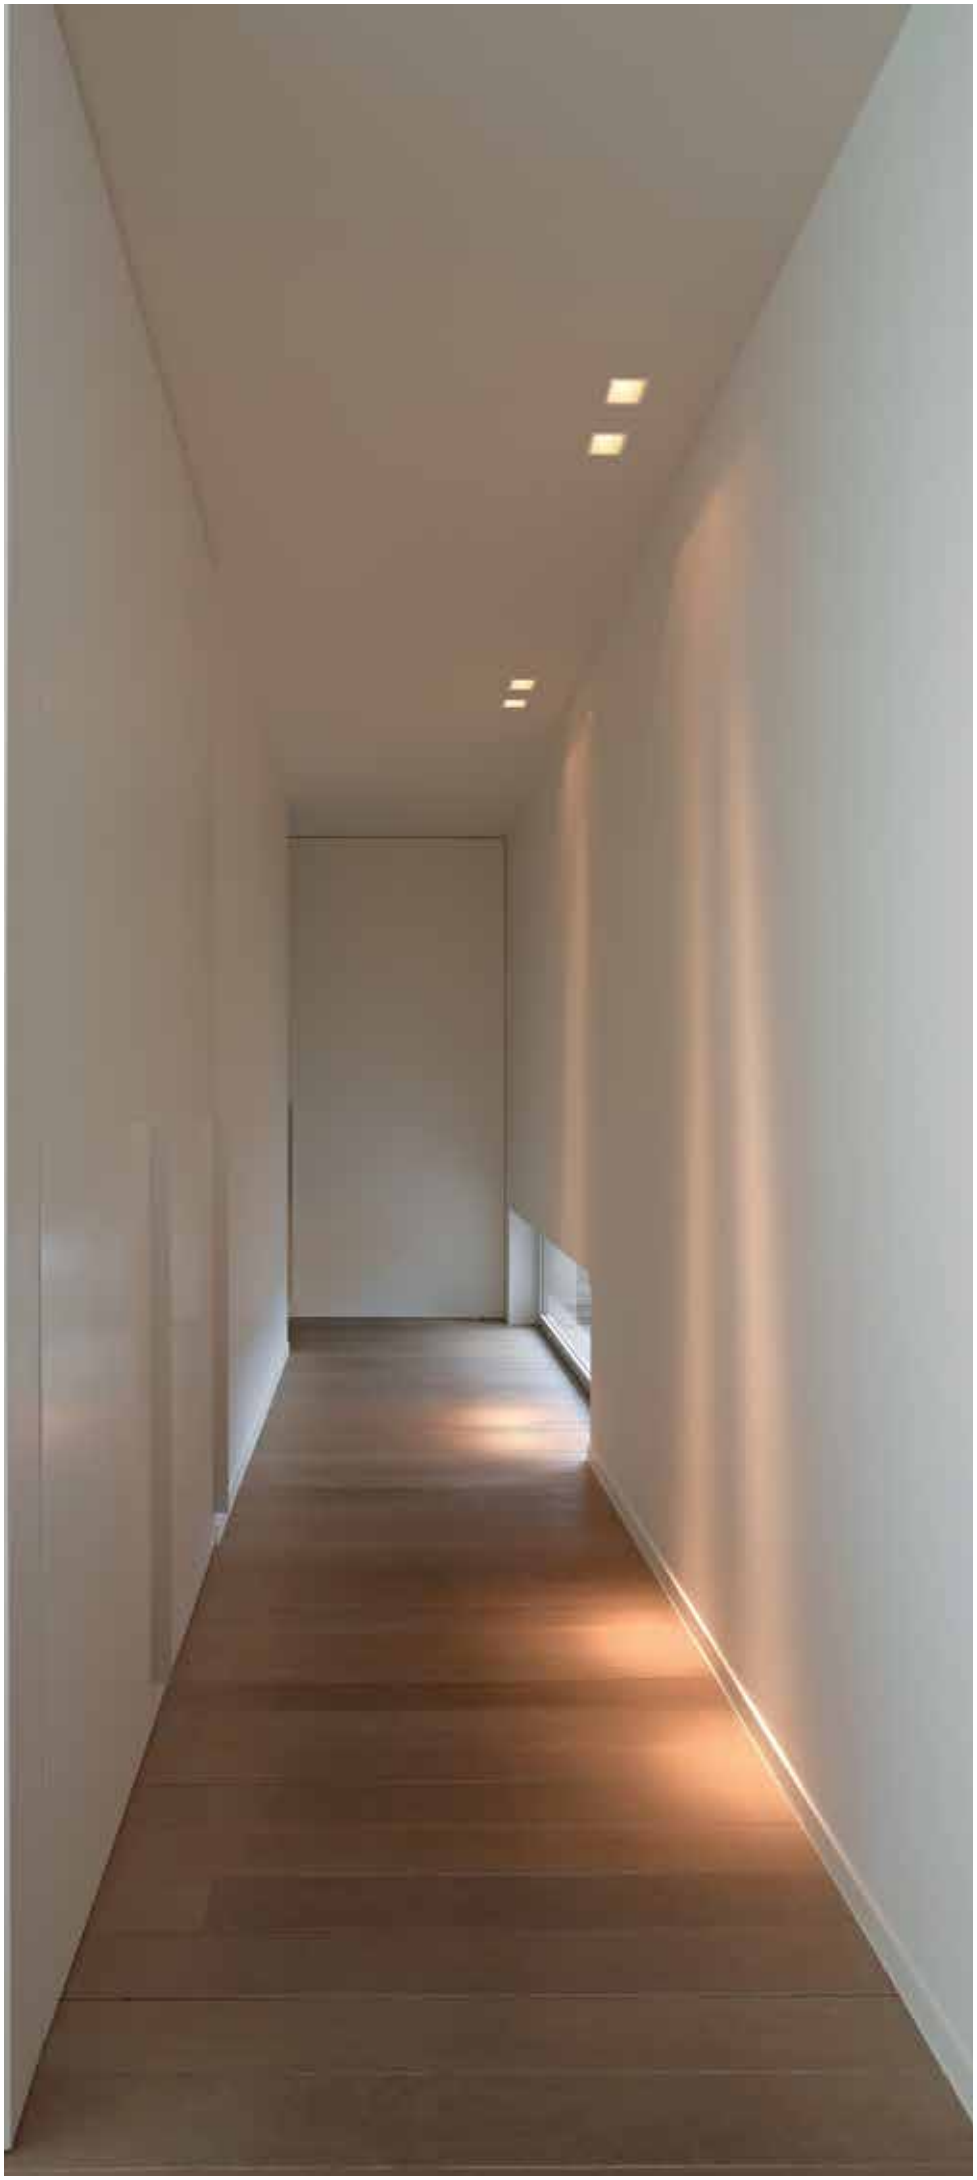


FULL INFO / PAG TEC

Options


INSTALLATION	A B C	
PLASTERKIT 161 **207 01 161**	200 x 200	175 x 175
CONCRETE BOX 161 **270 11 161**	202 x 202 x 186	207 x 207
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121

CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Fixation S1




Fixation S2




DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Deep Ringo S LED







	75 x 75 x 90 max.25		75 x 75 x 90	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	660 lm	580 lm
REFLECTOR FL-33°	**DEEP RINGO S LED 3033 S1 ◇** **202 28 28122 ◇** ◇ = B / W / MMAT	**DEEP RINGO S LED 3033-9 S1 ◇** **202 28 29122 ◇** ◇ = B / W / MMAT	**DEEP RINGO S LED 3033 S2 ◇** **202 282 28122 ◇** ◇ = B / W / MMAT	**DEEP RINGO S LED 3033-9 S2 ◇** **202 282 29122 ◇** ◇ = B / W / MMAT
2700K	620 lm	525 lm	620 lm	525 lm
REFLECTOR FL-33°	**DEEP RINGO S LED 2733 S1 ◇** **202 28 28123 ◇** ◇ = B / W / MMAT	**DEEP RINGO S LED 2733-9 S1 ◇** **202 28 29123 ◇** ◇ = B / W / MMAT	**DEEP RINGO S LED 2733 S2 ◇** **202 282 28123 ◇** ◇ = B / W / MMAT	**DEEP RINGO S LED 2733-9 S2 ◇** **202 282 29123 ◇** ◇ = B / W / MMAT
	FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,3 IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75 LED POWER SUPPLY 350mA-DC / DIM		FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,3 IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75 LED POWER SUPPLY 350mA-DC / DIM	



DEEP RINGO S LED 3033 S1 B



AABE




filipdeslee.com

FULL INFO / PAG TEC

Options

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC


Accessories

TUBE R ◇ **202 02 08 ◇** ◇ = B	Ø50 / Ø52 x 18
TUBE C ◇ **202 02 05 ◇** ◇ = B	Ø50 / Ø52 x 27




RINGO S1 A + TUBE R

Fixation S1





Fixation S2



Ringo







70 x 70 max.15

RINGO S1 ◇
202 11 13 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
IP20 0,5


OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
TUBE R

70 x 70 max.15

RINGO Hi S1 ◇
202 11 1310 ◇
◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5





70 x 70

RINGO S2 ◇
202 01 13 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE R


70 x 70

RINGO Hi S2 ◇
202 01 1310 ◇
◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5

Circle






82 x 70 max.15

CIRCLE S1 ◇
202 11 10 ◇
◇ = A / ALU / B / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE C




82 x 70

CIRCLE Hi S1 ◇
202 11 1010 ◇
◇ = A / ALU / W
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5




82 x 70

CIRCLE S2 ◇
202 01 10 ◇
◇ = A / ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE C



82 x 70


CIRCLE Hi S2 ◇
202 01 1010 ◇
◇ = A / ALU / W
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

Circle S






82 x 70 max.15

CIRCLE S S1 ◇
202 11 40 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE C




82 x 70

CIRCLE S Hi S1 ◇
202 11 4010 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO




82 x 70

CIRCLE S S2 ◇
202 01 40 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE C




82 x 70

CIRCLE S Hi S2 ◇
202 01 4010 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

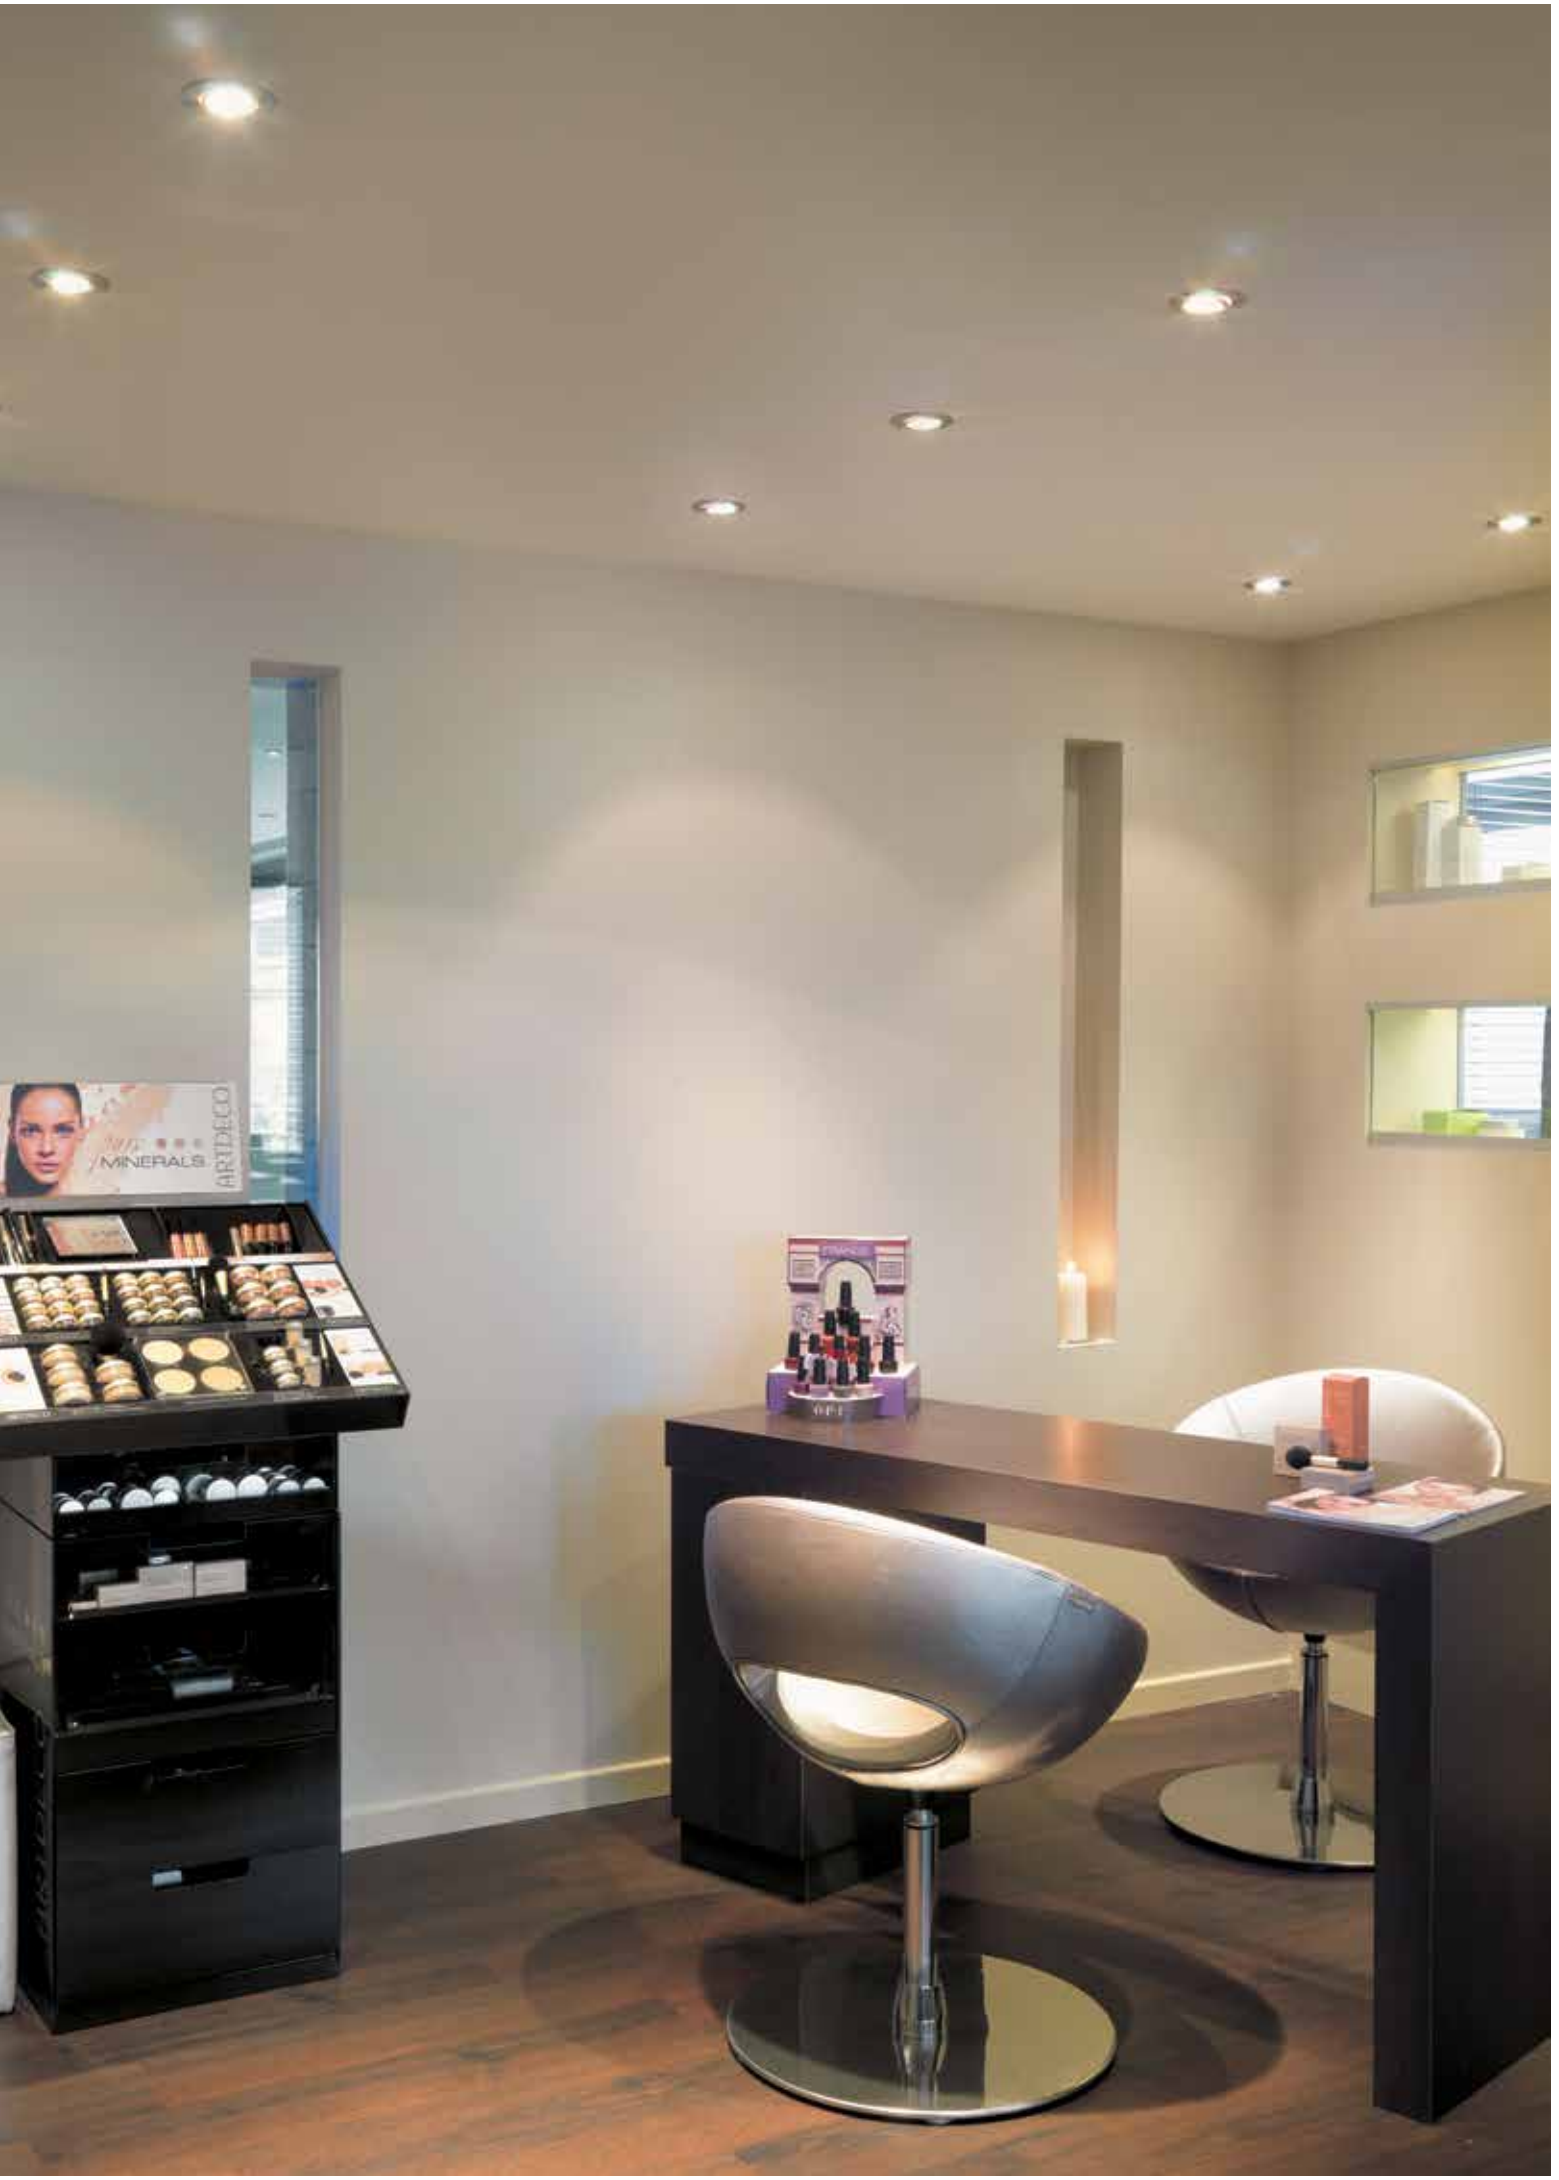


MINERALS
ARTDECO



FULL INFO / PAG TEC

Options

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC


Accessories

TUBE R ◇ **202 02 08 ◇** ◇ = B	Ø50 / Ø52 x 18
TUBE C ◇ **202 02 05 ◇** ◇ = B	Ø50 / Ø52 x 27




LUXOR S1 ALU + TUBE C

Fixation S1




Fixation S2



Lux






74 x 70 max.20

LUX S1 ◇
202 11 15 ◇
◇ = ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE R



74 x 70

LUX S2 ◇
202 01 15 ◇
◇ = ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE R

Luxor






79 x 70 max.20

LUXOR S1 ◇
202 11 14 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE C




79 x 70

LUXOR S2 ◇
202 01 14 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE C




79 x 80 max.20

LUXOR Hi S1 ◇
202 11 24 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5



79 x 80 max.20

LUXOR Hi S2 ◇
202 01 24 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,1 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 144 **302 21 19**	135 x 135	110 x 120


CONTROL GEAR		
	64	0
350mA-DC / 6W **04**		
35 15W **91**	115 x 34 x 19	
LED POWER SUPPLY **35 16 Dim8** **300 90 3112**	76 x 34 x 24	
35 17 **9 3**	111 x 38 x 28	
350mA-DC / 18W **112**	35	
5 6W **22 U**	45 x 45 x 25	
LED POWER SUPPLY **5 20** **300 90 92**	111 x 38 x 28	
5 32 **5**		
LED POWER SUPPLY **MULTI-POWER** **300 90 914**	124,5 x 79 x 22	
LED POWER SUPPLY **MULTI-POWER Dim6** **300 90 61**	165 x 47 x 35	
LED POWER SUPPLY **MULTI-POWER Dim7** **300 90 60**	103 x 67 x 21	
LED POWER SUPPLY **MULTI-POWER Dim9** **300 90 63**	111 x 79 x 22	
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


Martin's Hotel

led

Deep Iris





36 x 80 max.35

DEEP IRIS S1 NW ◇
302 22 04 ◇
◇ = ALU / W
INCL.1 x POWERLED WHITE 1-2W / 4000K

DEEP IRIS S1 WW ◇
302 22 02 ◇
◇ = ALU / W
INCL.1 x POWERLED WHITE 1-2W / 3000K

DEEP IRIS S1 BLUE ◇
302 22 01 BL ◇
◇ = ALU
INCL.1 x POWERLED BLUE 1W

FIXED
INCL.1 x LENS 10°
EXCL.LED POWER SUPPLY 350-500mA-DC


0,1 IP20

OPTIONS
PLASTERKIT 144
LED POWER SUPPLY 350-500mA-DC / DIM

led

Leds Swing





53 x 50 max.15

LEDS SWING S1 NW ◇
302 23 04 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1-2W / 4000K


LEDS SWING S1 WW ◇
302 23 02 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1-2W / 3000K

ADJUSTABLE 0°-30°
INCL.1 x LENS 10°
EXCL.LED POWER SUPPLY 350-500mA-DC

0,1 IP20

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM


Fixation S1



DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

MZ 35





41 x 50 max.12


MZ 35 S1 ◇
202 01 06 ◇
◇ = A / W
FIXED
G4 / 12V / EXCL.TRANSFO
1 x QR-CBC35 max.20W

IP20 0,5

OPTIONS
TRANSFO

RB 35





53 x 50 max.15


RB 35 S1 ◇
202 01 08 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G4 / 12V / EXCL.TRANSFO
1 x QR-CBC35 max.20W

IP20 0,5

OPTIONS
TRANSFO

RB 50





63 x 60 max.20

RB 50 S1 ◇
202 01 05 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.35W

IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO


Kurt Demeulemeester

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 185 **207 01 185**	200 x 200	133-180

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY 700mA-DC / 12W **300 90 43**	81 x 40 x 23
LED POWER SUPPLY 700mA-DC / 17W **300 90 93**	111 x 38 x 28
LED POWER SUPPLY 700mA-DC / 36W Dim8 **300 90 123**	133 x 40 x 30
LED POWER SUPPLY 700mA-DC / 32W Dim8 **300 90 7120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

4000K

3000K

REFLECTOR SP-15°

REFLECTOR FL-33°

REFLECTOR WFL-50°

REFLECTOR WFL-55°

2700K

REFLECTOR SP-15°

REFLECTOR FL-33°

REFLECTOR WFL-50°


REFLECTOR WFL-55°


DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali














121 x 110 max.30		121 x 110 max.30		121 x 110 max.30	
CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**	**CRI > 80**	**CRI > 90**
ON REQUEST		ON REQUEST		ON REQUEST	
660 lm	580 lm	1570 lm (18W) 2130 lm (25W)	1295 lm (18W) 1750 lm (25W)	1570 lm (18W) 2130 lm (25W)	1295 lm (18W) 1750 lm (25W)
				YOU-TURN OPTO 203015 ◇ **313 011 20112 ◇** ◇ = W-B	**YOU-TURN OPTO 203015-9 ◇** **313 011 209112 ◇** ◇ = W-B
YOU-TURN REO 3033 ◇ **313 01 28122 ◇** ◇ = W-B	**YOU-TURN REO 3033-9 ◇** **313 01 29122 ◇** ◇ = W-B	**YOU-TURN REO 203033 ◇** **313 010 20122 ◇** ◇ = W-B	**YOU-TURN REO 203033-9 ◇** **313 010 209122 ◇** ◇ = W-B	**YOU-TURN OPTO 203033 ◇** **313 011 20122 ◇** ◇ = W-B	**YOU-TURN OPTO 203033-9 ◇** **313 011 209122 ◇** ◇ = W-B
YOU-TURN REO 3050 ◇ **313 01 28132 ◇** ◇ = W-B	**YOU-TURN REO 3050-9 ◇** **313 01 29132 ◇** ◇ = W-B	**YOU-TURN REO 203050 ◇** **313 010 20132 ◇** ◇ = W-B	**YOU-TURN REO 203050-9 ◇** **313 010 209132 ◇** ◇ = W-B		
				YOU-TURN OPTO 203055 ◇ **313 011 20132 ◇** ◇ = W-B	**YOU-TURN OPTO 203055-9 ◇** **313 011 209132 ◇** ◇ = W-B
620 lm	525 lm	1475 lm (18W) 1990 lm (25W)	1284 lm (18W) 1735 lm (25W)	1475 lm (18W) 1990 lm (25W)	1284 lm (18W) 1735 lm (25W)
				YOU-TURN OPTO 202715 ◇ **313 011 20113 ◇** ◇ = W-B	**YOU-TURN OPTO 202715-9 ◇** **313 011 209113 ◇** ◇ = W-B
YOU-TURN REO 2733 ◇ **313 01 28123 ◇** ◇ = W-B	**YOU-TURN REO 2733-9 ◇** **313 01 29123 ◇** ◇ = W-B	**YOU-TURN REO 202733 ◇** **313 010 20123 ◇** ◇ = W-B	**YOU-TURN REO 202733-9 ◇** **313 010 209123 ◇** ◇ = W-B	**YOU-TURN OPTO 202733 ◇** **313 011 20123 ◇** ◇ = W-B	**YOU-TURN OPTO 202733-9 ◇** **313 011 209123 ◇** ◇ = W-B
YOU-TURN REO 2750 ◇ **313 01 28133 ◇** ◇ = W-B	**YOU-TURN REO 2750-9 ◇** **313 01 29133 ◇** ◇ = W-B	**YOU-TURN REO 202750 ◇** **313 010 20133 ◇** ◇ = W-B	**YOU-TURN REO 202750-9 ◇** **313 010 209133 ◇** ◇ = W-B		
				YOU-TURN OPTO 202755 ◇ **313 011 20133 ◇** ◇ = W-B	**YOU-TURN OPTO 202755-9 ◇** **313 011 209133 ◇** ◇ = W-B
ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC CE 0,7 IP20 OPTIONS PLASTERKIT 185 LED POWER SUPPLY 350mA-DC / DIM		ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 18-25W EXCL.LED POWER SUPPLY 500-700mA-DC CE 0,8 IP20 OPTIONS PLASTERKIT 185 LED POWER SUPPLY 500 / 700mA-DC / DIM		ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 18-25W INCL.1 x EFT FILTER* EXCL.LED POWER SUPPLY 500-700mA-DC CE 0,9 IP20 OPTIONS PLASTERKIT 185 LED POWER SUPPLY 500 / 700mA-DC / DIM	

*EFT / EQUALISING FILTER TECHNOLOGY

reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta



FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 185 **207 01 185**	200 x 200	133-180


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37












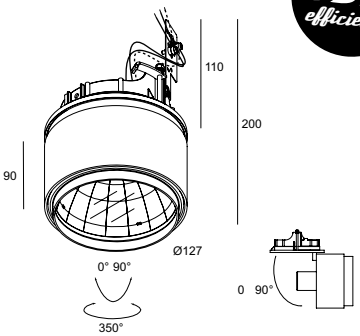

121 x 110 max.30

YOU-TURN 111 ◇
313 01 12 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.75W
0,6 IP20 1,0

OPTIONS
PLASTERKIT 185
TRANSFO

121 x 110 max.30

YOU-TURN H111 ◇
313 01 19 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / EXCL.EVG
1 x HIR111-CE-P max.70W
0,6 IP20 1,0

OPTIONS
PLASTERKIT 185
BALLASTSET HID

121 x 110 max.30

YOU-TURN HIT SP15 ◇
313 01 130 SP15 ◇
◇ = W-B
INCL. REFLECTOR SP-15° + GLASS

YOU-TURN HIT FL24 ◇
313 01 130 FL24 ◇
◇ = W-B
INCL. REFLECTOR FL-24° + GLASS

YOU-TURN HIT WFL43 ◇
313 01 130 WFL43 ◇
◇ = W-B
INCL. REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / EXCL.EVG
1 x HIT max.70W
0,9 IP20 1,0

OPTIONS
PLASTERKIT 185
BALLASTSET HID

www.deltalight.com/You-Turn



reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta


strellson








Roche



Obumex


FULL INFO / PAG TEC

Requirements

MOUNTING KIT R168 TRIMLESS
202 57 61 97

186 x 160 max.20

0,4



FULL INFO / PAG TEC

Options


HOLE IN ONE R15 PLATE ◇ **202 93 01 ◇** ◇ = W 0,6	Ø324 x 38	305 x 140 max.30



CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

Ultra In Trimless





Ø KIT x 160 max.20

ULTRA IN TRIMLESS 111 ◇
202 57 61 00 ◇
◇ = B-W
ADJUSTABLE 0°- 15° / 360°
G53 / 12V / EXCL.TRANSFO

1 x QR-LP111 max.100W


1,3 IP20 1,0

REQUIREMENTS
MOUNTING KIT R168 TRIMLESS
202 57 61 97

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

Ultra Spy



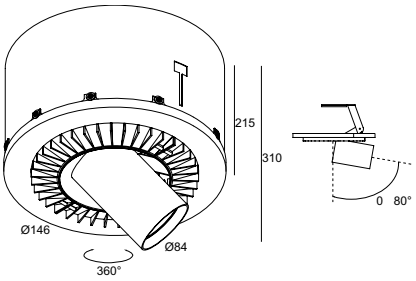

222 x 250 max.12

ULTRA SPY HIC SP10 ◇
202 91 10 66 SP10 ◇
◇ = W
INCL. REFLECTOR SP-10° + GLASS

ULTRA SPY HIC FL30 ◇
202 91 10 66 ◇
◇ = W
INCL. REFLECTOR FL-30° + GLASS

ULTRA SPY HIC WFL46 ◇
202 91 10 66 WFL46 ◇
◇ = W
INCL. REFLECTOR WFL-46° + GLASS

ADJUSTABLE 0°- 80° / 360°
G8.5 / EXCL.EVG

1 x HIT-TC max.70W

3,0 IP20 1,0

OPTIONS
BALLASTSET HID
HOLE IN ONE R15 PLATE









United Clothing of Belgium


"I wasn't really naked. I simply didn't have any clothes on."
Josephine Baker





HOLE IN ONE + R15 PLATE

Option


HOLE IN ONE R15 PLATE◇	Ø324 x 38	305 x 140
202 93 01◇		max.30


◇ = A / W


0,6




Hole In One

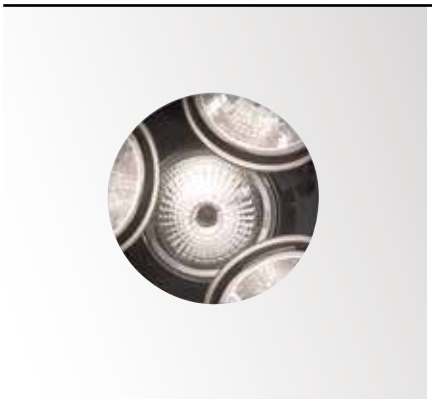

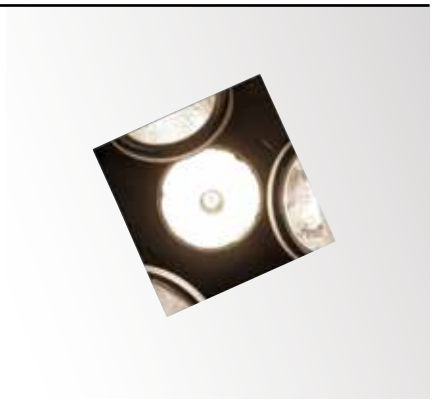






222 x 180 + H (PUT... CENTER) max.12

HOLE IN ONE R15
202 91 98 01
MOUNTING BOX
EXCL.PUT... CENTER
EXCL.PUT... CLICK
EXCL.PUT CLICKPLATE
EXCL.PUT CLICKPLATE + PUT... CLICK


2,0

OPTIONS
HOLE IN ONE R15 PLATE


ADVISED COMBINATIONS



1 x HOLE IN ONE R15
202 91 98 01
1 x PUT 111 CENTER
202 91 01 11
3 x PUT 50 CLICK
202 91 02 05




1 x HOLE IN ONE R15
202 91 98 01
1 x PUT C30 CENTER
202 91 01 30
3 x PUT 111 CLICK
202 91 02 11




1 x HOLE IN ONE R15
202 91 98 01
1 x PUT 111 CENTER
202 91 01 11
3 x PUT 111 CLICK
202 91 02 11


ADVISED COMBINATIONS



1 x HOLE IN ONE S15
202 91 98 11
1 x PUT 111 CENTER
202 91 01 11
3 x PUT 50 CLICK
202 91 02 05



1 x HOLE IN ONE S15
202 91 98 11
1 x PUT C30 CENTER
202 91 01 30
3 x PUT 111 CLICK
202 91 02 11



1 x HOLE IN ONE S15
202 91 98 11
1 x PUT 111 CENTER
202 91 01 11
3 x PUT 111 CLICK
202 91 02 11

FULL INFO / PAG TEC

Option

INSTALLATION


PUT CLICKPLATE 171 x Ø137
202 91 04 00
0,2





EXAMPLE:
PUT CLICKPLATE +
PUT 50 CLICK

CONTROL GEAR

TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

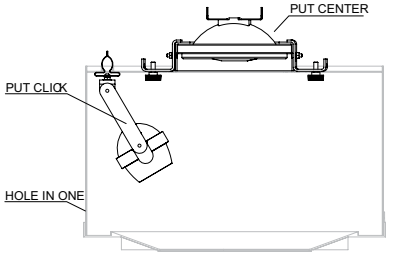


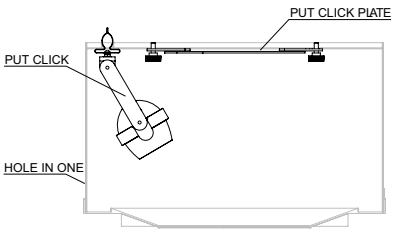


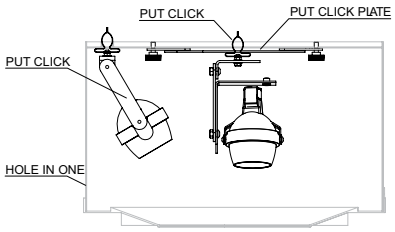










PUT 111 CENTER
202 91 01 11
FIXED
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W
0,2

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

PUT C30 CENTER
202 91 01 30
FIXED
E27Hs / EXCL.KVG-EVG
1 x HIPAR30 max.70W
0,3

OPTIONS
BALLASTSET HID






PUT C20 CENTER
202 91 01 20
FIXED
E27Hs / EXCL.KVG-EVG
1 x HIPAR20 35W
CE 0,4

OPTIONS
BALLASTSET HID






PUT 111 CLICK
202 91 02 11
ADJUSTABLE
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W
CE 0,2

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO






PUT 50 CLICK
202 91 02 05
ADJUSTABLE
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
CE 0,1

OPTIONS
PUT CLICK PLATE
TRANSFO





PUT C20 CLICK
202 91 02 20
ADJUSTABLE
E27Hs / EXCL.KVG-EVG
1 x HIPAR20 35W
CE 0,4

OPTIONS
PUT CLICK PLATE
BALLASTSET HID





OVERVIEW CARREE

Mini Carree ST OK



59 x 59


55 x 55

ADJUSTABLE 0-20°

QR-CBC35

PAG INT 101

Mini Carree II OK



70 x 70

55 x 55

ADJUSTABLE 0-30°

QR-CBC35

PAG INT 101

Carree ST



68 x 68

64 x 64

FIXED

QR-C51

PAG INT 105-107

Carree Trimless LED



77 x 77

Ø 121

FIXED

led

PAG INT 102

Carree Trimless OK



77 x 77

Ø 121

ADJUSTABLE 0-20°

QR-C51

PAG INT 103

Carree II



78 x 78

64 x 64

FIXED

QPAR51

PAG INT 108

Carree GT



81 x 81


75 x 75

FIXED

new led / QR-CB51 / QPAR51

PAG INT 110

Carree II OK



90 x 90

75 x 75

ADJUSTABLE 0-30°

QR-C51 / QPAR51

PAG INT 109

Carree 145



90 x 122

110 x 78

ADJUSTABLE 10-45°

QR-C51

PAG INT 113

new

Carree RS OK



95 x 95

Ø 89

ADJUSTABLE 0-12° / 0-20°

QR-C51 / QPAR51

PAG INT 113

Grand Carree 126 SBL



150 x 150

142 x 142

FIXED

TC-DEL

PAG INT 119

Grand Carree 111



150 x 150

142 x 142

ADJUSTABLE 0-50° / 360°

QR-LP111

PAG INT 119

Carree ST LED



79 x 79

75 x 75

FIXED

led

PAG INT 105

Carree ST L LED



79 x 79

75 x 75

FIXED

led

PAG INT 105

Carree ST OK



79 x 79

75 x 75

ADJUSTABLE 0-20°

QR-C51 / HIPAR51

PAG INT 107

Carree 235



90 x 157

145 x 78

1x FIXED + 1x ADJUSTABLE 10-45°

QR-C51

PAG INT 113

Carree Max



95 x 95

82 x 82

FIXED

QR-C51 / QPAR51

PAG INT 111

Carree RS



95 x 95


Ø 89

FIXED

QR-C51 / QPAR51

PAG INT 112

Grand Carree 211

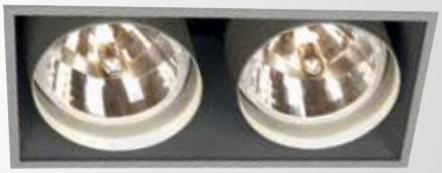


289 x 150

281 x 142

ADJUSTABLE 0-50° / 360°

QR-LP111

PAG INT 119




TRIMLESS



ST (Small Trim)



(Trim)



Carree RS (Fixed)



Carree RS **OK** (Adjustable)




FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 163 **207 01 163**	165 x 165	145 x 145
CONCRETE BOX 163 **270 11 163**	167 x 167 x 155	172 x 172
MOUNTING KIT 55 **202 00 55**	93 x 93 x 22	Ø89


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

Fixation S1



Mini Carree ST OK

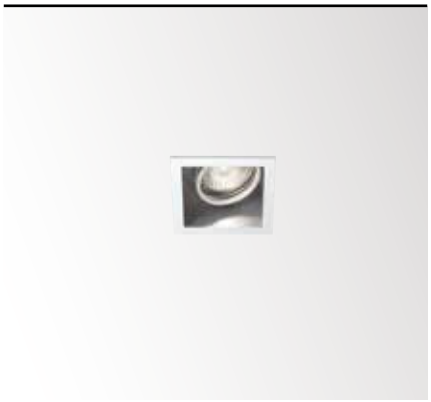




55 x 55 x 80 max.30


MINI CARREE ST OK S1 ◇
202 19 24 ◇
◇ = A / W
ADJUSTABLE 0°-20°
GZ4 / 12V / EXCL.TRANSFO
1 x QR-CBC35 max.35W

CE 0,2 IP20 0,5

OPTIONS
PLASTERKIT 163
CONCRETE BOX 163
MOUNTING KIT 55
TRANSFO

Mini Carree II OK

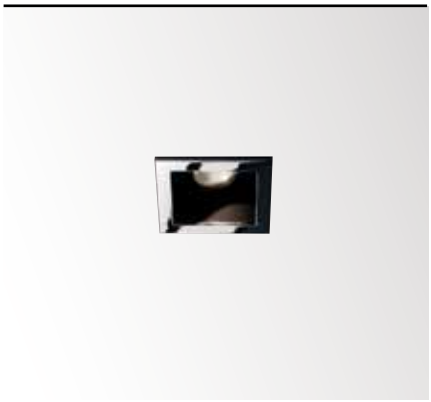




55 x 55 x 80 max.30


MINI CARREE II OK S1 ◇
202 19 41 ◇
◇ = A / C-B / W
ADJUSTABLE 0°- 30°
GZ4 / 12V / EXCL.TRANSFO
1 x QR-CBC35 max.35W

CE 0,2 IP20 0,5

OPTIONS
PLASTERKIT 163
CONCRETE BOX 163
MOUNTING KIT 55
TRANSFO

Carree Trimless LED

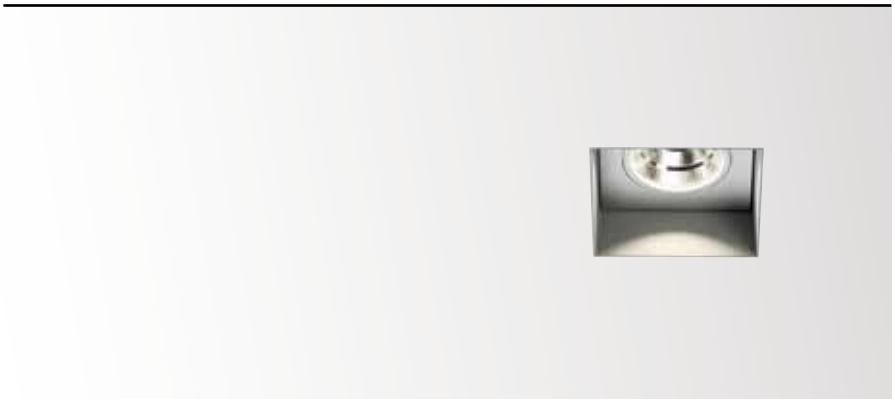



Ø KIT x 75 9 or 12

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**CARREE TRIMLESS LED 3033 S1 ◇** **202 51 28122 ◇** ◇ = A / W	**CARREE TRIMLESS LED 3033-9 S1 ◇** **202 51 29122 ◇** ◇ = A / W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**CARREE TRIMLESS LED 2733 S1 ◇** **202 51 28123 ◇** ◇ = A / W	**CARREE TRIMLESS LED 2733-9 S1 ◇** **202 51 29123 ◇** ◇ = A / W

FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC

0,3 IP20

REQUIREMENTS
MOUNTING KIT 75 TRIMLESS
202 01 75
or
MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM


Requirements

FULL INFO / PAG TEC

MOUNTING KIT 75 TRIMLESS
202 01 75

121 x 130 9 or 12


0,1



MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA

182

0,2



Options

FULL INFO / PAG TEC

	C / A B
CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21


Accessories

FULL INFO / PAG TEC

	C / A B
ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63



Fixation S1





DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali



Carree Trimless OK







Ø KIT x 130 9 or 12

CARREE TRIMLESS OK S1 ◇
202 51 51 ◇
◇ = A / B / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20

REQUIREMENTS
MOUNTING KIT 75 TRIMLESS
202 01 75
or
MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE





Carree Trimless OK + Anti Glare Tube




FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
PLASTERKIT 161 **207 01 161**	200 x 200	175 x 175
CONCRETE BOX 161 **270 11 161**	202 x 202 x 186	207 x 207
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121

CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22


Fixation S1



DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Carree ST LED





75 x 75 x 80 max.35

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**CARREE ST LED 3033 S1 ◇** **202 50 28122 ◇** ◇ = A / W	**CARREE ST LED 3033-9 S1 ◇** **202 50 29122 ◇** ◇ = A / W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**CARREE ST LED 2733 S1 ◇** **202 50 28123 ◇** ◇ = A / W	**CARREE ST LED 2733-9 S1 ◇** **202 50 29123 ◇** ◇ = A / W


FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC

0,4 IP20

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM

Carree ST L LED





75 x 75 x 80 max.35

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**CARREE ST L LED 3033 S1 ◇** **202 53 28122 ◇** ◇ = W-W / B-MMAT	**CARREE ST L LED 3033-9 S1 ◇** **202 53 29122 ◇** ◇ = W-W / B-MMAT
2700K	620 lm	525 lm
REFLECTOR FL-33°	**CARREE ST L LED 2733 S1 ◇** **202 53 28123 ◇** ◇ = W-W / B-MMAT	**CARREE ST L LED 2733-9 S1 ◇** **202 53 29123 ◇** ◇ = W-W / B-MMAT

FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC

0,4 IP20 IP43 IP20 IP20

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM



Carree ST L LED B-MMAT



FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
PLASTERKIT 161 **207 01 161**	200 x 200	175 x 175
PLASTERKIT 162 **207 01 162**	200 x 200	155 x 155
CONCRETE BOX 161 **270 11 161**	202 x 202 x 186	207 x 207
CONCRETE BOX 162 **270 11 162**	202 x 202 x 186	207 x 207
CONCRETE PACK S75 **207 02 9071**	250 x 220 x 150	-
CONCRETE PACK C S75 **207 02 9071 C**	310 x 250 x 150	-
CONCRETE PACK T S75 **207 02 9071 T**	450 x 250 x 150	-
EXPOSED CONCRETE PACK S75 **207 02 9093**	250 x 200 x 150	-
EXPOSED CONCRETE PACK C S75 **207 02 9093 C**	310 x 250 x 150	-
EXPOSED CONCRETE PACK T S75 **207 02 9093 T**	450 x 250 x 150	-
MOUNTING KIT 64 **202 00 64**	97 x 97 x 22	Ø105
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121


CONTROL GEAR	A B C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET C50 20 4,0 kV **200 44 21**	140 x 67 x 31
BALLASTSET C50 35 4,0 kV **200 44 36**	140 x 67 x 31

FULL INFO / PAG TEC


Accessories

	A B C	
ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	


Fixation S1




Fixation S2



Carree ST

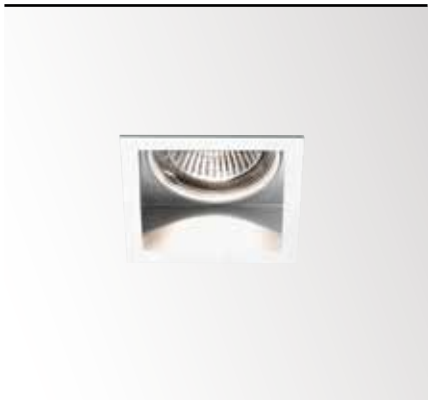



64 x 64 x 90 max.35

CARREE ST S1 ◇
202 50 50 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-C51 max.50W


CE 0,2 IP20 0,5

OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
MOUNTING KIT 64
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

Carree ST OK






75 x 75 x 80 max.35

CARREE ST OK S1 ◇
202 50 51 ◇
◇ = A / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50




75 x 75 x 160 max.35

CARREE ST OK C50 S1 ◇
202 47 51 ◇
◇ = A / W
ADJUSTABLE 0°- 20°
GX10 / EXCL.EVG
1 x HIPAR51 max.35W

CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
BALLASTSET C50



75 x 75 x 80

CARREE ST OK S2 ◇
202 50 53 ◇
◇ = A / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
CONCRETE PACK S75 / C S75 / T S75
EXPOSED CONCRETE PACK S75 / C S75 / T S75
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
PLASTERKIT 161 **207 01 161**	200 x 200	175 x 175
PLASTERKIT 162 **207 01 162**	200 x 200	155 x 155
CONCRETE BOX 161 **270 11 161**	202 x 202 x 186	207 x 207
CONCRETE BOX 162 **270 11 162**	202 x 202 x 186	207 x 207
CONCRETE PACK S75 **207 02 9071**	250 x 220 x 150	-
CONCRETE PACK C S75 **207 02 9071 C**	310 x 250 x 150	-
CONCRETE PACK T S75 **207 02 9071 T**	450 x 250 x 150	-
EXPOSED CONCRETE PACK S75 **207 02 9093**	250 x 200 x 150	-
EXPOSED CONCRETE PACK C S75 **207 02 9093 C**	310 x 250 x 150	-
EXPOSED CONCRETE PACK T S75 **207 02 9093 T**	450 x 250 x 150	-
MOUNTING KIT 64 **202 00 64**	97 x 97 x 22	Ø105
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121


CONTROL GEAR	A B C	
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	
BALLASTSET C50 20 4,0 kV **200 44 21**	140 x 67 x 31	
BALLASTSET C50 35 4,0 kV **200 44 36**	140 x 67 x 31	

FULL INFO / PAG TEC


Accessories

	A B C	
ANTI GLARE TUBE ◇ **201 34 00** ◇ ◇ = B / W max. 20W	Ø52 x 63	
DICROIC FILTER 50 **201 30 11** 🔵 **2 0 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	

Fixation S1




Fixation S2



Carree II






64 x 64 x 90 max.35

CARREE II S1 ◇
202 20 31 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
CE 0,2 IP20 0,5

OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
MOUNTING KIT 64
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50



64 x 64 x 100 max.35

CARREE II Hi S1 ◇
202 20 33 ◇
◇ = A / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
CE 0,2 IP20 0,5

OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
MOUNTING KIT 64
led LED SOLUTION - PAG TEC 4-5





64 x 64 x 90

CARREE II S2 ◇
202 20 32 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
CE 0,2 IP20 0,5

OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

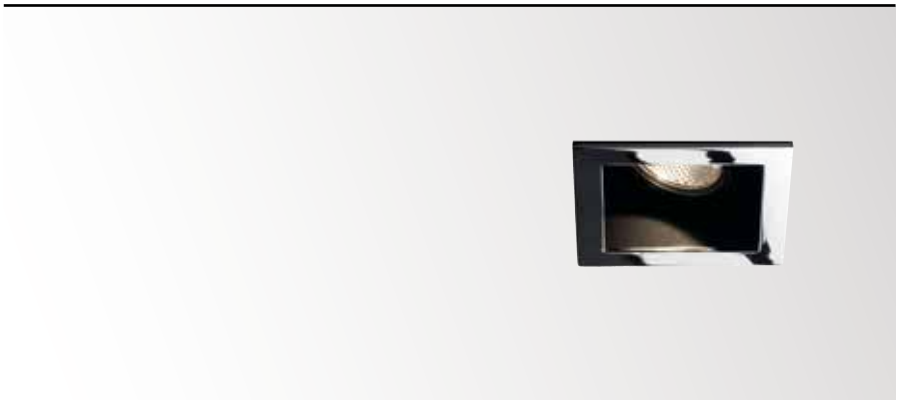




75 x 75 x 80 max.35

CARREE II OK S1 ◇
202 21 31 ◇
◇ = A / ALU-A / ALU-B / C-B / W
ADJUSTABLE 0°- 30°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50



75 x 75 x 90 max.35

CARREE II OK Hi S1 ◇
202 21 33 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
led LED SOLUTION - PAG TEC 4-5




75 x 75 x 80

CARREE II OK S2 ◇
202 21 32 ◇
◇ = A / ALU-A / ALU-B / C-B / W
ADJUSTABLE 0°- 30°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
CONCRETE PACK S75 / C S75 / T S75
EXPOSED CONCRETE PACK S75 / C S75 / T S75
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50



75 x 75 x 90

CARREE II OK Hi S2 ◇
202 21 34 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
CONCRETE PACK S75 / C S75 / T S75
EXPOSED CONCRETE PACK S75 / C S75 / T S75
led LED SOLUTION - PAG TEC 4-5


FULL INFO / PAG TEC

Options


INSTALLATION	A B C	
PLASTERKIT 111 **202 25 19**	185 x 185	90 x 180
PLASTERKIT 161 **207 01 161**	200 x 200	175 x 175
CONCRETE BOX 111 **202 25 18**	185 x 185 x 160	190 x 190
CONCRETE BOX 161 **270 11 161**	202 x 202 x 186	207 x 207
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121

CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

Fixation S1




Fixation S2




new

led

Carree GT LED

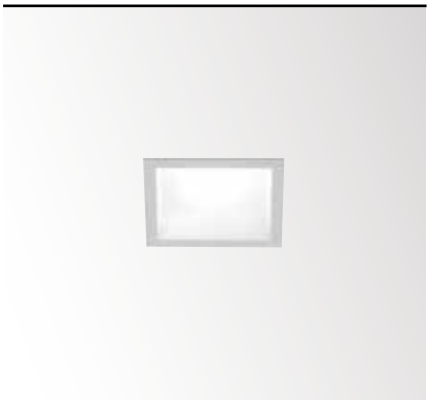



75 x 75 x 110 max.35

	CRI > 80
4000K	
	ON REQUEST
3000K	660 lm
REFLECTOR FL-33°	**CARREE GT LED 3033 S1** ◇ **202 49 28122** ◇ ◇ = A / W
2700K	620 lm
REFLECTOR FL-33°	**CARREE GT LED 2733 S1** ◇ **202 49 28123** ◇ ◇ = A / W


FIXED
INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC


III CE 0,5 IP20 IP44 IP20 IP20

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Carree GT

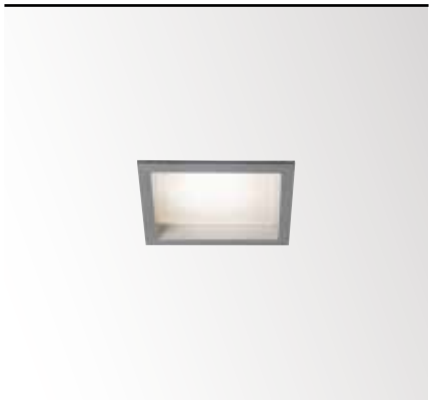




75 x 75 x 100 max.35

CARREE GT S1 ◇
202 50 11 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-CB51 max.50W

0,4 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
led LED SOLUTION - PAG TEC 4-5
TRANSFO



75 x 75 x 110


CARREE GT Hi S1 ◇
202 52 11 ◇
◇ = A / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,4 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
led LED SOLUTION - PAG TEC 4-5

Carree Max






82 x 82 x 100 max.35

CARREE MAX S1 ◇
202 22 05 ◇

◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
led LED SOLUTION - PAG TEC 4-5
TRANSFO




82 x 82 x 100

CARREE MAX S2 ◇
202 22 15 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
led LED SOLUTION - PAG TEC 4-5
TRANSFO




82 x 82 x 100 max.35

CARREE MAX Hi S1 ◇
202 22 25 ◇

◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
led LED SOLUTION - PAG TEC 4-5



82 x 82 x 100

CARREE MAX Hi S2 ◇
202 22 35 ◇
◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
led LED SOLUTION - PAG TEC 4-5

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 108 **202 20 19**	185 x 185	75 x 80
CONCRETE BOX 108 **202 20 18**	185 x 185 x 160	190 x 190
PLASTERKIT 109 **202 21 29**	140 x 260	85 x 230
CONCRETE BOX 109 **202 21 28**	140 x 260 x 120	145 x 265
PLASTERKIT 110 **202 21 59**	140 x 260	85 x 120
CONCRETE BOX 110 **202 21 58**	140 x 260 x 120	145 x 265


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC


Accessories

ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W

Fixation S1




Fixation S2





Carree Rs






89 x 90 max.35

CARREE Rs50 S1 ◇
202 20 06 ◇

◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
IP20

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50




89 x 100 max.35

CARREE Rs50 Hi S1 ◇
202 20 07 ◇

◇ = A / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5




89 x 90

CARREE Rs50 S2 ◇
202 20 16 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
IP20

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50




89 x 100


CARREE Rs50 Hi S2 ◇
202 20 17 ◇
◇ = A / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5

new

Carree Rs OK

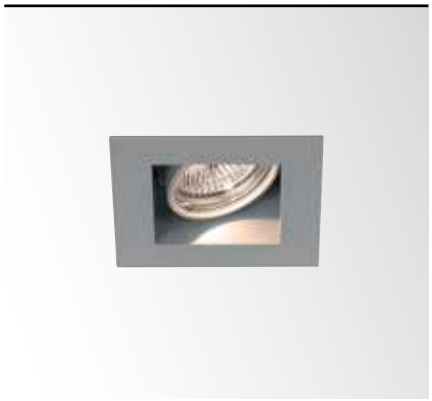




89 x 100 min.5

CARREE Rs50 OK ◇
202 20 161 ◇
◇ = A / W
ADJUSTABLE 0°-12° / 0°-20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50



89 x 110 min.5


CARREE Rs50 OK Hi ◇
202 20 171 ◇
◇ = A / W
ADJUSTABLE 0°-12° / 0°-20°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5

Carree 145





110 x 78 x 90 max.35

CARREE 145 S1 ◇
202 21 15 ◇
◇ = A / W
ADJUSTABLE 10° - 45°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


0,4 IP20 0,5

OPTIONS
PLASTERKIT 110
CONCRETE BOX 110
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
DICROIC FILTER 50

Carree 235





145 x 78 x 90 max.35

CARREE 235 S1 ◇
202 21 20 ◇
◇ = A / W
1 x ADJUSTABLE 10°- 45°
1 x FIXED
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W

0,4 IP20 0,5


OPTIONS
PLASTERKIT 109
CONCRETE BOX 109
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
DICROIC FILTER 50







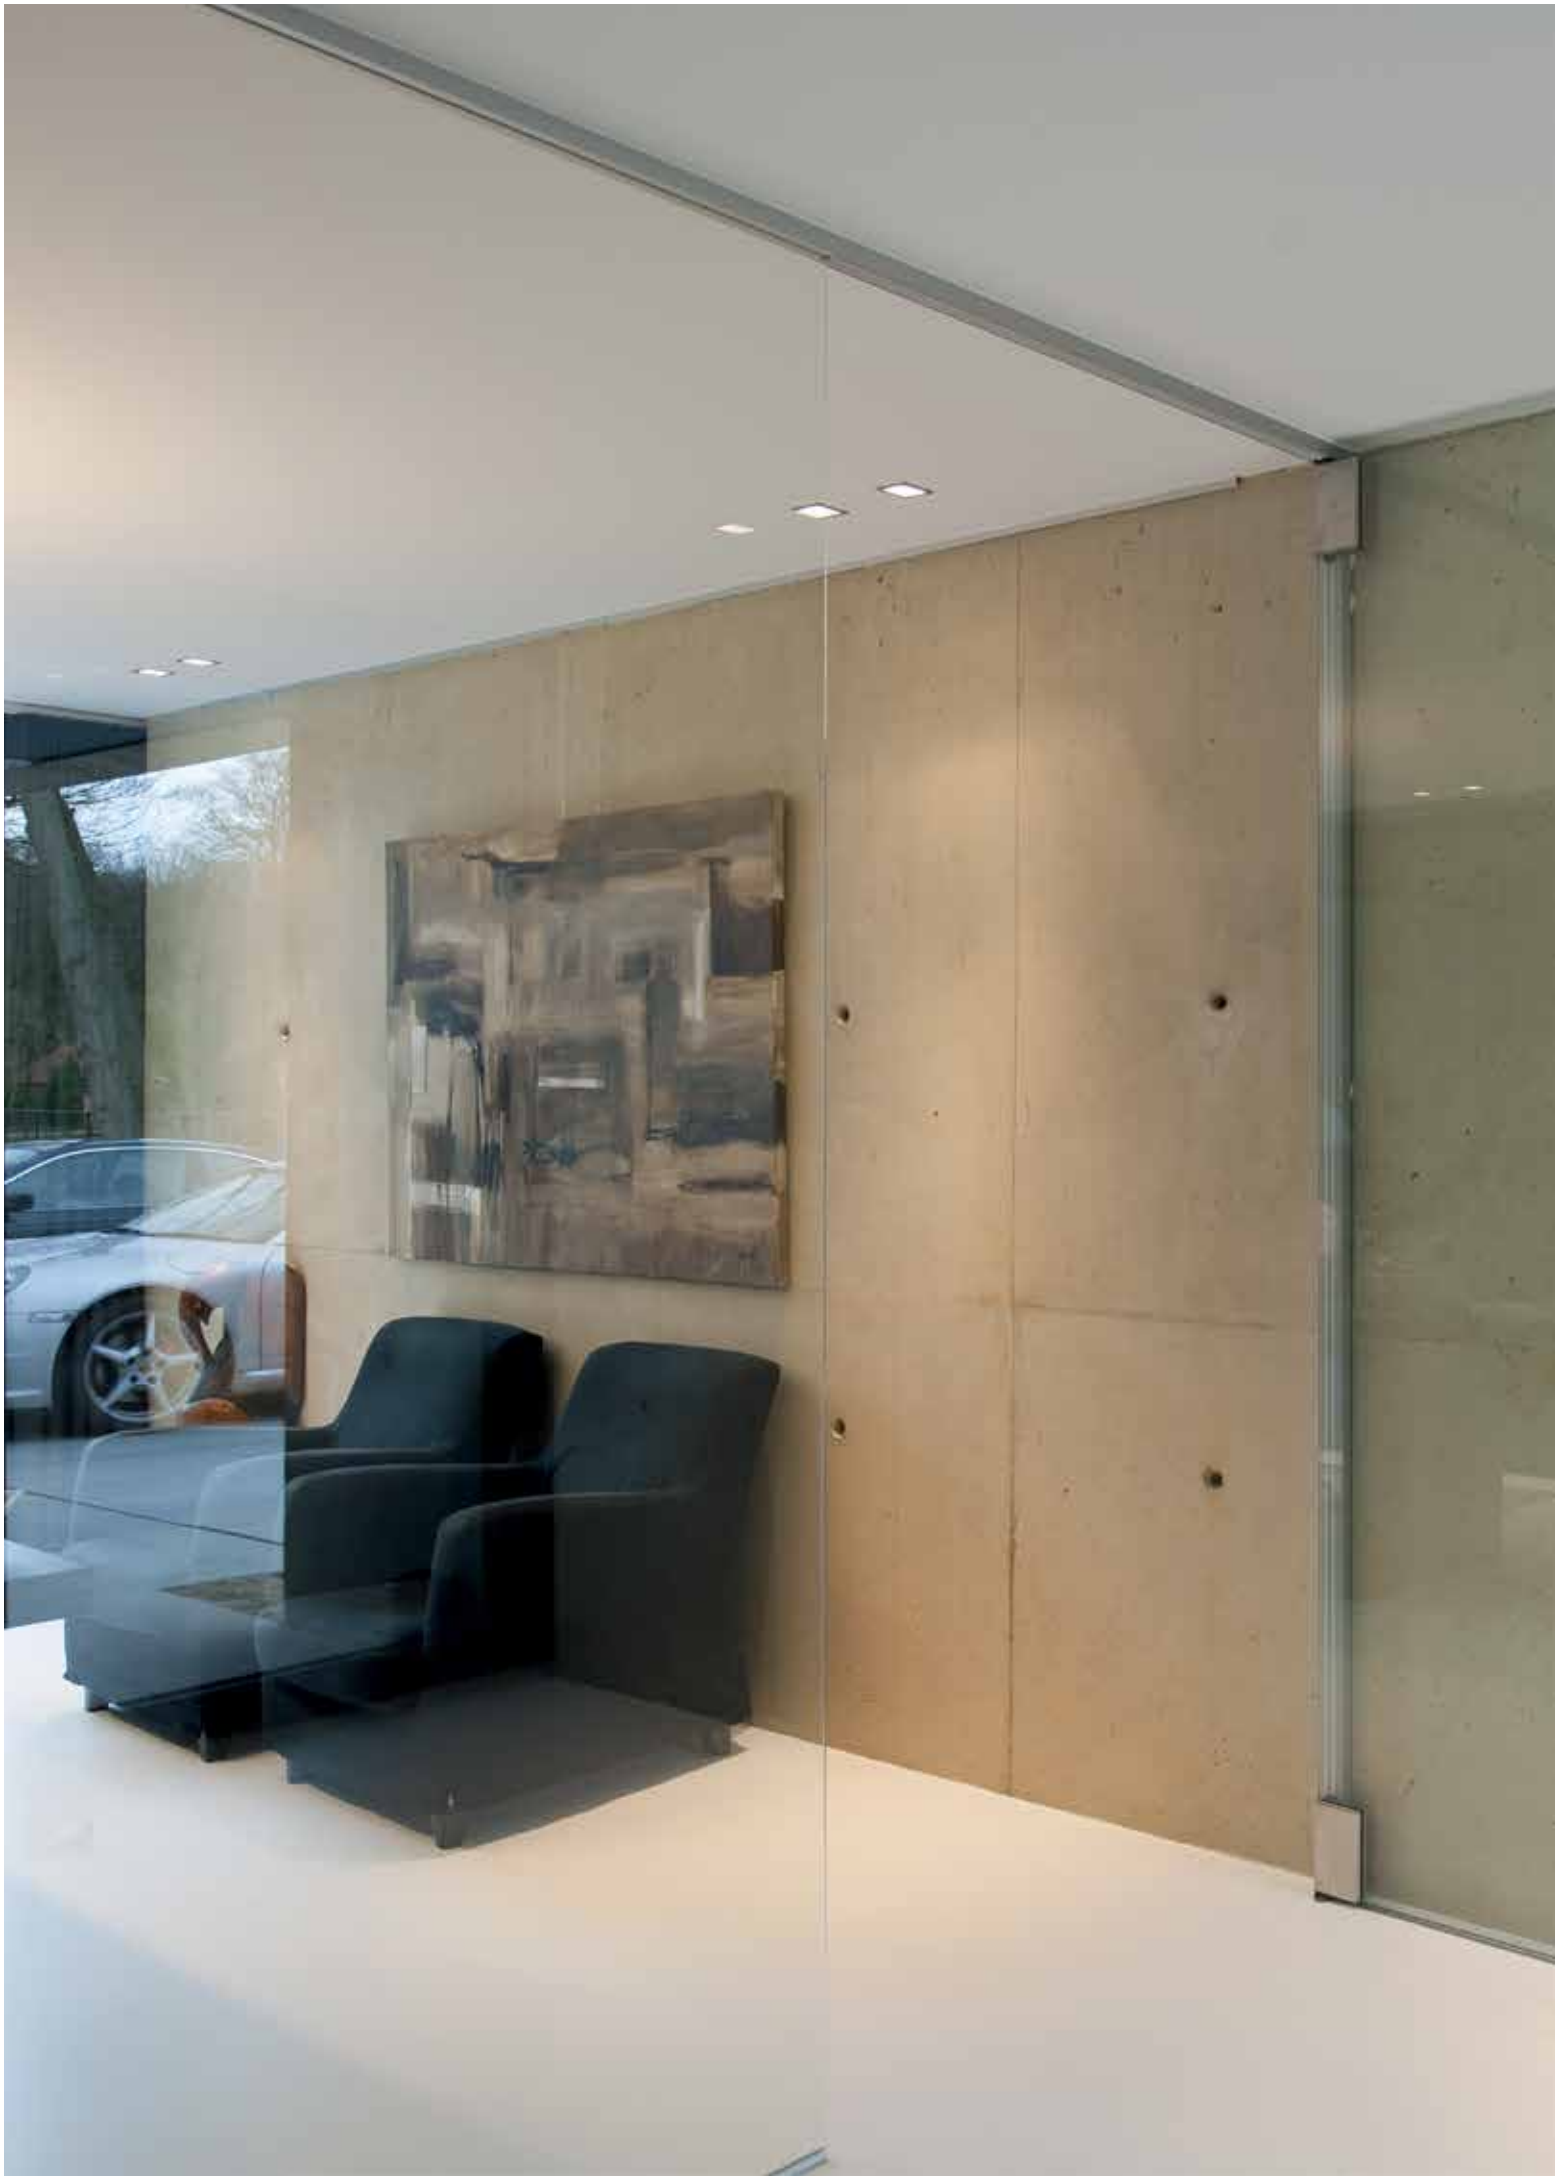






FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 167 **207 01 167**	200 x 200	150 x 150
PLASTERKIT 168 **207 01 168**	180 x 349	150 x 290

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

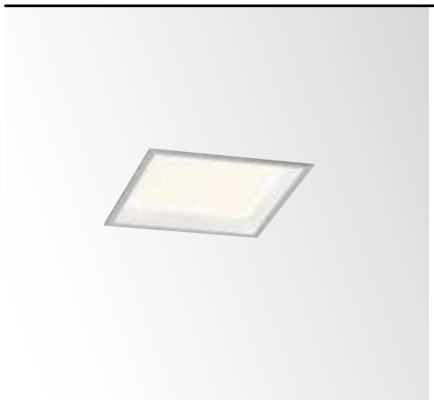








142 x 142 x 120 max.25

GRAND CARREE 126 SBL ◇
202 28 26 ◇
◇ = A / W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-DEL 26W

IP20 0,1

OPTIONS
PLASTERKIT 167




142 x 142 x 120 max.25

GRAND CARREE 111 ◇
202 24 11 ◇
◇ = A / W
ADJUSTABLE 0°- 50° / 360°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W

IP20 1,0

OPTIONS
PLASTERKIT 167
TRANSFO



281 x 142 x 120 max.25

GRAND CARREE 211 ◇
202 24 21 ◇
◇ = A / W
ADJUSTABLE 0°- 50° / 360°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W

IP20 1,0

OPTIONS
PLASTERKIT 168
TRANSFO



GRAND CARREE 111 W







OVERVIEW MINIGRID

Minigrid In ZB Reo



ADJUSTABLE 0-30°

led

PAG INT 125

Minigrid In ZB



ADJUSTABLE 0-30°

QR-CBC51 / QR-C51

QR-LP70

QPAR51

PAG INT 127

Minigrid In Reo



ADJUSTABLE 0-30°/350°

led

PAG INT 139

Minigrid In HP



ADJUSTABLE 0-20°/350°

led

PAG INT 141

Minigrid In



ADJUSTABLE 0-30°

QR-CBC51 / QR-C51

QR-LP70

QPAR51

PAG INT 143

Minigrid In Trimless Reo



ADJUSTABLE 0-30°/350°

led

PAG INT 129

Minigrid In Trimless HP




ADJUSTABLE 0-20°/350°

led

PAG INT 131

Minigrid In Trimless

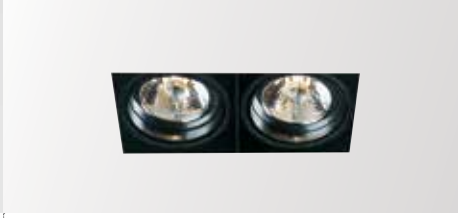

ADJUSTABLE 0-30°

QR-CBC51 / QR-C51

QR-LP70

QPAR51

PAG INT 135



Minigrid In **TRIMLESS**



Minigrid In (Trim)



Minigrid In Reo



Minigrid In **HP** (High Power)



FULL INFO / PAG TEC

Options


INSTALLATION		
MINIGRID IN ZB 1 BOX L **202 70 98 01**	140 x 140 x 128	141 x 141
MINIGRID IN ZB 2 BOX L **202 70 98 02**	140 x 250 x 128	141 x 251


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali









	109 x 109 x 113		219 x 109 x 113	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**MINIGRID IN ZB 1 REO 3033 ◇** **202 70 28122 ◇** ◇ = A / W	**MINIGRID IN ZB 1 REO 3033-9 ◇** **202 70 29122 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 3033 ◇** **202 70 28222 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 3033-9 ◇** **202 70 29222 ◇** ◇ = A / W
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**MINIGRID IN ZB 1 REO 2733 ◇** **202 70 28123 ◇** ◇ = A / W	**MINIGRID IN ZB 1 REO 2733-9 ◇** **202 70 29123 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 2733 ◇** **202 70 28223 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 2733-9 ◇** **202 70 29223 ◇** ◇ = A / W
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
	ADJUSTABLE 0°- 30° INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,5 IP20 IP23 OPTIONS MINIGRID IN ZB 1 BOX L LED POWER SUPPLY 350mA-DC / DIM		ADJUSTABLE 0°- 30° INCL.2 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,9 IP20 IP23 OPTIONS MINIGRID IN ZB 2 BOX L LED POWER SUPPLY 350mA-DC / DIM	



FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
MINIGRID IN ZB 1 BOX L **202 70 98 01**	140 x 140 x 128	141 x 141
MINIGRID IN ZB 2 BOX L **202 70 98 02**	140 x 250 x 128	141 x 251
MINIGRID IN ZB 3 BOX L **202 70 98 03**	140 x 357 x 128	141 x 358

CONTROL GEAR	A B C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories

	A B C	
CONE 50 ◇ **201 31 50 ◇** ◇ = ALU / W ◁ QR-CB51 max. 24°	Ø75 / Ø42 / H23	
CLIP 50 ◇ **201 30 98 ◇** ◇ = A / B / W	Ø50 / H12	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	








109 x 109 x 113

MINIGRID IN ZB 1 50 ◇
202 70 55 01 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W




0,4 IP20 0,5

OPTIONS
MINIGRID IN ZB 1 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

219 x 109 x 113

MINIGRID IN ZB 2 50 ◇
202 70 55 02 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W
2 x QR-CBC51 max.35W




0,8 IP20 0,5

OPTIONS
MINIGRID IN ZB 2 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

326 x 109 x 113

MINIGRID IN ZB 3 50 ◇
202 70 55 03 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
3 x QR-C51 max.50W
3 x QR-CBC51 max.35W




1,2 IP20 0,5

OPTIONS
MINIGRID IN ZB 3 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

109 x 109 x 113

MINIGRID IN ZB 1 QR ◇
202 70 00 01 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
1 x QR-LP70 max.50W




0,4 IP20 1,0

OPTIONS
MINIGRID IN ZB 1 BOX L
TRANSFO

219 x 109 x 113

MINIGRID IN ZB 2 QR ◇
202 70 00 02 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
2 x QR-LP70 max.50W




0,8 IP20 0,5

OPTIONS
MINIGRID IN ZB 2 BOX L
TRANSFO

326 x 109 x 113

MINIGRID IN ZB 3 QR ◇
202 70 00 03 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
3 x QR-LP70 max.50W




1,2 IP20 1,0

OPTIONS
MINIGRID IN ZB 3 BOX L
TRANSFO

109 x 109 x 113

MINIGRID IN ZB 1 50 Hi ◇
202 70 66 01 ◇
◇ = A
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W




0,4 IP20 0,5

OPTIONS
MINIGRID IN ZB 1 BOX L
led LED SOLUTION - PAG TEC 4-5

219 x 109 x 113

MINIGRID IN ZB 2 50 Hi ◇
202 70 66 02 ◇
◇ = A
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W



0,8 IP20 0,5

OPTIONS
MINIGRID IN ZB 2 BOX L
led LED SOLUTION - PAG TEC 4-5




FULL INFO / PAG TEC

Requirements

MINIGRID IN 1 MOUNTING KIT
202 71 95 01

130 x 130 max.25


0,5



MINIGRID IN 2 MOUNTING KIT
202 71 95 02

130 x 233 max.25


0,8



MINIGRID IN 1 MOUNTING KIT LARGE
202 71 95 01L

145 x 145 max.25


0,9



MINIGRID IN 2 MOUNTING KIT LARGE
202 71 95 02L

145 x 233 max.25

1,0




CONCRETE PACK MGIT1 **202 71 96 01**	133 x 160 x 133	160 x 160 x 140
CONCRETE PACK MGIT2 **202 71 96 02**	234 x 160 x 133	260 x 160 x 140

FULL INFO / PAG TEC


Options


CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

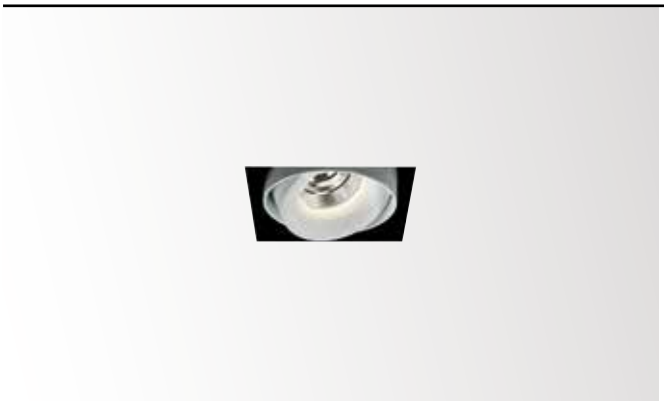







	KIT x 85		KIT x 85	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**MINIGRID IN TRIMLESS 1 REO 3033 ◇** **202 73 28122 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 REO 3033-9 ◇** **202 73 29122 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 REO 3033 ◇** **202 73 28222 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 REO 3033-9 ◇** **202 73 29222 ◇** ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**MINIGRID IN TRIMLESS 1 REO 2733 ◇** **202 73 28123 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 REO 2733-9 ◇** **202 73 29123 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 REO 2733 ◇** **202 73 28223 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 REO 2733-9 ◇** **202 73 29223 ◇** ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
	ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,5 IP20 IP23 REQUIREMENTS MINIGRID IN 1 MOUNTING KIT 202 71 95 01 or MINIGRID IN 1 MOUNTING KIT LARGE 202 71 95 01L or CONCRETE PACK MGIT1 OPTIONS LED POWER SUPPLY 350mA-DC / DIM		ADJUSTABLE 0°- 30° / 350° INCL.2 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,9 IP20 IP23 REQUIREMENTS MINIGRID IN 2 MOUNTING KIT 202 71 95 02 or MINIGRID IN 2 MOUNTING KIT LARGE 202 71 95 02L or CONCRETE PACK MGIT2 OPTIONS LED POWER SUPPLY 350mA-DC / DIM	




FULL INFO / PAG TEC

Requirements

MINIGRID IN 1 MOUNTING KIT HP
202 71 95 01 HP

130 x 130 max.25


0,5



MINIGRID IN 2 MOUNTING KIT HP
202 71 95 02 HP

130 x 233 max.25

0,8




FULL INFO / PAG TEC


Options


CONTROL GEAR	C A B
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

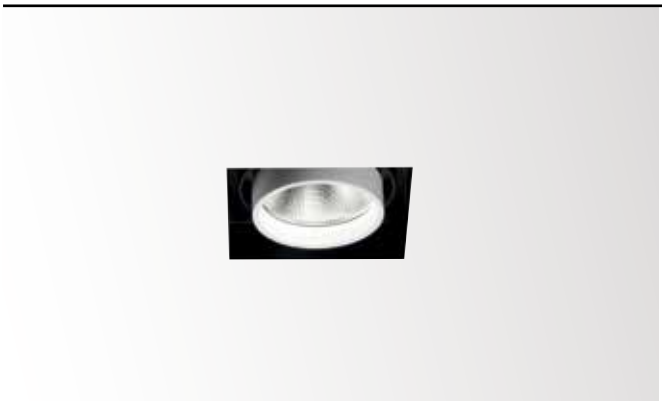







	KIT x 150		KIT x 150	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	1570 lm	1295 lm	2x 1570 lm	2x 1295 lm
REFLECTOR SP-17°	**MINIGRID IN TRIMLESS 1 HP 3017 ◇** **202 731 20112 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 3017-9 ◇** **202 731 209112 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 3017 ◇** **202 731 20212 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 3017-9 ◇** **202 731 209212 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN TRIMLESS 1 HP 3037 ◇** **202 731 20122 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 3037-9 ◇** **202 731 209122 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 3037 ◇** **202 731 20222 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 3037-9 ◇** **202 731 209222 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN TRIMLESS 1 HP 3060 ◇** **202 731 20132 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 3060-9 ◇** **202 731 209132 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 3060 ◇** **202 731 20232 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 3060-9 ◇** **202 731 209232 ◇** ◇ = W-B
2700K	1475 lm	1284 lm	2x 1475 lm	2x 1284 lm
REFLECTOR SP-17°	**MINIGRID IN TRIMLESS 1 HP 2717 ◇** **202 731 20113 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 2717-9 ◇** **202 731 209113 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 2717 ◇** **202 731 20213 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 2717-9 ◇** **202 731 209213 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN TRIMLESS 1 HP 2737 ◇** **202 731 20123 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 2737-9 ◇** **202 731 209123 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 2737 ◇** **202 731 20223 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 2737-9 ◇** **202 731 209223 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN TRIMLESS 1 HP 2760 ◇** **202 731 20133 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 2760-9 ◇** **202 731 209133 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 2760 ◇** **202 731 20233 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 2760-9 ◇** **202 731 209233 ◇** ◇ = W-B
	ADJUSTABLE 0°- 22° / 350° INCL.1 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC CE 0,5 IP20 REQUIREMENTS MINIGRID IN 1 MOUNTING KIT HP 202 71 95 01 HP OPTIONS LED POWER SUPPLY 500mA-DC / DIM		ADJUSTABLE 0°- 22° / 350° INCL.2 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC CE 0,9 IP20 REQUIREMENTS MINIGRID IN 2 MOUNTING KIT HP 202 71 95 02 HP OPTIONS LED POWER SUPPLY 500mA-DC / DIM	


BELONGS
TO YOU







FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
MINIGRID IN 1 MK **202 71 95 01**	128 x 128 x 100	130 x 130
MINIGRID IN 1 MK L **202 71 95 01L**	245 x 245 x 100	145 x 145
MINIGRID IN 2 MK **202 71 95 02**	128 x 231 x 100	130 x 233
MINIGRID IN 2 MK L **202 71 95 02L**	342 x 245 x 100	145 x 233
CONCRETE PACK MGIT1 **202 71 96 01**	133 x 160 x 133	160 x 160 x 140
CONCRETE PACK MGIT2 **202 71 96 02**	234 x 160 x 133	260 x 160 x 140
MINIGRID IN TRIMLESS 3 KIT **202 71 97 03**	112 x 314 x 54	315 x 113

CONTROL GEAR	A B C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories


	A B C	
CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W ◁ QR-CB51 max. 24°	Ø75 / Ø42 / H23	
CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W	





108 x 108 x 140 max.40

MINIGRID IN TRIMLESS 1 50 ◇
202 71 55 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W




CE 0,4 IP20 0,5

OPTIONS
MINIGRID IN 1 MOUNTING KIT
MINIGRID IN 1 MOUNTING KIT LARGE
CONCRETE PACK MGIT 1
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

211 x 108 x 140 max.40

MINIGRID IN TRIMLESS 2 50 ◇
202 71 55 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W
2 x QR-CBC51 max.35W




CE 0,8 IP20 0,5

OPTIONS
MINIGRID IN 2 MOUNTING KIT
MINIGRID IN 2 MOUNTING KIT LARGE
CONCRETE PACK MGIT 2
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

310 x 108 x 140 max.40

MINIGRID IN TRIMLESS 3 50 ◇
202 71 55 03 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
3 x QR-C51 max.50W
3 x QR-CBC51 max.35W




CE 1,1 IP20 0,5

OPTIONS
MINIGRID IN TRIMLESS 3 KIT
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

108 x 108 x 140 max.40

MINIGRID IN TRIMLESS 1 QR ◇
202 71 00 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
1 x QR-LP70 max.50W




CE 0,4 IP20 1,0

OPTIONS
MINIGRID IN 1 MOUNTING KIT
MINIGRID IN 1 MOUNTING KIT LARGE
CONCRETE PACK MGIT 1
TRANSFO

211 x 108 x 140 max.40

MINIGRID IN TRIMLESS 2 QR ◇
202 71 00 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
2 x QR-LP70 max.50W




CE 0,8 IP20 1,0

OPTIONS
MINIGRID IN 2 MOUNTING KIT
MINIGRID IN 2 MOUNTING KIT LARGE
CONCRETE PACK MGIT 2
TRANSFO

310 x 108 x 140 max.40

MINIGRID IN TRIMLESS 3 QR ◇
202 71 00 03 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
3 x QR-LP70 max.50W




CE 1,1 IP20 1,0

OPTIONS
MINIGRID IN TRIMLESS 3 KIT
TRANSFO

108 x 108 x 140 max.40

MINIGRID IN TRIMLESS 1 50 Hi ◇
202 71 66 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W




CE 0,4 IP20 0,5

OPTIONS
MINIGRID IN 1 MOUNTING KIT
MINIGRID IN 1 MOUNTING KIT LARGE
CONCRETE PACK MGIT 1
led LED SOLUTION - PAG TEC 4-5

211 x 108 x 140 max.40

MINIGRID IN TRIMLESS 2 50 Hi ◇
202 71 66 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W



CE 0,8 IP20 0,5

OPTIONS
MINIGRID IN 2 MOUNTING KIT
MINIGRID IN 2 MOUNTING KIT LARGE
CONCRETE PACK MGIT 2
led LED SOLUTION - PAG TEC 4-5







FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 127 **202 72 99 02**	215 x 250	120 x 225


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali









	111 x 111 x 60 max.22		214 x 111 x 60 max.22	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**MINIGRID IN 1 REO 3033 ◇** **202 74 28122 ◇** ◇ = W-B	**MINIGRID IN 1 REO 3033-9 ◇** **202 74 29122 ◇** ◇ = W-B	**MINIGRID IN 2 REO 3033 ◇** **202 74 28222 ◇** ◇ = W-B	**MINIGRID IN 2 REO 3033-9 ◇** **202 74 29222 ◇** ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**MINIGRID IN 1 REO 2733 ◇** **202 74 28123 ◇** ◇ = W-B	**MINIGRID IN 1 REO 2733-9 ◇** **202 74 29123 ◇** ◇ = W-B	**MINIGRID IN 2 REO 2733 ◇** **202 74 28223 ◇** ◇ = W-B	**MINIGRID IN 2 REO 2733-9 ◇** **202 74 29223 ◇** ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
	ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,6 IP20 IP23 OPTIONS PLASTERKIT 126 LED POWER SUPPLY 350mA-DC / DIM		ADJUSTABLE 0°- 30° / 350° INCL.2 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 1,0 IP20 IP23 OPTIONS PLASTERKIT 127 LED POWER SUPPLY 350mA-DC / DIM	

reddot design award winner 2011

GREEN GOOD DESIGN award



FULL INFO / PAG TEC

Options

INSTALLATION	C A B	
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 127 **202 72 99 02**	215 x 250	120 x 225


CONTROL GEAR	C A B
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Minigrid In HP









	111 x 111 x 150 max.22		214 x 111 x 150 max.22	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	1570 lm	1295 lm	2x 1570 lm	2x 1295 lm
REFLECTOR SP-17°	**MINIGRID IN 1 HP 3017 ◇** **202 741 20112 ◇** ◇ = W-B	**MINIGRID IN 1 HP 3017-9 ◇** **202 741 209112 ◇** ◇ = W-B	**MINIGRID IN 2 HP 3017 ◇** **202 741 20212 ◇** ◇ = W-B	**MINIGRID IN 2 HP 3017-9 ◇** **202 741 209212 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN 1 HP 3037 ◇** **202 741 20122 ◇** ◇ = W-B	**MINIGRID IN 1 HP 3037-9 ◇** **202 741 209122 ◇** ◇ = W-B	**MINIGRID IN 2 HP 3037 ◇** **202 741 20222 ◇** ◇ = W-B	**MINIGRID IN 2 HP 3037-9 ◇** **202 741 209222 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN 1 HP 3060 ◇** **202 741 20132 ◇** ◇ = W-B	**MINIGRID IN 1 HP 3060-9 ◇** **202 741 209132 ◇** ◇ = W-B	**MINIGRID IN 2 HP 3060 ◇** **202 741 20232 ◇** ◇ = W-B	**MINIGRID IN 2 HP 3060-9 ◇** **202 741 209232 ◇** ◇ = W-B
2700K	1475 lm	1284 lm	2x 1475 lm	2x 1284 lm
REFLECTOR SP-17°	**MINIGRID IN 1 HP 2717 ◇** **202 741 20113 ◇** ◇ = W-B	**MINIGRID IN 1 HP 2717-9 ◇** **202 741 209113 ◇** ◇ = W-B	**MINIGRID IN 2 HP 2717 ◇** **202 741 20213 ◇** ◇ = W-B	**MINIGRID IN 2 HP 2717-9 ◇** **202 741 209213 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN 1 HP 2737 ◇** **202 741 20123 ◇** ◇ = W-B	**MINIGRID IN 1 HP 2737-9 ◇** **202 741 209123 ◇** ◇ = W-B	**MINIGRID IN 2 HP 2737 ◇** **202 741 20223 ◇** ◇ = W-B	**MINIGRID IN 2 HP 2737-9 ◇** **202 741 209223 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN 1 HP 2760 ◇** **202 741 20133 ◇** ◇ = W-B	**MINIGRID IN 1 HP 2760-9 ◇** **202 741 209133 ◇** ◇ = W-B	**MINIGRID IN 2 HP 2760 ◇** **202 741 20233 ◇** ◇ = W-B	**MINIGRID IN 2 HP 2760-9 ◇** **202 741 209233 ◇** ◇ = W-B
	ADJUSTABLE 0°- 22° / 350° INCL.1 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC 0,8 IP20 OPTIONS PLASTERKIT 126 LED POWER SUPPLY 500mA-DC / DIM		ADJUSTABLE 0°- 22° / 350° INCL.2 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC 1,4 IP20 OPTIONS PLASTERKIT 127 LED POWER SUPPLY 500mA-DC / DIM	



FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 127 **202 72 99 02**	215 x 250	120 x 225
PLASTERKIT 128 **202 72 99 03**	215 x 350	120 x 330


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories

CONE 50◇ **201 31 50◇** ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23
CLIP 50◇ **201 30 98◇** ◇ = A / B / W	Ø50 / H12
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W

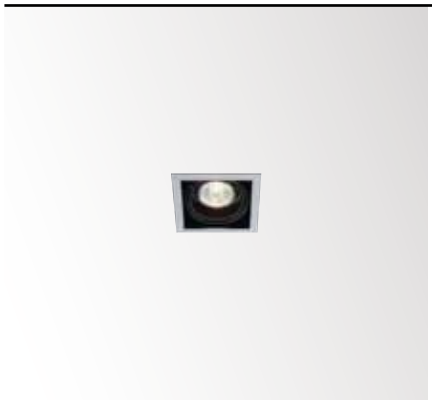




111 x 111 x 140 max.20

MINIGRID IN 1 50 ◇
202 72 55 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W

CE 0,5 IP20 0,5

OPTIONS
PLASTERKIT 126
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50




111 x 111 x 140 max.20

MINIGRID IN 1 QR ◇
202 72 00 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
1 x QR-LP70 max.50W

CE 0,5 IP20 1,0

OPTIONS
PLASTERKIT 126
TRANSFO




111 x 111 x 140 max.20

MINIGRID IN 1 50 Hi ◇
202 72 66 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

CE 0,5 IP20 0,5

OPTIONS
PLASTERKIT 126
led LED SOLUTION - PAG TEC 4-5






214 x 111 x 140 max.20

MINIGRID IN 2 50 ◇
202 72 55 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W
2 x QR-CBC51 max.35W

CE 0,9 IP20 0,5

OPTIONS
PLASTERKIT 127
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50




214 x 111 x 140 max.20

MINIGRID IN 2 QR ◇
202 72 00 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
2 x QR-LP70 max.50W

CE 0,9 IP20 1,0

OPTIONS
PLASTERKIT 127
TRANSFO




214 x 111 x 140 max.20

MINIGRID IN 2 50 Hi ◇
202 72 66 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W

CE 0,9 IP20 0,5

OPTIONS
PLASTERKIT 127
led LED SOLUTION - PAG TEC 4-5






312 x 111 x 140 max.20

MINIGRID IN 3 50 ◇
202 72 55 03 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
3 x QR-C51 max.50W
3 x QR-CBC51 20-35 W

CE 1,3 IP20 0,5

OPTIONS
PLASTERKIT 128
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50



312 x 111 x 140 max.20

MINIGRID IN 3 QR ◇
202 72 00 03 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
3 x QR-LP70 max.50W

CE 1,3 IP20 1,0

OPTIONS
PLASTERKIT 128
TRANSFO

OVERVIEW GRID

new

Grid In ZB Reo



ADJUSTABLE 0-20°/360°

led

PAG INT 147

Grid In ZB



ADJUSTABLE 0-30°

QR-LP111

PAG INT 149

new

Grid In Trimless Reo



ADJUSTABLE 0-20°/360°

led

PAG INT 155

new

Grid In Reo



ADJUSTABLE 0-20°/360°

led

PAG INT 171

new

Grid In Opto



ADJUSTABLE 0-20°/340°

led

PAG INT 173

new

Grid In HP



ADJUSTABLE 0-20°/340°

led

PAG INT 175

Grid In Trimless Opto



ADJUSTABLE 0-20°/360°

led

PAG INT 157

Grid In Trimless HP



ADJUSTABLE 0-20°/340°

led

PAG INT 159

Grid In Trimless



ADJUSTABLE 0-30°

QR-LP111 / HIR-CE111 / HIT-TC

PAG INT 160-163

Grid In



ADJUSTABLE 0-30°

QR-LP111 / HIR-CE111 / HIT-TC

PAG INT 176-179



Grid in Reo **ZB** (+ZB Box)



Grid in Reo **TRIMLESS**




Grid in Reo



Grid in **REO**



Grid in **OPTO**



Grid in **HP** (High Power)



FULL INFO / PAG TEC

Options

INSTALLATION		
GRID IN ZB 1 LED BOX **202 601 98 01**	183 x 183 x 100	184 x 184
GRID IN ZB 2 LED BOX **202 601 98 02**	183 x 336 x 100	184 x 337


CONTROL GEAR	
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Grid In ZB Reo







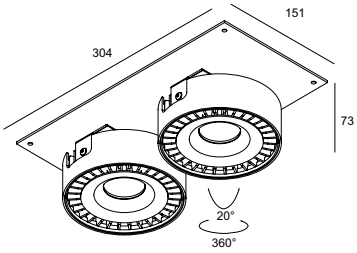

	152 x 152 x 86		305 x 152 x 86	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	1570 lm	1295 lm	2x 1570 lm	2x 1295 lm
REFLECTOR FL-33°	**GRID IN ZB 1 REO 203033 ◇** **202 600 20122 ◇** ◇ = W	**GRID IN ZB 1 REO 203033-9 ◇** **202 600 209122 ◇** ◇ = W	**GRID IN ZB 2 REO 203033 ◇** **202 600 20222 ◇** ◇ = W	**GRID IN ZB 2 REO 203033-9 ◇** **202 600 209222 ◇** ◇ = W
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
2700K	1475 lm	1284 lm	2x 1475 lm	2x 1284 lm
REFLECTOR FL-33°	**GRID IN ZB 1 REO 202733 ◇** **202 600 20123 ◇** ◇ = W	**GRID IN ZB 1 REO 202733-9 ◇** **202 600 209123 ◇** ◇ = W	**GRID IN ZB 2 REO 202733 ◇** **202 600 20223 ◇** ◇ = W	**GRID IN ZB 2 REO 202733-9 ◇** **202 600 209223 ◇** ◇ = W
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
	ADJUSTABLE 0°- 20° / 360° INCL.1 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC 1,3 IP20 OPTIONS GRID IN ZB 1 LED BOX LED POWER SUPPLY 500mA-DC / DIM		ADJUSTABLE 0°- 20° / 360° INCL.2 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC 2,2 IP20 OPTIONS GRID IN ZB 2 LED BOX LED POWER SUPPLY 500mA-DC / DIM	



GRID IN ZB 2 REO 203033 W-B



FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
GRID IN ZB 1 BOX L **202 60 98 01**	183 x 183 x 128	184 x 184
GRID IN ZB 2 BOX L **202 60 98 02**	183 x 336 x 128	184 x 337
GRID IN ZB 3 BOX L **202 60 98 03**	183 x 483 x 128	184 x 484
GRID IN ZB 4 BOX L **202 60 98 04**	336 x 336 x 128	337 x 337


CONTROL GEAR	A B C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories

	A B C	
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 111 **201 27 11** ● **201 27 12** ● **201 27 13** ● **201 27 14** ●	Ø100	
LENS 111 **201 47 11**	Ø100	





152 x 152 x 114


GRID IN ZB 1 QR ◇
202 60 00 01 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W

0,7 IP20 1,0

OPTIONS
GRID IN ZB 1 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111





305 x 152 x 114


GRID IN ZB 2 QR ◇
202 60 00 02 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W

1,4 IP20 1,0

OPTIONS
GRID IN ZB 2 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111





452 x 152 x 114


GRID IN ZB 3 QR ◇
202 60 00 03 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
3 x QR-LP111 max.100W

2,0 IP20 1,0

OPTIONS
GRID IN ZB 3 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111





305 x 305 x 114

GRID IN ZB 4 QR ◇
202 60 00 04 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W

2,6 IP20 1,0

OPTIONS
GRID IN ZB 4 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111














FULL INFO / PAG TEC

Requirements

GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02

312 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110


0,7



GRID IN TRIMLESS 2 MK L
202 61 95 02L

312 x 173 x 110

0,9



FULL INFO / PAG TEC

Options

CONTROL GEAR	C A B
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

4000K

3000K

REFLECTOR FL-33°


REFLECTOR WFL-50°

2700K


REFLECTOR FL-33°


REFLECTOR WFL-50°

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

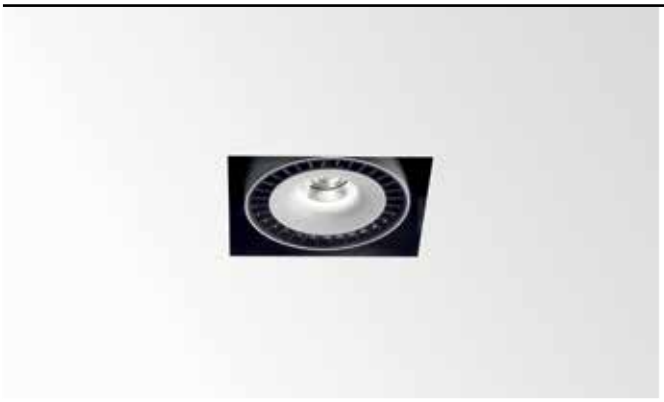







KIT x 110 max.40		KIT x 110 max.40	
CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
ON REQUEST		ON REQUEST	
1570 lm	1295 lm	2x 1570 lm	2x 1295 lm
GRID IN TRIMLESS 1 REO 203033 ◇ **202 680 20122 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 REO 203033-9 ◇** **202 680 209122 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 REO 203033 ◇** **202 680 20222 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 REO 203033-9 ◇** **202 680 209222 ◇** ◇ = W-B
ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
1475 lm	1284 lm	2x 1475 lm	2x 1284 lm
GRID IN TRIMLESS 1 REO 202733 ◇ **202 680 20123 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 REO 202733-9 ◇** **202 680 209123 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 REO 202733 ◇** **202 680 20223 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 REO 202733-9 ◇** **202 680 209223 ◇** ◇ = W-B
ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
ADJUSTABLE 0°- 20° / 360° INCL.1 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC CE 1,0 IP20 REQUIREMENTS GRID IN TRIMLESS 1 MOUNTING KIT 202 61 95 01 or GRID IN TRIMLESS 1 MOUNTING KIT LARGE 202 61 95 01L OPTIONS LED POWER SUPPLY 500mA-DC / DIM		ADJUSTABLE 0°- 20° / 360° INCL.2 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC CE 1,8 IP20 REQUIREMENTS GRID IN TRIMLESS 2 MOUNTING KIT 202 61 95 02 or GRID IN TRIMLESS 2 MOUNTING KIT LARGE 202 61 95 02L OPTIONS LED POWER SUPPLY 500mA-DC / DIM	




FULL INFO / PAG TEC

Requirements

GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02

312 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110


0,7



GRID IN TRIMLESS 2 MK L
202 61 95 02L

312 x 173 x 110

0,9



FULL INFO / PAG TEC

Options

CONTROL GEAR	C A B
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

4000K

3000K

REFLECTOR SP-15°

REFLECTOR FL-33°

REFLECTOR WFL-55°


2700K

REFLECTOR SP-15°


REFLECTOR FL-33°

REFLECTOR WFL-55°









KIT x 110 max.40

CRI > 80	CRI > 90
ON REQUEST	
1570 lm	1295 lm
GRID IN TRIMLESS 1 OPTO 203015 ◇ **202 681 20112 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 203015-9 ◇** **202 681 209112 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 203033 ◇ **202 681 20122 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 203033-9 ◇** **202 681 209122 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 203055 ◇ **202 681 20132 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 203055-9 ◇** **202 681 209132 ◇** ◇ = W-B
1475 lm	1284 lm
GRID IN TRIMLESS 1 OPTO 202715 ◇ **202 681 20113 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 202715-9 ◇** **202 681 209113 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 202733 ◇ **202 681 20123 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 202733-9 ◇** **202 681 209123 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 202755 ◇ **202 681 20133 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 202755-9 ◇** **202 681 209133 ◇** ◇ = W-B

ADJUSTABLE 0°- 20° / 360°
INCL.1 x POWERLED WHITE 18W
INCL.1 x EFT FILTER*
EXCL.LED POWER SUPPLY 500mA-DC

1,1 IP20

REQUIREMENTS
GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01
or
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
202 61 95 01L

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

KIT x 110 max.40

CRI > 80	CRI > 90
ON REQUEST	
2x 1570 lm	2x 1295 lm
GRID IN TRIMLESS 2 OPTO 203015 ◇ **202 681 20212 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 203015-9 ◇** **202 681 209212 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 203033 ◇ **202 681 20222 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 203033-9 ◇** **202 681 209222 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 203055 ◇ **202 681 20232 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 203055-9 ◇** **202 681 209232 ◇** ◇ = W-B
2x 1475 lm	2x 1284 lm
GRID IN TRIMLESS 2 OPTO 202715 ◇ **202 681 20213 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 202715-9 ◇** **202 681 209213 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 202733 ◇ **202 681 20223 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 202733-9 ◇** **202 681 209223 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 202755 ◇ **202 681 20233 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 202755-9 ◇** **202 681 209233 ◇** ◇ = W-B


ADJUSTABLE 0°- 20° / 360°
INCL.2 x POWERLED WHITE 18W
INCL.2 x EFT FILTER*
EXCL.LED POWER SUPPLY 500mA-DC

1,9 IP20

REQUIREMENTS
GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02
or
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
202 61 95 02L

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

*EFT / EQUALISING FILTER TECHNOLOGY

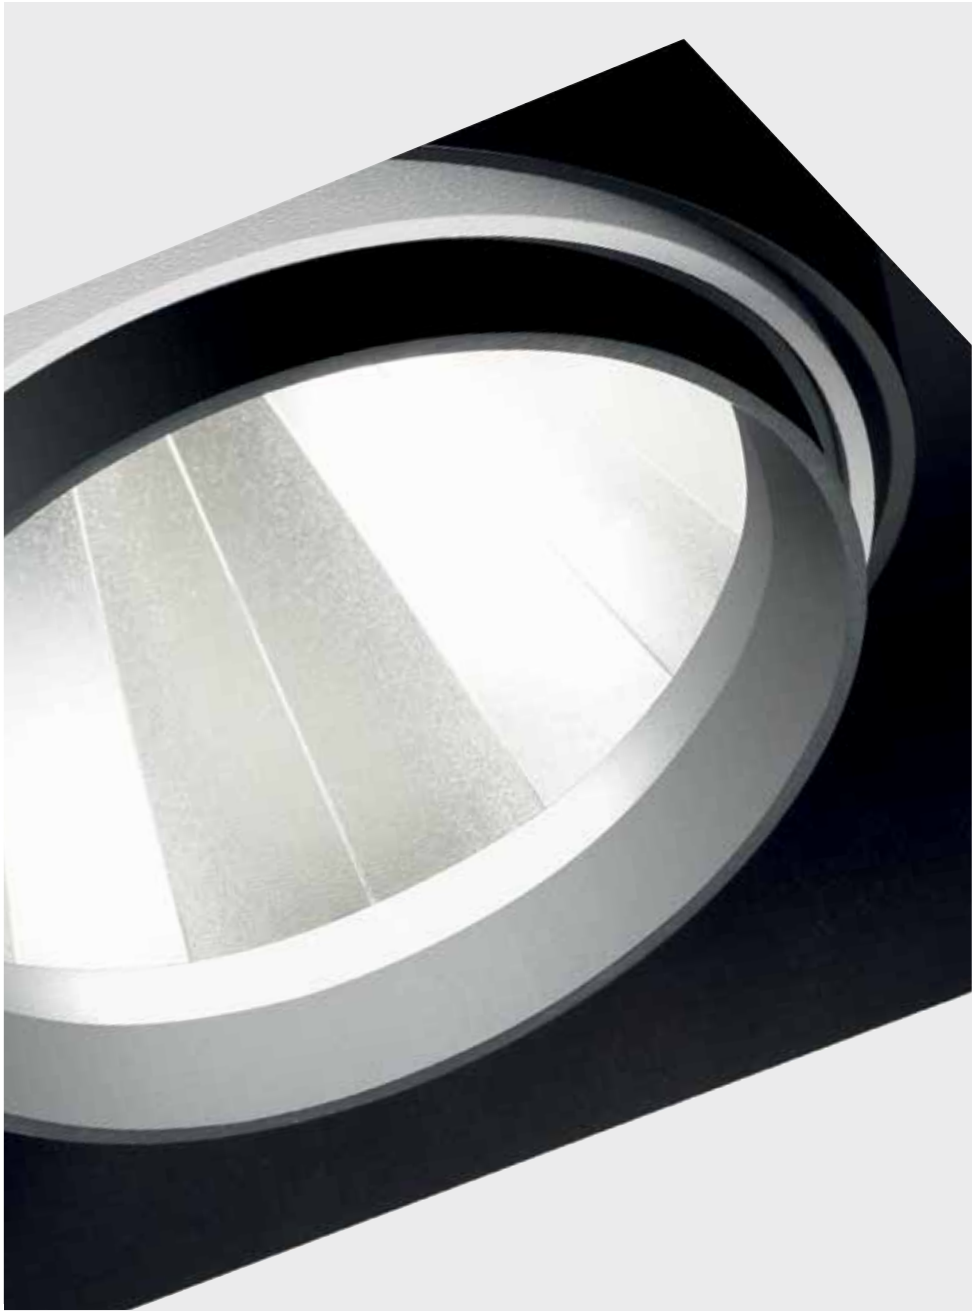


FULL INFO / PAG TEC

Requirements

GRID IN TRIMLESS 1 MOUNTING KIT HP
202 61 95 01 HP

173 x 173 max.25


0,5



GRID IN TRIMLESS 2 MOUNTING KIT HP
202 61 95 02 HP

312 x 173 max.25

0,7




3000K


REFLECTOR FL-27°

REFLECTOR WFL-50°









KIT x 150

CRI > 80	CRI > 90
3000 lm (29W)	3000 lm (33W)
GRID IN TRIMLESS 1 HP 303027 ◇ **202 682 20122 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 HP 303027-9 ◇** **202 682 209122 ◇** ◇ = W-B
GRID IN TRIMLESS 1 HP 303050 ◇ **202 682 20132 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 HP 303050-9 ◇** **202 682 209132 ◇** ◇ = W-B

ADJUSTABLE 0°- 20° / 340°
ACTIVE COOLING
INCL.1 x POWERLED WHITE
INCL.1 x LED POWER SUPPLY 220-240V/50-60Hz

CE 1,6 IP20

REQUIREMENTS
GRID IN TRIMLESS 1 MOUNTING KIT HP
202 61 95 01 HP

KIT x 150

CRI > 80	CRI > 90
2x 3000 lm (2x 29W)	2x 3000 lm (2x 33W)
GRID IN TRIMLESS 2 HP 303027 ◇ **202 682 20222 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 HP 303027-9 ◇** **202 682 209222 ◇** ◇ = W-B
GRID IN TRIMLESS 2 HP 303050 ◇ **202 682 20232 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 HP 303050-9 ◇** **202 682 209232 ◇** ◇ = W-B

ADJUSTABLE 0°- 20° / 340°
ACTIVE COOLING
INCL.2 x POWERLED WHITE
INCL.2 x LED POWER SUPPLY 220-240V/50-60Hz

CE 2,5 IP20

REQUIREMENTS
GRID IN TRIMLESS 2 MOUNTING KIT HP
202 61 95 02 HP

FULL INFO / PAG TEC

Options

INSTALLATION		
GRID IN TRIMLESS 1 MK **202 61 95 01**	171 x 171 x 55	173 x 173
GRID IN TRIMLESS 1 MK L **202 61 95 01L**	293 x 293 x 55	173 x 173
CONCRETE PACK GIT 1 **202 61 96 01**	220 x 262 x 210	-
GRID IN TRIMLESS 2 MK **202 61 95 02**	171 x 310 x 55	312 x 173
GRID IN TRIMLESS 2 MK L **202 61 95 02L**	432 x 293 x 55	312 x 173
CONCRETE PACK GIT 2 **202 61 96 02**	220 x 401 x 210	-


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37


FULL INFO / PAG TEC

Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100	
LENS 111 **201 47 11**	Ø100	

Grid In Trimless 1

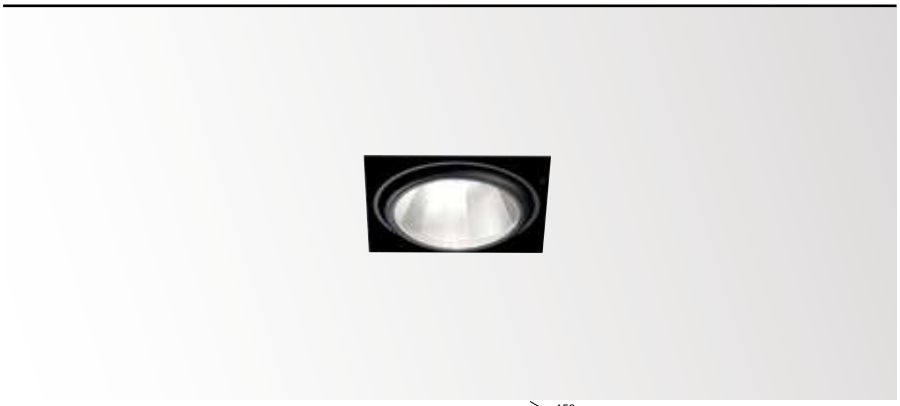




157 x 157 x 120 max.40

GRID IN TRIMLESS 1 QR ◇
202 61 00 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
0,7 IP20 1,0

OPTIONS
GRID IN TRIMLESS 1 MOUNTING KIT
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
CONCRETE PACK GIT 1
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



157 x 157 x 160 max.40

GRID IN TRIMLESS 1 H111 ◇
202 61 88 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
1 x HIR-CE111 max.70W
0,8 IP20 1,0

OPTIONS
GRID IN TRIMLESS 1 MOUNTING KIT
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
CONCRETE PACK GIT 1
BALLASTSET HID



new
up to 93% efficiency

157 x 157 x 210 max.40

GRID IN TRIMLESS 1 HIC SP15 ◇
202 61 660 01 SP15 ◇
◇ = B / W
INCL.1 x REFLECTOR SP-15° + GLASS


GRID IN TRIMLESS 1 HIC FL24 ◇
202 61 660 01 FL24 ◇
◇ = B / W
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN TRIMLESS 1 HIC WFL43 ◇
202 61 660 01 WFL43 ◇
◇ = B / W
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
1,1 IP20 IP23 1,0

OPTIONS
GRID IN TRIMLESS 1 MOUNTING KIT
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
CONCRETE PACK GIT 1
BALLASTSET HID






296 x 157 x 120 max.40

GRID IN TRIMLESS 2 QR ◇
202 61 00 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W
1,2 IP20 1,0

OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
CONCRETE PACK GIT 2
led LED SOLUTION - PAG TEC 4-5
TRANSFO
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



new
up to 93% efficiency

296 x 157 x 210 max.40


GRID IN TRIMLESS 2 HIC SP15 ◇
202 61 660 02 SP15 ◇
◇ = B / W
INCL.2 x REFLECTOR SP-15° + GLASS

GRID IN TRIMLESS 2 HIC FL24 ◇
202 61 660 02 FL24 ◇
◇ = B / W
INCL.2 x REFLECTOR FL-24° + GLASS

GRID IN TRIMLESS 2 HIC WFL43 ◇
202 61 660 02 WFL43 ◇
◇ = B / W
INCL.2 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
2 x HIT-TC max.70W
2,0 IP20/IP23 1,0


OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
CONCRETE PACK GIT 2
BALLASTSET HID



296 x 157 x 160 max.40

GRID IN TRIMLESS 2 H111 ◇
202 61 88 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
2 x HIR-CE111 max.70W
1,4 IP20 1,0

OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
CONCRETE PACK GIT 2
BALLASTSET HID



new
up to 93% efficiency

296 x 157 x 210 max.40

GRID IN TRIMLESS 2 CR SP15 ◇
202 61 060 12 SP15 ◇
◇ = B / W
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN TRIMLESS 2 CR FL24 ◇
202 61 060 12 FL24 ◇
◇ = B / W
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN TRIMLESS 2 CR WFL43 ◇
202 61 060 12 WFL43 ◇
◇ = B / W
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
2,0 IP20 1,0

OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
CONCRETE PACK GIT 2
TRANSFO
BALLASTSET HID
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111


GRID IN TRIMLESS 1 HIC SP15 B

FULL INFO / PAG TEC

Options

INSTALLATION		
GRID IN TRIMLESS 3 MK **202 61 95 03**	453 x 171 x 55	455 x 173
CONCRETE PACK GIT 3 **202 61 96 03**	220 x 544 x 210	-
GRID IN TRIMLESS 4 MK **202 61 95 04**	308 x 308 x 54	309 x 309
GRID IN TRIMLESS 4LINE MK **202 61 95 04L**	593 x 171 x 55	595 x 173
CONCRETE PACK GIT 4LINE **202 61 96 04L**	220 x 684 x 210	-

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37


FULL INFO / PAG TEC

Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 111 **201 27 11** ● **201 27 12** ● **201 27 13** ● **201 27 14** ●	Ø100	
LENS 111 **201 47 11**	Ø100	

Grid In Trimless 3






439 x 157 x 120 max.40

GRID IN TRIMLESS 3 QR ◇
202 61 00 03 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
3 x QR-LP111 max.100W
CE 1,7 IP20 1,0

OPTIONS
GRID IN TRIMLESS 3 MOUNTING KIT
CONCRETE PACK GIT 3
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111





439 x 157 x 210 max.40


GRID IN TRIMLESS 3 HIC SP15 ◇
202 61 660 03 SP15 ◇
◇ = B
INCL.3 x REFLECTOR SP-15° + GLASS

GRID IN TRIMLESS 3 HIC FL24 ◇
202 61 660 03 FL24 ◇
◇ = B
INCL.3 x REFLECTOR FL-24° + GLASS

GRID IN TRIMLESS 3 HIC WFL43 ◇
202 61 660 03 WFL43 ◇
◇ = B
INCL.3 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
3 x HIT-TC max.70W
CE 2,8 IP20 IP23 1,0

OPTIONS
GRID IN TRIMLESS 3 MOUNTING KIT
CONCRETE PACK GIT 3
BALLASTSET HID





439 x 157 x 210 max.40

GRID IN TRIMLESS 3 CR SP15 ◇
202 61 060 13 SP15 ◇
◇ = B
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN TRIMLESS 3 CR FL24 ◇
202 61 060 13 FL24 ◇
◇ = B
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN TRIMLESS 3 CR WFL43 ◇
202 61 060 13 WFL43 ◇
◇ = B
INCL.1 x REFLECTOR WFL-43° + GLASS


ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
CE 2,8 IP20 1,0


OPTIONS
GRID IN TRIMLESS 3 MOUNTING KIT
CONCRETE PACK GIT 3
TRANSFO
BALLASTSET HID

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111









579 x 157 x 120 max.40

GRID IN TRIMLESS 4LINE QR ◇
202 61 00 04L ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W

CE 2,0 IP20 1,0

OPTIONS
GRID IN TRIMLESS 4LINE MOUNTING KIT
CONCRETE PACK GIT 4LINE
led LED SOLUTION - PAG TEC 4-5 TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

304 x 304 x 120 max.40

GRID IN TRIMLESS 4 QR ◇
202 61 00 04 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W


CE 2,0 IP20 1,0


OPTIONS
GRID IN TRIMLESS 4 MOUNTING KIT
led LED SOLUTION - PAG TEC 4-5 TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



filipdeslee.com

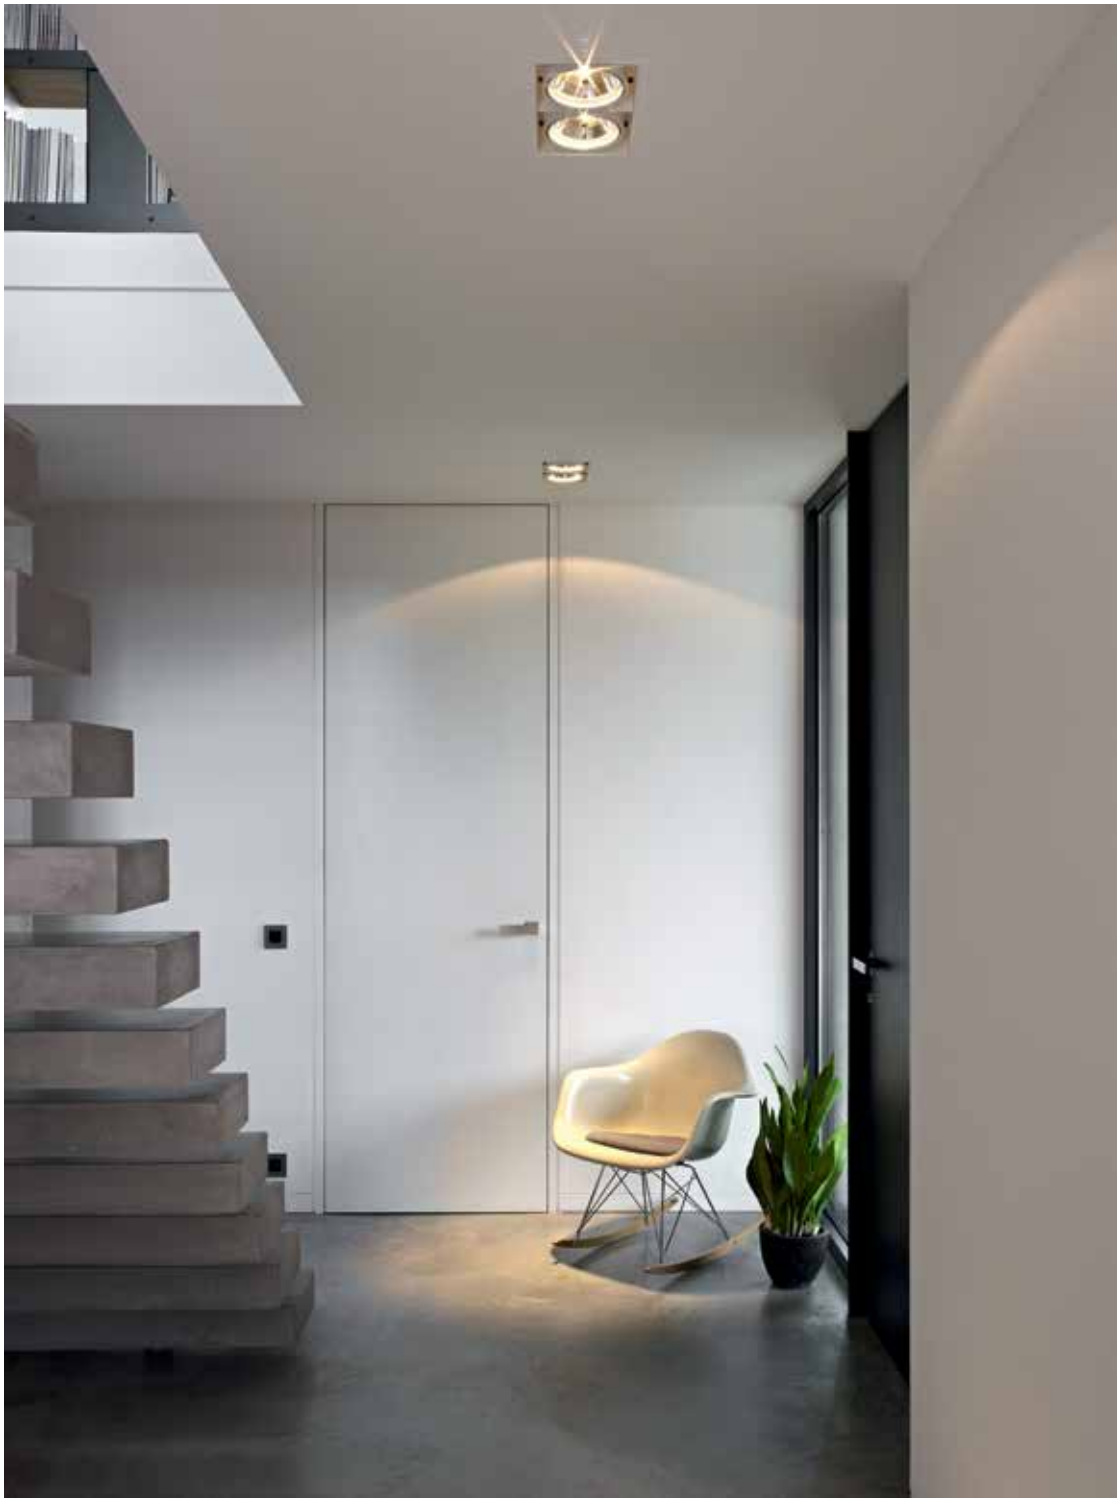

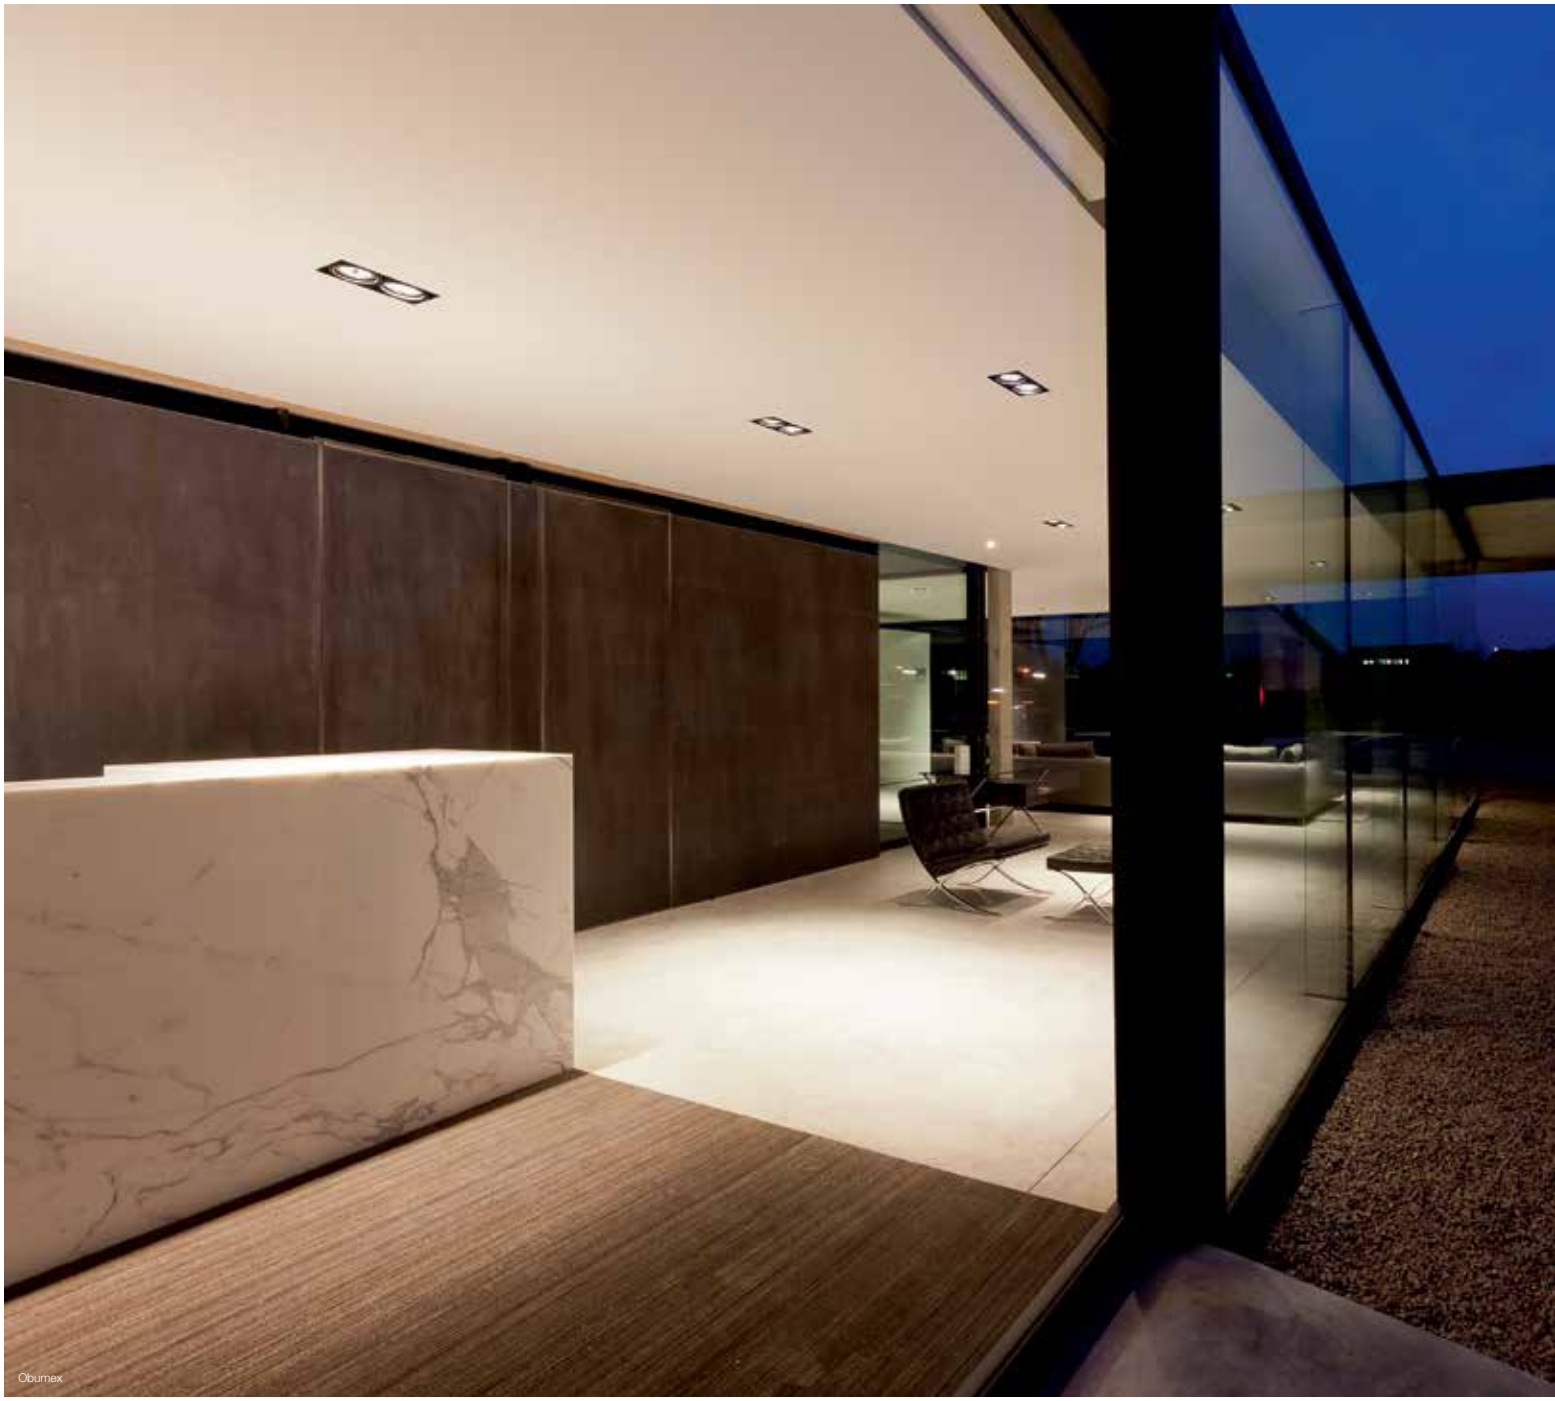

Oburnex






Filip Vanryckegem





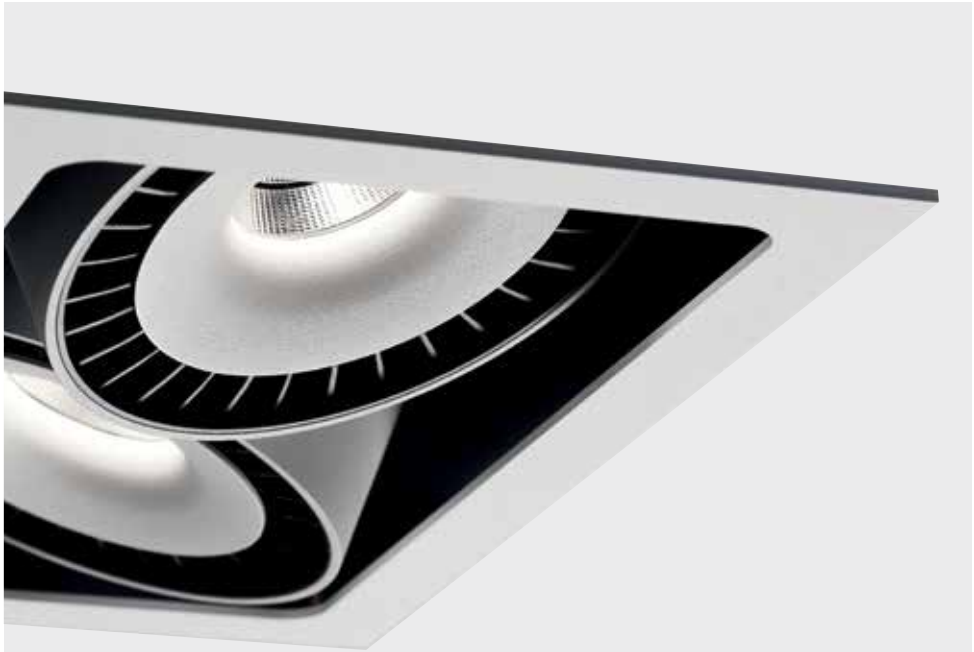

FULL INFO / PAG TEC

Options

INSTALLATION	C A B	
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310
CONCRETE BOX 120 **202 62 98 01**	230 x 260 x 120	235 x 265
CONCRETE BOX 121 **202 62 98 02**	260 x 399 x 120	265 x 405


CONTROL GEAR	C A B
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Grid In Reo









	167 x 167 x 110 max.15		306 x 167 x 110 max.15	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	1570 lm	1295 lm	2x 1570 lm	2x 1295 lm
REFLECTOR FL-33°	**GRID IN 1 REO 203033 ◇** **202 690 20122 ◇** ◇ = W-B	**GRID IN 1 REO 203033-9 ◇** **202 690 209122 ◇** ◇ = W-B	**GRID IN 2 REO 203033 ◇** **202 690 20222 ◇** ◇ = W-B	**GRID IN 2 REO 203033-9 ◇** **202 690 209222 ◇** ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
2700K	1475 lm	1284 lm	2x 1475 lm	2x 1284 lm
REFLECTOR FL-33°	**GRID IN 1 REO 202733 ◇** **202 690 20123 ◇** ◇ = W-B	**GRID IN 1 REO 202733-9 ◇** **202 690 209123 ◇** ◇ = W-B	**GRID IN 2 REO 202733 ◇** **202 690 20223 ◇** ◇ = W-B	**GRID IN 2 REO 202733-9 ◇** **202 690 209223 ◇** ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
	ADJUSTABLE 0°- 20° / 360° INCL.1 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC CE 1,3 IP20 OPTIONS PLASTERKIT 120 CONCRETE BOX 120 LED POWER SUPPLY 500mA-DC / DIM		ADJUSTABLE 0°- 20° / 360° INCL.2 x POWERLED WHITE 18W EXCL.LED POWER SUPPLY 500mA-DC CE 2,2 IP20 OPTIONS PLASTERKIT 121 CONCRETE BOX 121 LED POWER SUPPLY 500mA-DC / DIM	



FULL INFO / PAG TEC

Options


INSTALLATION	A B C	
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310
CONCRETE BOX 120 **202 62 98 01**	230 x 260 x 120	235 x 265
CONCRETE BOX 121 **202 62 98 02**	260 x 399 x 120	265 x 405


CONTROL GEAR	A B C
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali









	167 x 167 x 110 max.15		306 x 167 x 110 max.15	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	1570 lm	1295 lm	2x 1570 lm	2x 1295 lm
REFLECTOR SP-15°	**GRID IN 1 OPTO 203015 ◇** **202 691 20112 ◇** ◇ = W-B	**GRID IN 1 OPTO 203015-9 ◇** **202 691 209112 ◇** ◇ = W-B	**GRID IN 2 OPTO 203015 ◇** **202 691 20212 ◇** ◇ = W-B	**GRID IN 2 OPTO 203015-9 ◇** **202 691 209212 ◇** ◇ = W-B
REFLECTOR FL-33°	**GRID IN 1 OPTO 203033 ◇** **202 691 20122 ◇** ◇ = W-B	**GRID IN 1 OPTO 203033-9 ◇** **202 691 209122 ◇** ◇ = W-B	**GRID IN 2 OPTO 203033 ◇** **202 691 20222 ◇** ◇ = W-B	**GRID IN 2 OPTO 203033-9 ◇** **202 691 209222 ◇** ◇ = W-B
REFLECTOR WFL-55°	**GRID IN 1 OPTO 203055 ◇** **202 691 20132 ◇** ◇ = W-B	**GRID IN 1 OPTO 203055-9 ◇** **202 691 209132 ◇** ◇ = W-B	**GRID IN 2 OPTO 203055 ◇** **202 691 20232 ◇** ◇ = W-B	**GRID IN 2 OPTO 203055-9 ◇** **202 691 209232 ◇** ◇ = W-B
2700K	1475 lm	1284 lm	2x 1475 lm	2x 1284 lm
REFLECTOR SP-15°	**GRID IN 1 OPTO 202715 ◇** **202 691 20113 ◇** ◇ = W-B	**GRID IN 1 OPTO 202715-9 ◇** **202 691 209113 ◇** ◇ = W-B	**GRID IN 2 OPTO 202715 ◇** **202 691 20213 ◇** ◇ = W-B	**GRID IN 2 OPTO 202715-9 ◇** **202 691 209213 ◇** ◇ = W-B
REFLECTOR FL-33°	**GRID IN 1 OPTO 202733 ◇** **202 691 20123 ◇** ◇ = W-B	**GRID IN 1 OPTO 202733-9 ◇** **202 691 209123 ◇** ◇ = W-B	**GRID IN 2 OPTO 202733 ◇** **202 691 20223 ◇** ◇ = W-B	**GRID IN 2 OPTO 202733-9 ◇** **202 691 209223 ◇** ◇ = W-B
REFLECTOR WFL-55°	**GRID IN 1 OPTO 202755 ◇** **202 691 20133 ◇** ◇ = W-B	**GRID IN 1 OPTO 202755-9 ◇** **202 691 209133 ◇** ◇ = W-B	**GRID IN 2 OPTO 202755 ◇** **202 691 20233 ◇** ◇ = W-B	**GRID IN 2 OPTO 202755-9 ◇** **202 691 209233 ◇** ◇ = W-B
	ADJUSTABLE 0°- 20° / 360° INCL.1 x POWERLED WHITE 18W INCL.1 x EFT FILTER* EXCL.LED POWER SUPPLY 500mA-DC CE 1,4 IP20 OPTIONS PLASTERKIT 120 CONCRETE BOX 120 LED POWER SUPPLY 500mA-DC / DIM		ADJUSTABLE 0°- 20° / 360° INCL.2 x POWERLED WHITE 18W INCL.2 x EFT FILTER* EXCL.LED POWER SUPPLY 500mA-DC CE 2,3 IP20 OPTIONS PLASTERKIT 121 CONCRETE BOX 121 LED POWER SUPPLY 500mA-DC / DIM	

*EFT / EQUALISING FILTER TECHNOLOGY




FULL INFO / PAG TEC


Options

INSTALLATION	A-B	C
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310









	167 x 167 x 150 max.30		306 x 167 x 150 max.30	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
3000K	3000 lm (29W)	3000 lm (33W)	2x 3000 lm (2x 29W)	2x 3000 lm (2x 33W)
REFLECTOR FL-27°	**GRID IN 1 HP 303027 ◇** **202 692 20122 ◇** ◇ = W-B	**GRID IN 1 HP 303027-9 ◇** **202 692 209122 ◇** ◇ = W-B	**GRID IN 2 HP 303027 ◇** **202 692 20222 ◇** ◇ = W-B	**GRID IN 2 HP 303027-9 ◇** **202 692 209222 ◇** ◇ = W-B
REFLECTOR WFL-50°	**GRID IN 1 HP 303050 ◇** **202 692 20132 ◇** ◇ = W-B	**GRID IN 1 HP 303050-9 ◇** **202 692 209132 ◇** ◇ = W-B	**GRID IN 2 HP 303050 ◇** **202 692 20232 ◇** ◇ = W-B	**GRID IN 2 HP 303050-9 ◇** **202 692 209232 ◇** ◇ = W-B
	ADJUSTABLE 0°- 20° / 340° ACTIVE COOLING INCL.1 x POWERLED WHITE INCL.1 x LED POWER SUPPLY 220-240V/50-60Hz CE 1,9 IP20 OPTIONS PLASTERKIT 120		ADJUSTABLE 0°- 20° / 340° ACTIVE COOLING INCL.2 x POWERLED WHITE INCL.2 x LED POWER SUPPLY 220-240V/50-60Hz CE 2,8 IP20 OPTIONS PLASTERKIT 121	

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310
CONCRETE BOX 120 **202 62 98 01**	230 x 260 x 120	235 x 265
CONCRETE BOX 121 **202 62 98 02**	260 x 399 x 120	265 x 405

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

FULL INFO / PAG TEC


Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100
LENS 111 **201 47 11**	Ø100

Grid In 1



GRID IN 1 HIC A-B




167 x 167 x 120 max.15

GRID IN 1 QR ◇
202 62 00 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
1,0 IP20 1,0

OPTIONS
PLASTERKIT 120
CONCRETE BOX 120
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



167 x 167 x 160 max.15

GRID IN 1 H111 ◇
202 62 88 01 ◇
◇ = A-B / A-A / W-W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
1 x HIR-CE111 max.70W
1,1 IP20 1,0

OPTIONS
PLASTERKIT 120
BALLASTSET HID





167 x 167 x 210 max.15

GRID IN 1 HIC SP15 ◇
202 62 660 01 SP15 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN 1 HIC FL24 ◇
202 62 660 01 FL24 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR FL-24° + GLASS


GRID IN 1 HIC WFL43 ◇
202 62 660 01 WFL43 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
1,4 IP20 IP23 1,0

OPTIONS
PLASTERKIT 120
BALLASTSET HID



GRID IN 2 QR W-W




306 x 167 x 120 max.15

GRID IN 2 QR ◇
202 62 00 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W
1,6 IP20 1,0

OPTIONS
PLASTERKIT 121
CONCRETE BOX 121
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



306 x 167 x 160 max.15

GRID IN 2 H111 ◇
202 62 88 02 ◇
◇ = A-B / A-A / W-W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
2 x HIR-CE111 max.70W
1,8 IP20 1,0

OPTIONS
PLASTERKIT 121
BALLASTSET HID



new
up to 93% efficiency

306 x 167 x 210 max.15


GRID IN 2 HIC SP15 ◇
202 62 660 02 SP15 ◇
◇ = A-B / W-W
INCL.2 x REFLECTOR SP-15° + GLASS

GRID IN 2 HIC FL24 ◇
202 62 660 02 FL24 ◇
◇ = A-B / W-W
INCL.2 x REFLECTOR FL-24° + GLASS

GRID IN 2 HIC WFL43 ◇
202 62 660 02 WFL43 ◇
◇ = A-B / W-W
INCL.2 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
2 x HIT-TC max.70W
2,4 IP20 IP23 1,0

OPTIONS
PLASTERKIT 121
BALLASTSET HID



new
up to 93% efficiency

306 x 167 x 210 max.15

GRID IN 2 CR SP15 ◇
202 62 060 12 SP15 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN 2 CR FL24 ◇
202 62 060 12 FL24 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN 2 CR WFL43 ◇
202 62 060 12 WFL43 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
2,4 IP20 1,0

OPTIONS
PLASTERKIT 121
TRANSFO
BALLASTSET HID

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 122 **202 62 99 03**	260 x 537	190 x 450
PLASTERKIT 123 **202 62 99 04**	399 x 399	310 x 310
PLASTERKIT 124 **202 62 99 04L**	260 x 680	190 x 610
CONCRETE BOX 122 **202 62 98 03**	260 x 537 x 120	265 x 538
CONCRETE BOX 123 **202 62 98 04**	399 x 399 x 120	405 x 405
CONCRETE BOX 124 **202 62 98 04L**	260 x 680 x 120	265 x 685

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

FULL INFO / PAG TEC


Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100	
LENS 111 **201 47 11**	Ø100	

Grid In 3



GRID IN 3 CR A-B




450 x 167 x 120 max.15

GRID IN 3 QR ◇
202 62 00 03 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
3 x QR-LP111 max.100W

2,1 IP20 1,0

OPTIONS
PLASTERKIT 122
CONCRETE BOX 122
led LED SOLUTION - PAG TEC 4-5
TRANSFO
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



450 x 167 x 210 max.15

GRID IN 3 HIC SP15 ◇
202 62 660 03 SP15 ◇
◇ = A-B
INCL.3 x REFLECTOR SP-15° + GLASS


GRID IN 3 HIC FL24 ◇
202 62 660 03 FL24 ◇
◇ = A-B
INCL.3 x REFLECTOR FL-24° + GLASS

GRID IN 3 HIC WFL43 ◇
202 62 660 03 WFL43 ◇
◇ = A-B
INCL.3 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
3 x HIT-TC max.70W

3,2 IP20 IP23 1,0

OPTIONS
PLASTERKIT 122
BALLASTSET HID



450 x 167 x 210 max.15

GRID IN 3 CR SP15 ◇
202 62 060 13 SP15 ◇
◇ = A-B
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN 3 CR FL24 ◇
202 62 060 13 FL24 ◇
◇ = A-B
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN 3 CR WFL43 ◇
202 62 060 13 WFL43 ◇
◇ = A-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W
G8.5 / EXCL.EVG
1 x HIT-TC max.70W

3,2 IP20 1,0


OPTIONS
PLASTERKIT 122
TRANSFO
BALLASTSET HID
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



GRID IN 4 LINE QR A-B



GRID IN 4 QR A-B




590 x 167 x 120 max.15

GRID IN 4LINE QR ◇
202 62 00 04L ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W

CE 2,5 IP20 1,0

OPTIONS
PLASTERKIT 124
CONCRETE BOX 124
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



306 x 306 x 120 max.15

GRID IN 4 QR ◇
202 62 00 04 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W

CE 2,5 IP20 1,0

OPTIONS
PLASTERKIT 123
CONCRETE BOX 123
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111





Martin's Hotel


Boutique



Martin's Hotel

FULL INFO / PAG TEC

Options

CONTROL GEAR

TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

FULL INFO / PAG TEC

Accessories

CONE 111◇ Ø117 / Ø80 / H26
201 28 00◇
◇ = ALU / B / C / W
QR-LP111 max. 24°



CLIP 111◇ Ø110 / H22
201 27 99 A◇
◇ = A / B / W



FRONTGLASS 111 Ø100
201 17 00



COLOUR FILTER 111 Ø100
201 27 11 ●
201 27 12 ●
201 27 13 ●
201 27 14 ●




LENS 111 Ø100
201 47 11




Maestro R









330 x 186 x 140 max.20

MAESTRO R224
202 55 24 00
INCL.MOUNTING KIT
2G11 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
CE 1,8 IP20 0,1

330 x 186 x 140 max.20


MAESTRO R224-211
202 55 24 11
INCL.MOUNTING KIT
CABLING 2 CIRCUITS
ADJUSTABLE 0°- 30° / 350°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.50W
2G11 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
CE 2,0 IP20 1,0


OPTIONS
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111




MAESTRO R224-211 + CONE 111

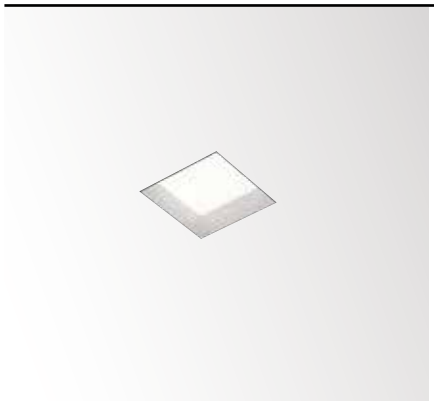




173 x 173 x 150 max.20

MAESTRO S226
202 54 26 00
INCL.MOUNTING KIT
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 26W
CE 1,5 IP20 0,1

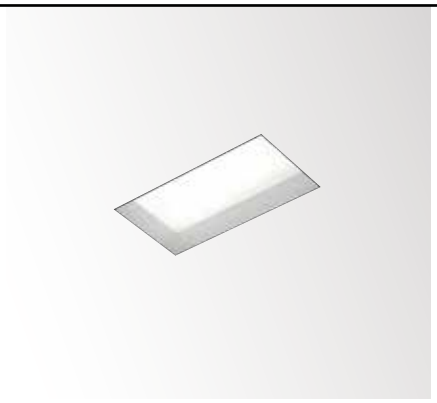




312 x 173 x 140 max.20

MAESTRO S224
202 54 24 00
INCL.MOUNTING KIT
2G11 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
CE 1,8 IP20 0,1





312 x 173 x 140 max.20

MAESTRO S224-211
202 54 24 11
INCL.MOUNTING KIT
CABLING 2 CIRCUITS
ADJUSTABLE 0°- 30° / 350°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.50W
2G11 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
CE 2,0 IP20 1,0

OPTIONS
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111




BEBA
BEBA
NAN
SENSODYNE
SENSODYNE
SENSODYNE


FULL INFO / PAG TEC

Requirements

MINIGRID IN 1 MOUNTING KIT
202 71 95 01

130 x 130 max.25


0,5



MINIGRID IN 1 MOUNTING KIT LARGE
202 71 95 01L

145 x 145 max.25


0,9



GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110


0,7



FULL INFO / PAG TEC

Options

	A-B-C	
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 188 **207 01 188**	125 x 173	80 x 115

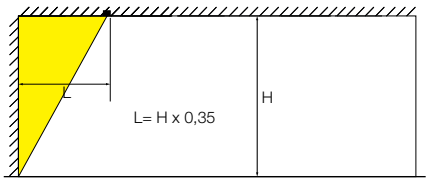

example: H=3000 mm → L= 3000 mm x 0,35 = 1050 mm


new

led

Streamer Trimless W








KIT x 135

STREAMER TRIMLESS W M ED1 ◇
202 591 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.2 x POWERLED WHITE 7W / 3000K ● / 660lm
INCL.LED POWER SUPPLY 350mA-DC ED1
120-240V / 50-60Hz

□ CE 1,0 IP20

REQUIREMENTS
MINIGRID IN 1 MOUNTING KIT
202 71 95 01
or
MINIGRID IN 1 MOUNTING KIT L
202 71 95 01 L

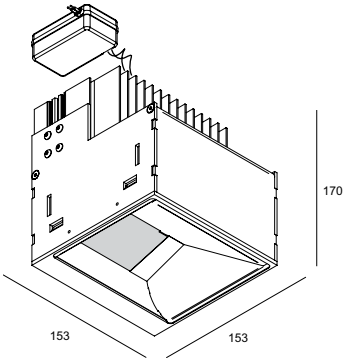

KIT x 175

STREAMER TRIMLESS W L350 ED1 ◇
202 591 312 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 7W / 3000K ● / 660lm
INCL.LED POWER SUPPLY 350mA-DC ED1


STREAMER TRIMLESS W L500 ED1 ◇
202 591 322 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 10W / 3000K ● / 920lm
INCL.LED POWER SUPPLY 500mA-DC ED1

FIXED
DIMMING BY 1-10V
120-240V / 50-60Hz

□ CE 1,7 IP20

REQUIREMENTS
GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01
or
GRID IN TRIMLESS 1 MOUNTING KIT L
202 61 95 01 L





110 x 62 x 90 max.25


STREAMER W S ED1 ◇
202 592 112 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.1 x POWERLED WHITE 10W / 3000K / 920lm
INCL.LED POWER SUPPLY 500mA-DC ED1
120-240V / 50-60Hz

CE 0,6 IP20

OPTIONS
PLASTERKIT 188





108 x 108 x 135 max.25


STREAMER W M ED1 ◇
202 592 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.2 x POWERLED WHITE 7W / 3000K / 660lm
INCL.LED POWER SUPPLY 350mA-DC ED1
120-240V / 50-60Hz

CE 1,1 IP20

OPTIONS
PLASTERKIT 126



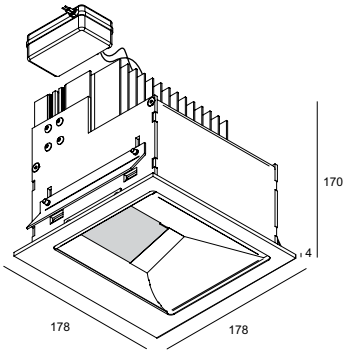

164 x 164 x 175 max.25

STREAMER W L350 ED1 ◇
202 592 312 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 7W / 3000K / 660lm
INCL.LED POWER SUPPLY 350mA-DC ED1

STREAMER W L500 ED1 ◇
202 592 322 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 10W / 3000K / 920lm
INCL.LED POWER SUPPLY 500mA-DC ED1

FIXED
DIMMING BY 1-10V
120-240V / 50-60Hz

CE 2,0 IP20

OPTIONS
PLASTERKIT 120










FULL INFO / PAG TEC

Requirements

MINIGRID IN 1 MOUNTING KIT
202 71 95 01

130 x 130 max.25


0,5



MINIGRID IN 1 MOUNTING KIT LARGE
202 71 95 01L

145 x 145 max.25


0,9



GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110

0,7



FULL INFO / PAG TEC


Options


	C / A B	
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120

new led

Streamer Trimless





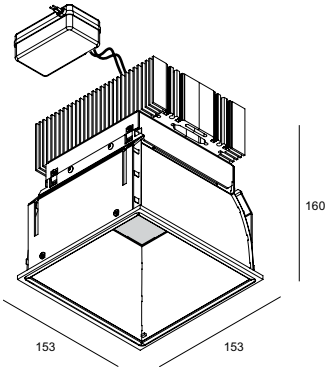

KIT x 100

STREAMER TRIMLESS M ED1 ◇
202 581 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.POWERLED WHITE 10W / 3000K / 920lm
INCL.LED POWER SUPPLY 500mA-DC ED1
120-240V / 50-60Hz

CE 0,4 IP20

REQUIREMENTS
MINIGRID IN 1 MOUNTING KIT
202 71 95 01
or
MINIGRID IN 1 MOUNTING KIT L
202 71 95 01 L

KIT x 165

STREAMER TRIMLESS L ED1 ◇
202 581 312 ED1 ◇
◇ = W


FIXED
DIMMING BY 1-10V
INCL.LEDCLUSTER 27W / 3000K / 2300lm
INCL.LED POWER SUPPLY 1A-DC ED1
120-240V / 50-60Hz


CE 1,9 IP20

REQUIREMENTS
GRID IN 1 MOUNTING KIT
202 61 95 01
or
GRID IN 1 MOUNTING KIT L
202 61 95 01 L







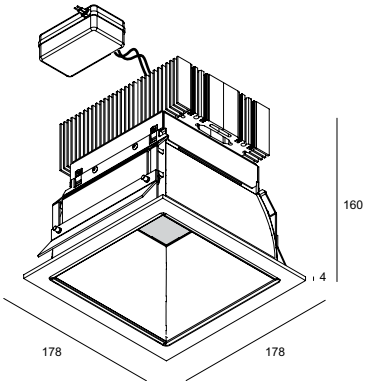

108 x 108 x 100 max.25

STREAMER M ED1 ◇
202 582 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.POWERLED WHITE 10W / 3000K / 920lm
INCL.LED POWER SUPPLY 500mA-DC ED1
120-240V / 50-60Hz

CE 0,4 IP20

OPTIONS
PLASTERKIT 126

164 x 164 x 165 max.25

STREAMER L ED1 ◇
202 582 312 ED1 ◇
◇ = W
FIXED
DIMMING BY 1-10V
INCL.LEDCLUSTER 27W / 3000K / 2300lm
INCL.LED POWER SUPPLY 1A-DC ED1
120-240V / 50-60Hz

CE 2,2 IP20

OPTIONS
PLASTERKIT 120








FULL INFO / PAG TEC

Options

	A B C	
PLASTERKIT 172 **207 01 172**	390 x 390	275 x 275



DOWNFORCE R A + DOWNFORCE R GLASS B




260 x 150 max.25

DOWNFORCE R ◇
202 42 23 ◇
◇ = A / B / W
EXCL.DOWNFORCE R COVER
EXCL.DOWNFORCE R GLASS
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x TC-DEL 26W
2 x TC-TEL 32W
1,5 IP20 0,1

OPTIONS
PLASTERKIT 172

ACCESSORIES
DOWNFORCE R COVER
DOWNFORCE R GLASS




260 x 150 max.25

DOWNFORCE R EVG DIM 2 ◇
202 42 23 ED2 ◇
◇ = A / B / W
EXCL.DOWNFORCE R COVER
EXCL.DOWNFORCE R GLASS
DIMMING BY SWITCH DIM / DALI
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x TC-DEL 26W
2 x TC-TEL 32W
1,6 IP20 0,1

OPTIONS
PLASTERKIT 172

ACCESSORIES
DOWNFORCE R COVER
DOWNFORCE R GLASS




DOWNFORCE R COVER ◇
202 42 00 ◇
◇ = A / B / W
0,2



DOWNFORCE R A + COVER A



DOWNFORCE R EVG DIM 2 A + COVER B



DOWNFORCE R GLASS ◇
202 42 04 ◇
◇ = B / W
0,5



DOWNFORCE R W + GLASS B



DOWNFORCE R EVG DIM 2 W + GLASS W




FULL INFO / PAG TEC

Options

PLASTERKIT 173 **207 01 173**	350 x 350	275 x 275



DOWNFORCE S B + DOWNFORCE S COVER W + DOWNFORCE S RASTER W






260 x 260 x 160 max.25

DOWNFORCE S ◇
202 43 23 ◇
◇ = A / B / W
EXCL.DOWNFORCE S COVER
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x TC-DEL 26W
2 x TC-TEL 32W
CE 1,6 IP20 0,1

OPTIONS
PLASTERKIT 173

ACCESSORIES
DOWNFORCE S COVER
DOWNFORCE S COVER + DOWNFORCE S GLASS
DOWNFORCE S COVER + DOWNFORCE S RASTER
DOWNFORCE S COVER + DOWNFORCE S ANTI-GLARE






260 x 260 x 160 max.25

DOWNFORCE S EVG DIM 2 ◇
202 43 23 ED2 ◇
◇ = A / B / W
EXCL.DOWNFORCE S COVER
DIMMING BY SWITCH DIM / DALI
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x TC-DEL 26W
2 x TC-TEL 32W
CE 1,7 IP20 0,1

OPTIONS
PLASTERKIT 173

ACCESSORIES
DOWNFORCE S COVER
DOWNFORCE S COVER + DOWNFORCE S GLASS
DOWNFORCE S COVER + DOWNFORCE S RASTER
DOWNFORCE S COVER + DOWNFORCE S ANTI-GLARE






DOWNFORCE S COVER ◇
202 43 00 ◇
◇ = A / B / W
0,2



DOWNFORCE S B + COVER W



DOWNFORCE S B + COVER W





DOWNFORCE S GLASS
202 43 04
0,4

DOWNFORCE S GLASS SBL
202 43 04 SBL
0,4


+ COVER ◇
202 43 00 ◇
◇ = A / B / W
0,2



DOWNFORCE S W + COVER W + GLASS



DOWNFORCE S EVG DIM 2 W + COVER A + GLASS





DOWNFORCE S RASTER ◇
202 43 07 ◇
◇ = A / B / W
0,1

+ COVER ◇
202 43 00 ◇
◇ = A / B / W
0,2



DOWNFORCE S W + COVER A + RASTER W



DOWNFORCE S EVG DIM 2 W + COVER A + RASTER W







FULL INFO / PAG TEC


Options


PLASTERKIT 150 **278 62 99 00**	500 x 500	440 x 440
LED RGB KIT 150 **300 90 215**		
LED RGB KIT 60 **300 90 206**		
LED RGB KIT 20 **300 90 202**		
RGB TOUCH CONTROLLER DMX **300 90 330**		



CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

Circa RGB

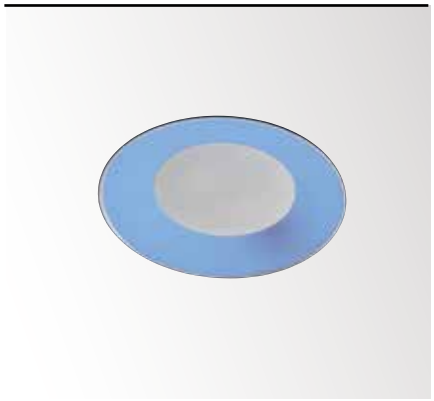




365 x 120 max.35

CIRCA 55 RGB ◇
278 62 33 00 ◇
◇ = W
INCL.1 x PC SBL
INCL.LEDSTRIP RGB 12W
EXCL.LED RGB KIT

CE 2,6 IP20 IP40 0,1

OPTIONS
PLASTERKIT 150
LED RGB KIT
RGB TOUCH CONTROLLER DMX



365 x 120 max.35


CIRCA 5505 RGB ◇
278 62 33 52 ◇
◇ = W
INCL.1 x PC SBL
INCL.LEDSTRIP RGB 12W
EXCL.LED RGB KIT
CABLING 2 CIRCUITS
ADJUSTABLE 0°- 30°
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.20W

CE 3,0 IP20 0,5

OPTIONS
PLASTERKIT 150
LED RGB KIT
RGB TOUCH CONTROLLER DMX
TRANSFO

Circa






365 x 120 max.35

CIRCA 55 ◇
278 62 55 00 ◇
◇ = W
INCL.1 x PC SBL
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 55W

CE 2,6 IP20 IP40 0,1

OPTIONS
PLASTERKIT 150



365 x 120 max.35

CIRCA 5505 ◇
278 62 55 52 ◇
◇ = W
INCL.1 x PC SBL
CABLING 2 CIRCUITS
ADJUSTABLE 0°- 30°
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.20W
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 55W

CE 3,0 IP20 0,5

OPTIONS
PLASTERKIT 150
TRANSFO

OVERVIEW SUPERNOVA

Supernova XS Recessed	Supernova Trimless	Supernova Semi	Supernova
			
Ø 260 - Ø 330	Ø 675 - Ø 975 - Ø 1275	Ø 672 - Ø 972 - Ø 1272	Ø 650 - Ø 950 - Ø 1250
ADJUSTABLE 0-8° / 360°	FIXED	FIXED	FIXED
led	led / T16 / TC-L	T16 / TC-L	new led / T16
PAG INT 207	PAG INT 209	PAG INT 211	PAG INT 213
PAG INT 282	PAG INT 282	PAG INT 282	PAG INT 282



Supernova XS **RECESSED**



Supernova **TRIMLESS**



Supernova **SEMI**






FULL INFO / PAG TEC

Requirements

SUPERNOVA XS RECESSED KIT 260
274 88 029

301 x 200 max.25


1,1



SUPERNOVA XS RECESSED KIT 330
274 88 036


371 x 200 max.25


1,4




led

Supernova XS Recessed

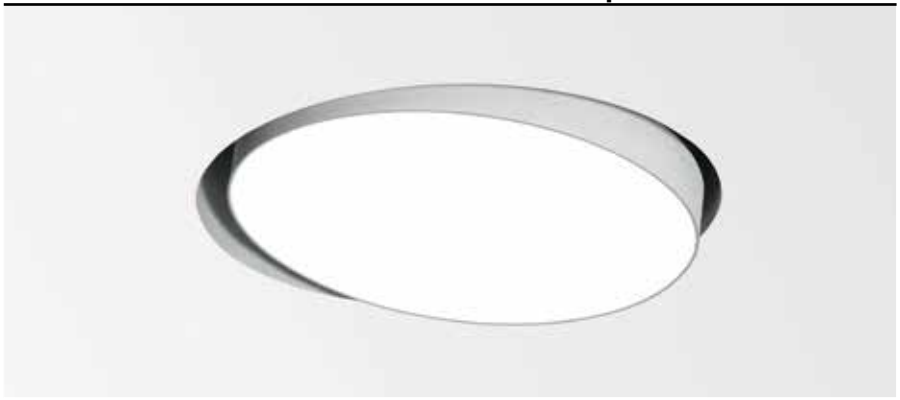



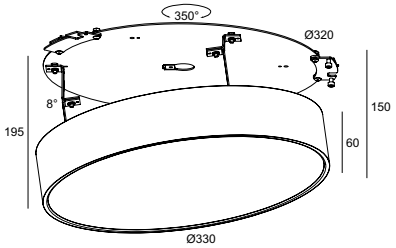

SUPERNOVA XS RECESSED 260 ◇
274 86 2515 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 15W / 3000K / 1312lm
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

2,2 IP40 0,1

REQUIREMENTS
SUPERNOVA XS RECESSED KIT 260
274 88 029


SUPERNOVA XS RECESSED 330 ◇
274 86 3224 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 25W / 3000K / 2155lm
INCL.LED POWER SUPPLY 1050mA-DC
110-240V / 50-60Hz


2,7 IP40 0,1


REQUIREMENTS
SUPERNOVA XS RECESSED KIT 330
274 88 036

reddot design award winner 2013

GOOD DESIGN award

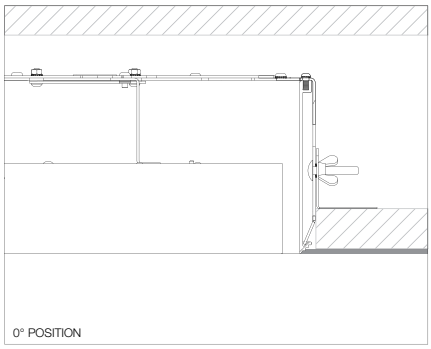
0° POSITION

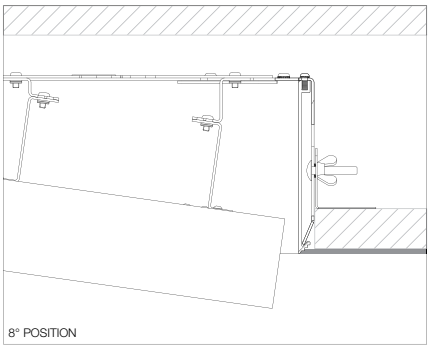
8° POSITION

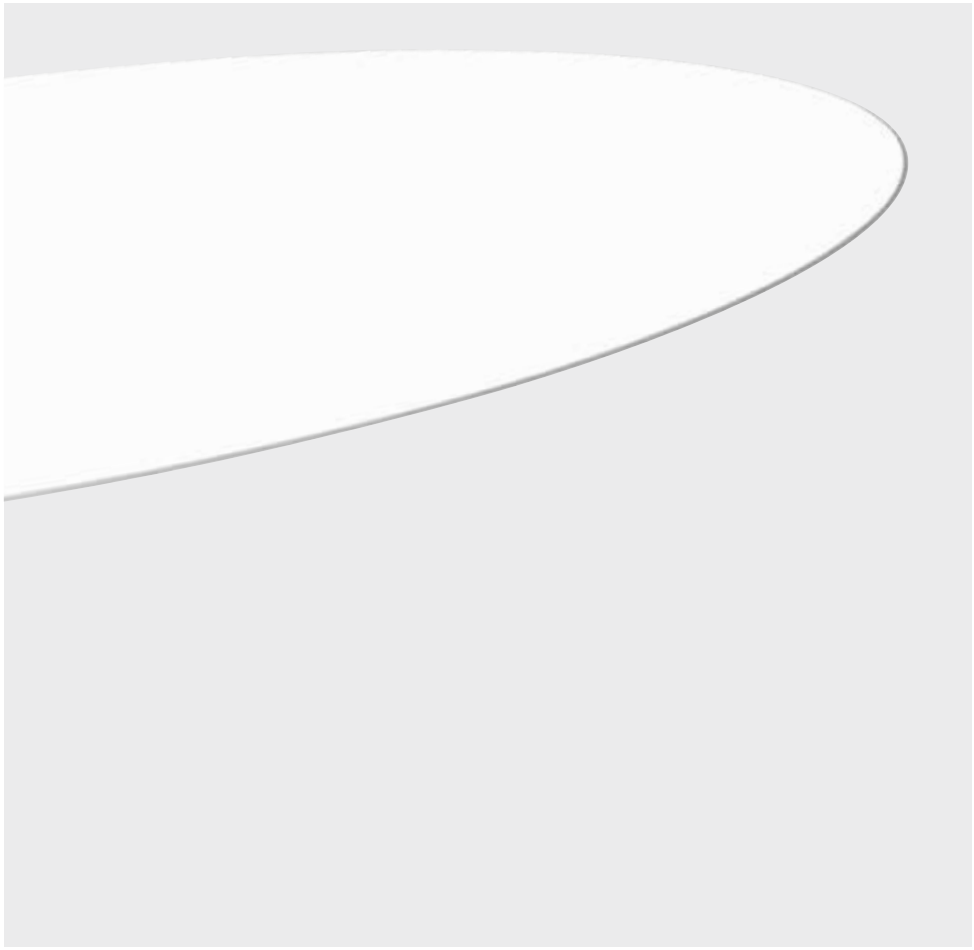



FULL INFO / PAG TEC


Options


CONTROL GEAR


DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 20x SUPERNOVA 6528 EVG DIM1
max. 9x SUPERNOVA 9526 EVG DIM1
max. 4x SUPERNOVA 12528 EVG DIM1

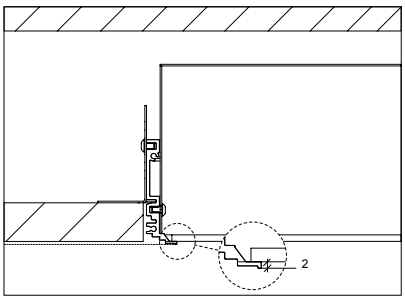

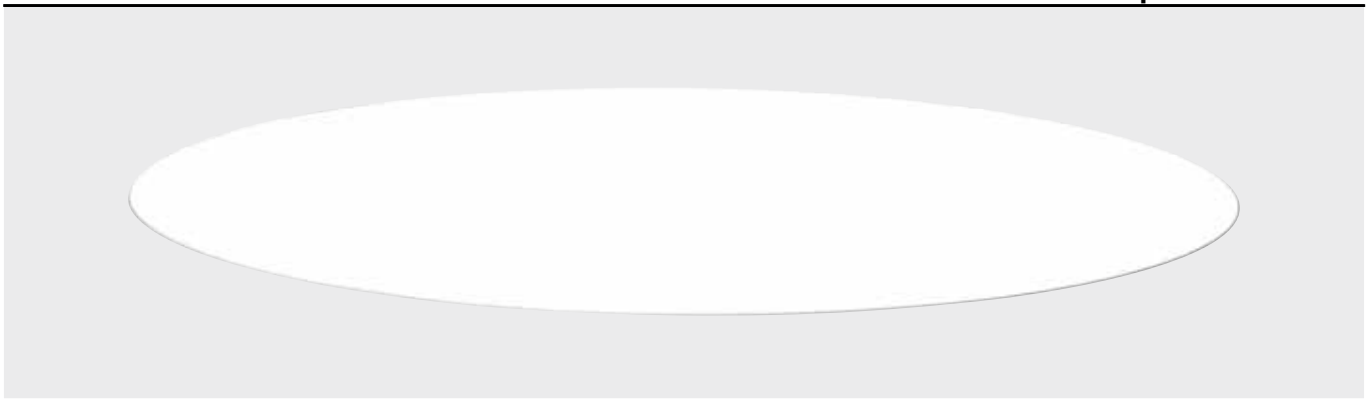







led

685 x 200 max.25

SUPERNOVA TRIMLESS 6528 EVG DIM 1 ◇
274 89 6528 ED1
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 51W / 3000K / 4340 lm
INCL.1 x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

CE 6,8 IP20 0,1

OPTIONS
DALI TO 1-10V CONVERTER

685 x 200 max.25

SUPERNOVA TRIMLESS 65
274 89 60
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI-EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W

CE 8,3 IP20 0,1

685 x 200 max.25

SUPERNOVA TRIMLESS 65 EVG DIM 2 ◇
274 89 60 ED2
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W

CE 8,3 IP20 0,1

led

985 x 200 max.25

SUPERNOVA TRIMLESS 9528 EVG DIM 1 ◇
274 89 9528 ED1
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 114W / 3000K / 9825 lm
INCL.2 x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

CE 8,9 IP20 0,1

OPTIONS
DALI TO 1-10V CONVERTER

985 x 200 max.25

SUPERNOVA TRIMLESS 95
274 89 90
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI-EVG
4 x T16 14/24W
4 x T16 21/39W

CE 10,4 IP20 0,1

985 x 200 max.25

SUPERNOVA TRIMLESS 95 EVG DIM 2 ◇
274 89 90 ED2
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W

CE 10,4 IP20 0,1

led

1285 x 200 max.25

SUPERNOVA TRIMLESS 12528 EVG DIM 1 ◇
274 89 12528 ED1
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 225W / 3000K / 19420 lm
INCL.3 x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

CE 10,8 IP20 0,1

OPTIONS
DALI TO 1-10V CONVERTER

1285 x 200 max.25

SUPERNOVA TRIMLESS 125
274 89 120
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 4 x 2 ~ 2 x 1~MULTI-EVG
2 x T16 14/24W
4 x T16 21/39W
4 x T16 28/54W


CE 12,6 IP20 0,1


1285 x 200 max.25

SUPERNOVA TRIMLESS 125 EVG DIM 2 ◇
274 89 120 ED2
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 4 x 2 ~ 2 x 1~MULTI EVG DIM
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W

CE 12,6 IP20 0,1



DELTALIGHT®

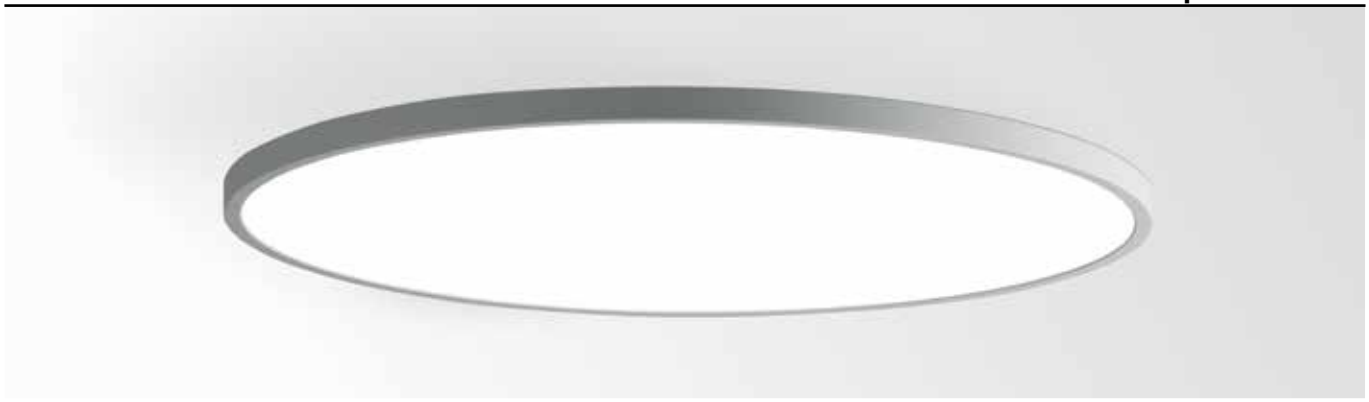




652 x 120 max.25

SUPERNOVA SEMI 65 ◇
274 88 60 ◇
◇ = B / W
INCL.PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI-EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
11,0 IP20 0,1




952 x 120 max.25

SUPERNOVA SEMI 95 ◇
274 88 90 ◇
◇ = B / W
INCL.PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI-EVG
4 x T16 14/24W
4 x T16 21/39W
15,5 IP20 0,1



1252 x 120 max.25

SUPERNOVA SEMI 125 ◇
274 88 120 ◇
◇ = B / W
INCL.PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI-EVG
2 x T16 14/24W
4 x T16 21/39W
4 x T16 28/54W
20,0 IP20 0,1

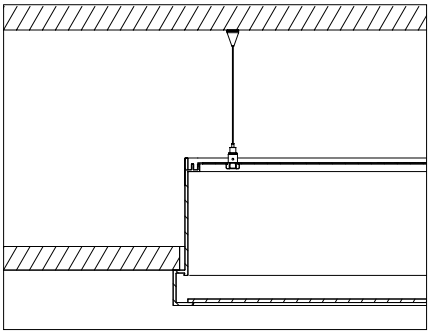




FULL INFO / PAG TEC

Requirements

SUPERNOVA 65 RECESSED KIT
274 94 0710

735 x 200 max.25


3,1



SUPERNOVA 95 RECESSED KIT
274 94 1010

1035 x 200 max.25


3,1



SUPERNOVA 125 RECESSED KIT
274 94 1310

1335 x 200 max.25

4,6




FULL INFO / PAG TEC

Options


SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED2
328 18 43 ED2
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²




SUSPENSION SET 18 3m ED1
328 18 43 ED1
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
INCL. 1 x CABLE 2 x 0,75mm²





CONTROL GEAR


DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 20x SUPERNOVA 6528 EVG DIM1
max. 9x SUPERNOVA 9526 EVG DIM1
max. 4x SUPERNOVA 12528 EVG DIM1



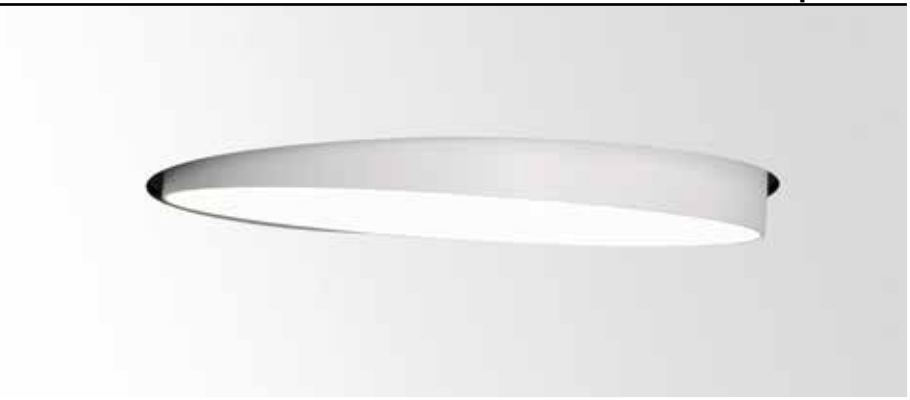







SUPERNOVA 6528 EVG DIM 1 ◇
274 95 6528 ED1 ◇
◇ = W
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 51W / 3000K / 4340 lm
INCL.1x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

CE 8,7 IP20 0,1

REQUIREMENTS
SUPERNOVA 65 RECESSED KIT
274 94 0710

OPTIONS
SUSPENSION SET 18 3m ED1
DALI TO 1-10V CONVERTER

SUPERNOVA 65 ◇
274 95 60 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 50-60Hz / 1 x 3~MULTI EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W

CE 10,0 IP20 0,1

REQUIREMENTS
SUPERNOVA 65 RECESSED KIT
274 94 0710

OPTIONS
SUSPENSION SET 18 3m

SUPERNOVA 65 EVG DIM 2 ◇
274 95 60 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W

CE 10,0 IP20 0,1

REQUIREMENTS
SUPERNOVA 65 RECESSED KIT
274 94 0710

OPTIONS
SUSPENSION SET 18 3m ED2

SUPERNOVA 9528 EVG DIM 1 ◇
274 95 9528 ED1 ◇
◇ = W
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 114W / 3000K / 9825 lm
INCL.2x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

CE 12,7 IP20 0,1

REQUIREMENTS
SUPERNOVA 95 RECESSED KIT
274 94 1010

OPTIONS
SUSPENSION SET 18 3m ED1
DALI TO 1-10V CONVERTER

SUPERNOVA 95 ◇
274 95 90 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 50-60Hz / 4 x 2~MULTI EVG
4 x T16 14/24W
4 x T16 21/39W

CE 14,5 IP20 0,1

REQUIREMENTS
SUPERNOVA 95 RECESSED KIT
274 94 1010

OPTIONS
SUSPENSION SET 18 3m

SUPERNOVA 95 EVG DIM 2 ◇
274 95 90 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W

CE 14,5 IP20 0,1

REQUIREMENTS
SUPERNOVA 95 RECESSED KIT
274 94 1010

OPTIONS
SUSPENSION SET 18 3m ED2

SUPERNOVA 12528 EVG DIM 1 ◇
274 95 12528 ED1 ◇
◇ = W
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 225W / 3000K / 19420 lm
INCL.3x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

CE 16,6 IP20 0,1

REQUIREMENTS
SUPERNOVA 125 RECESSED KIT
274 94 1310

OPTIONS
SUSPENSION SET 18 3m ED1
DALI TO 1-10V CONVERTER

SUPERNOVA 125 ◇
274 95 120 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 50-60Hz / 5 x 2~MULTI EVG
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W

CE 19 IP20 0,1

REQUIREMENTS
SUPERNOVA 125 RECESSED KIT
274 94 1310

OPTIONS
SUSPENSION SET 18 3m

SUPERNOVA 125 EVG DIM 2 ◇
274 95 120 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 5 x 2~MULTI EVG DIM
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W

CE 19 IP20 0,1

REQUIREMENTS
SUPERNOVA 125 RECESSED KIT
274 94 1310

OPTIONS
SUSPENSION SET 18 3m ED2







DELL





Microline 50 1154






45 x 1214 x 100 max.22

MICROLINE 50 1154 ◇
297 01 154 ◇
◇ = ANO
INCL.1 x PC SBL
INCL.2 x INSIDE CLIP
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16 28/54W

CE 4,8 IP20 0,1

B-Liner 70 430




62 x 1130 x 125 max.25

B-LINER 70 430 EVG DIM1 ◇
385 01 42 ED1 ◇
◇ = ANO / W
INCL.1 x PC SBL
INCL.2 x INSIDE CLIP
INCL.LED CLUSTER 32W / 3000K / 2800lm
INCL.LED POWER SUPPLY DIM1
110-240V / 50-60Hz

CE 2,6 IP20 0,1

Headliner 95 1154




82 x 1205 x 145 max.25

HEADLINER 95 1154 ◇
378 01 154 ◇
◇ = ANO / W
INCL.1 x PC SBL
INCL.2 x INSIDE CLIP
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W

CE 4,8 IP20 0,1


ACCESSORIES
HDL - HE REFLECTOR T16 SEAMLESS DOWN

Efficiency Headliner




HEADLINER

+




HEADLINER HE REFLECTOR
T16 SEAMLESS DOWN


=



HEADLINER
+ HE REFLECTOR



HEADLINER



HIGH EFFICIENCY

up to 71% efficiency

The Headliner

is a no-nonsense made-to-measure profile solution, with excellent efficiency and light output results.

The white lacquered reflector of the standard Headliner is optimized to produce perfect lighting conditions, achieving a light output of 53%.

+


HE Reflector
Specially designed reflector in sheet metal plate provides superior reflection abilities. Resulting in increase of efficiency of 34%, guaranteeing reduced energy consumption.

=

Exceptional output results are achieved by adding the HE Reflector to the standard Headliner module, resulting in 71% efficiency.

INTERIOR
CEILING SURFACE / SUSPENDED

This chapter combines the ceiling surface mounted and ceiling suspended luminaires. These collections feature many carefully designed shapes for all preferences and purposes. We invite you to discover new levels in flexibility, exciting materials, colours and shapes, a wide variety of lighting effects and industry leading efficiency, enabling you to upgrade any project with customized lighting concepts.

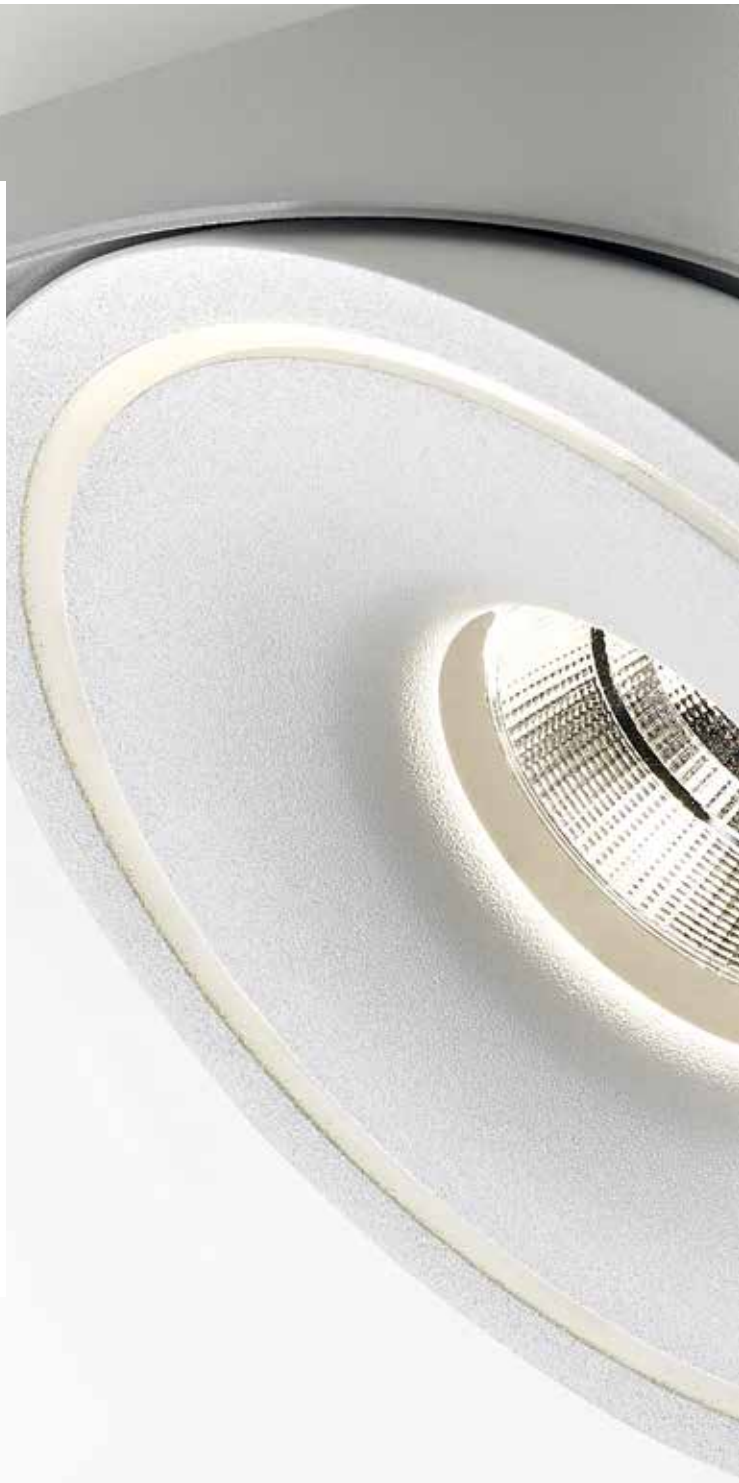





interior ceiling surface / suspended

www.deltalight.com/ICS
www.deltalight.com/ICP



TWEETER ON
INT 227



ULTRA
INT 264



PITCH
INT 281



YOU-TURN ON
INT 232



ULTRA C
INT 267



SUPERNOVA XS
INT 285



BOXTER
INT 240



ULTRA TWIN
INT 270



SUPERNOVA
INT 287



BOXY
INT 244



BOOSTER
INT 274



SUPERNOVA SR
INT 295



GRID ON
INT 249



CIRCA ON
INT 277



SUPERNOVA L
INT 301



LINK
INT 252



KODO
INT 279



SPOTNIC
INT 302



FORUM
INT 307



PHANTOM II
INT 327



SUNSET
INT 309



HALOSUN
INT 327



RATIO
INT 311



CLUB
INT 329



SPATIO
INT 313



XILO
INT 333



QUAD
INT 321



RAND
INT 339



CREDO
INT 322



OUTFIT
INT 350

BAMBO	INT 401
BE COOL	INT 391
BICEP	INT 413
B-LINER	INT 411
BOOSTER	INT 274
BOXTER	INT 240
BOXY	INT 244
CIRCA ON	INT 277
CLUB	INT 329
CREDO	INT 322
CUMULUS	INT 397
ENDLESS	INT 419
FORUM	INT 307
GRAND PRIX	INT 357
GRID ON	INT 249
HALOSUN	INT 327
HEADLINER 75	INT 411
HUSK	INT 369
JETI	INT 382
KODO	INT 279
LAY OUT	INT 425
LINK	INT 252
MAGMA	INT 367
MC DELTA	INT 359
METRONOME	INT 373
MICROLINE 30+	INT 409
NEBEL	INT 393
NICE 2 C	INT 365
NOBODY	INT 415
NYX	INT 361
O2 OXYGEN	INT 402
OUTFIT	INT 350
PHANTOM II	INT 327
PITCH	INT 281
QUAD	INT 321
RAND	INT 339
RANDOM	INT 406
RATIO	INT 311
SPATIO	INT 313
SPOTNIC	INT 302
SUNSET	INT 309
SUPERNOVA	INT 287
SUPERNOVA L	INT 301
SUPERNOVA SR	INT 295
SUPERNOVA XS	INT 285
TWEETER ON	INT 227
ULTRA	INT 264
ULTRA C	INT 267
ULTRA TWIN	INT 270
XILO	INT 333
YOU-TURN ON	INT 232



interior ceiling surface / suspended


www.deltalight.com/ICS
www.deltalight.com/ICP



GRAND PRIX
INT 357



METRONOME
INT 373



O_2 OXYGEN
INT 402



MC DELTA
INT 359



JETI
INT 382



RANDOM
INT 406



NYX
INT 361



BE COOL
INT 391



MICROLINE 30+
INT 409



NICE 2 C
INT 365



NEBEL
INT 393



B-LINER 65
INT 411



MAGMA
INT 367



CUMULUS
INT 397



HEADLINER 75
INT 411



HUSK
INT 369



BAMBO
INT 401



BICEP
INT 413



NOBODY
INT 415


ENDLESS
INT 419



LAY OUT
INT 425

BAMBO	INT 401
BE COOL	INT 391
BICEP	INT 413
B-LINER	INT 411
BOOSTER	INT 274
BOXTER	INT 240
BOXY	INT 244
CIRCA ON	INT 277
CLUB	INT 329
CREDO	INT 322
CUMULUS	INT 397
ENDLESS	INT 419
FORUM	INT 307
GRAND PRIX	INT 357
GRID ON	INT 249
HALOSUN	INT 327
HEADLINER 75	INT 411
HUSK	INT 369
JETI	INT 382
KODO	INT 279
LAY OUT	INT 425
LINK	INT 252
MAGMA	INT 367
MC DELTA	INT 359
METRONOME	INT 373
MICROLINE 30+	INT 409
NEBEL	INT 393
NICE 2 C	INT 365
NOBODY	INT 415
NYX	INT 361
O2 OXYGEN	INT 402
OUTFIT	INT 350
PHANTOM II	INT 327
PITCH	INT 281
QUAD	INT 321
RAND	INT 339
RANDOM	INT 406
RATIO	INT 311
SPATIO	INT 313
SPOTNIC	INT 302
SUNSET	INT 309
SUPERNOVA	INT 287
SUPERNOVA L	INT 301
SUPERNOVA SR	INT 295
SUPERNOVA XS	INT 285
TWEETER ON	INT 227
ULTRA	INT 264
ULTRA C	INT 267
ULTRA TWIN	INT 270
XILO	INT 333
YOU-TURN ON	INT 232


www.deltalight.com/Tweeter

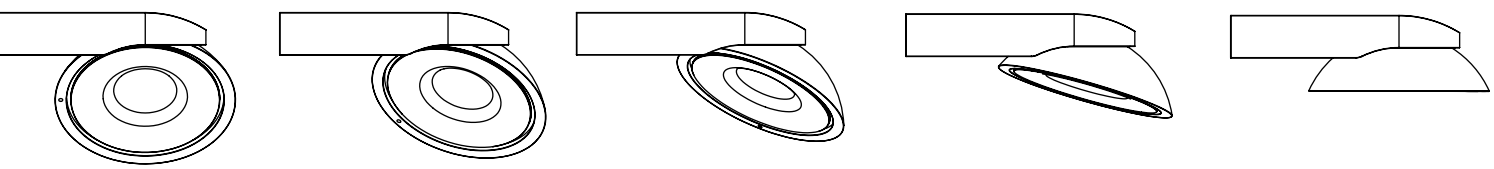


Tweeter On





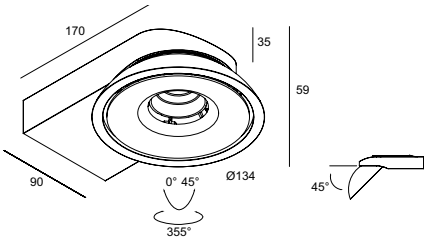

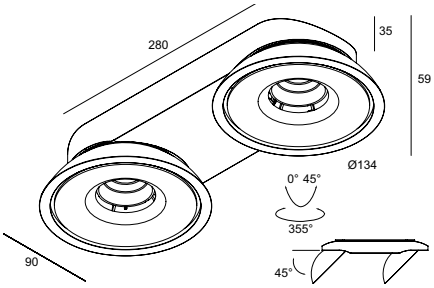

	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	920 lm	810 lm	2x 920 lm	2x 810 lm
REFLECTOR FL-33°	**TWEETER ON 1 REO 3033 ◇** **206 31 12122 ◇** ◇ = W	**TWEETER ON 1 REO 3033-9 ◇** **206 31 129122 ◇** ◇ = W	**TWEETER ON 2 REO 3033 ◇** **206 31 12222 ◇** ◇ = W	**TWEETER ON 2 REO 3033-9 ◇** **206 31 129222 ◇** ◇ = W
REFLECTOR WFL-50°	**TWEETER ON 1 REO 3050 ◇** **206 31 12132 ◇** ◇ = W	**TWEETER ON 1 REO 3050-9 ◇** **206 31 129132 ◇** ◇ = W	**TWEETER ON 2 REO 3050 ◇** **206 31 12232 ◇** ◇ = W	**TWEETER ON 2 REO 3050-9 ◇** **206 31 129232 ◇** ◇ = W
2700K	865 lm	735 lm	2x 865 lm	2x 735 lm
REFLECTOR FL-33°	**TWEETER ON 1 REO 2733 ◇** **206 31 12123 ◇** ◇ = W	**TWEETER ON 1 REO 2733-9 ◇** **206 31 129123 ◇** ◇ = W	**TWEETER ON 2 REO 2733 ◇** **206 31 12223 ◇** ◇ = W	**TWEETER ON 2 REO 2733-9 ◇** **206 31 129223 ◇** ◇ = W
REFLECTOR WFL-50°	**TWEETER ON 1 REO 2750 ◇** **206 31 12133 ◇** ◇ = W	**TWEETER ON 1 REO 2750-9 ◇** **206 31 129133 ◇** ◇ = W	**TWEETER ON 2 REO 2750 ◇** **206 31 12233 ◇** ◇ = W	**TWEETER ON 2 REO 2750-9 ◇** **206 31 129233 ◇** ◇ = W
	ADJUSTABLE 0-45° / 355° INCL.1 x POWERLED WHITE 10W INCL.DIMMABLE LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 0,7 IP20		ADJUSTABLE 0-45° / 355° INCL.2 x POWERLED WHITE 10W INCL. DIMMABLE LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,1 IP20	

PATENTED EX-CENTRIC ROTATION SYSTEM®



top design award 2013

reddot design award winner 2013


interior innovation award 2013 Winner



Graux & Baeyens



Graux & Baeyens

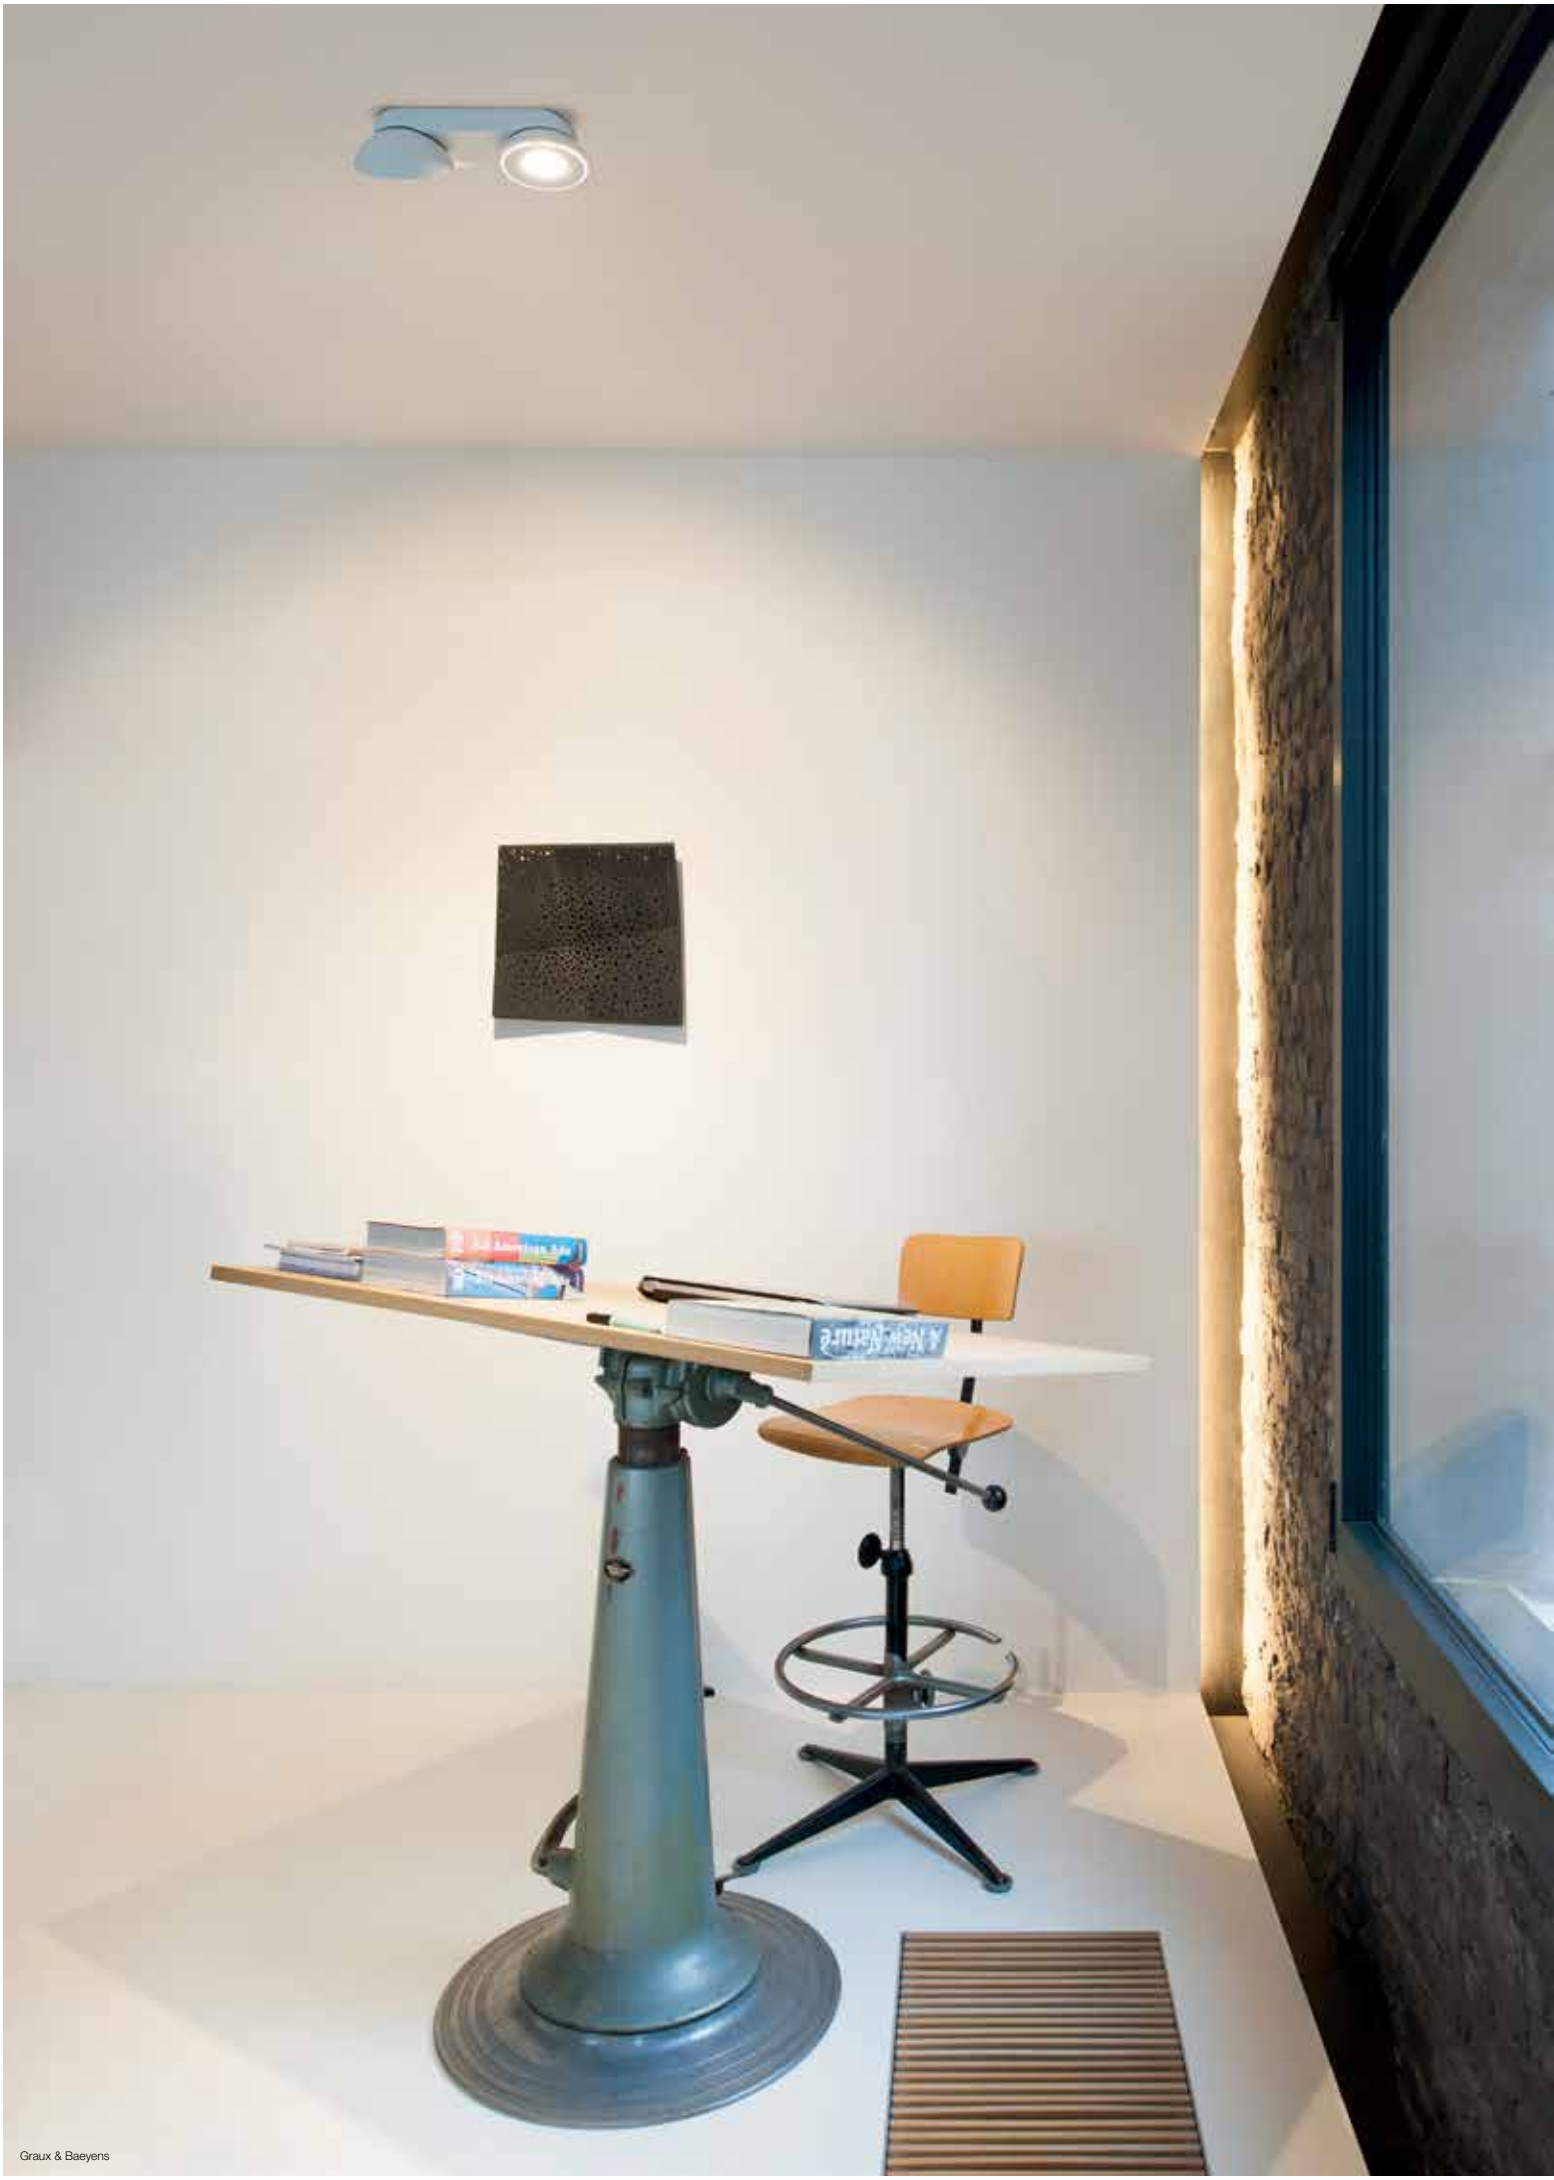


Graux & Baeyens




You-Turn On Reo





You-Turn On Opto





	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	920 lm	810 lm	920 lm	810 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 3015 ◇** **313 021 12112 ◇** ◇ = W-B	**YOU-TURN ON OPTO 3015-9 ◇** **313 021 129112 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 3033 ◇** **313 020 12122 ◇** ◇ = W-B	**YOU-TURN ON REO 3033-9 ◇** **313 020 129122 ◇** ◇ = W-B	**YOU-TURN ON OPTO 3033 ◇** **313 021 12122 ◇** ◇ = W-B	**YOU-TURN ON OPTO 3033-9 ◇** **313 021 129122 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 3050 ◇** **313 020 12132 ◇** ◇ = W-B	**YOU-TURN ON REO 3050-9 ◇** **313 020 129132 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 3055 ◇** **313 021 12132 ◇** ◇ = W-B	**YOU-TURN ON OPTO 3055-9 ◇** **313 021 129132 ◇** ◇ = W-B
2700K	865 lm	735 lm	865 lm	735 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 2715 ◇** **313 021 12113 ◇** ◇ = W-B	**YOU-TURN ON OPTO 2715-9 ◇** **313 021 129113 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 2733 ◇** **313 020 12123 ◇** ◇ = W-B	**YOU-TURN ON REO 2733-9 ◇** **313 020 129123 ◇** ◇ = W-B	**YOU-TURN ON OPTO 2733 ◇** **313 021 12123 ◇** ◇ = W-B	**YOU-TURN ON OPTO 2733-9 ◇** **313 021 129123 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 2750 ◇** **313 020 12133 ◇** ◇ = W-B	**YOU-TURN ON REO 2750-9 ◇** **313 020 129133 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 2755 ◇** **313 021 12133 ◇** ◇ = W-B	**YOU-TURN ON OPTO 2755-9 ◇** **313 021 129133 ◇** ◇ = W-B
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 10W INCL.DIMMABLE LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,0 IP20		ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 10W INCL.1 x EFT FILTER* INCL.DIMMABLE LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,1 IP20	


*EFT / EQUALISING FILTER TECHNOLOGY



new

You-Turn On 111






YOU-TURN ON 111 T50 ◇
313 02 12 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
IP20 1,0

reddot design award
winner 2012


You-Turn On Reo





You-Turn On Opto






	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	2130 lm	1750 lm	2130 lm	1750 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 203015 ◇** **313 021 20112 ◇** ◇ = W-B	**YOU-TURN ON OPTO 203015-9 ◇** **313 021 209112 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 203033 ◇** **313 020 20122 ◇** ◇ = W-B	**YOU-TURN ON REO 203033-9 ◇** **313 020 209122 ◇** ◇ = W-B	**YOU-TURN ON OPTO 203033 ◇** **313 021 20122 ◇** ◇ = W-B	**YOU-TURN ON OPTO 203033-9 ◇** **313 021 209122 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 203050 ◇** **313 020 20132 ◇** ◇ = W-B	**YOU-TURN ON REO 203050-9 ◇** **313 020 209132 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 203055 ◇** **313 021 20132 ◇** ◇ = W-B	**YOU-TURN ON OPTO 203055-9 ◇** **313 021 209132 ◇** ◇ = W-B
2700K	1990 lm	1735 lm	1990 lm	1735 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 202715 ◇** **313 021 20113 ◇** ◇ = W-B	**YOU-TURN ON OPTO 202715-9 ◇** **313 021 209113 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 202733 ◇** **313 020 20123 ◇** ◇ = W-B	**YOU-TURN ON REO 202733-9 ◇** **313 020 209123 ◇** ◇ = W-B	**YOU-TURN ON OPTO 202733 ◇** **313 021 20123 ◇** ◇ = W-B	**YOU-TURN ON OPTO 202733-9 ◇** **313 021 209123 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 202750 ◇** **313 020 20133 ◇** ◇ = W-B	**YOU-TURN ON REO 202750-9 ◇** **313 020 209133 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 202755 ◇** **313 021 20133 ◇** ◇ = W-B	**YOU-TURN ON OPTO 202755-9 ◇** **313 021 209133 ◇** ◇ = W-B
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 25W INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,5 IP20		ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 25W INCL.1 x EFT FILTER* INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,6 IP20	

*EFT / EQUALISING FILTER TECHNOLOGY



You-Turn On H111






YOU-TURN ON H111-35 ◇
313 02 1935 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 35W
IP20 1,5 1,0

YOU-TURN ON H111-70 ◇
313 02 1970 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 70W
IP20 1,5 1,0

You-Turn On HIT



up to 93% efficiency

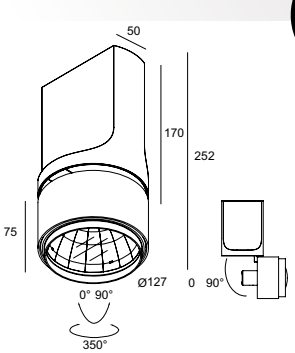

YOU-TURN ON HIT-35 SP15 ◇
313 02 133 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-35 FL24 ◇
313 02 133 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-35 WFL43 ◇
313 02 133 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W
IP20 1,5 1,0

YOU-TURN ON HIT-70 SP15 ◇
313 02 137 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-70 FL24 ◇
313 02 137 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-70 WFL43 ◇
313 02 137 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W
IP20 1,6 1,0

reddot design award
winner 2012





www.deltalight.com/You-Turn



VALENTINE




Boxter LED









	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**BOXTER 1 LED 3033 ◇** **202 78 8122 ◇** ◇ = B-B / W-B	**BOXTER 1 LED 3033-9 ◇** **202 78 89122 ◇** ◇ = B-B / W-B	**BOXTER 2 LED 3033 ◇** **202 78 8222 ◇** ◇ = B-B / W-B	**BOXTER 2 LED 3033-9 ◇** **202 78 89222 ◇** ◇ = B-B / W-B
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**BOXTER 1 LED 2733 ◇** **202 78 8123 ◇** ◇ = B-B / W-B	**BOXTER 1 LED 2733-9 ◇** **202 78 89123 ◇** ◇ = B-B / W-B	**BOXTER 2 LED 2733 ◇** **202 78 8223 ◇** ◇ = B-B / W-B	**BOXTER 2 LED 2733-9 ◇** **202 78 89223 ◇** ◇ = B-B / W-B
	ADJUSTABLE 0°- 30°/360° INCL.1 x POWERLED WHITE 7W INCL. DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,0 IP20		ADJUSTABLE 0°- 30°/360° INCL.2 x POWERLED WHITE 7W INCL. DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,9 IP20	





new

Boxter









BOXTER 1 50 ◇
202 78 55 01 ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 30°/360°
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.35W
1,0 IP20 0,5

BOXTER 2 50 ◇
202 78 55 02 ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 30°/360°
GU5.3 / 220-240V / 50-60Hz / TE
2 x QR-C51 max.35W
1,9 IP20 0,5



reddot design award winner 2013



Graux & Baeyens



FULL INFO / PAG TEC

Options

INSTALLATION

COVERSET S ◇
204 90 90 ◇ 90 x 90
◇ = ANO / W


CONTROL GEAR

TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10


Boxy L+ LED





Boxy 2L+ LED






	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**BOXY L+ LED 3033 ◇** **251 67 8122 ◇** ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY L+ LED 3033-9 ◇** **251 67 89122 ◇** ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY 2 L+ LED 3033 ◇** **251 67 8222 ◇** ◇ = A-A / B-B / B-MMAT / W-W	**BOXY 2 L+ LED 3033-9 ◇** **251 67 89222 ◇** ◇ = A-A / B-B / B-MMAT / W-W
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**BOXY L+ LED 2733 ◇** **251 67 8123 ◇** ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY L+ LED 2733-9 ◇** **251 67 89123 ◇** ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY 2 L+ LED 2733 ◇** **251 67 8223 ◇** ◇ = A-A / B-B / B-MMAT / W-W	**BOXY 2 L+ LED 2733-9 ◇** **251 67 89223 ◇** ◇ = A-A / B-B / B-MMAT / W-W
	INCL.1 x POWERLED WHITE 7W INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 0,6 IP53 OPTIONS COVERSET S 90		INCL.2 x POWERLED WHITE 7W INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,1 IP53	


BOXY L+ LED 83033 A-A / B-B / G-G / W-W



Boxy






BOXY ◇
251 67 20 ◇
◇ = ALU / B / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
CE 0,3 IP20 0,5

OPTIONS
COVERSET S 90

Boxy +





BOXY + ◇
251 67 44 ◇
◇ = A / G / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 35W
CE 0,4 IP44 0,5

OPTIONS
COVERSET S 90

BOXY + 12V ◇
251 67 43 ◇
◇ = A / W
GU5.3 / 12V
1 x QR-C51 max.35W
CE 0,4 IP44 0,5

OPTIONS
COVERSET S 90
TRANSFO





filipdeslee.com




Grid On











GRID ON 1 QR ◇
202 67 00 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
CE 1,8 IP20 1,0

GRID ON 2 QR ◇
202 67 00 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 3,2 IP20 1,0





GRID ON 1 H111-35 ◇
202 67 88 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR-CE111 35W
CE 2,4 IP20 1,0


GRID ON 2 H111-35 ◇
202 67 88 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x HIR-CE111 35W
CE 3,8 IP20 1,0

GRID ON 1 H111-70 ◇
202 67 89 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR-CE111 70W
CE 2,4 IP20 1,0

GRID ON 2 H111-70 ◇
202 67 89 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x HIR-CE111 70W
CE 3,8 IP20 1,0

DESIGN BY **DELTA LIGHT®** & **PATRICK SIX**




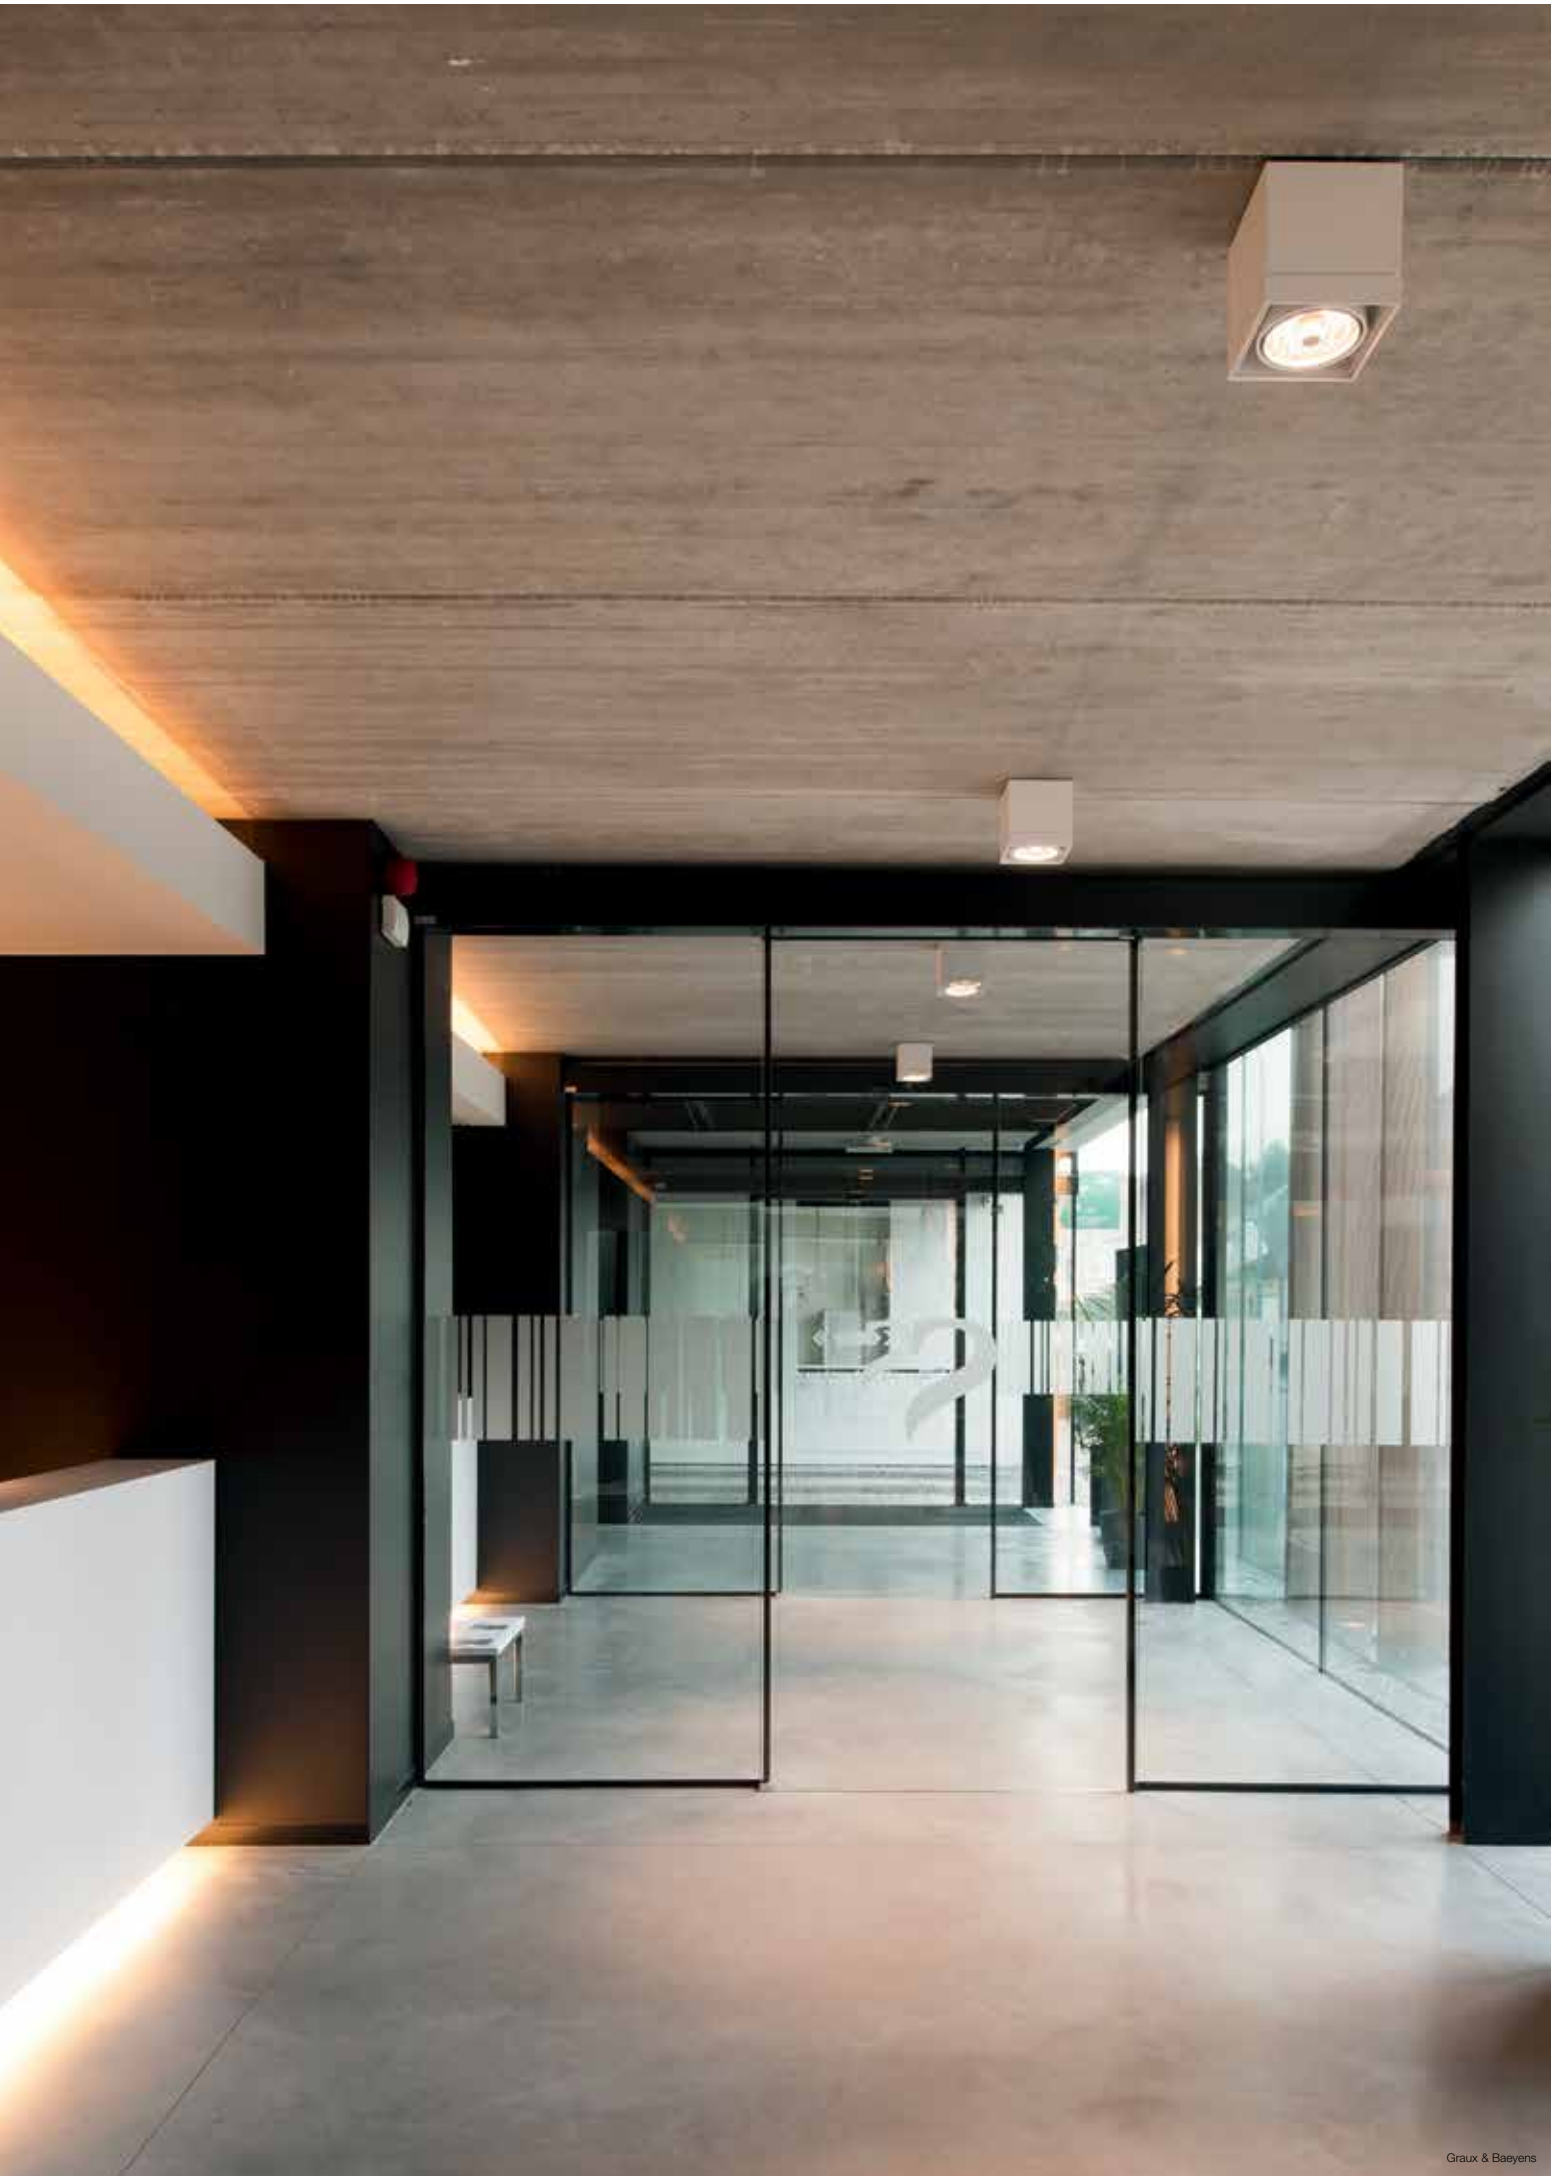

Graux & Baeyens

Link 1 Reo





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**LINK 1 REO 3033** ◇ **315 41 8122** ◇ ◇ = W	**LINK 1 REO 3033-9** ◇ **315 41 89122** ◇ ◇ = W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**LINK 1 REO 2733** ◇ **315 41 8123** ◇ ◇ = W	**LINK 1 REO 2733-9** ◇ **315 41 89123** ◇ ◇ = W

ADJUSTABLE 0°- 30° / 350°
INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 0,9 IP20







Link 1









LINK 111 ◇
315 11 00 ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
0,7 IP20 1,0

LINK 1 226 ◇
315 226 00 ◇
◇ = W
FIXED
INCL.PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 26W
1,8 IP20 0,1

reddot design award winner 2011

GOOD DESIGN award




P8 architecten


P8 architecten



Link 2 Reo





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**LINK 2 REO 3033** ◇ **315 41 8222** ◇ ◇ = W	**LINK 2 REO 3033-9** ◇ **315 41 89222** ◇ ◇ = W
2700K	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**LINK 2 REO 2733** ◇ **315 41 8223** ◇ ◇ = W	**LINK 2 REO 2733-9** ◇ **315 41 89223** ◇ ◇ = W


ADJUSTABLE 0°- 30° / 350°
INCL.2 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,8 IP20



Link 2






LINK 211 ◇
315 12 00 ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

CE 1,4 IP20 1,0

◀ Link Combinations see pages PRO 96-101

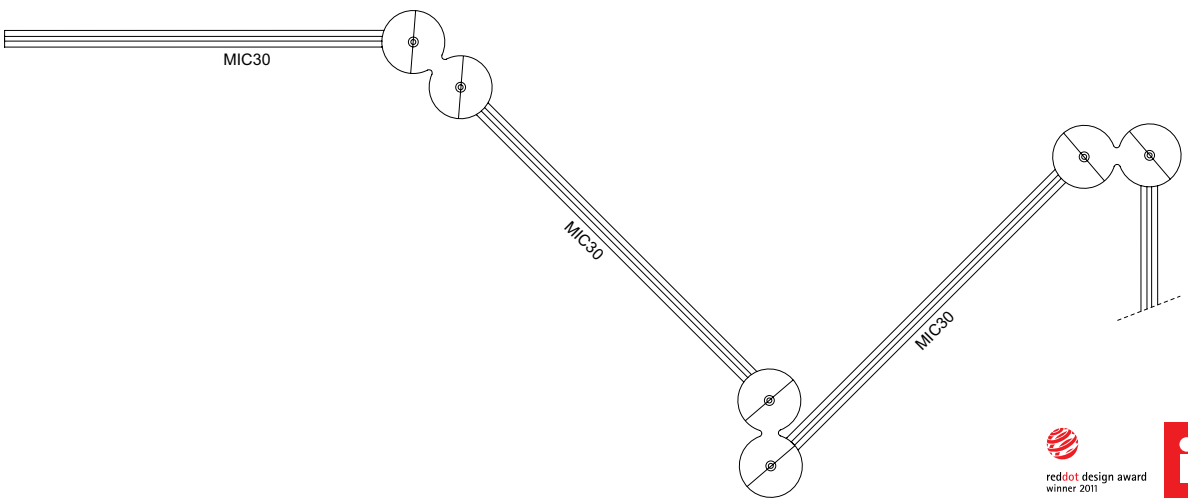



reddot design award winner 2011

GOOD DESIGN award

Link 3 Reo







	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	3x 660 lm	3x 580 lm
REFLECTOR FL-33°	**LINK 3 REO 3033** ◇ **315 41 8322** ◇ ◇ = W	**LINK 3 REO 3033-9** ◇ **315 41 89322** ◇ ◇ = W
2700K	3x 620 lm	3x 525 lm
REFLECTOR FL-33°	**LINK 3 REO 2733** ◇ **315 41 8323** ◇ ◇ = W	**LINK 3 REO 2733-9** ◇ **315 41 89323** ◇ ◇ = W

ADJUSTABLE 0°- 30° / 350°
INCL.3 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 2,7 IP20







Link 3







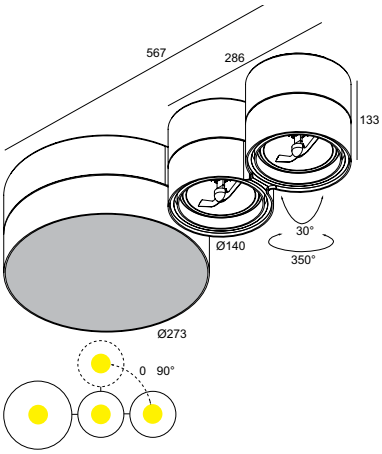

LINK 311 ◇
315 13 00 ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W
CE 2,1 IP20 1,0

LINK 3 226-211 ◇
315 226 12 ◇
◇ = W
INCL.PC SBL
G24q-3 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-DEL 26W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 3,2 IP20 1,0

reddot design award winner 2011

GOOD DESIGN award











Ultra S Reo





Ultra S D LED





	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	660 lm	580 lm
REFLECTOR FL-33°	**ULTRA S REO 3033** ◇ **279 71 8122** ◇ ◇ = W	**ULTRA S REO 3033-9** ◇ **279 71 89122** ◇ ◇ = W	**ULTRA S D LED 3033** ◇ **279 72 28122** ◇ ◇ = B-MMAT / W-B / W-W	**ULTRA S D LED 3033-9** ◇ **279 72 29122** ◇ ◇ = B-MMAT / W-B / W-W
2700K	620 lm	525 lm	620 lm	525 lm
REFLECTOR FL-33°	**ULTRA S REO 2733** ◇ **279 71 8123** ◇ ◇ = W	**ULTRA S REO 2733-9** ◇ **279 71 89123** ◇ ◇ = W	**ULTRA S D LED 2733** ◇ **279 72 28123** ◇ ◇ = B-MMAT / W-B / W-W	**ULTRA S D LED 2733-9** ◇ **279 72 29123** ◇ ◇ = B-MMAT / W-B / W-W
	INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz 0,7 IP20		INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz 1,1 IP20	






new

Ultra II S





ULTRA II S ◇
279 72 20 ◇
◇ = ALU / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20



FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION + CONNECTION TRIMLESS

328 10 02

INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²





SUSPENSION + CONNECTION TRIMLESS

new

led

Ultra C D LED





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**ULTRA C D LED 3033** ◇ **279 73 28122** ◇ ◇ = B-MMAT / W-B / W-W	**ULTRA C D LED 3033-9** ◇ **279 73 29122** ◇ ◇ = B-MMAT / W-B / W-W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**ULTRA C D LED 2733** ◇ **279 73 28123** ◇ ◇ = B-MMAT / W-B / W-W	**ULTRA C D LED 2733-9** ◇ **279 73 29123** ◇ ◇ = B-MMAT / W-B / W-W

INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 2 x 0.75mm²
100-240V / 50-60Hz

CE 1,1 IP20

OPTIONS
SUSPENSION + CONNECTION TRIMLESS





FULL INFO / PAG TEC

Options


INSTALLATION

SUSPENSION + CONNECTION TRIMLESS

328 10 02

INCL.1 x AUTOMATIC ADJUSTMENT


INCL.1 x CONNECTOR 3 x 2.5mm²




Ultra C









ULTRA C 40 ◇

279 74 100 ◇

◇ = W

INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m

INCL.1 x CABLE 3 x 0.75mm²

E27Ls / 100-240V / 50-60Hz

1 x TC-TSE max.20W

1 x TCA-SE max.20W

1 x QPAR30 75W

CE 2,3 IP20 0,5

OPTIONS

SUSPENSION + CONNECTION TRIMLESS

led LED SOLUTION - PAG TEC 4-5

ULTRA C 60 ◇

279 76 100 ◇

◇ = W

INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m

INCL.1 x CABLE 3 x 0.75mm²

E27Ls / 100-240V / 50-60Hz

1 x TC-TSE max.20W

1 x TCA-SE max.20W

1 x QPAR30 75W

CE 2,8 IP20 0,5

OPTIONS

SUSPENSION + CONNECTION TRIMLESS

led LED SOLUTION - PAG TEC 4-5



SUSPENSION + CONNECTION TRIMLESS

FULL INFO / PAG TEC


Options

INSTALLATION


COVERSET R ◇
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / W


led

Ultra Twin LED

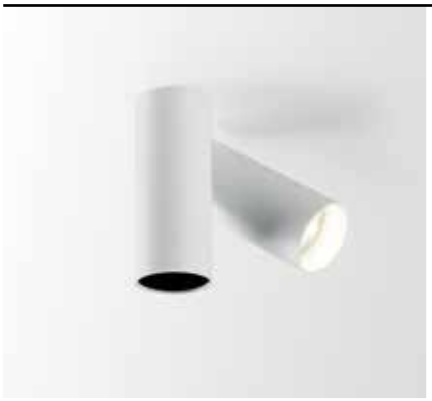









	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST			
3000K	660 lm	580 lm	1420 lm	
REFLECTOR SP-20°			**ULTRA TWIN LED SP20** ◇ **316 08 32** ◇ ◇ = W	
REFLECTOR FL-33°	**ULTRA TWIN LED 3033** ◇ **316 06 8122** ◇ ◇ = W	**ULTRA TWIN LED 3033-9** ◇ **316 06 89122** ◇ ◇ = W		
REFLECTOR FL-40°			**ULTRA TWIN LED FL40** ◇ **316 08 34** ◇ ◇ = W	
REFLECTOR WFL-50°	**ULTRA TWIN LED 3050** ◇ **316 06 8132** ◇ ◇ = W	**ULTRA TWIN LED 3050-9** ◇ **316 06 89132** ◇ ◇ = W		
2700K	620 lm	525 lm		
REFLECTOR FL-33°	**ULTRA TWIN LED 2733** ◇ **316 06 8123** ◇ ◇ = W	**ULTRA TWIN LED 2733-9** ◇ **316 06 89123** ◇ ◇ = W		
REFLECTOR WFL-50°	**ULTRA TWIN LED 2750** ◇ **316 06 8133** ◇ ◇ = W	**ULTRA TWIN LED 2750-9** ◇ **316 06 89133** ◇ ◇ = W		
	INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz CE 1,0 IP20 OPTIONS COVERSET R 90-100		INCL.1 x POWERLED WHITE 18W INCL.LED POWER SUPPLY 700mA-DC 220-240V / 50-60Hz CE 1,7 IP20 OPTIONS COVERSET R 90-100	


Ultra Twin

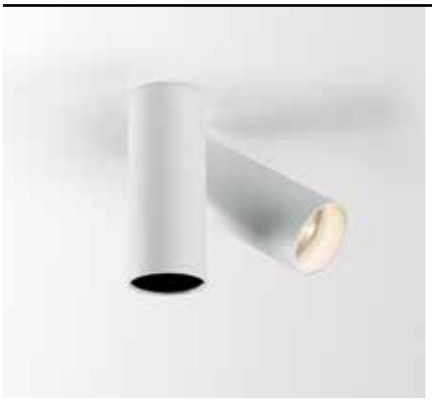




ULTRA TWIN 50 ◇
316 06 05 ◇
◇ = W
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W
0,9 IP20 0,5

OPTIONS
COVERSET R 90-100

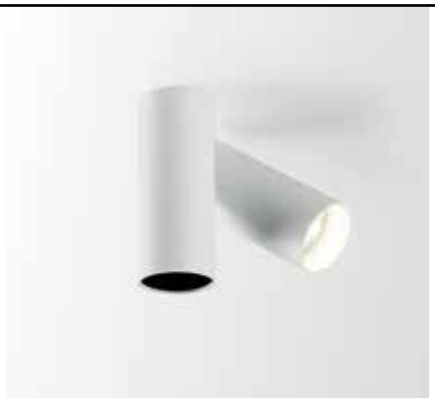




ULTRA TWIN C50-20 ◇
316 06 44 20 ◇
◇ = W
GX10 / 220-240V / 50-60Hz / 1 x 1~EVG 1,5kV
1 x HIPAR51 20W
0,9 IP20 0,5

OPTIONS
COVERSET R 90-100





ULTRA TWIN HIC-35 ◇
316 08 66 35 ◇
◇ = W
INCL. REFLECTOR FL-30° + GLASS

ULTRA TWIN HIC-35 SP10 ◇
316 08 66 35 SP10 ◇
◇ = W
INCL. REFLECTOR SP-10° + GLASS

ULTRA TWIN HIC-35 WFL46 ◇
316 08 66 35 WFL46 ◇
◇ = W
INCL. REFLECTOR WFL-46° + GLASS

G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-TC 35W
1,3 IP20 0,5

OPTIONS
COVERSET R 90-100

ULTRA TWIN HIC-70 ◇
316 08 66 70 ◇
◇ = W
INCL. REFLECTOR FL-30° + GLASS

ULTRA TWIN HIC-70 SP10 ◇
316 08 66 70 SP10 ◇
◇ = W
INCL. REFLECTOR SP-10° + GLASS

ULTRA TWIN HIC-70 WFL46 ◇
316 08 66 70 WFL46 ◇
◇ = W
INCL. REFLECTOR WFL-46° + GLASS

G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-TC 70W
1,3 IP20 1,0

OPTIONS
COVERSET R 90-100


reddot design award
winner 2011





Booster HP



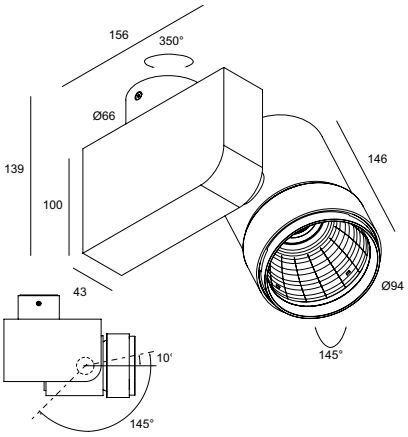


up to 90% efficiency

	CRI > 80	CRI > 80
3000K	1500 lm	3000 lm
REFLECTOR SP-20°	**BOOSTER HP 3020** ◇ **313 22 28122** ◇ ◇ = B / W	
REFLECTOR FL-27°		**BOOSTER HP 3027** ◇ **313 22 48122** ◇ ◇ = B / W
REFLECTOR WFL-40°	**BOOSTER HP 3040** ◇ **313 22 28132** ◇ ◇ = B / W	
REFLECTOR WFL-50°		**BOOSTER HP 3050** ◇ **313 22 48132** ◇ ◇ = B / W
	ADJUSTABLE 145° / 350° INCL.1 x POWERLED WHITE 17W INCL. LED POWER SUPPLY 700mA-DC 220-240V / 50-60Hz CE 1,8 IP20	ADJUSTABLE 145° / 350° ACTIVE COOLING INCL.1 x POWERLED WHITE 29W INCL. LED POWER SUPPLY 700mA-DC 220-240V / 50-60Hz CE 1,8 IP20

ON REQUEST CRI>90



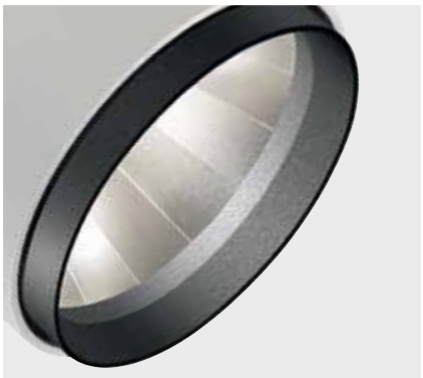




new

Booster HIC



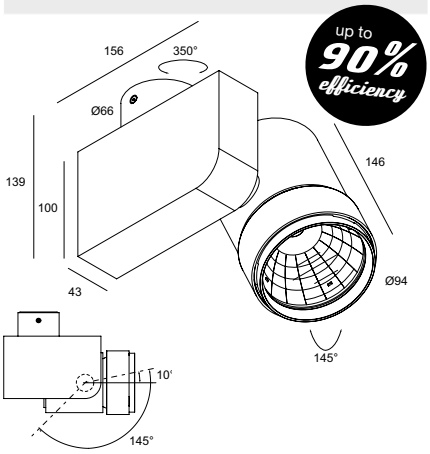

BOOSTER HIC-35 SP18 ◇
313 22 1935-18 ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-35 FL28 ◇
313 22 1935-28 ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-35 WFL52 ◇
313 22 1935-52 ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 35W

BOOSTER HIC-50 SP18 ◇
313 22 1950-18 ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-50 FL28 ◇
313 22 1950-28 ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-50 WFL52 ◇
313 22 1950-52 ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 50W

BOOSTER HIC-70 SP18 ◇
313 22 1970-18 ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-70 FL28 ◇
313 22 1970-28 ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-70 WFL52 ◇
313 22 1970-52 ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 70W

◇ = B / W
ADJUSTABLE 145° / 350°
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG


CE 1,7 IP20 1,0





Circa On






CIRCA ON ◇
278 64 55 00 ◇
◇ = ALU-W
INCL. 1 x PC SBL SHIELD
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 55W

CE 2,6 IP40 0,1


IGGY POP
BEAT EM UP

Kodo LED






KODO LED ◇
274 90 3224 ◇
◇ = W
FIXED
INCL.1 x PC SBL
INCL.LED CLUSTER 25W / 3000K / 2155lm
INCL.LED POWER SUPPLY 1050 mA-DC
110-240V / 50-60Hz

CE 3,1 IP20 0,1

Kodo 226





KODO 226 ◇
274 90 226 ◇
◇ = W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 26W

CE 3,1 IP20 0,1








new

led

Pitch





PITCH ◇

274 85 2515 ◇

◇ = W

INCL.1 x PC SBL

INCL.LED CLUSTER 15W / 3000K / 1312lm

INCL.LED POWER SUPPLY 24V-DC


220-240V / 50-60Hz

CE 0,7 IP40

OVERVIEW SUPERNOVA

Supernova XS Pivot	Supernova XS	Supernova	Supernova Down/Up
			
Ø 260 - Ø 330	Ø 260 - Ø 330	Ø 650 - Ø 950 - Ø 1250	Ø 650 - Ø 950 - Ø 1250
ADJUSTABLE 0-45°	FIXED	FIXED	FIXED
led	led	new led / T16 / TC-L	T16 / TC-L
PAG INT 285	PAG INT 285	PAG INT 287	PAG INT 289
PAG INT 204	PAG INT 204	PAG INT 204	

Supernova SR	Supernova SR Down/Up	Supernova L
		
620 x 620 - 1240 x 310 - 1240 x 1240	620 x 620 - 1240 x 310 - 1240 x 1240	Ø 200 x 700 - Ø 200 x 1545
FIXED	FIXED	FIXED
T16	T16	T16 / TC-L
PAG INT 295	PAG INT 297	PAG INT 301

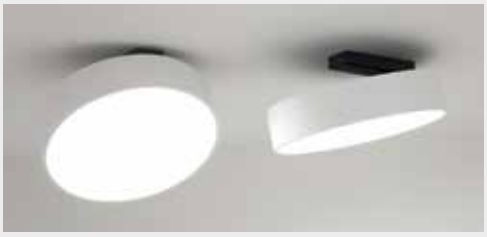

Supernova xs **PIVOT**



Supernova



Supernova **DOWN-UP**



Supernova



Supernova **SR**




Supernova **L**


Visit the Garden Restaurant
Whitney Museum of American Art
945 Madison Avenue, New York


Supernova XS Pivot





SUPERNOVA XS PIVOT 260 ◇
274 88 2515 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 15W / 3000K / 1312lm
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

CE 1,2 IP40




SUPERNOVA XS PIVOT 330 ◇
274 88 3224 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 25W / 3000K / 2155lm
INCL.LED POWER SUPPLY 1050 mA-DC
110-240V / 50-60Hz

CE 1,4 IP40


Supernova XS





SUPERNOVA XS 260 ◇
274 87 2515 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 15W / 3000K / 1312lm
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

CE 0,8 IP40



SUPERNOVA XS 330 ◇
274 87 3224 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 25W / 3000K / 2155lm
INCL.LED POWER SUPPLY 1050 mA-DC
110-240V / 50-60Hz

CE 1,0 IP40

reddot design award winner 2013

GOOD DESIGN award





FULL INFO / PAG TEC


Options

INSTALLATION


SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED2
328 18 43 ED2
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²



SUSPENSION SET 18 3m ED1
328 18 43 ED1
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
INCL. 1 x CABLE 2 x 0,75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W





CONTROL GEAR


DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 20x SUPERNOVA 6528 EVG DIM1
max. 9x SUPERNOVA 9526 EVG DIM1
max. 4x SUPERNOVA 12528 EVG DIM1

Supernova









SUPERNOVA 6528 EVG DIM 1 ◇
274 95 6528 ED1 ◇
◇ = W
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 51W / 3000K / 4340 lm
INCL.1x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

8,7 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED1
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
DALI TO 1-10V CONVERTER

SUPERNOVA 9528 EVG DIM 1 ◇
274 95 9528 ED1 ◇
◇ = W
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 114W / 3000K / 9825 lm
INCL.2x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

12,7 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED1
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
DALI TO 1-10V CONVERTER

SUPERNOVA 12528 EVG DIM 1 ◇
274 95 12528 ED1 ◇
◇ = W
INCL.PC SBL
DIMMING BY 1-10V
INCL.LEDCLUSTER 225W / 3000K / 19420 lm
INCL.3x LED POWER SUPPLY 350mA-DC DIM1
120-240V / 50-60Hz

16,6 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED1
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
DALI TO 1-10V CONVERTER

SUPERNOVA 65 ◇
274 95 60 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 | 50-60Hz / 1 x 3~MULTI EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W

10,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 ◇
274 95 90 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 | 50-60Hz / 4 x 2~MULTI EVG
4 x T16 14/24W
4 x T16 21/39W

14,5 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 ◇
274 95 120 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 | 50-60Hz / 5 x 2~MULTI EVG
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W

19 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 65 EVG DIM 2 ◇
274 95 60 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 | 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W

10,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 EVG DIM 2 ◇
274 95 90 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 | 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W

14,5 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 EVG DIM 2 ◇
274 95 120 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 | 50-60Hz / 5 x 2~MULTI EVG DIM
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W

19 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90





FULL INFO / PAG TEC


Options


INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Supernova Down-Up

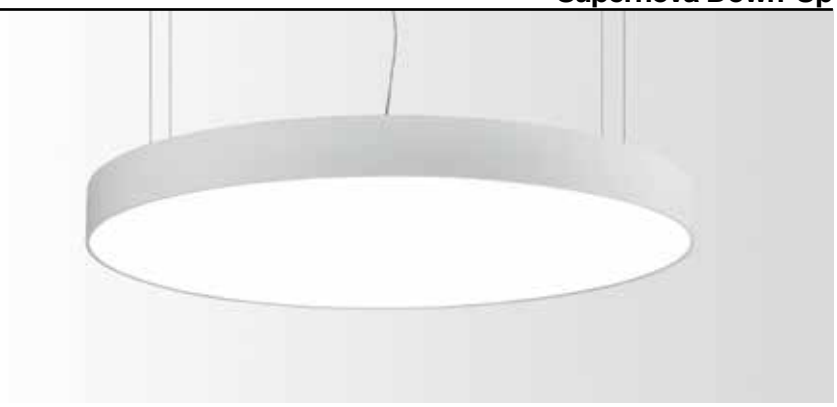







SUPERNOVA 65 DOWN-UP ◇
274 96 60 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
10,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 DOWN-UP ◇
274 96 90 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI EVG
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 DOWN-UP ◇
274 96 120 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI EVG
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 65 DOWN-UP EVG DIM 2 ◇
274 96 60 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W
10,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 DOWN-UP EVG DIM 2 ◇
274 96 90 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 DOWN-UP EVG DIM 2 ◇
274 96 120 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI EVG DIM
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

GOOD DESIGN award







Vandecandelaere







FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED2
328 18 43 ED2
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B




COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W





COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W




Supernova SR

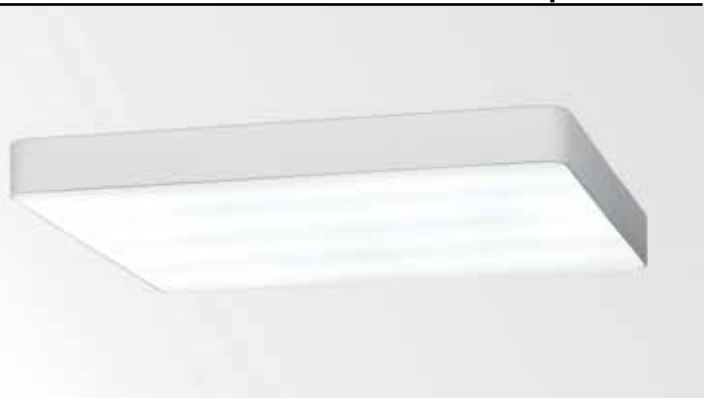





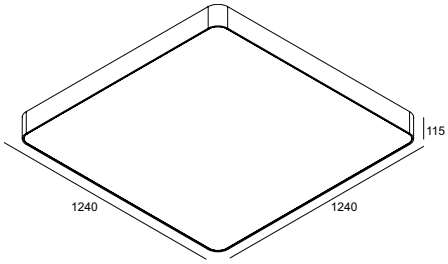

SUPERNOVA SR 424 ◇
274 92 0606 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG
4 x T16 14/24W
CE 6,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 ◇
274 92 0312 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 ◇
274 92 1212 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 3 x 2~MULTI-EVG
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 424 EVG DIM 2 ◇
274 92 0606 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG DIM
4 x T16 14/24W
CE 6,0 IP20 0,1


OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 EVG DIM 2 ◇
274 92 0312 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 EVG DIM 2 ◇
274 92 1212 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 3 x 2~MULTI-EVG DIM
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

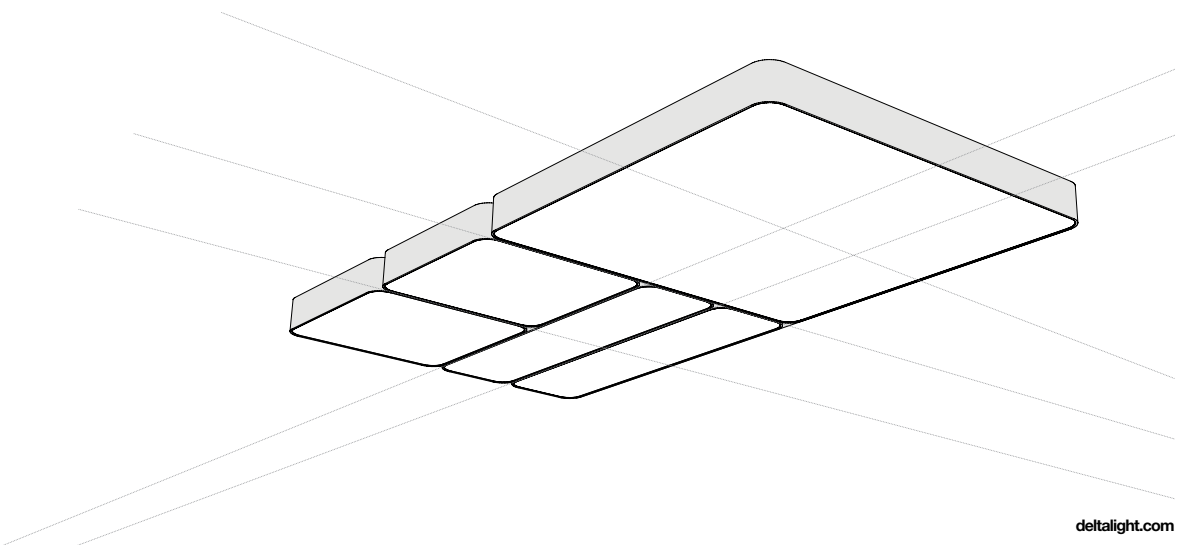

FULL INFO / PAG TEC


Options


INSTALLATION	
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41
COVERSET R ◇ **204 00 62** ◇ **204 00 90** ◇ **204 00 100** ◇ ◇ = ANO / B / W	 Ø62 Ø90 Ø100
COVERSET S ◇ **204 62 62** ◇ **204 80 80** ◇ **204 90 90** ◇ ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90




Supernova SR Down-Up







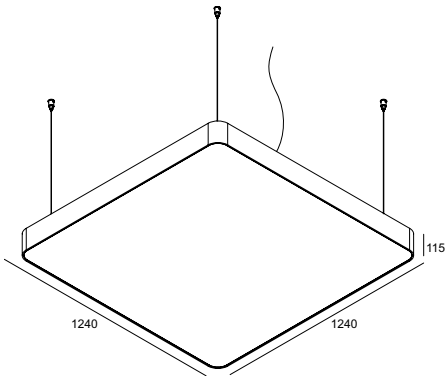

SUPERNOVA SR 424 DOWN-UP ◇
274 93 0606 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 | 50-60Hz / 2 x 2~MULTI-EVG
4 x T16 14/24W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 DOWN-UP ◇
274 93 0312 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 DOWN-UP ◇
274 93 1212 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 | 50-60Hz / 3 x 2~MULTI-EVG
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 424 DOWN-UP EVG DIM 2 ◇
274 93 0606 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 | 50-60Hz / 2 x 2~MULTI-EVG DIM
4 x T16 14/24W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 DOWN-UP EVG DIM 2 ◇
274 93 0312 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 DOWN-UP EVG DIM 2 ◇
274 93 1212 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 | 50-60Hz / 3 x 2~MULTI-EVG DIM
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90








FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W




COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W




Supernova L







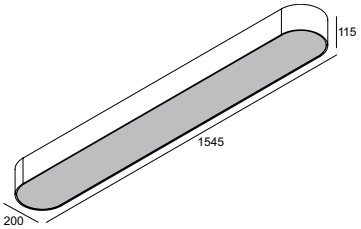

SUPERNOVA L 255 ◇
350 07 01 ◇
◇ = W
2G11 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-L 55W
4,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA L 280 ◇
350 15 80 ◇
◇ = W
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 35/80W
12,5 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90




SPOTNIC 2 3033 W


SPOTNIC 2 3033 W

FULL INFO / PAG TEC


Options

JACK SYSTEM		
JACKPOINT◇ **203 10 01◇** ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT◇ **203 10 27◇** ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT◇ **203 10 02◇** ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE◇ **203 20 01◇** ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT◇ **203 10 06◇** ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT◇ **203 10 03◇** ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1◇ **203 10 15◇** ◇ = A / W	Ø50 / Ø19 x 52	
M10 SYSTEM SPOTNIC		
SPOTNIC M10 TRIMLESS **328 10 05**	Ø62 x 80	60 x 80
SPOTNIC CLIP + ROSAS◇ **203 05 041◇** ◇ = W	-	20 Ø65
SPOTNIC S1 CLIP◇ **203 05 061◇** ◇ = W	58 x 45 max.12	19 Ø65
CONTROL GEAR		
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19	
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24	
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28	
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23	
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22	
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21	
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35	
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21	
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22	
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	

new led

Spotnic LED M10





12 max.10

SPOTNIC LED 3033 M10 ◇
M10 89 28122 ◇
◇ = W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350mA-DC


0,4 IP20

OPTIONS
M10 SYSTEM SPOTNIC
LED POWER SUPPLY 350mA-DC

CRI>80 660lm (7W)
ON REQUEST 2700K

Spotnic JAC





SPOTNIC 50 JAC ◇
JAC 89 00 ◇
◇ = W
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.35W


IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

Spotnic LED


led





SPOTNIC 1 3033 ◇
250 16 28122 ◇
◇ = W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

0,7 IP20

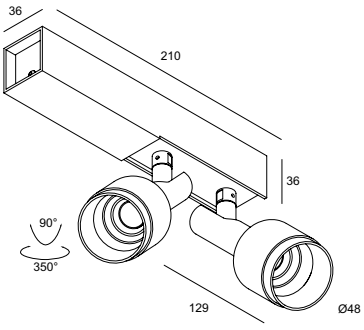


SPOTNIC 2 3033 ◇
250 16 28222 ◇
◇ = W
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.2 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

0,9 IP20

CRI>80 660lm (7W)
ON REQUEST 2700K


Spotnic T50





SPOTNIC 1 T50 ◇
250 16 10 ◇
◇ = W
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.35W


0,7 IP20 0,5

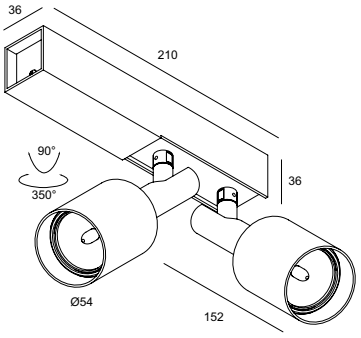

SPOTNIC 2 T50 ◇
250 16 20 ◇
◇ = W
GU5.3 / 220-240V / 50-60Hz / TE
2 x QR-C51 max.35W

0,9 IP20 0,5



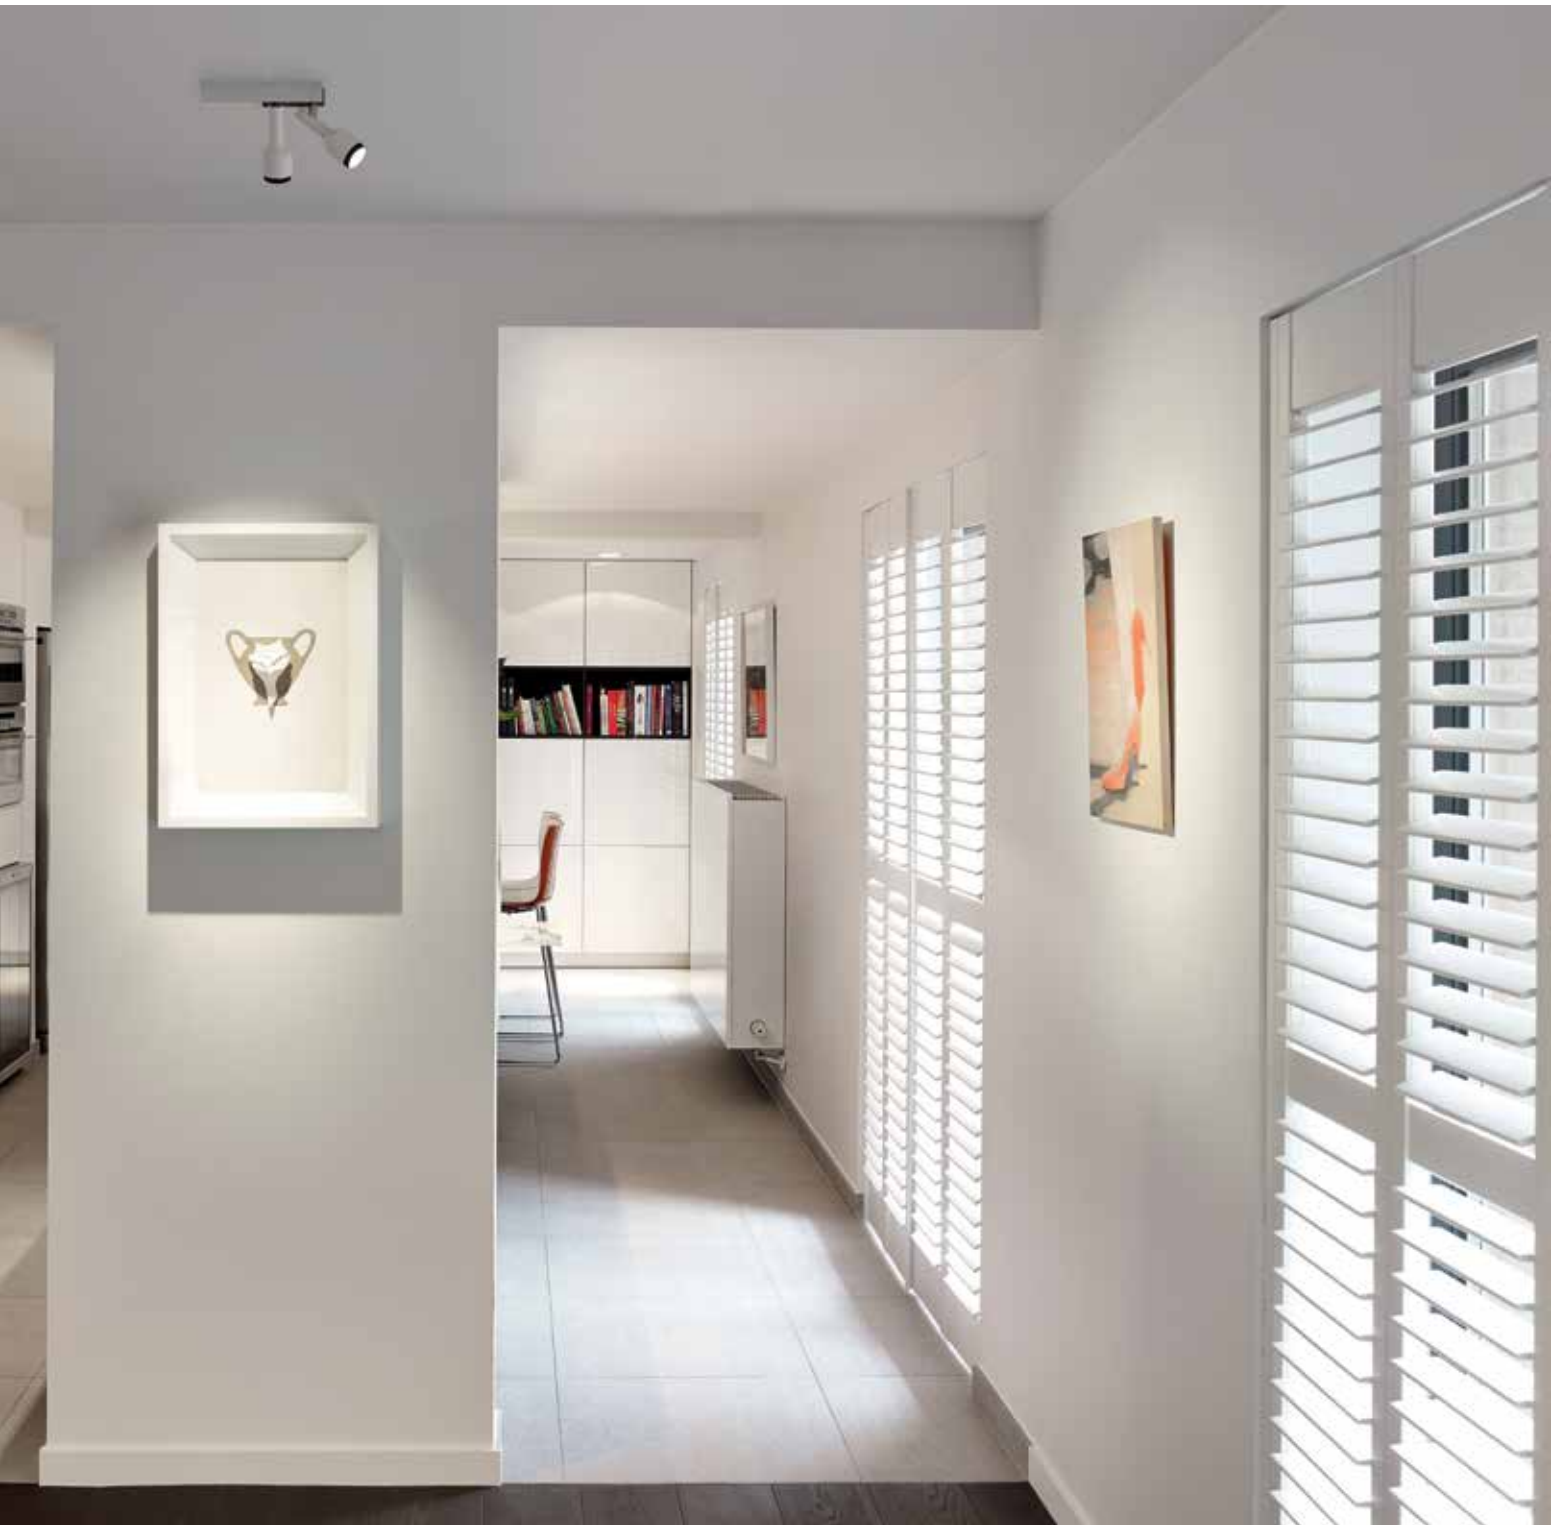



Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339

Forum








FORUM 1 A + 1 x CLUB 111 A




FORUM 2 A + 2 x CREDO 70 A



FORUM 1 ◇
250 13 10 ◇
◇ = A / W
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.75W

◇ CE 0,6 IP20



FORUM 2 ◇
250 13 20 ◇
◇ = A / W
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

◇ CE 0,7 IP20



FORUM 2 W + 2x SPOTNIC 50 JAC W



Spot JAC


SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339

Sunset





SUNSET 1 A + 1 x CREDO 70 A




SUNSET 1 ◇
250 11 10 ◇
◇ = A / W
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

□ CE 0,6 IP20





SUNSET 2 A + 2 x CREDO 70 A




SUNSET 2 ◇
250 11 20 ◇
◇ = A / W
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

□ CE 1,0 IP20






SUNSET 3 A + 3 x CLUB 70 A




SUNSET 3 ◇
250 11 30 ◇
◇ = A / W
EXCL.3 x SPOT JAC
220-240V / 50-60Hz / TE
3 x max.50W

□ CE 1,7 IP20





SUNSET 4 A + 4 x CREDO 111 A



SUNSET 4 ◇
250 11 40 ◇
◇ = A / W
EXCL.4 x SPOT JAC
220-240V / 50-60Hz / TE
4 x max.50W

□ CE 2,2 IP20



Sunset 4 W + 4 x CREDO 111 W



FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


FULL INFO / PAG TEC

Accessories

CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100	
LENS 111 **201 47 11**	Ø100	

Ratio






RATIO 50 JAC ◇
JAC 85 00 ◇
◇ = A / W
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.50W
0,3 IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50





RATIO 111 JAC ◇
JAC 86 00 ◇
◇ = A / W
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
0,4 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	

FULL INFO / PAG TEC

Accessories


CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12
RING 66 ◇ **201 32 50** ◇ ◇ = A / W	Ø74
RING 109 ◇ **201 28 01** ◇ ◇ = A / B / W	Ø116
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W
CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23
CONE 66 ◇ **201 32 52** ◇ ◇ = B	Ø66 / Ø45 / H38
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 109 **201 18 00**	Ø109
FRONTGLASS 111 **201 17 00**	Ø100
COLOUR FILTER 66 **201 33 11** 🔵 **201 33 12** 🟢 **201 33 13** 🔴 **201 33 14** 🟡	Ø66
COLOUR FILTER 109 **201 28 11** 🔵 **201 28 12** 🟢 **201 28 13** 🔴 **201 28 14** 🟡	Ø109
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100
LENS 109 **201 48 01**	Ø109
LENS 111 **201 47 11**	Ø100
RASTER 66 ◇ **201 32 51** ◇ ◇ = B	Ø66
RASTER 109 ◇ **201 28 02** ◇ ◇ = B	Ø109


Spatio














SPATIO 50 JAC ◇
JAC 81 00 ◇
◇ = A / W
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.50W
0,3 IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
RING 66 + COLOUR FILTER 66
RING 66 + RASTER 66
RING 66 + CONE 66
CONE 50
CLIP 50 + DICROIC FILTER 50

SPATIO 70 JAC ◇
JAC 82 00 ◇
◇ = A / W
BA15d / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP70 max.50W
0,3 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
RING 66 + COLOUR FILTER 66
RING 66 + RASTER 66
RING 66 + CONE 66

SPATIO 111 JAC ◇
JAC 83 00 ◇
◇ = A / B / W
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
0,4 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
RING 109 + FRONTGLASS 109
RING 109 + COLOUR FILTER 109
RING 109 + LENS 109
RING 109 + RASTER 109
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

FULL INFO / PAG TEC

Options

INSTALLATION	C A B
COVERSET R ◇	
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / W	



FULL INFO / PAG TEC

Accessories

	C A B
CLIP 50 ◇	Ø50 / H12
201 30 98 ◇	
◇ = A / B / W	



RING 66 ◇	Ø74
201 32 50 ◇	
◇ = A / W	



RING 109 ◇	Ø116
201 28 01 ◇	
◇ = A / B / W	



DICROIC FILTER 50	Ø50
201 30 11 ●	max. 20W
201 30 12 ●	
201 30 13 ●	
201 30 14 ●	



CONE 50 ◇	Ø75 / Ø42 / H23
201 31 50 ◇	
◇ = ALU / W	
QR-CB51 max. 24°	



CONE 66 ◇	Ø66 / Ø45 / H38
201 32 52 ◇	
◇ = B	



CONE 111 ◇	Ø117 / Ø80 / H26
201 28 00 ◇	
◇ = ALU / B / C / W	
QR-LP111 max. 24°	



CLIP 111 ◇	Ø110 / H22
201 27 99 A ◇	
◇ = A / B / W	



FRONTGLASS 109	Ø109
201 18 00	



FRONTGLASS 111	Ø100
201 17 00	



COLOUR FILTER 66	Ø66
201 33 11 ●	
201 33 12 ●	
201 33 13 ●	
201 33 14 ●	



COLOUR FILTER 109	Ø109
201 28 11 ●	
201 28 12 ●	
201 28 13 ●	
201 28 14 ●	



COLOUR FILTER 111	Ø100
201 27 11 ●	
201 27 12 ●	
201 27 13 ●	
201 27 14 ●	



LENS 109	Ø109
201 48 01	



LENS 111	Ø100
201 47 11	



RASTER 66 ◇	Ø66
201 32 51 ◇	
◇ = B	




RASTER 109 ◇	Ø109
201 28 02 ◇	
◇ = B	



led

Spatio Reo





	CRI > 80	CRI > 90
4000K ●		
	ON REQUEST	
3000K ●	660 lm	580 lm
REFLECTOR FL-33°	**SPATIO REO 3033** ◇ **311 13 8122** ◇ ◇ = A / W	**SPATIO REO 3033-9** ◇ **311 13 89122** ◇ ◇ = A / W
REFLECTOR WFL-50°	**SPATIO REO 3050** ◇ **311 13 8132** ◇ ◇ = A / W	**SPATIO REO 3050-9** ◇ **311 13 89132** ◇ ◇ = A / W
2700K ●	620 lm	525 lm
REFLECTOR FL-33°	**SPATIO REO 2733** ◇ **311 13 8123** ◇ ◇ = A / W	**SPATIO REO 2733-9** ◇ **311 13 89123** ◇ ◇ = A / W
REFLECTOR WFL-50°	**SPATIO REO 2750** ◇ **311 13 8133** ◇ ◇ = A / W	**SPATIO REO 2750-9** ◇ **311 13 89133** ◇ ◇ = A / W

INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,7 IP20


OPTIONS
COVERSET R 90-100




Spatio T50









SPATIO 50 T50 ◇
311 10 105 ◇
◇ = A / W
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W
0,5 IP20 0,5

OPTIONS
COVERSET R 90-100

ACCESSORIES
RING 66 + COLOUR FILTER 66
RING 66 + RASTER 66
RING 66 + CONE 66
CONE 50
CLIP 50 + DICROIC FILTER 50

SPATIO 111 T50 ◇
311 10 111 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
0,6 IP20 1,0

OPTIONS
COVERSET R 90-100

ACCESSORIES
RING 109 + FRONTGLASS 109
RING 109 + COLOUR FILTER 109
RING 109 + LENS 109
RING 109 + RASTER 109
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



SPATIO 50 T50 A
+ RING 66 A + CONE 66 B



SPATIO 111 T50 A
+ RING 109 A + RASTER 109 B



FULL INFO / PAG TEC

Options

INSTALLATION		
COVERSET R ◇		
204 00 90 ◇	Ø90	
204 00 100 ◇	Ø100	

◇ = ANO / W

FULL INFO / PAG TEC

Accessories

RING 109 ◇	Ø116	
201 28 01 ◇		


◇ = A / B / W

RASTER 109 ◇	Ø109	
201 28 02 ◇		

◇ = B

Spatio H111





SPATIO H111-35 ◇
311 11 135 E ◇
◇ = A / B / W
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR-CE111 35W
1,7 IP20 0,5


OPTIONS
COVERSET R 90-100

SPATIO H111-70 ◇
311 11 170 E ◇
◇ = A / B / W
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR-CE111 70W
1,7 IP20 1,0

OPTIONS
COVERSET R 90-100

Spatio HIT





SPATIO HIT-35 FL28 ◇
311 12 135 E ◇
◇ = A / W
INCL. REFLECTOR FL-28° + GLASS + ANTI-GLARE

SPATIO HIT-35 SP15 ◇
311 12 135 E SP15 ◇
◇ = A / W
INCL.1x REFLECTOR SP-15° + GLASS + ANTI-GLARE

SPATIO HIT-35 WFL55 ◇
311 12 135 E WFL55 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-55° + GLASS

SPATIO HIT-35 WFL80 ◇
311 12 135 E WFL80 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-80° + GLASS

G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W
2,3 IP20 1,0

OPTIONS
COVERSET R 90-100
ACCESSORIES
RING 109 + RASTER 109

SPATIO HIT-70 FL28 ◇
311 12 170 E ◇
◇ = A / W
INCL. REFLECTOR FL-28° + GLASS + ANTI-GLARE

SPATIO HIT-70 SP15 ◇
311 12 170 E SP15 ◇
◇ = A / W
INCL.1x REFLECTOR SP-15° + GLASS + ANTI-GLARE


SPATIO HIT-70 WFL55 ◇
311 12 170 E WFL55 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-55° + GLASS

SPATIO HIT-70 WFL80 ◇
311 12 170 E WFL80 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-80° + GLASS

G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W
2,3 IP20 1,0

OPTIONS
COVERSET R 90-100
ACCESSORIES
RING 109 + RASTER 109





SPATIO HIT-150 FL28 ◇
311 12 1150 E ◇
◇ = A / W
INCL. REFLECTOR FL-28° + GLASS + ANTI-GLARE

SPATIO HIT-150 SP15 ◇
311 12 1150 E SP15 ◇
◇ = A / W
INCL.1x REFLECTOR SP-15° + GLASS + ANTI-GLARE

SPATIO HIT-150 WFL55 ◇
311 12 1150 E WFL55 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-55° + GLASS

SPATIO HIT-150 WFL80 ◇
311 12 1150 E WFL80 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-80° + GLASS

G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 150W
2,5 IP20 2,0

OPTIONS
COVERSET R 90-100
ACCESSORIES
RING 109 + RASTER 109


Ricezione





FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


FULL INFO / PAG TEC

Accessories

CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
COLOUR FILTER 111 **201 27 11** ● **201 27 12** ● **201 27 13** ● **201 27 14** ●	Ø100
LENS 111 **201 47 11**	Ø100

Quad






QUAD 50 JAC ◇
JAC 87 00 ◇
◇ = ALU
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.50W
IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50





QUAD 111 JAC ◇
JAC 88 00 ◇
◇ = ALU
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19	
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24	
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28	
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23	
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22	
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21	
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35	
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21	
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22	
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	

FULL INFO / PAG TEC


Accessories

CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	

led

Credo Reo





	CRI > 80	CRI > 90
4000K 🟡		
	ON REQUEST	
3000K 🟡	660 lm	580 lm
REFLECTOR FL-33°	**CREDO REO 3033 JAC** ◇ **JAC 62 28122** ◇ ◇ = A / W	**CREDO REO 3033-9 JAC** ◇ **JAC 62 29122** ◇ ◇ = A / W
2700K 🟡	620 lm	525 lm
REFLECTOR FL-33°	**CREDO REO 2733 JAC** ◇ **JAC 62 28123** ◇ ◇ = A / W	**CREDO REO 2733-9 JAC** ◇ **JAC 62 29123** ◇ ◇ = A / W

INCL.1 x POWERLED WHITE 7W
EXCL. 1 x JACK SYSTEM
EXCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,4 IP20

OPTIONS
JACK SYSTEM
LED POWER SUPPLY 350mA-DC / DIM


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Credo










CREDO 50 JAC ◇
JAC 61 00 ◇
◇ = A / W
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.50W
0,3 IP20 0,5


OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50




CREDO 70 JAC ◇
JAC 62 00 ◇
◇ = A / W
BA15d / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP70 max.50W
0,3 IP20 1,0

OPTIONS
JACK SYSTEM
TRANFO



CREDO 111 JAC ◇
JAC 63 00 ◇
◇ = A / W
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
0,4 IP20 1,0


OPTIONS
JACK SYSTEM
TRANSFO

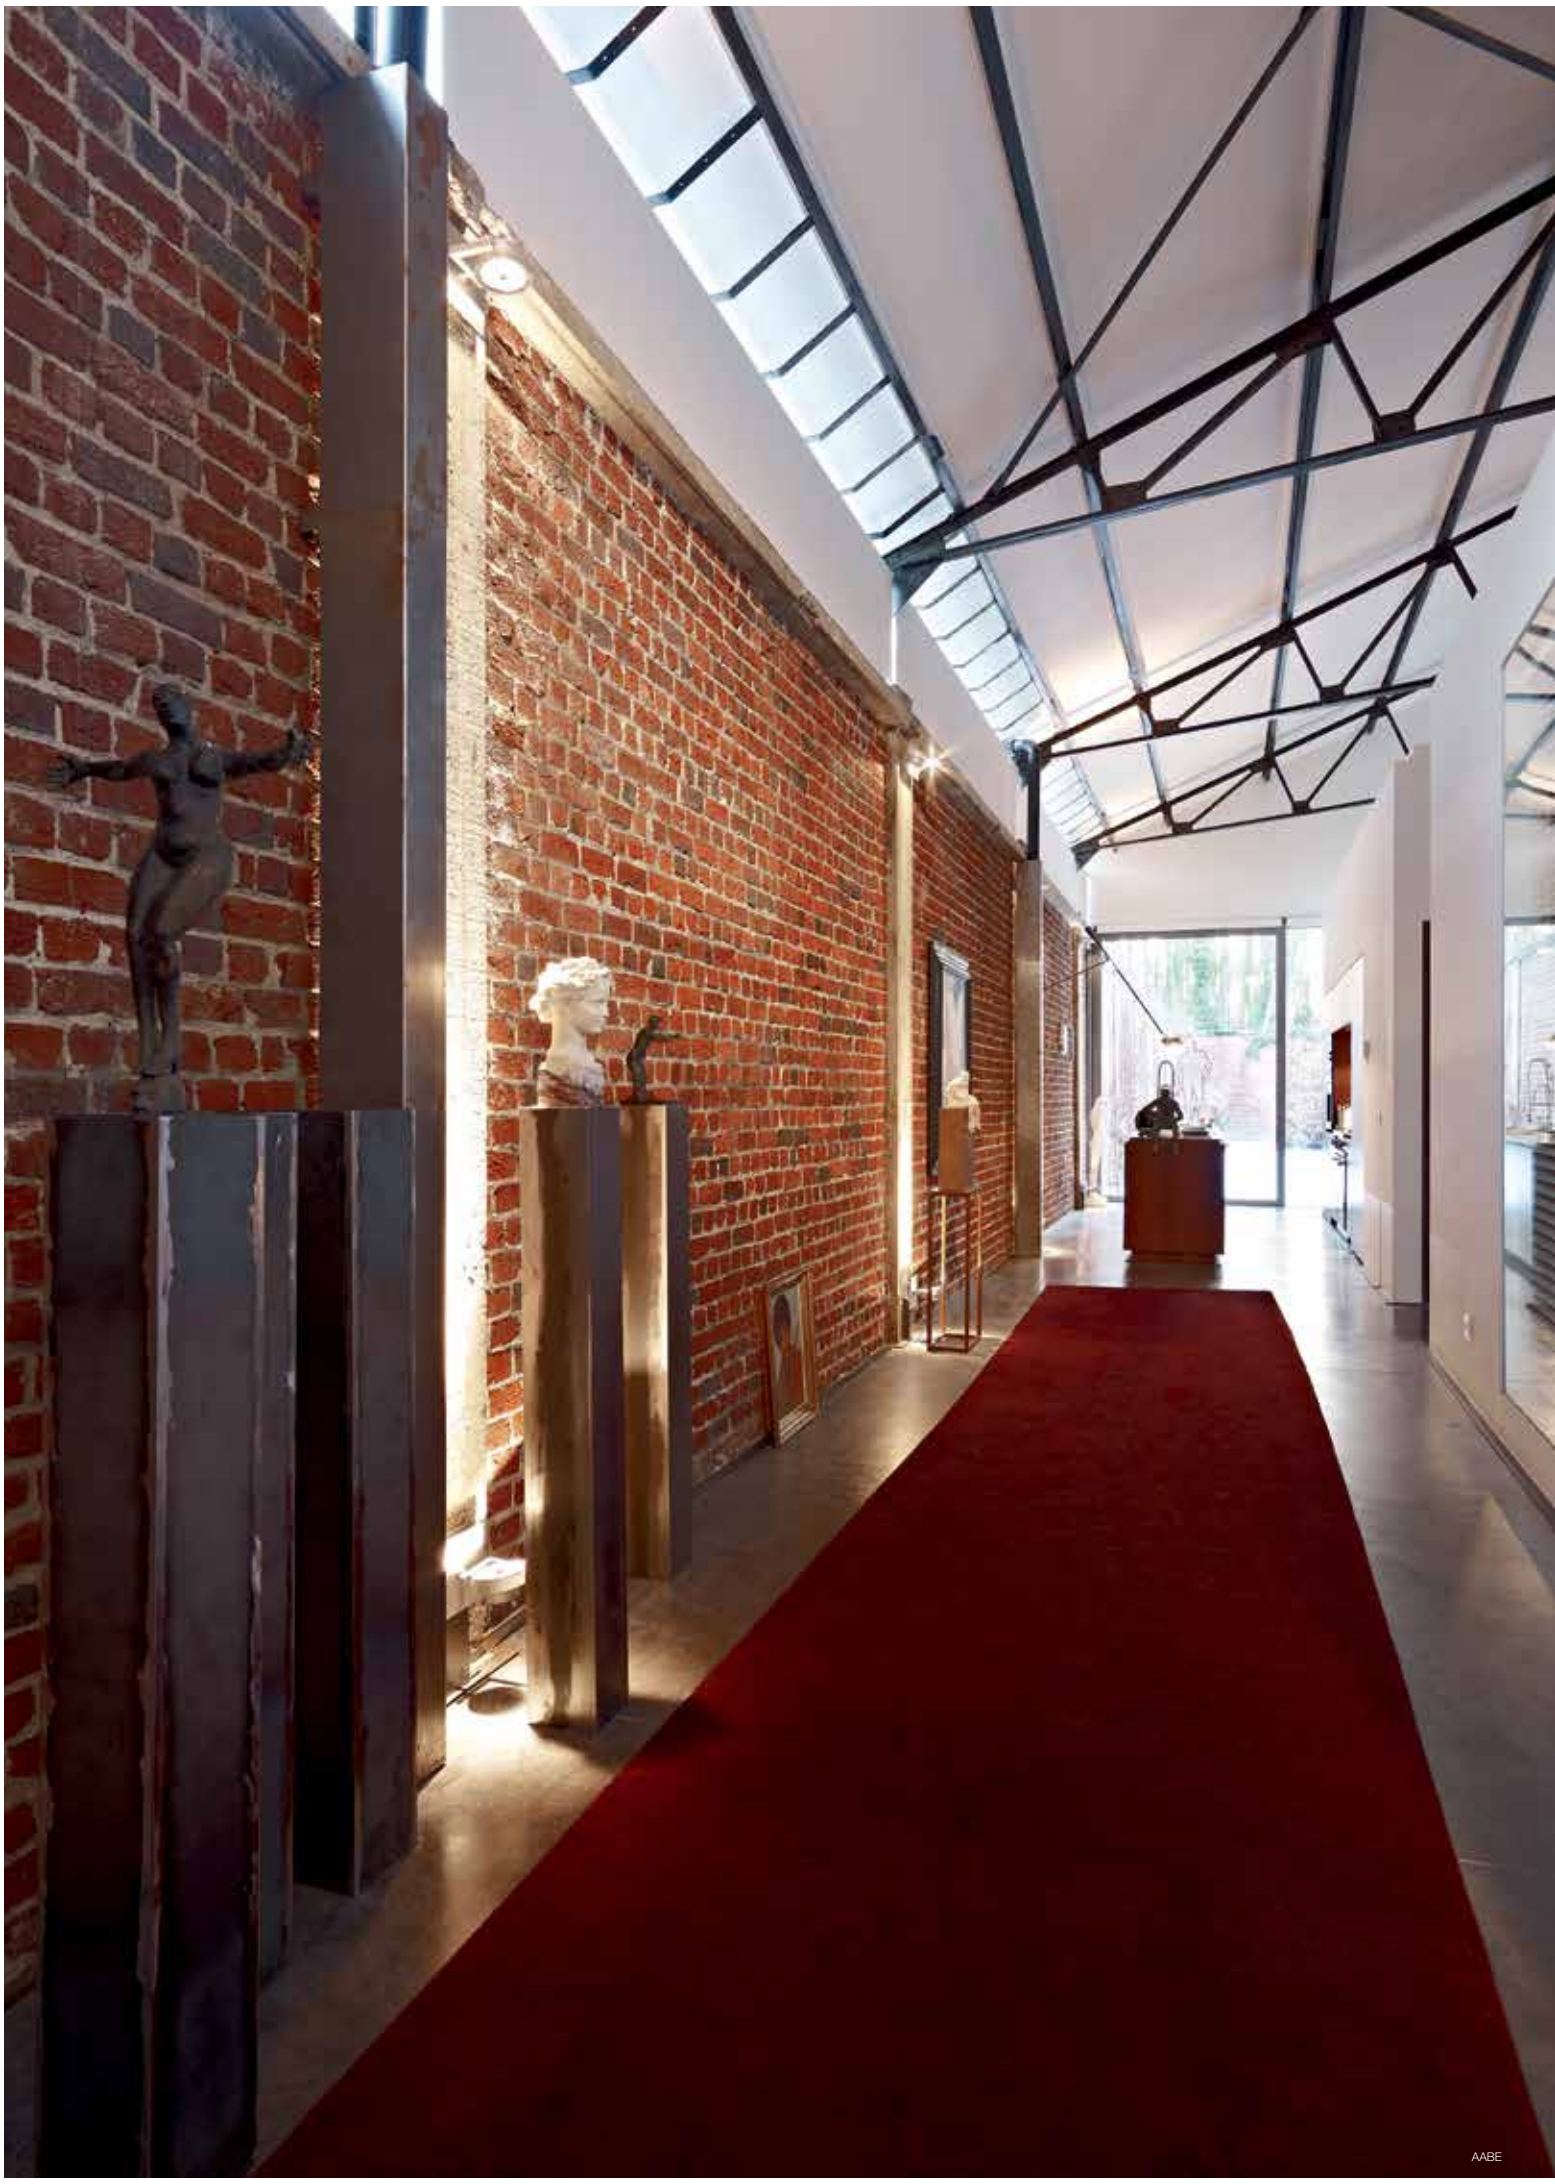

AABE



SUNSET 2/4 + CREDO

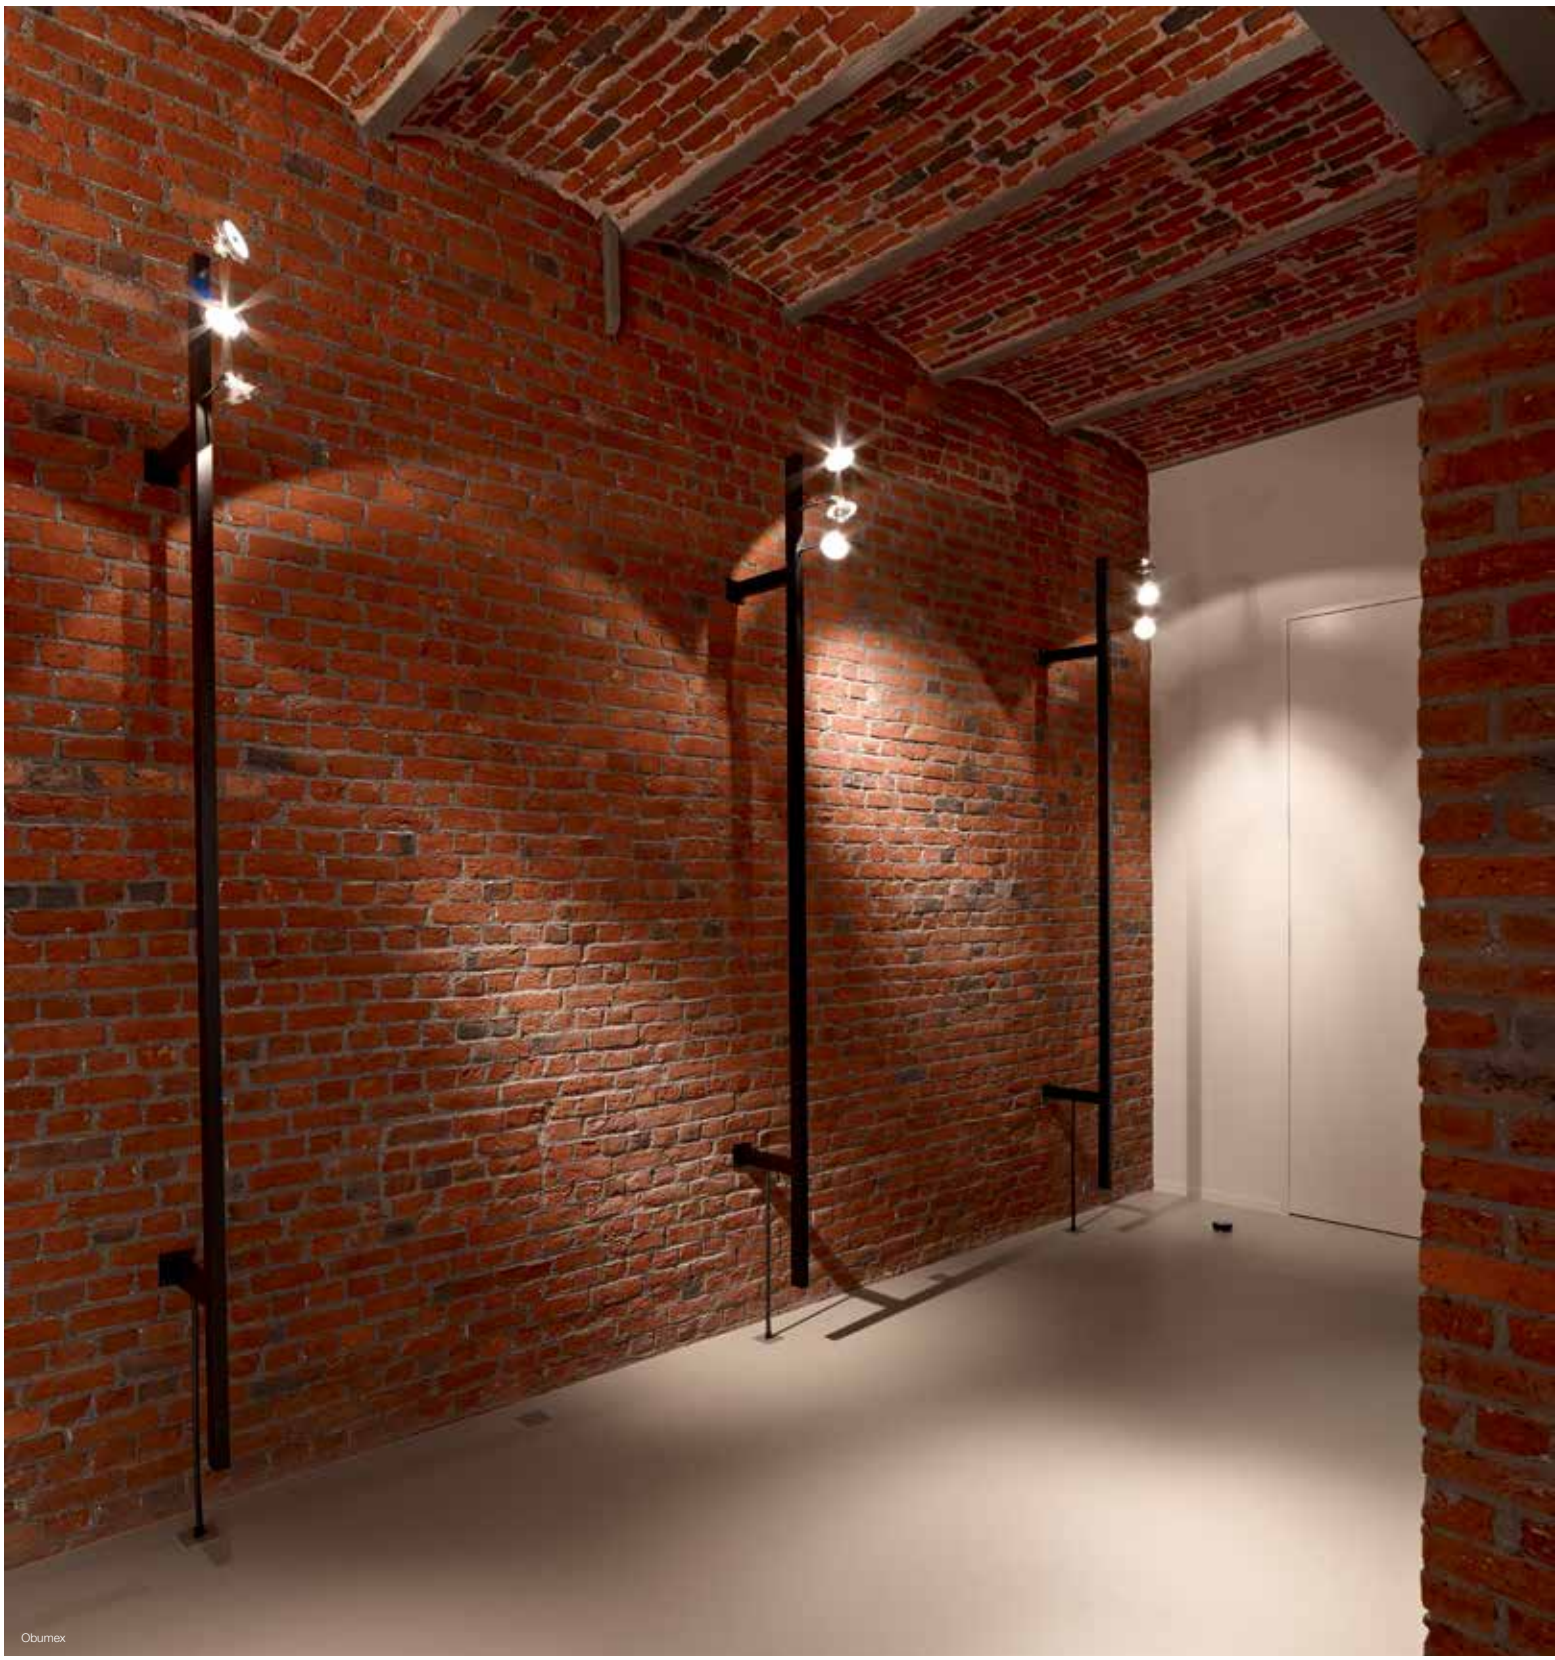

Obumex

FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
M10 SYSTEM		
DELTA CLIP + ROSAS ◇ **203 05 04** ◇ ◇ = A / B / W	-	Ø65, 20, 350°
DAX CLIP ◇ **203 05 06** ◇ ◇ = A / B / W	58 x 45 max.12	19, Ø65, 350°
DELTA FIX ◇ **203 05 10** ◇ ◇ = A / B / W	Ø18	Ø42, 350°
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


FULL INFO / PAG TEC

Accessories

CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	

Phantom II





PHANTOM II JAC ◇
JAC 04 01 ◇
JAC 04 15 ◇
JAC 04 30 ◇
◇ = A / W
GX5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-CBC35 max.35W
1 x QR-CB51 max.50W
CE 0,3 IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50


PHANTOM II M10 ◇
M10 04 01 ◇
M10 04 15 ◇
M10 04 30 ◇
◇ = A / W
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC35 max.35W
1 x QR-CB51 max.50W
CE 0,3 IP20 0,5

OPTIONS
M10 SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50

Halosun






HALOSUN JAC ◇
JAC 20 01 ◇
JAC 20 15 ◇
JAC 20 30 ◇
◇ = A
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
CE 0,3 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

HALOSUN M10 ◇
M10 20 01 ◇
M10 20 15 ◇
M10 20 30 ◇
◇ = A
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
CE 0,3 IP20 1,0

OPTIONS
M10 SYSTEM
TRANSFO

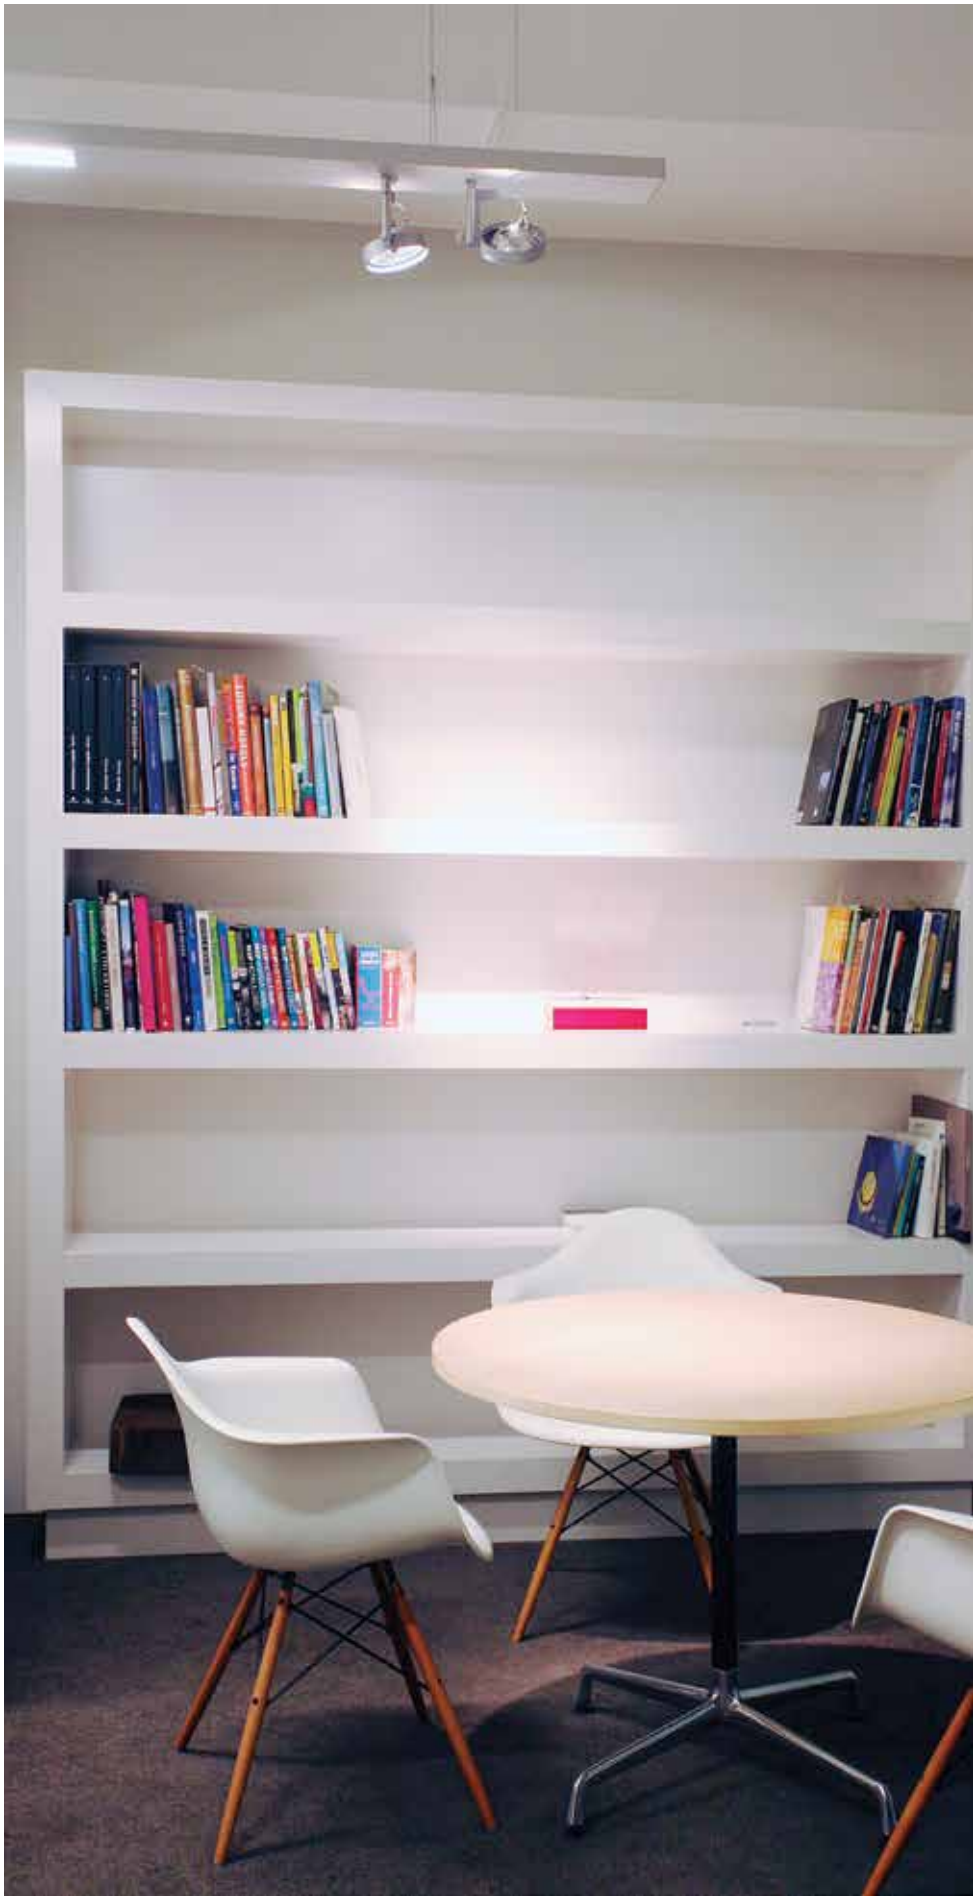

FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


FULL INFO / PAG TEC

Accessories

DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100
LENS 111 **201 47 11**	Ø100

Club






CLUB 50 JAC ◇
JAC 67 00 ◇
◇ = A
GX5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.50W
0,3 IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
DICROIC FILTER 50






CLUB 70 JAC ◇
JAC 68 00 ◇
◇ = A
BA15d / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP70 max.50W
0,3 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO






CLUB 111 JAC ◇
JAC 69 00 ◇
◇ = A
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
0,5 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

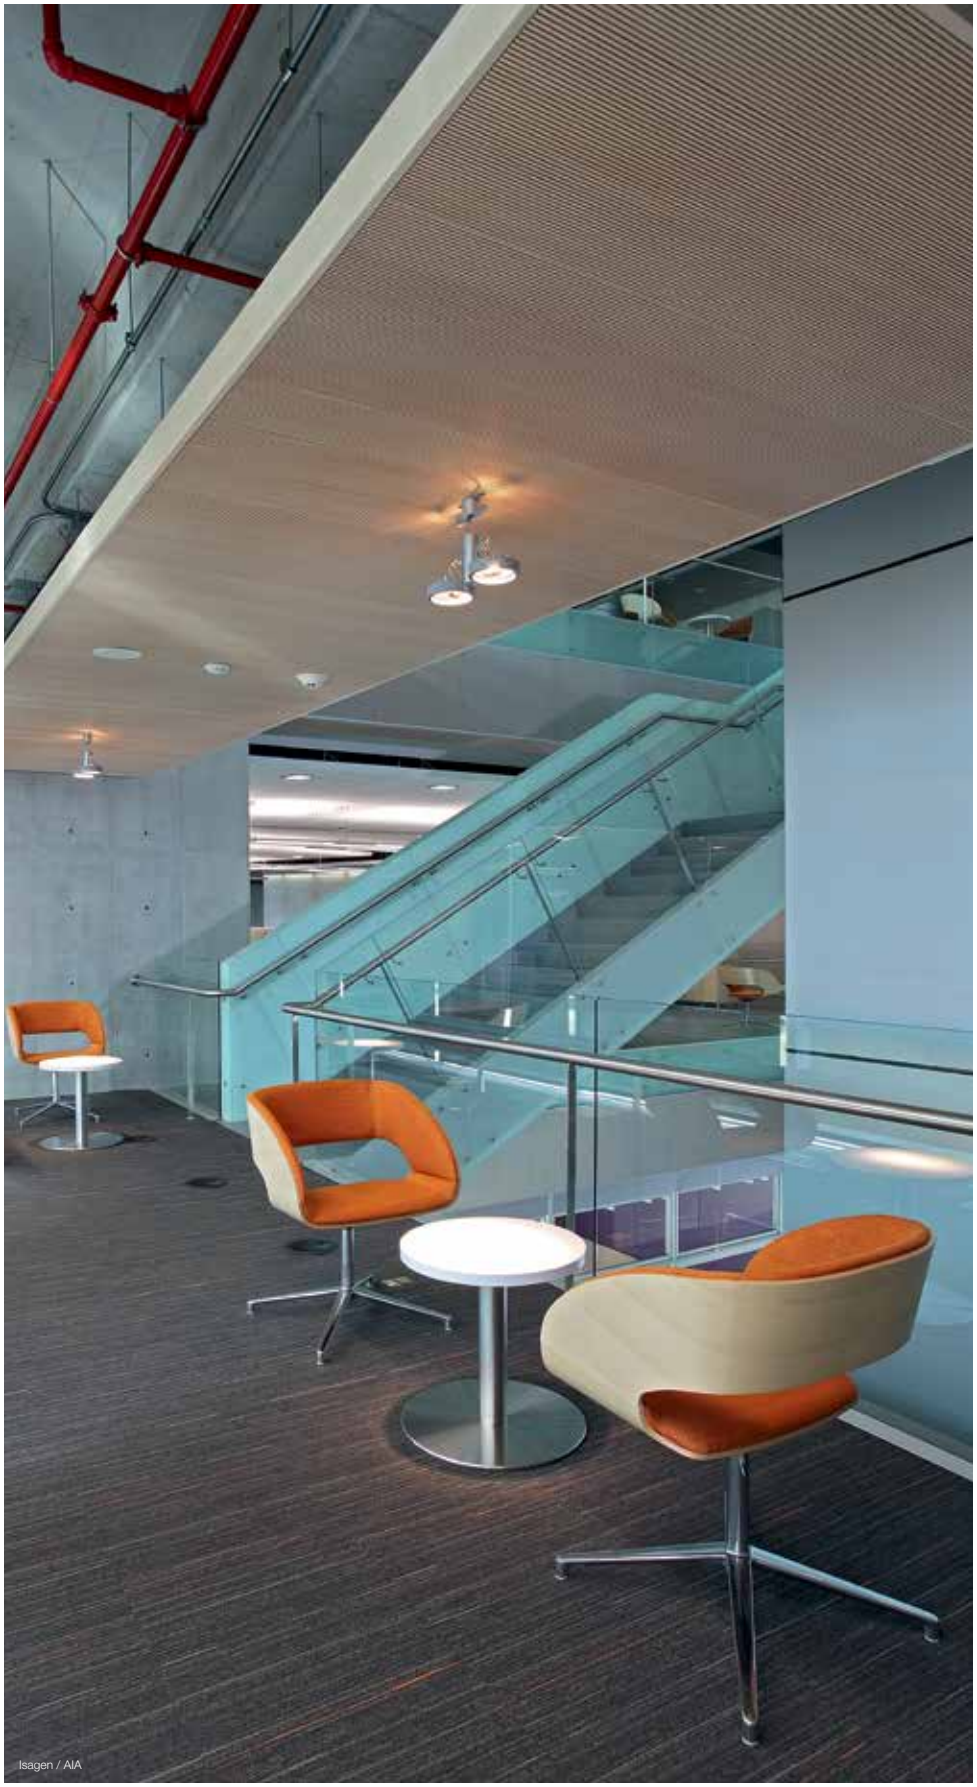

Isagen / AIA

FULL INFO / PAG TEC

Options

INSTALLATION	
CLUB DISC ◇	Ø75 / 3
284 29 99 ◇	
◇ = ALU	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	





FULL INFO / PAG TEC

Accessories

CLIP 111 ◇	Ø110 / H22
201 27 99 A ◇	
◇ = A / B / W	
FRONTGLASS 111	Ø100
201 17 00	
COLOUR FILTER 111	Ø100
201 27 11 🔵	
201 27 12 🟢	
201 27 13 🔴	
201 27 14 🟡	
LENS 111	Ø100
201 47 11	










Club T50











CLUB S 1111 T50 ◇
284 21 1111 ◇
◇ = A
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 35W
0,5 IP20 1,0

OPTIONS
CLUB DISC
COVERSET R 62-90-100
ACCESSORIES
CLIP 111 + FRONTGLASS 111
CLIP 111 + COLOUR FILTER 111
CLIP 111 + LENS 111




CLUB S 1211 T50 ◇
284 21 1211 ◇
◇ = A
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 35W
0,9 IP20 1,0

OPTIONS
CLUB DISC
COVERSET R 62-90-100
ACCESSORIES
CLIP 111 + FRONTGLASS 111
CLIP 111 + COLOUR FILTER 111
CLIP 111 + LENS 111




CLUB S 1411 T50 ◇
284 21 1411 ◇
◇ = A
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 35W
1,7 IP20 1,0

OPTIONS
COVERSET R 62-90-100
ACCESSORIES
CLIP 111 + FRONTGLASS 111
CLIP 111 + COLOUR FILTER 111
CLIP 111 + LENS 111



CLUB C 1211 T50 ◇
284 51 1211 ◇
◇ = A
INCL.2 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 35W
1,7 IP20 1,0

OPTIONS
CLUB DISC
COVERSET R 62-90-100
ACCESSORIES
CLIP 111 + FRONTGLASS 111
CLIP 111 + COLOUR FILTER 111
CLIP 111 + LENS 111



CLUB C 1411 T50 ◇
284 51 1411 ◇
◇ = A
INCL.2 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 35W
2,8 IP20 1,0

ACCESSORIES
CLIP 111 + FRONTGLASS 111
CLIP 111 + COLOUR FILTER 111
CLIP 111 + LENS 111



FULL INFO / PAG TEC

Options

JACK SYSTEM		
COVERSET R ◇ **204 00 100** ◇ ◇ = ANO / W	Ø100	
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	

FULL INFO / PAG TEC


Accessories

FRONTGLASS 111 **201 17 00**	Ø100
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100
LENS 111 **201 47 11**	Ø100



Xilo 111





XILO 111 JAC ◇
JAC 74 00 ◇
◇ = C / W
INCL.1 x CONE 111 C
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.50W


CE 0,3 IP20 1.0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
FRONTGLASS 111
COLOUR FILTER 111
LENS 111

Xilo T50






XILO S 211 T50 ◇
282 70 211 ◇
◇ = W-C
INCL.2 x CONE 111 C
ADJUSTABLE 0°- 30°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

CE 1,2 IP20 1,0

OPTIONS
COVERSET R 100

ACCESSORIES
FRONTGLASS 111
COLOUR FILTER 111
LENS 111






XILO S 411 T50 ◇
282 70 411 ◇
◇ = W-C
INCL.4 x CONE 111 C
ADJUSTABLE 0°- 30°
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W

CE 1,9 IP20 1,0

OPTIONS
COVERSET R 100

ACCESSORIES
FRONTGLASS 111
COLOUR FILTER 111
LENS 111




XILO C 211 T50 ◇
282 71 211 ◇
◇ = W-C
INCL.2 x CONE 111 C
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
ADJUSTABLE 0°- 30°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

CE 1,3 IP20 1,0

OPTIONS
COVERSET R 100

ACCESSORIES
FRONTGLASS 111
COLOUR FILTER 111
LENS 111




XILO C 411 T50 ◇
282 71 411 ◇
◇ = W-C
INCL.4 x CONE 111 C
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
ADJUSTABLE 0°- 30°
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W

CE 2,1 IP20 1,0

OPTIONS
COVERSET R 100

ACCESSORIES
FRONTGLASS 111
COLOUR FILTER 111
LENS 111

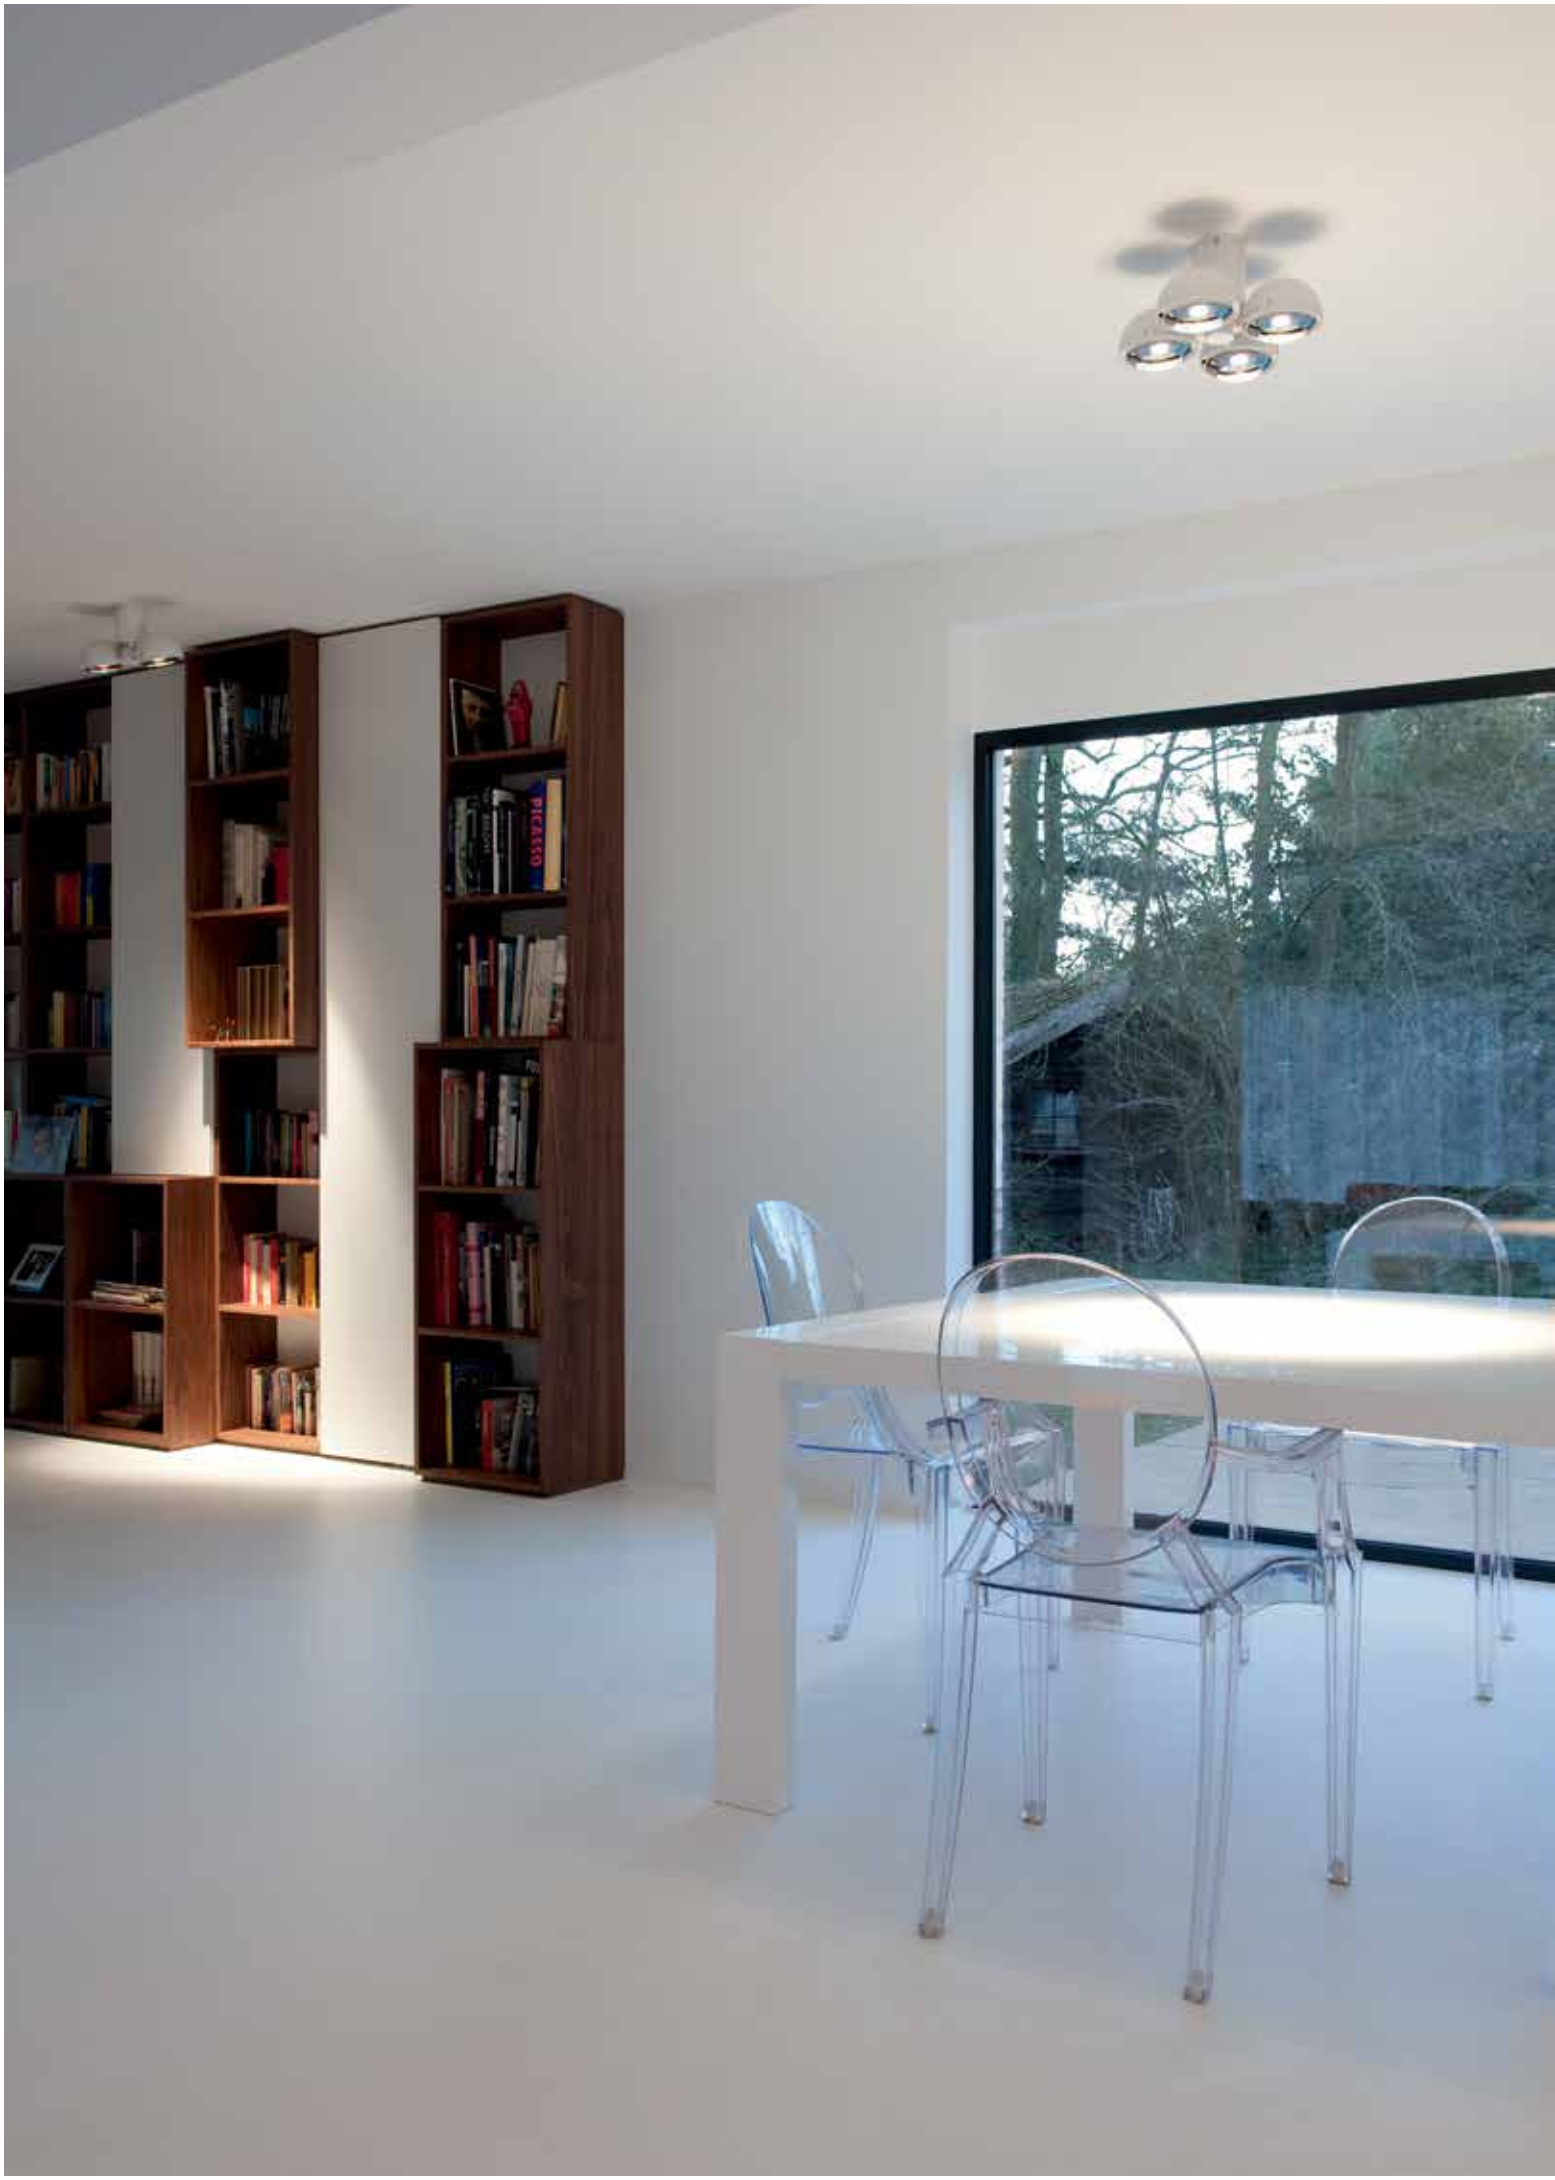
PICASSO





FULL INFO / PAG TEC

Options


INSTALLATION	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100

◇ = ANO / B / W

Xilo C








XILO CL 150 ◇
282 71 155 ◇
◇ = C
INCL.1 x GLASS SBL-CLEAR
INCL.1 x CONE 111 C
INCL.1 x CABLE 2 x 0.75mm²
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 35W

0,5 IP20 0,5

OPTIONS
COVERSET R 62-90-100



XILO CL 450 ◇
282 71 455 ◇
◇ = C
INCL.4 x GLASS SBL-CLEAR
INCL.4 x CONE 111 C
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 2 x 0.75mm²
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
4 x QPAR51 35W

1,8 IP20 0,5

OPTIONS
COVERSET R 62-90-100



RAND XL H111 CLIP W-C

FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
LED TRANSFO **12V / 1-70W** **300 89 12 71**	117 x 34 x 21	
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32	
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37	


FULL INFO / PAG TEC

Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 111 **201 27 11** **201 27 12** **201 27 13** **201 27 14**	Ø100	
LENS 111 **201 47 11**	Ø100	

Rand XL 111






RAND XL 111 JAC ◇
JAC 73 01 ◇
◇ = B-C / W-C
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
led SOLUTION - PAG TEC 4-5
IP20 1,0

OPTIONS
JACK SYSTEM
LED TRANSFO 12V / 1-70W
TRANSFO

Rand XL H111 Clip






98 x 90 max.25

RAND XL H111 CLIP ◇
285 60 66 ◇
◇ = B-C / W-C
GX8.5 / EXCL.EVG
1 x HIR111-CE-P max.70W
IP20 1,0

OPTIONS
BALLASTSET HID

Rand 111






RAND 111 JAC ◇
JAC 73 00 ◇
◇ = A / B / W
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

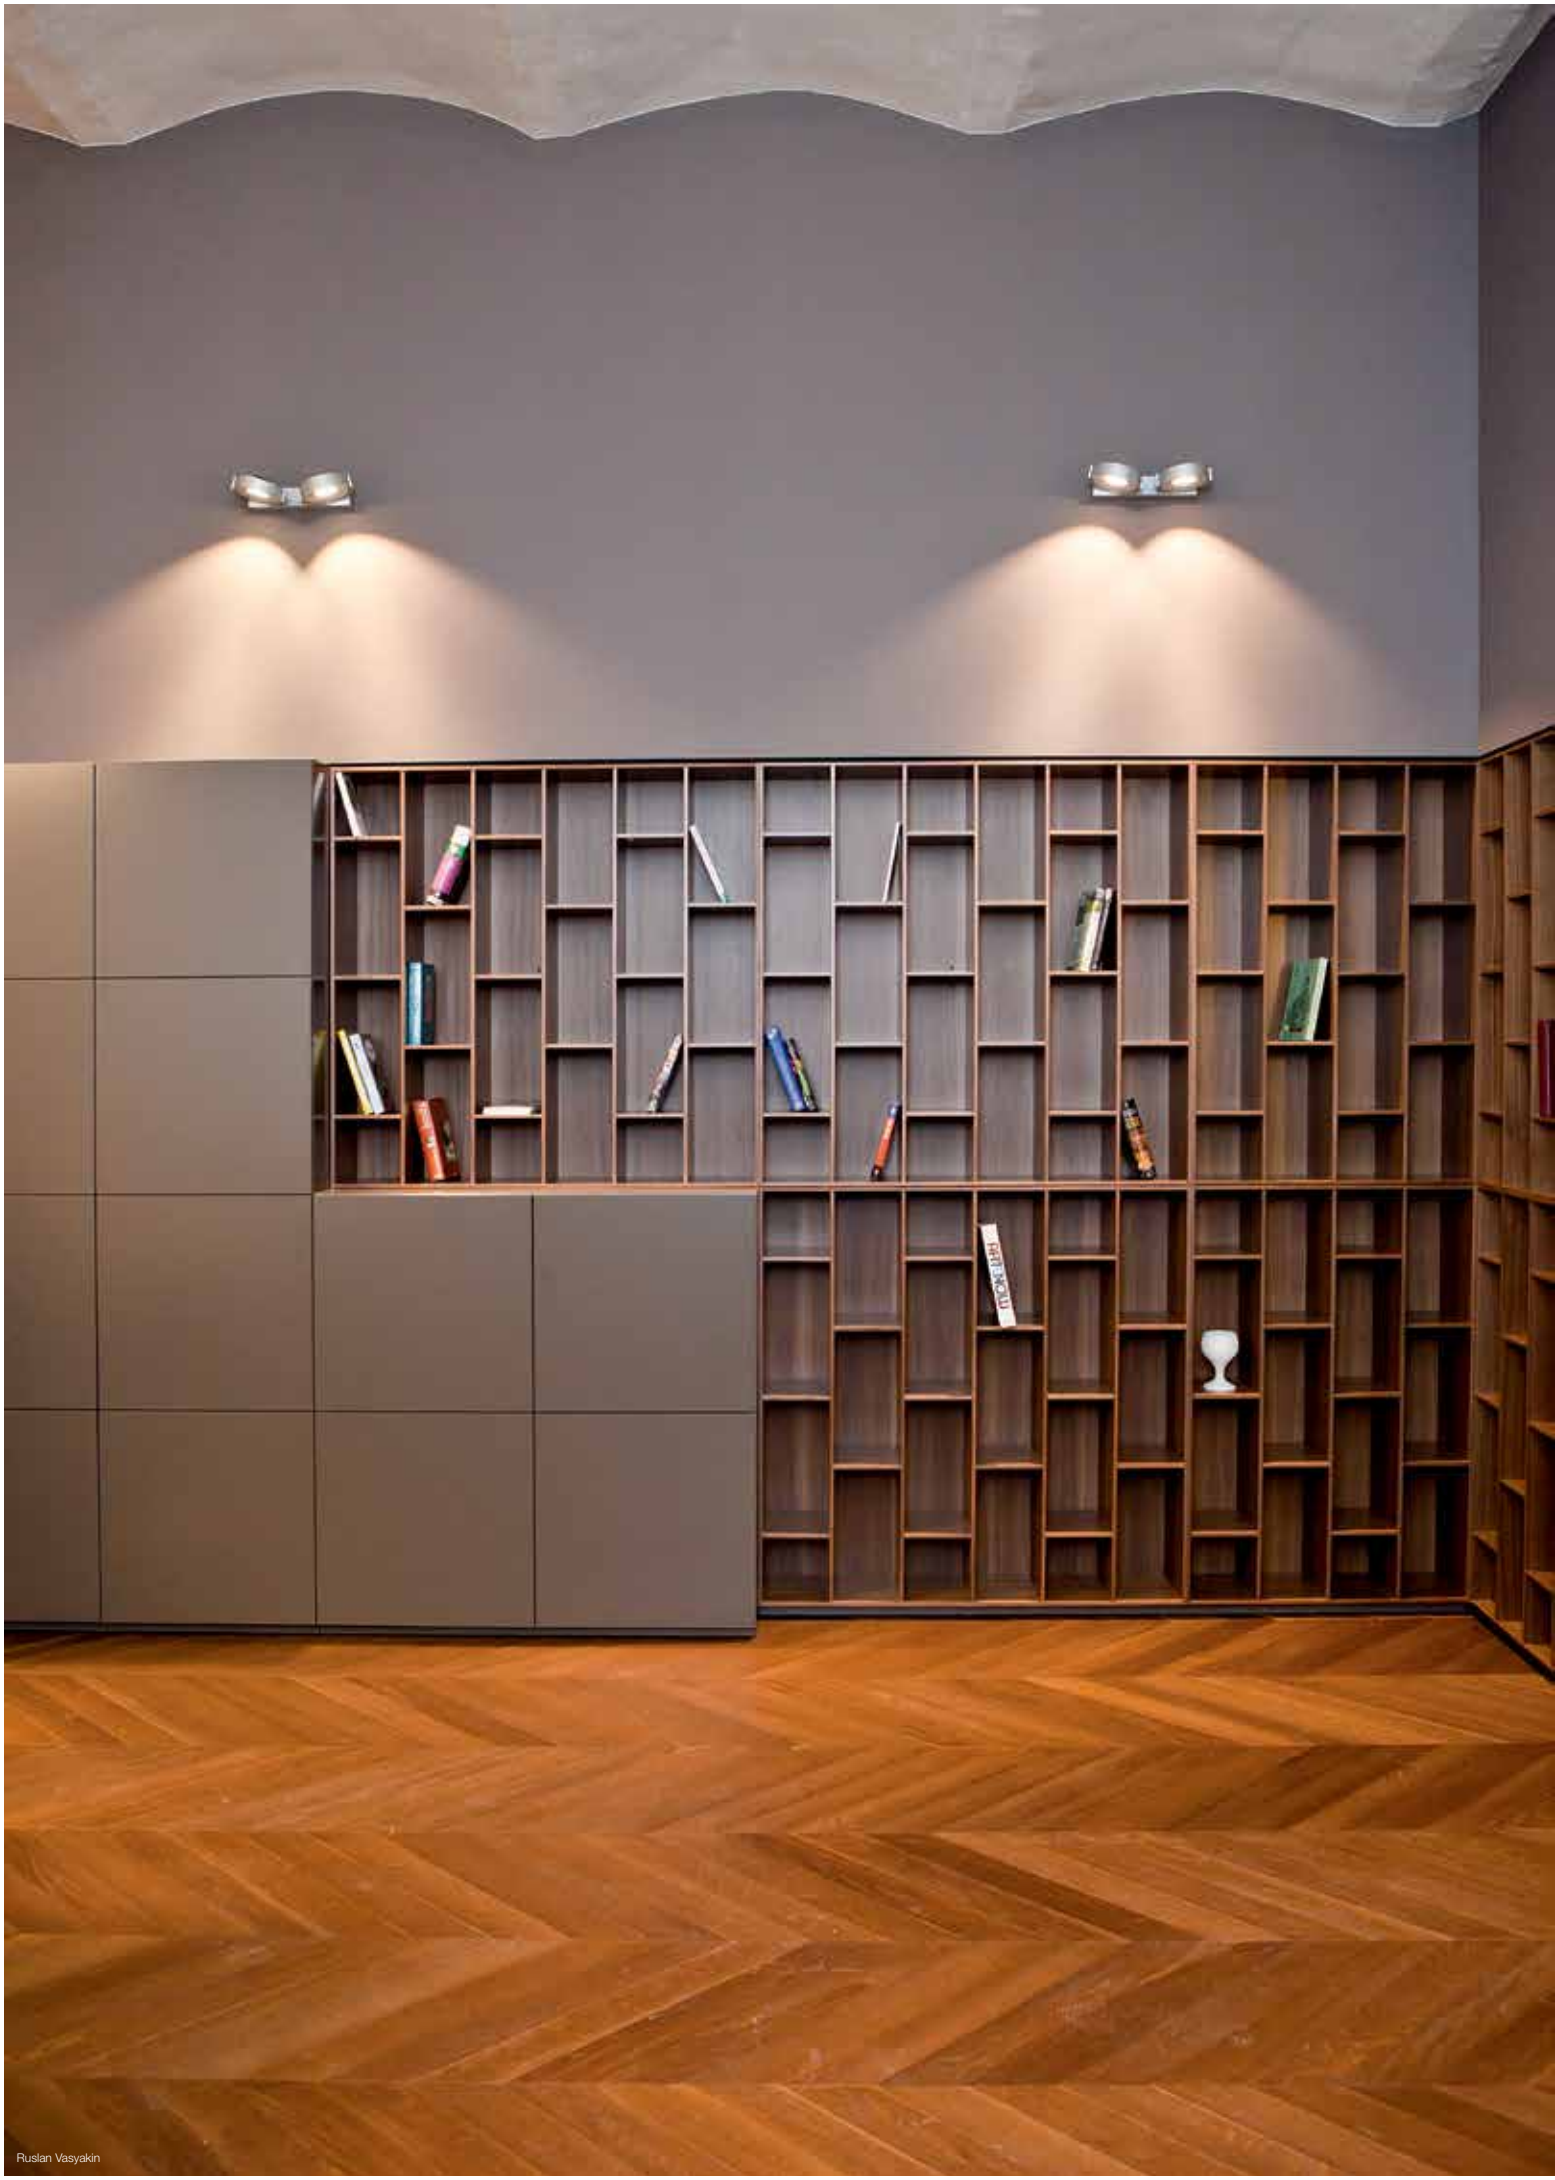



Ruslan Vasyakin

Rand Reo









	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**RAND 1 REO 3033 ◇** **285 52 8122 ◇** ◇ = A / W	**RAND 1 REO 3033-9 ◇** **285 52 89122 ◇** ◇ = A / W	**RAND 2 REO 3033 ◇** **285 52 8222 ◇** ◇ = A / W	**RAND 2 REO 3033-9 ◇** **285 52 89222 ◇** ◇ = A / W
REFLECTOR WFL-50°	**RAND 1 REO 3050 ◇** **285 52 8132 ◇** ◇ = A / W	**RAND 1 REO 3050-9 ◇** **285 52 89132 ◇** ◇ = A / W	**RAND 2 REO 3050 ◇** **285 52 8232 ◇** ◇ = A / W	**RAND 2 REO 3050-9 ◇** **285 52 89232 ◇** ◇ = A / W
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**RAND 1 REO 2733 ◇** **285 52 8123 ◇** ◇ = A / W	**RAND 1 REO 2733-9 ◇** **285 52 89123 ◇** ◇ = A / W	**RAND 2 REO 2733 ◇** **285 52 8223 ◇** ◇ = A / W	**RAND 2 REO 2733-9 ◇** **285 52 89223 ◇** ◇ = A / W
REFLECTOR WFL-50°	**RAND 1 REO 2750 ◇** **285 52 8133 ◇** ◇ = A / W	**RAND 1 REO 2750-9 ◇** **285 52 89133 ◇** ◇ = A / W	**RAND 2 REO 2750 ◇** **285 52 8233 ◇** ◇ = A / W	**RAND 2 REO 2750-9 ◇** **285 52 89233 ◇** ◇ = A / W
	INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 0,8 IP20 1,0		INCL.2 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 1,5 IP20 1,0	



RAND 2 REO 3033 W

FULL INFO / PAG TEC

Accessories

CONE 111 ◇ Ø117 / Ø80 / H26
201 28 00 ◇
◇ = ALU / B / C / W
QR-LP111 max. 24°



CLIP 111 ◇ Ø110 / H22
201 27 99 A ◇
◇ = A / B / W



FRONTGLASS 111 Ø100
201 17 00




COLOUR FILTER 111 Ø100
201 27 11 ●
201 27 12 ●
201 27 13 ●
201 27 14 ●




LENS 111 Ø100
201 47 11











RAND 111 T50 ◇
285 51 11 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
0,6 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111


RAND 211 T50 ◇
285 52 21 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
1,0 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



Rand T50






RAND 311 T50 ◇
285 53 31 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W
1,6 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111






RAND 411 T50 ◇
285 54 41 ◇
◇ = A / W
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
2,0 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111





RAND 511 T50 ◇
285 55 51 ◇
◇ = A / W
G53 / 220-240V / 50-60Hz / TE
5 x QR-LP111 max.50W
2,6 IP20 1,0


ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111


Rand XL T50














RAND XL 111 T50 ◇
285 51 12 ◇
◇ = B-C / W-C
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.35W
led SOLUTION - PAG TEC 4-5
CE 0,6 IP20 1,0

RAND XL 211 T50 ◇
285 52 12 ◇
◇ = B-C / W-C
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.35W
led SOLUTION - PAG TEC 4-5
CE 1,0 IP20 1,0

RAND XL 311 T50 ◇
285 53 12 ◇
◇ = B-C / W-C
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.35W
led SOLUTION - PAG TEC 4-5
CE 1,6 IP20 1,0




RAND XL 111 T50 + led SOLUTION


new

Rand XL H111









RAND XL H111-35 ◇
285 61 35 ◇
◇ = B-C / W-C
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 35W
1,5 IP20 1,0

RAND XL 2H111-35 ◇
285 62 35 ◇
◇ = B-C / W-C
GX8.5 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x HIR111-CE-P 35W
2,4 IP20 1,0

RAND XL H111-70 ◇
285 61 70 ◇
◇ = B-C / W-C
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 70W
1,5 IP20 1,0

RAND XL 2H111-70 ◇
285 62 70 ◇
◇ = B-C / W-C
GX8.5 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x HIR111-CE-P 70W
2,4 IP20 1,0









AABE










FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION SET 2 1,6m
328 15 21
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²




SUSPENSION SET 4 1,6m
328 15 41
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²



CABLE BASE R ◇	Ø57 x 41	
203 99 55 ◇		
◇ = ANO / W / B		
CABLE BASE S ◇	57 x 57 x 41	
203 99 56 ◇		
◇ = ANO / W / B		
COVERSET R ◇		
204 00 62 ◇	Ø62	
204 00 90 ◇	Ø90	
204 00 100 ◇	Ø100	
◇ = ANO / B / W		
COVERSET S ◇		
204 62 62 ◇	62 x 62	
204 80 80 ◇	80 x 80	
204 90 90 ◇	90 x 90	
◇ = ANO / B / W		






OUTFIT U 211 T50 ◇
345 02 21 ◇
◇ = W
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 2,9 IP20 850° 1,0

OPTIONS
SUSPENSION SET 2 1,6m
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Outfit U






OUTFIT U 411 T50 ◇
345 02 41 ◇
◇ = W
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W

CE 5,4 IP20 850° 1,0

OPTIONS
SUSPENSION SET 2 1,6m
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Outfit L






OUTFIT L 211 T50 ◇
345 01 21 ◇
◇ = W
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

CE 2,3 IP20 850° 1,0

OPTIONS
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90





OUTFIT L 411 T50 ◇
345 01 41 ◇
◇ = W
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W

CE 4,2 IP20 850° 1,0

OPTIONS
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



OUTFIT U 211 T50 + SUSPENSION SET 2 1,6m







FULL INFO / PAG TEC

Options

INSTALLATION	
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	


FULL INFO / PAG TEC

Accessories

CONE 111 ◇	Ø117 / Ø80 / H26
201 28 00 ◇	
◇ = ALU / B / C / W	
QR-LP111 max. 24°	
CLIP 111 ◇	Ø110 / H22
201 27 99 A ◇	
◇ = A / B / W	
FRONTGLASS 111	Ø100
201 17 00	
COLOUR FILTER 111	Ø100
201 27 11 🔵	
201 27 12 🟢	
201 27 13 🔴	
201 27 14 🟡	
LENS 111	Ø100
201 47 11	

Outfit P 254-411



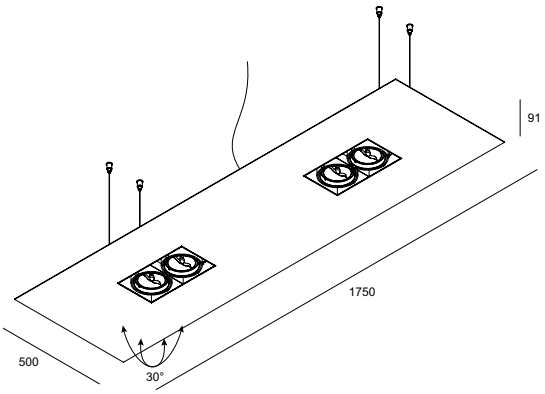

OUTFIT P 254-411 T50 ◇
345 13 63 ◇
◇ = W
INCL. 4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL. 1 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28W / 54W
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
IP20 850° 1,0

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



FULL INFO / PAG TEC

Options

INSTALLATION	
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41
COVERSET R ◇ **204 00 62** ◇ **204 00 90** ◇ **204 00 100** ◇ ◇ = ANO / B / W	 Ø62 Ø90 Ø100
COVERSET S ◇ **204 62 62** ◇ **204 80 80** ◇ **204 90 90** ◇ ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90

FULL INFO / PAG TEC

Accessories


CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100
LENS 111 **201 47 11**	Ø100


Grand Prix RC














GRAND PRIX RC 211 T50 ◇
280 30 211 ◇
◇ = ALU
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
1,6 IP20 850° 1,0

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

GRAND PRIX RC 411 T50 ◇
280 30 411 ◇
◇ = ALU
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
2,5 IP20 850° 1,0

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

GRAND PRIX SC 411 T50 ◇
280 31 411 ◇
◇ = ALU
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
2,3 IP20 850° 1,0

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



FULL INFO / PAG TEC

Options

INSTALLATION

COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



CONTROL GEAR

LED POWER SUPPLY 24V-DC / 20W 146 x 55 x 19
300 89 24 20


LED POWER SUPPLY 24V-DC / 40W 242 x 46 x 36
300 89 24 40

LED POWER SUPPLY 24V-DC / 60W 211 x 43 x 28
300 89 24 60

LED POWER SUPPLY 24V-DC / 150W 260 x 60 x 49
300 89 24 150

McDelta





McDelta ◇
286 69 28122 ◇
◇ = W
INCL.1 x BIPOLAR CABLE 2 x 0.5mm²
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.REFLECTOR FL-33°
EXCL.POWER SUPPLY 24V-DC

0,7 IP20

OPTIONS
COVERSET R 62-90-100
LED POWERSUPPLY 24V-DC

CRI>80 660lm (7W)



FULL INFO / PAG TEC


Options

INSTALLATION	C A B
COVERSET R ◇	
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100

◇ = ANO / W

Nyx





NYX ◇
286 68 28102 B ◇
◇ = B
INCL.PC SBL
INCL.1 x CABLE SUSPENSION 1.6m
INCL.1 x BIPOLAR CABLE 2 x 0.5mm²
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


1,3 IP20

OPTIONS
COVERSET R 90-100

CRI>80 660lm (7W)





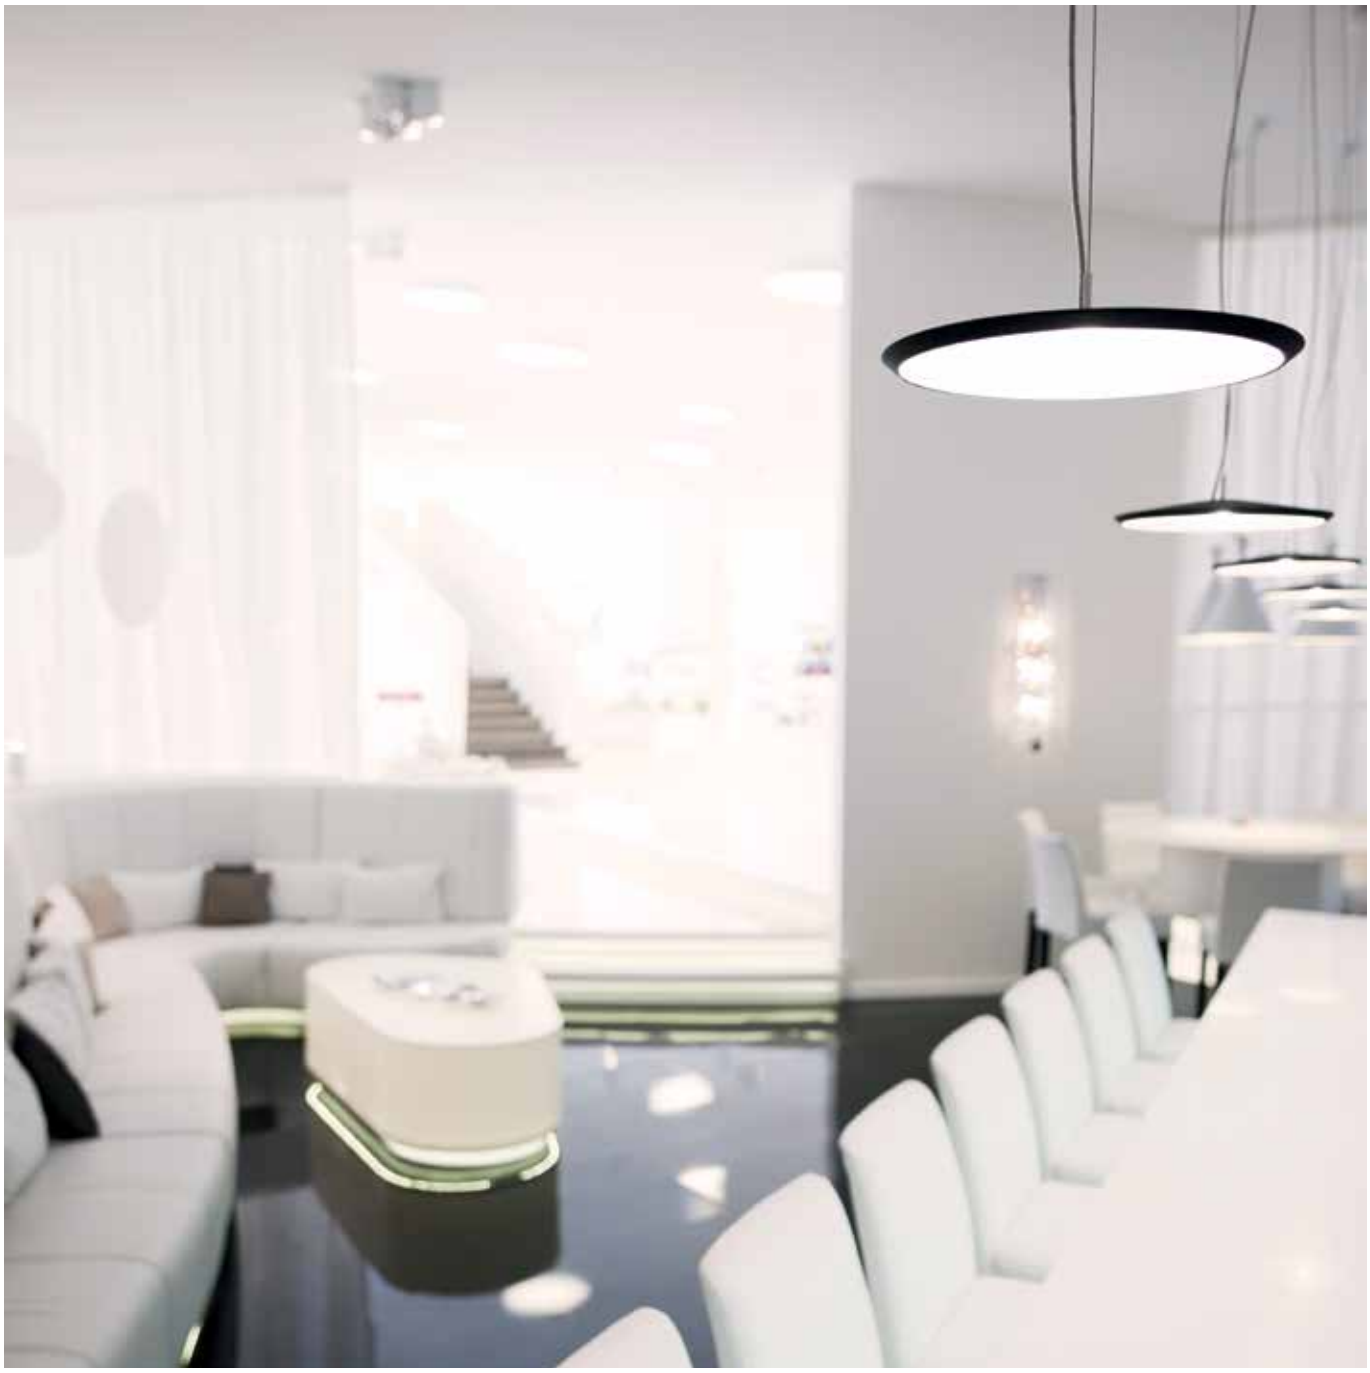




FULL INFO / PAG TEC

Options

INSTALLATION	C A B
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Nice 2C® C





NICE 2C® C
271 71 21
INCL.1 x CABLE 2 x 0.75mm²
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

IP20 0,1

OPTIONS
COVERSET R 62-90-100



FULL INFO / PAG TEC

Options


INSTALLATION

COVERSET R ◇
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / W

SUSPENSION + CONNECTION TRIMLESS
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²

Magma





MAGMA ◇
286 66 27 ◇
◇ = B / W
INCL.1 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 3 x 0.75mm²
E27Ls / 100-240V / 50-60Hz
1 x TC-TSE max.15W
1 x TCA-SE max.15W
0,6 IP20 0,1

OPTIONS
COVERSET R 90-100
SUSPENSION + CONNECTION TRIMLESS
led LED SOLUTION - PAG TEC 4-5


SUSPENSION + CONNECTION TRIMLESS






SUSPENSION + CONNECTION TRIMLESS

FULL INFO / PAG TEC

Options


INSTALLATION

COVERSET R ◇
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / W

SUSPENSION + CONNECTION TRIMLESS
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²

Husk





HUSK ◇
286 65 27 ◇
◇ = B / W
INCL.PC SBL
INCL.1 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
E27Ls / 100-240V / 50-60Hz
1 x TC-TSE max.15W
1 x TCA-SE max.15W
IP20 0,1

OPTIONS
COVERSET R 90-100
SUSPENSION + CONNECTION TRIMLESS
led LED SOLUTION - PAG TEC 4-5












Designed
by
TIM VAN STEENBERGEN

FULL INFO / PAG TEC

Options

INSTALLATION

COVERSET R ◇

204 00 90 ◇	Ø90
204 00 100 ◇	Ø100

◇ = ANO / W


SUSPENSION + CONNECTION TRIMLESS
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



SUSPENSION + CONNECTION TRIMLESS

Metronome



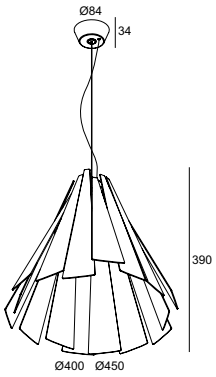


METRONOME ◇
286 70 27 ◇
◇ = B / W
INCL.1 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.23W
1 x A60 max.60W
CE 2,1 IP20 0,1

OPTIONS
COVERSET R 90-100
SUSPENSION + CONNECTION TRIMLESS
led LED SOLUTION - PAG TEC 4-5

Metronome H



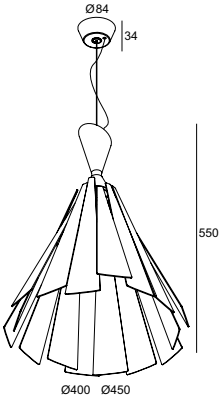

METRONOME H ◇
286 70 28 ◇
◇ = B / W
INCL.1 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.23W
1 x A60 max.60W
CE 2,3 IP20 0,1

OPTIONS
COVERSET R 90-100
SUSPENSION + CONNECTION TRIMLESS
led LED SOLUTION - PAG TEC 4-5

DESIGN BY **DELTA LIGHT®** & **TIM VAN STEENBERGEN**



reddot design award winner 2012

interior innovation award 2012 Winner









Oburnex


FULL INFO / PAG TEC


Options

INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

new

Metronome L

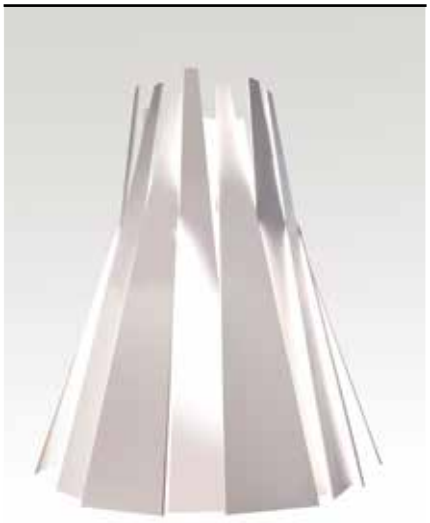

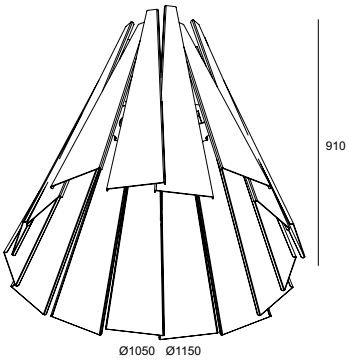

METRONOME L ◇
286 71 427 ◇
◇ = W
INCL.1 x CABLE 3 x 0.75mm² 3m
INCL.SUSPENSION CHAIN 3m
E27Ls / 100-240V / 50-60Hz
4 x TC-TSE max.23W
4 x TCA-SE max.23W
4 x A60 max.60W
CE 35,0 IP20 0,1

OPTIONS
COVERSET R 90-100
CABLE BASE R / S
led LED SOLUTION - PAG TEC 4-5

DESIGN BY **DELTA LIGHT®** & **TIM VAN STEENBERGEN**



reddot design award winner 2012

interior innovation award 2012 Winner





FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION CHAIN 3M
286 71 03

SUSPENSION CHAIN 6M
286 71 06

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B

CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B


COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W

COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W

new

Metronome XXL



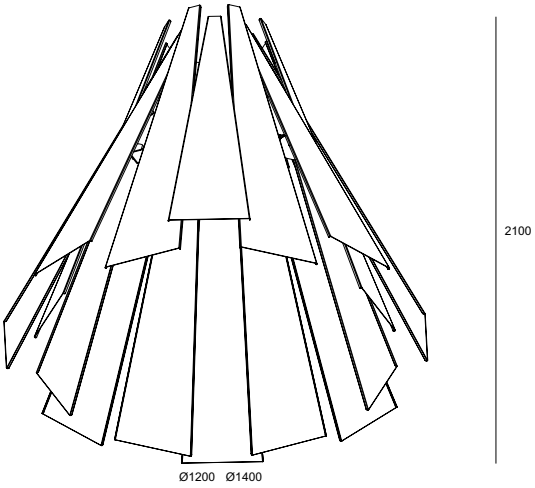

METRONOME XXL ◇
286 71 727 ◇
◇ = W
INCL.1 x CABLE 3 x 0.75mm² / 6m
E27Ls / 100-240V / 50-60Hz
7 x TC-TSE max.23W
7 x TCA-SE max.23W
7 x A60 max.60W
80,0 IP20 0,1


OPTIONS
SUSPENSION CHAIN
COVERSET R 90-100
CABLE BASE R / S
led LED SOLUTION - PAG TEC 4-5

DESIGN BY **DELTA LIGHT®** & **TIM VAN STEENBERGEN**

reddot design award winner 2012

interior innovation award 2012 Winner




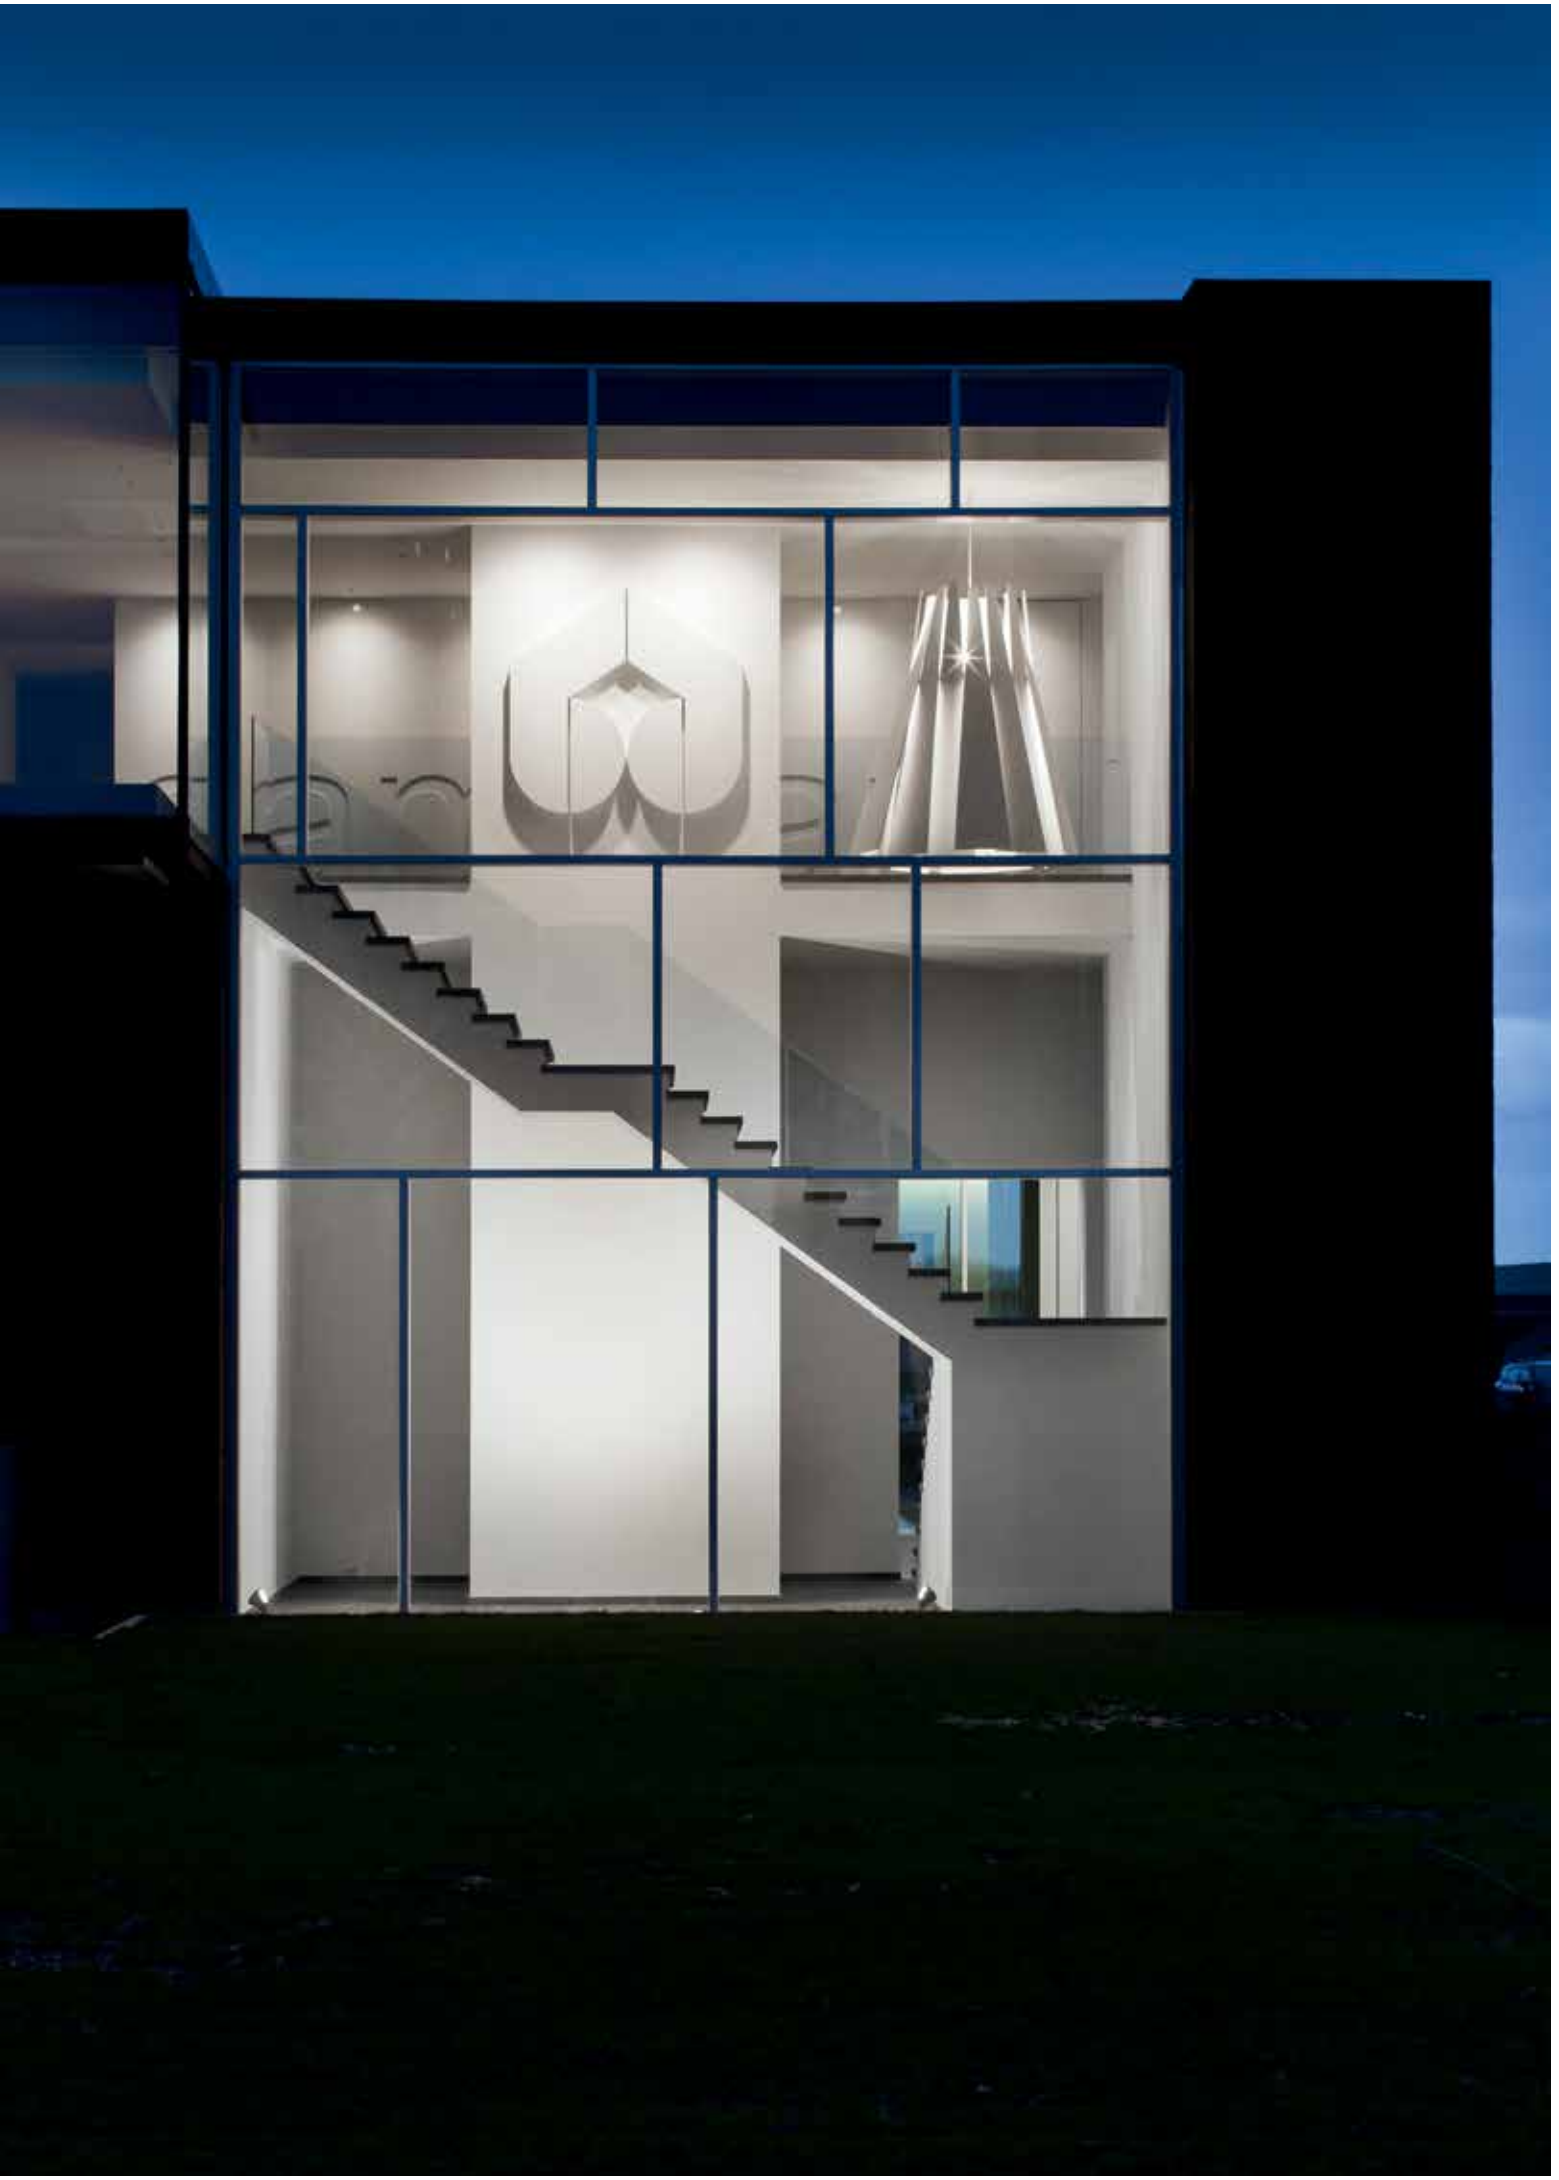


FULL INFO / PAG TEC


Options

INSTALLATION	
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

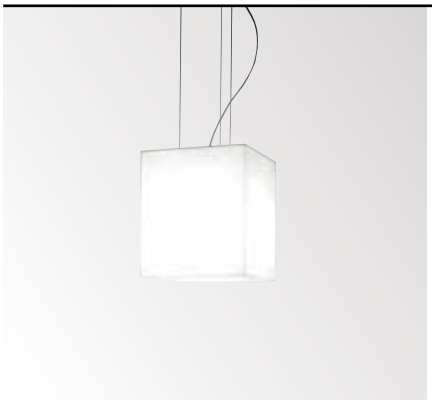







JETI S
271 61 21
INCL.3 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
E27Ls / 100-240V / 50-60Hz
1 x A60 max.60W
1 x TC-TSE max.23W
1 x TCA-SE max.20W

IP40 0,1


OPTIONS
COVERSET R 62-90-100 / S 62-80-90

JETI PLANO L 218
271 52 218
G24q-2 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 18W

0,9 IP43 0,1




Jeti




JETI L 124
271 51 124
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16-S 24W
0,8 IP20 0,1






JETI PLANO L 160
271 52 160
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 60W
5,4 IP20 0,1

JETI PLANO L 424
271 52 424
G5 / 220-240V / 0 I 50-60Hz / 1 x 4~EVG
4 x T16 24W
5,9 IP20 0,1

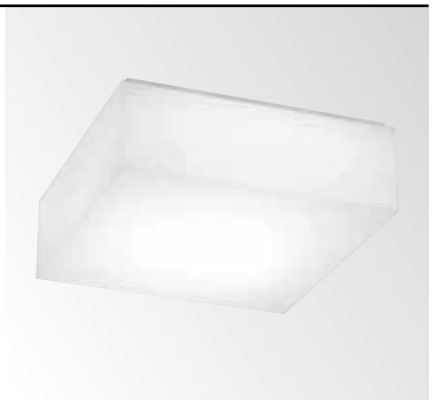



JETI PLANO H 260 C
271 54 260
INCL.4 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
2GX13 / 220-240V / 50-60Hz / 2 x 1~EVG
2 x T16-R 60W
7,4 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90




nthaal





SCWP
SCWP



Jeti Luster



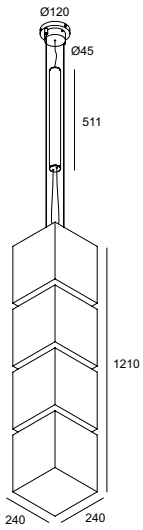

JETI LUSTER
271 64 21
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
CE 6,5 IP20 0,1

JETI LUSTER EVG DIM 2
271 64 21 ED2
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG DIM
2 x T16 54W
CE 6,5 IP20 0,1





FULL INFO / PAG TEC

Options


INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	


Be Cool®

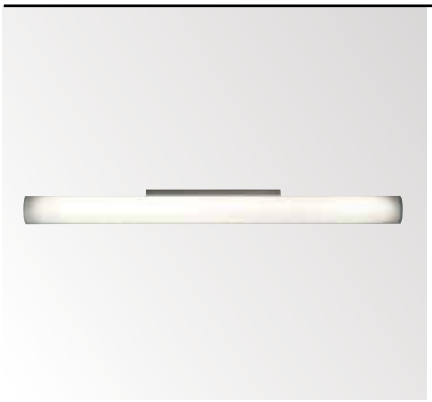




BE COOL® 154 ◇
274 25 154 ◇
◇ = ALU
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 54W
2,5 IP40 0,1

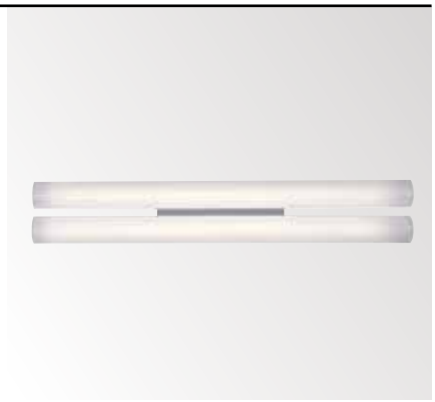



BE COOL® 254 ◇
274 25 254 ◇
◇ = A
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
5,0 IP40 0,1

BE COOL® 254 EVG DIM 2 ◇
274 25 254 ED2 ◇
◇ = A
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG DIM
2 x T16 54W
5,0 IP40 0,1



BE COOL® C 254 ◇
274 26 254 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
5,6 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

BE COOL® C 254 EVG DIM 2 ◇
274 26 254 ED2 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 5 x 0.75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG DIM
2 x T16 54W
5,6 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



FULL INFO / PAG TEC

Options

INSTALLATION

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



CONTROL GEAR

LED RGB KIT 150
300 90 215


RGB TOUCH CONTROLLER DMX
300 90 330




RGB REMOTE CONTROL
300 90 310
MAX.1 x NEBEL RGB RC M
+
MAX.5 x NEBEL RGB RC S



Nebel RGB

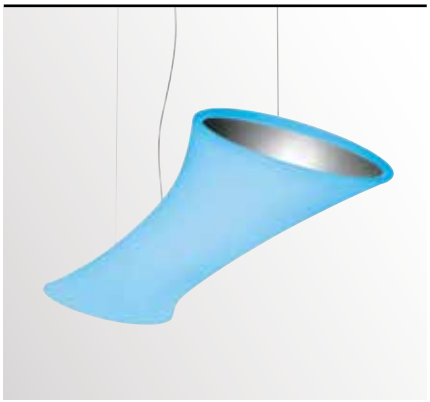



NEBEL RGB
286 61 33
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
INCL.LEDSTRIP RGB 72W
EXCL.LED RGB KIT

CE 3,0 IP40

OPTIONS
LED RGB KIT
RGB TOUCH CONTROLLER DMX
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

NEBEL RGB RC M
286 61 33 RC M
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
INCL.LEDSTRIP RGB 72W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER MASTER
220-240V / 50-60Hz

CE 3,0 IP40


NEBEL RGB RC S
286 61 33 RC S
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
INCL.LEDSTRIP RGB 72W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER SLAVE
220-240V / 50-60Hz

CE 3,0 IP40

OPTIONS
RGB REMOTE CONTROL
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Nebel





NEBEL
286 61 254
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI EVG
2 x T16-S 28/54W

CE 2,8 IP40 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

NEBEL EVG DIM 2
286 61 254 ED2
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI EVG DIM
2 x T16-S 28/54W

CE 2,8 IP40 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90







FULL INFO / PAG TEC

Options

CONTROL GEAR

LED RGB KIT 150
300 90 215


LED RGB KIT 60
300 90 206

LED RGB KIT 20
300 90 202

RGB TOUCH CONTROLLER DMX
300 90 330

Cumulus RGB C






CUMULUS RGB C ◇
286 51 300 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
INCL.LEDSTRIP RGB 44W
EXCL.LED RGB KIT

9,2 IP40

OPTIONS
LED RGB KIT
RGB TOUCH CONTROLLER DMX

Cumulus C






CUMULUS 255 C
286 51 255 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
2GX13 / 220-240V / 50-60Hz / 2 x 1~EVG
2 x T16-R 55W

8,0 IP40 0,1

CUMULUS 255 C EVG DIM 6
286 51 255 ED6 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
DIMMING BY SWITCH DIM
2GX13 / 220-240V / 50-60Hz / 2 x 1~EVG DIM
2 x T16-R 55W

8,0 IP40 0,1



CUMULUS 155-111 C ◇
286 51 155 11 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
ADJUSTABLE 0°- 30°
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 55W
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 35W

10,2 IP20 1,0








FULL INFO / PAG TEC

Options

INSTALLATION

BAMBO SUSPENSION SET ◇
308 01 06 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3.0m
INCL.1 x CABLE 3 x 0.75mm²




CONTROL GEAR

RGB TOUCH CONTROLLER DMX
300 90 330



Accessories

BAMBO COVER ◇
308 00 00 ◇
◇ = B
CE 5,5






BAMBO + COVER

Bambo RGB





BAMBO RGB
308 01 33
INCL.12 x POWERLED RGB
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB DRIVER
EXCL.RGB TOUCH CONTROLLER DMX
100-240V / 50-60Hz


15,2 IP20 0,1

OPTIONS
RGB TOUCH CONTROLLER DMX
BAMBO SUSPENSION SET

ACCESSORIES
BAMBO COVER

Bambo HIT RGB C



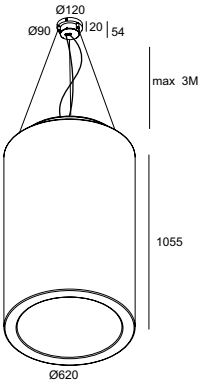


BAMBO HIT RGB C
308 01 33 210
INCL.3 x CABLE SUSP. SINGLE AUTO. 3.0m
INCL.2 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
INCL.12 x POWERLED RGB
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB DRIVER
EXCL.RGB TOUCH CONTROLLER DMX
PGZX18 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-TC-od 210W

18,0 IP20 1,0

OPTIONS
RGB TOUCH CONTROLLER DMX

Bambo HIT C



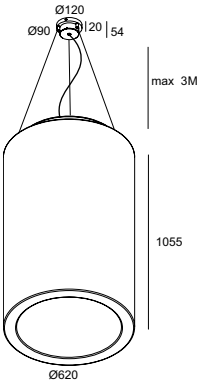

BAMBO HIT C
308 01 00 210
INCL.3 x CABLE SUSP. SINGLE AUTO. 3.0m
INCL.1 x CABLE 3 x 0.75mm²
PGZX18 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-CE-od 210W

18,0 IP20 1,0

Options

INSTALLATION

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B

CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B

COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W

COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W

CONTROL GEAR


LED RGB KIT 150
0 9 15


LED RGB KIT 60
300 90 206


RGB TOUCH CONTROLLER DMX
300 90 330


RGB REMOTE CONTROL
300 90 310
MAX.1 x O_2Oxygen xx RGB RC M
+
MAX.5 x O_2Oxygen xx RGB RC S

O_2Oxygen RGB

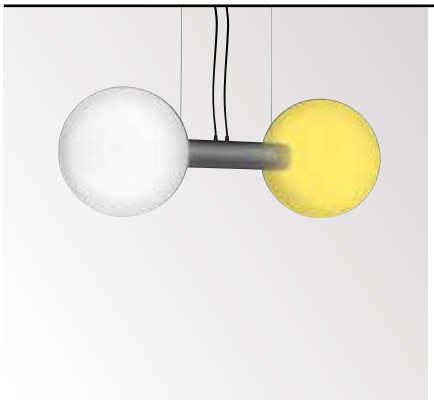

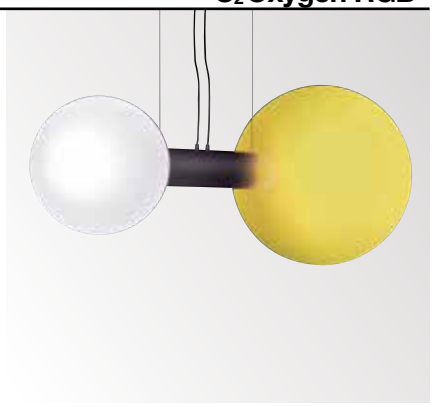





O_2 OXYGEN 44 RGB ◇
307 44 14 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
INCL.1 x CABLE 5 x 0.75mm²
INCL.LEDSTRIP RGB 25W
EXCL.LED RGB KIT
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 32W
9,3 IP20 0,1

OPTIONS
LED RGB KIT
RGB TOUCH CONTROLLER DMX
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

O_2 OXYGEN 64 RGB ◇
307 64 16 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
INCL.1 x CABLE 5 x 0.75mm²
INCL.LEDSTRIP RGB 35W
EXCL.LED RGB KIT
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 32W
12,3 IP20 0,1

OPTIONS
LED RGB KIT
RGB TOUCH CONTROLLER DMX
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

O_2 OXYGEN 44 RGB RC M ◇
307 44 14 RC M ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
INCL.LEDSTRIP RGB 25W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER MASTER
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 32W
9,7 IP20 0,1

O_2 OXYGEN 64 RGB RC M ◇
307 64 16 RC M ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
INCL.LEDSTRIP RGB 35W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER MASTER
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 32W
12,7 IP20 0,1

O_2 OXYGEN 44 RGB RC S ◇
307 44 14 RC S ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
INCL.LEDSTRIP RGB 25W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER SLAVE
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 32W
9,7 IP20 0,1

OPTIONS
RGB REMOTE CONTROL
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90


O_2 OXYGEN 64 RGB RC S ◇
307 64 16 RC S ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
INCL.LEDSTRIP RGB 35W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER SLAVE
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 32W
12,7 IP20 0,1


OPTIONS
RGB REMOTE CONTROL
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90


DESIGN BY **DELTA LIGHT®** & **FRANS VAN PRAET**

O_2 Oxygen



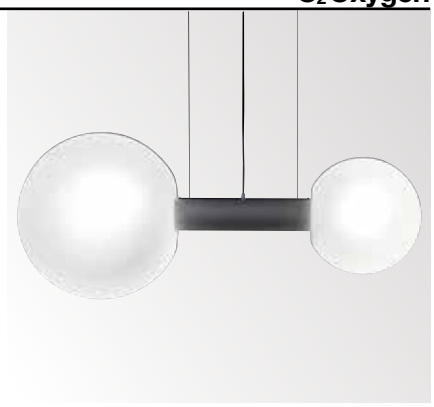





O_2 OXYGEN 44 ◇
307 44 11 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-TEL 32W
8,3 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

O_2 OXYGEN 64 ◇
307 64 11 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
GX24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 32W
GX24q-4 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 42W
11,3 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



DESIGN BY **DELTA LIGHT®** & **FRANS VAN PRAET**







FULL INFO / PAG TEC

Options

INSTALLATION

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



FULL INFO / PAG TEC

Accessories

CONE 111 ◇ Ø117 / Ø80 / H26
201 28 00 ◇
◇ = ALU / B / C / W
QR-LP111 max. 24°



CLIP 111 ◇ Ø110 / H22
201 27 99 A ◇
◇ = A / B / W



FRONTGLASS 111 Ø100
201 17 00



COLOUR FILTER 111 Ø100
201 27 11 ●
201 27 12 ●
201 27 13 ●
201 27 14 ●




LENS 111 Ø100
201 47 11



Random 211







RANDOM 211 T50 ◇
274 72 211 ◇
◇ = ANO
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

◇ CE 1,8 IP20 1,0


ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

Random

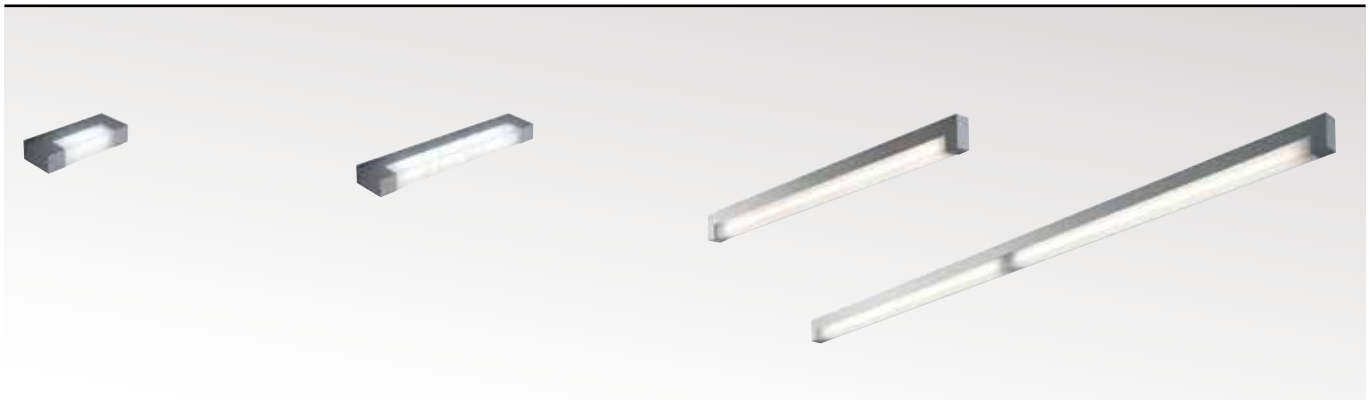




RANDOM 118 EVG ◇
274 75 118 E ◇
◇ = ANO
DIRECT FIXATION
INCL.1 x RANDOM 118 PC SBL
G24q-2 / 230-240V / 50Hz / 1 x 1~EVG
1 x TC-DEL 18W
CE 0,9 IP20 0,1




RANDOM 124 ◇
274 75 124 ◇
◇ = ANO
DIRECT FIXATION
INCL.1 x RANDOM 124 PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 24W
CE 2,2 IP20 0,1

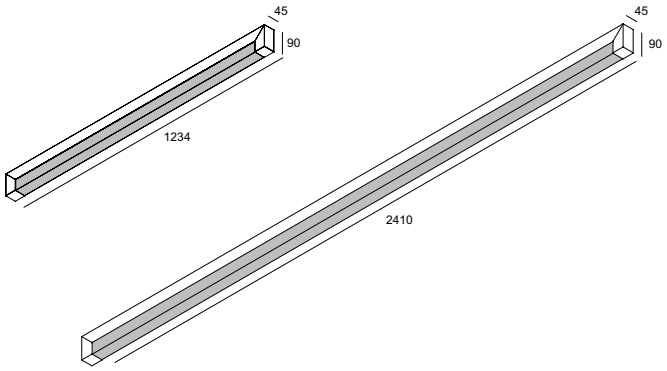

RANDOM 154 ◇
274 75 154 ◇
◇ = ANO
DIRECT FIXATION
INCL.1 x RANDOM 154 PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 54W
CE 2,7 IP20 0,1

RANDOM 254 ◇
274 75 254 ◇
◇ = ANO
DIRECT FIXATION
INCL.1 x RANDOM 254 PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
CE 4,8 IP20 0,1

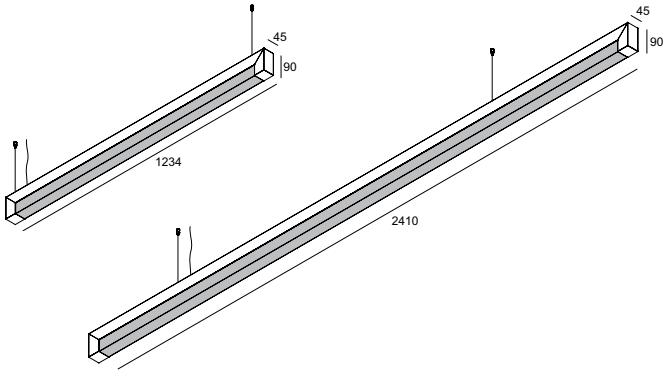

RANDOM C 154 ◇
274 74 154 ◇
◇ = ANO
INCL.1 x RANDOM 154 PC SBL
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 54W
CE 2,8 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

RANDOM C 254 ◇
274 74 254 ◇
◇ = ANO
INCL.1 x RANDOM 254 PC SBL
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
CE 4,8 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION SET 21 2x0.75 1.6m
328 21 212
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 2 x 0.75mm²

SUSPENSION SET 21 3x0.75 1.6m
328 21 213
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B

CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B


COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W


COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



MICROLINE 30+ P1154 ANO + SUSPENSION SET 21 3x0.75 1.6m

Microline 30+ P310

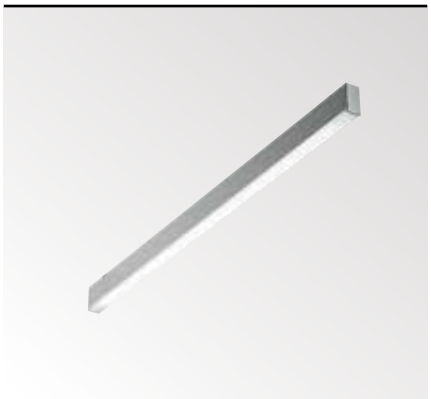





MICROLINE 30+ P310 ◇
346 021 310 ◇
◇ = ANO / W
DOWN
INCL.1 x MIC30+ PC SBL
INCL.LEDSTRIP 30W / WHITE 3000K / 1890lm
INCL.POWERSUPPLY 24V-DC
220-240V / 50-60Hz

2,5 IP20 0,1

OPTIONS
SUSPENSION SET 21 2x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Microline 30+ P

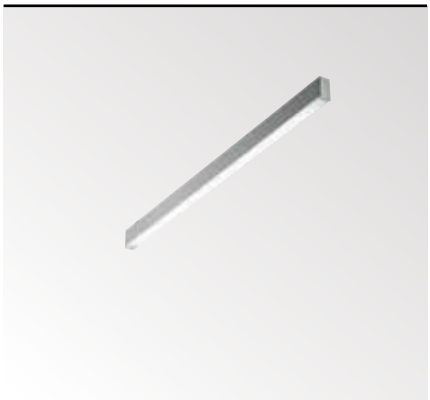

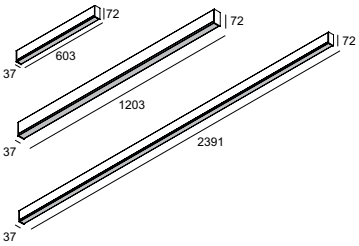

MICROLINE 30+ P1124 ◇
346 021 124 ◇
◇ = ANO / W
DOWN
INCL.1 x MIC30+ PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 14/24W

1,6 IP20 0,1

OPTIONS
SUSPENSION SET 21 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

MICROLINE 30+ P1154 ◇
346 021 154 ◇
◇ = ANO / W
DOWN
INCL.1 x MIC30+ PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W


2,2 IP20 0,1

OPTIONS
SUSPENSION SET 21 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

MICROLINE 30+ P2154 ◇
346 021 254 ◇
◇ = ANO / W
DOWN
INCL.1 x MIC30+ PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16-S 28/54W

4,5 IP20 0,1

OPTIONS
SUSPENSION SET 21 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

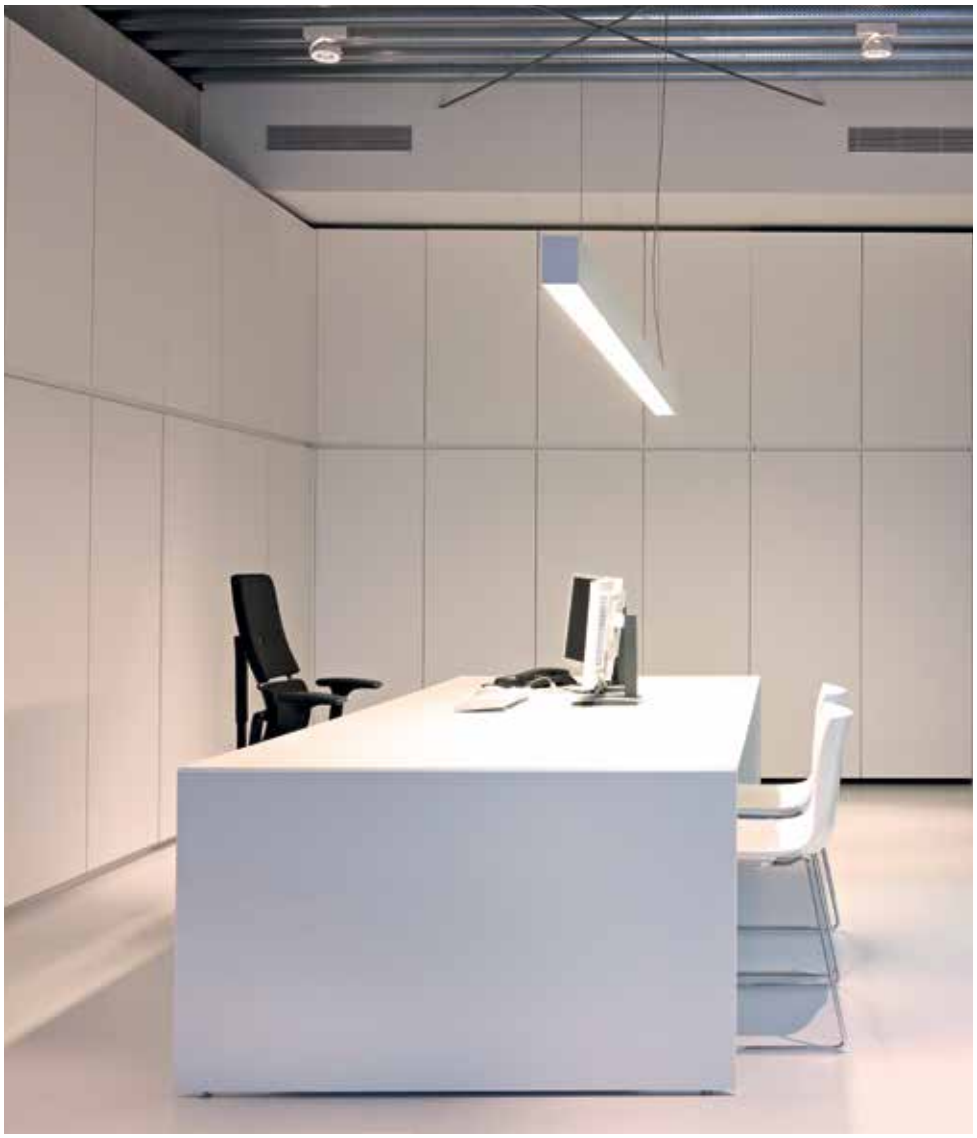

FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION SET 22 1.6m
328 22 22
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²

SUSPENSION SET 22 EVG DIM1 1.6m
328 22 22 ED1
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
INCL.1 x CABLE 2 x 0.75mm²

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B

CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B


COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W

COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W

Accessories


HDL - HE REFLECTOR T16 SEAMLESS DOWN
378 52 154

Efficiency Headliner 75 P1154




HEADLINER 75P 1154

+




HEADLINER HE REFLECTOR
T16 SEAMLESS DOWN


=



HEADLINER 75P 1154
+ HE REFLECTOR



HEADLINER 75P 1154



HIGH EFFICIENCY

up to 71% efficiency

The Headliner

is a no-nonsense made-to-measure profile solution, with excellent efficiency and light output results.

The white lacquered reflector of the standard Headliner is optimized to produce perfect lighting conditions, achieving a light output of 53%.


+


HE Reflector
Specially designed reflector in sheet metal plate provides superior reflection abilities. Resulting in increase of efficiency of 34%, guaranteeing reduced energy consumption.

=

Exceptional output results are achieved by adding the HE Reflector to the standard Headliner module, resulting in 71% efficiency.

B-Liner 65 P630

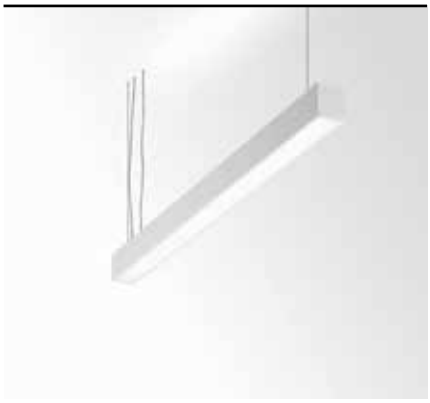






B-LINER 65 P630 ◇
384 01 62 ED1 ◇
◇ = ANO / W


DOWN-UP
INCL.2 x PC SBL
INCL.LED CLUSTER DOWN 32W / 3000K / 2800lm
INCL.LED CLUSTER UP 16W / 3000K / 1400lm
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 5 x 0.75mm² + 2 x 0.75mm²
CABLING 2 CIRCUITS
INCL.2 x LED POWERSUPPLY (DOWN ONLY)
DIMMING BY 1-10V CONTROL
110-240V / 50-60Hz

CE 2,5 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Headliner 75 P412

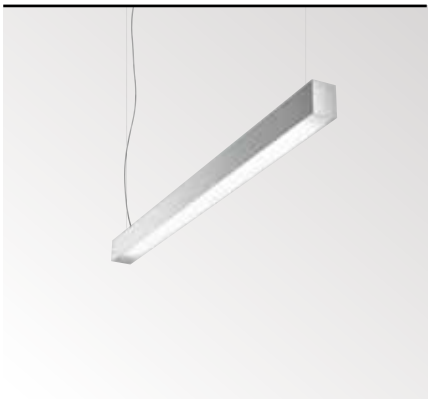




HEADLINER 75 P412 ◇
377 022 412 ED1 ◇
◇ = ANO / W


DOWN
INCL.1 x HDL75 PC SBL
INCL.LED CLUSTER 32W / WHITE 3000K / 2800lm
INCL. POWERSUPPLY DIM1
DIMMING BY 1-10V CONTROL
110-240V / 50-60Hz

CE 2,5 IP20 0,1

OPTIONS
SUSPENSION SET 22 1.6m
SUSPENSION SET 22 EVG DIM1 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Headliner 75 P1154

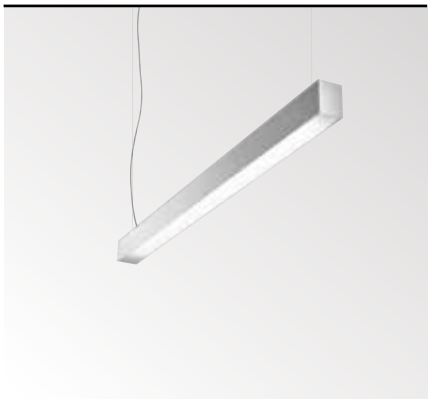



HEADLINER 75 P1154 ◇
377 01 154 ◇
◇ = ANO / W

DOWN
INCL.1 x HDL75 PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W

CE 2,7 IP20 0,1

OPTIONS
SUSPENSION SET 22 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

ACCESSORIES
HDL - HE REFLECTOR T16 SEAMLESS DOWN





B-LINER 65 P630 / HEADLINER 75 P412 LED CLUSTER



FULL INFO / PAG TEC


Options

INSTALLATION	C A B	
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41	
COVERSET R ◇ **204 00 62** ◇ **204 00 90** ◇ **204 00 100** ◇ ◇ = ANO / B / W	 Ø62 Ø90 Ø100	
COVERSET S ◇ **204 62 62** ◇ **204 80 80** ◇ **204 90 90** ◇ ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90	

new

Bicep





BICEP P1254 ◇
380 01 254 ◇
◇ = W
DOWN
INCL.1 x BICEP 54 PC OPAL DOWN
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W


IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

BICEP P1254 DOWN-UP ◇
380 02 254 ◇
◇ = W
DOWN / UP
INCL.1 x BICEP 54 PC OPAL DOWN
INCL.1 x BICEP 54 PC CLEAR UP
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W

IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

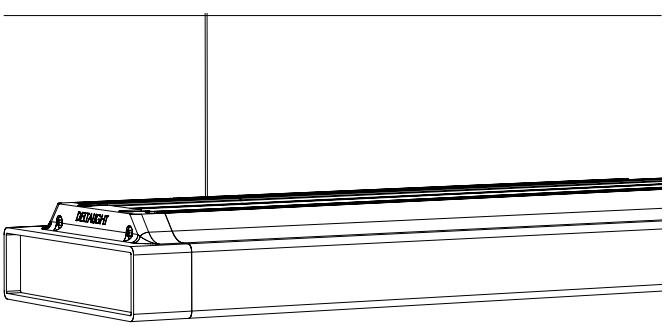



FULL INFO / PAG TEC

Options

INSTALLATION	
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	


FULL INFO / PAG TEC

Accessories

NoBody 200 54 PC CLEAR UP
331 52 54

NoBody 200 P






NoBody 200 P1254 ◇
331 02 88 ◇
◇ = ANO
DOWN-UP
INCL.1 x NB200 54 PC OPAL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
CE 6,1 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-90-90
ACCESSORIES
NoBody 200 54 PC CLEAR UP






NoBody 200 P1254L ◇
331 02 885 ◇
◇ = ANO
DOWN-UP
INCL.1 x NB200 54 PC OPAL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 5 x 0.75mm²
ADJUSTABLE 0°- 30°
CABLING 2 CIRCUITS
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CB51 max.50W
CE 6,6 IP20 0,5

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-90-90
ACCESSORIES
NoBody 200 54 PC CLEAR UP





NoBody 200 P1254 BAP ◇
331 02 88 B ◇
◇ = ANO
DOWN-UP
INCL.1 x NB200 54 BAP
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-90-90
ACCESSORIES
NoBody 200 54 PC CLEAR UP




FULL INFO / PAG TEC

Options

INSTALLATION	
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	






NoBody 300 P1254 ◇
268 02 88 ◇
◇ = ANO
DOWN-UP
INCL.2 x NB300 54 PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W

8,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

NoBody 300 P






NoBody 300 P1254L ◇
268 02 885 ◇
◇ = ANO
DOWN-UP
INCL.2 x NB300 54 PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 5 x 0.75mm²
ADJUSTABLE 0°- 30°
CABLING 2 CIRCUITS
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CB51 max.50W
8,5 IP20 0,5

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90




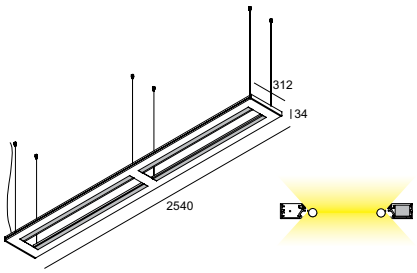

NoBody 300 P2254 ◇
268 02 89 ◇
◇ = ANO
DOWN-UP
INCL.4 x NB300 54 PC SBL
INCL.6 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG
4 x T16 28/54W
14,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



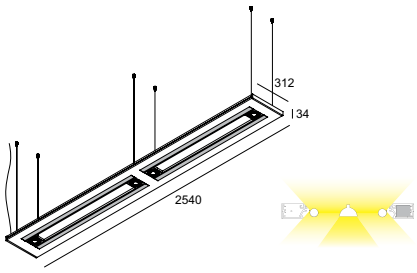


NoBody 300 P2254L ◇
268 02 895 ◇
◇ = ANO
DOWN-UP
INCL.4 x NB300 54 PC SBL
INCL.6 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 5 x 0.75mm²
ADJUSTABLE 0°- 30°
CABLING 2 CIRCUITS
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG
4 x T16 28/54W
GX5.3 / 220-240V / 50-60Hz / TE
4 x QR-CB51 max.50W
15,0 IP20 0,5

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



Endless



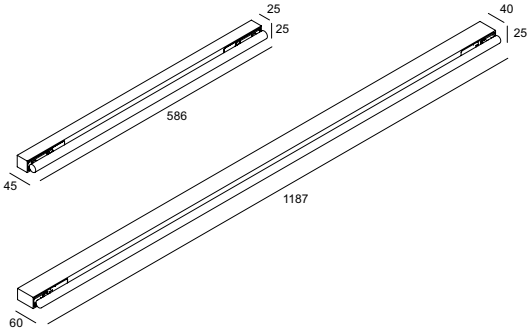

ENDLESS 124 ◇
355 01 124 ◇
◇ = A / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16-S 24W
0,8 IP20 0,1

ENDLESS 154 ◇
355 01 154 ◇
◇ = A /W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W
1,4 IP20 0,1


ENDLESS 124 W


ENDLESS 154 A

FULL INFO / PAG TEC


Options

INSTALLATION


SUSPENSION SET 2x0.75 1.6m
328 17 212
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 2 x 0.75mm²

SUSPENSION SET 3x0.75 1.6m
328 17 213
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²


SUSPENSION TRIMLESS
328 10 01
INCL.1 x AUTOMATIC ADJUSTMENT



SUSPENSION + CONNECTION TRIMLESS
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



CONNECTION TRIMLESS
328 10 03
INCL.1 x CABLE 3 x 0.75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W




COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



led

Endless 30 LED





ENDLESS 30 LED WW ◇
369 01 342 ◇
◇ = B / W
INCL.12 x POWERLED WHITE 1W / 3000K
INCL.12 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz


2,8 IP20 650°


OPTIONS
SUSPENSION SET 328 17 212
SUSPENSION TRIMLESS
SUSPENSION + CONNECTION TRIMLESS
CONNECTION TRIMLESS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



ENDLESS 30 LED WW W

Endless 30

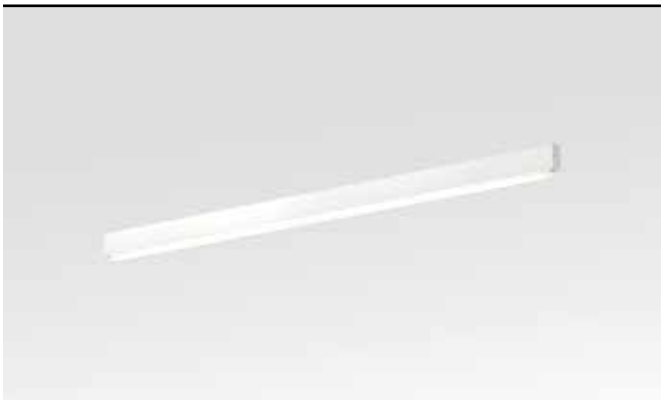

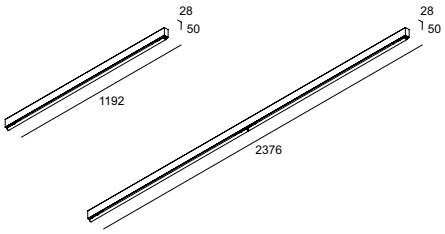


ENDLESS 30 P1154 ◇
369 01 154 ◇
◇ = B / W
DIRECT FIXATION
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W
1,8 IP20 0,1

ENDLESS 30 P2154 ◇
369 01 254 ◇
◇ = B / W
DIRECT FIXATION
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16-S 28/54W
3,4 IP20 0,1

OPTIONS
SUSPENSION SET 328 17 213
SUSPENSION TRIMLESS
SUSPENSION + CONNECTION TRIMLESS
CONNECTION TRIMLESS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Endless 30+



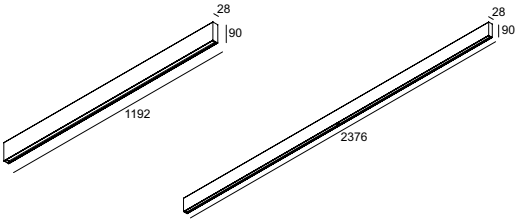


ENDLESS 30+ P1154 ◇
374 01 154 ◇
◇ = B / W
DIRECT FIXATION
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W
1,8 IP20 0,1

ENDLESS 30+ P2154 ◇
374 01 254 ◇
◇ = B / W
DIRECT FIXATION
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16-S 28/54W
3,4 IP20 0,1

OPTIONS
SUSPENSION SET 328 17 213
SUSPENSION TRIMLESS
SUSPENSION + CONNECTION TRIMLESS
CONNECTION TRIMLESS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



ENDLESS 30+
+ SUSPENSION + CONNECTION TRIMLESS

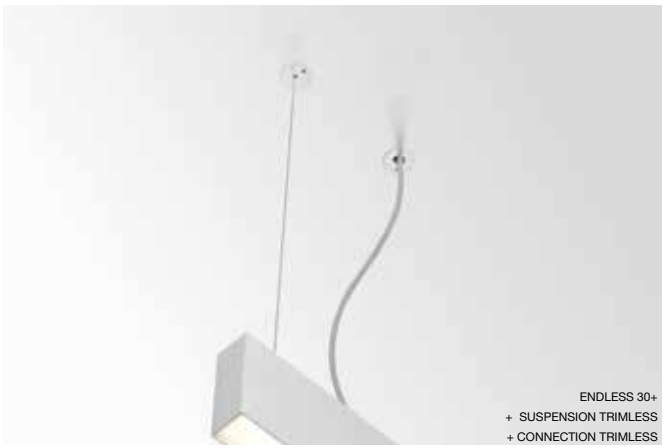

ENDLESS 30+
+ SUSPENSION TRIMLESS
+ CONNECTION TRIMLESS







Obumex




Lay Out







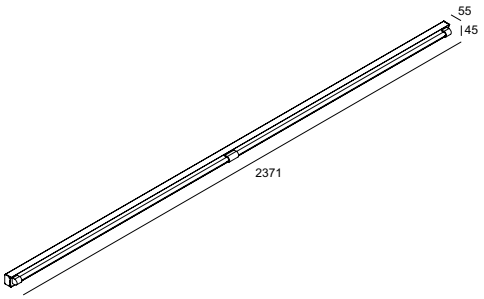

LAY OUT 124 ◇
338 01 124 ◇
◇ = ANO
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16 14/24W
0,8 IP20 0,1

LAY OUT 154 ◇
338 01 154 ◇
◇ = ANO
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16 28/54W
1,4 IP20 0,1

LAY OUT 254 ◇
338 01 254 ◇
◇ = ANO
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
2,6 IP20 0,1






INTERIOR
WALL RECESSED

Wall recessed luminaires are often applied to provide direction and guarantee safety, but the Delta Light range has much more to offer. In addition to functional or directional lighting, the collection enables you to create playful light effects and original compositions. You can combine several fixtures to produce an attractive and artistic setting. Or you can opt for a discrete, but entertaining light emphasis.



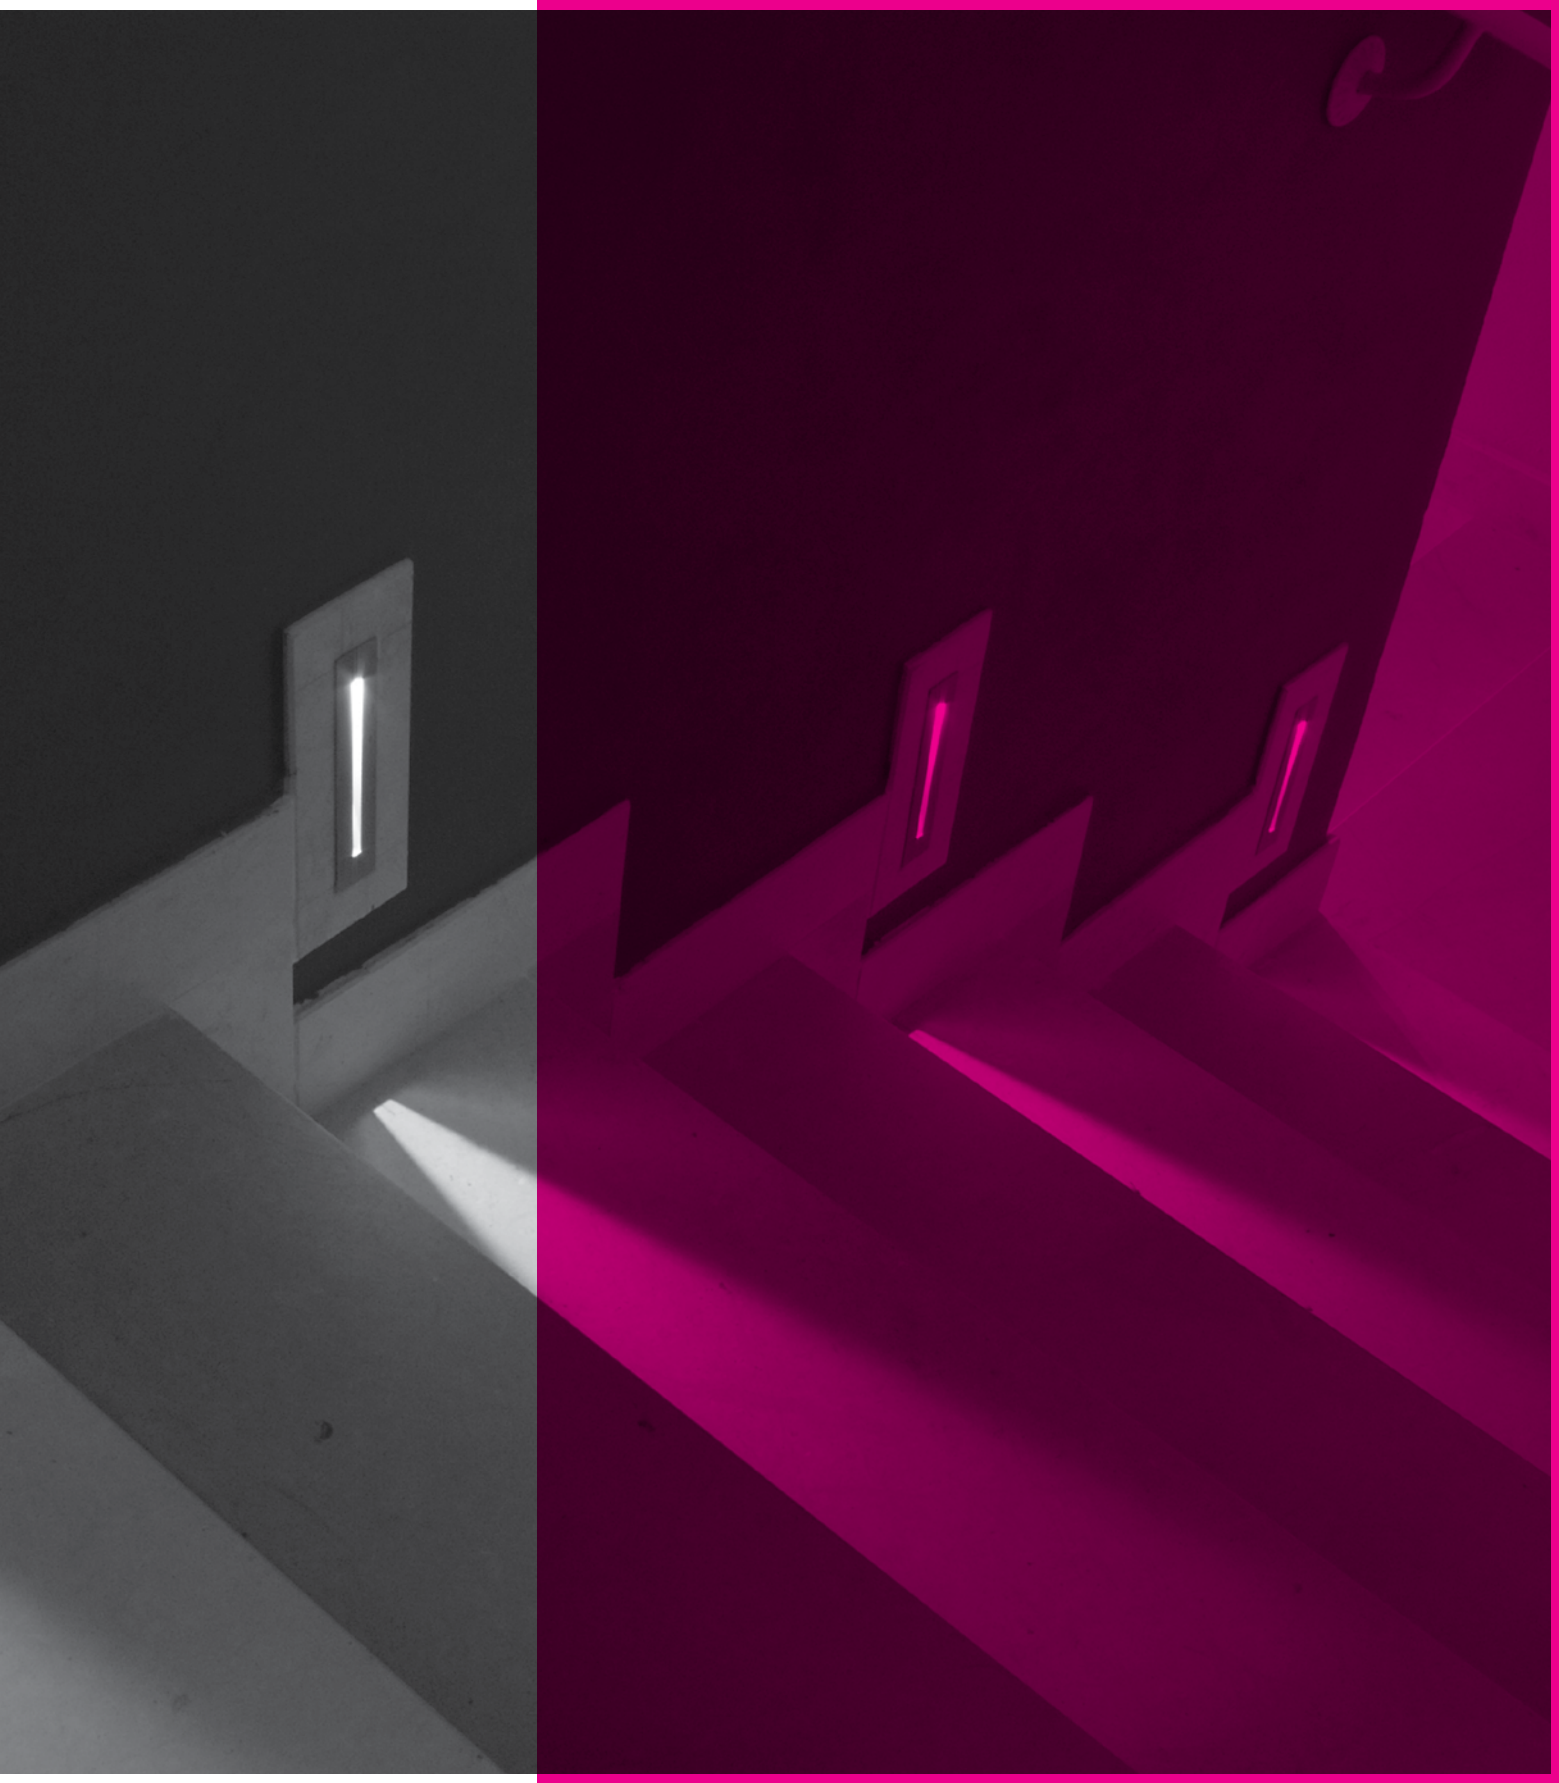



interior wall recessed

www.deltalight.com/IWR


FEMTOLINE	INT 437
HELI	INT 430
INLET	INT 435
LEDS C R	INT 433
LEDS C S	INT 433
LEDS GO 4Q ON	INT 432
M-T	INT 440
SKELP	INT 439
VICE VERSA	INT 445



HELI
INT 430



SKELP
INT 439



LEDS GO 4Q ON
INT 432

M-T
INT 440



LEDS C R
INT 433



VICE VERSA
INT 445



LEDS C S
INT 433



INLET
INT 435



FEMTOLINE
INT 437

FULL INFO / PAG TEC

Options


INSTALLATION	C A B	
PLASTERKIT 115 **202 31 99**	150 x 150	75 x 75
PLASTERKIT 186 **207 01 186**	190 x 150	75 x 75
CONCRETE BOX 115 **202 31 98**	150 x 150 x 80	155 x 155
CONCRETE BOX 186 **270 11 186**	145 x 105 x 70	105 x 110
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121


CONTROL GEAR	C A B
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

led

Heli 1 LED







new

75 x 75 x 60

HELI 1 LED NW ◇
202 04 34 ◇
◇ = A / W
INCL.1 x LEDCLUSTER WHITE 1,1W / 4000K

HELI 1 LED WW ◇
202 04 32 ◇
◇ = A / W
INCL.1 x LEDCLUSTER WHITE 1,1W / 3000K
INCL.1 x HELI 1 PC SBL

EXCL.LED POWER SUPPLY 350mA-DC

IP40

OPTIONS
PLASTERKIT 186
CONCRETE BOX 186
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM

75 x 75 x 85

HELI 1 SCREEN LED NW ◇
202 04 14 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 4000K

HELI 1 SCREEN LED WW ◇
202 04 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

IP20


OPTIONS
PLASTERKIT 186
CONCRETE BOX 186
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM





DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Heli 1



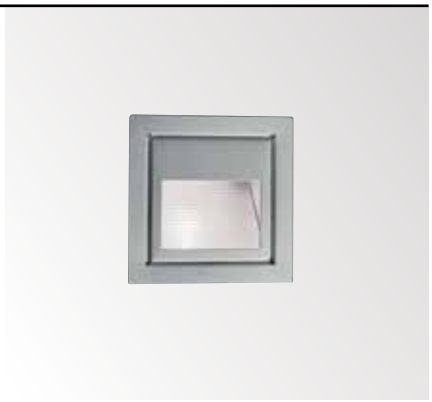





64 x 71 x 85

HELI 1 WHITE ◇
202 31 00 ◇
◇ = ANO
INCL.1 x HELI 1 GLASS SBL
G4 / 12V / EXCL.TRANSFO

1 x QT9 max.20W

IP20 0,1

OPTIONS
PLASTERKIT 115
CONCRETE BOX 115
TRANSFO

64 x 71 x 85

HELI 1 SCREEN ◇
202 31 10 ◇
◇ = ANO
INCL.1 x HELI 1 GLASS
G4 / 12V / EXCL.TRANSFO

1 x QT9 max.20W

IP20 0,1

OPTIONS
PLASTERKIT 115
CONCRETE BOX 115
TRANSFO








FULL INFO / PAG TEC


Options

INSTALLATION		
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43

CONTROL GEAR	
LED POWER SUPPLY 14V-DC / 12W **300 90 90**	100 x 48 x 28
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Leds Go® 4Q On

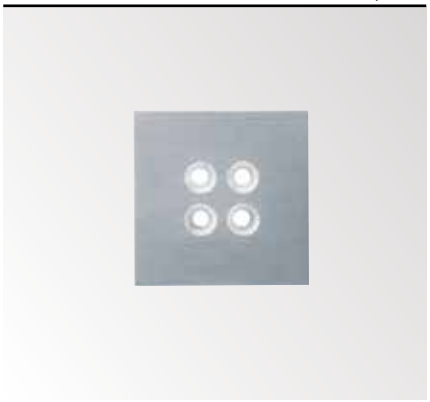



38 x 38 x 40

LEDS GO® 4Q ON S2 NW ◇
302 10 44 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 4000K

LEDS GO® 4Q ON S2 WW ◇
302 10 24 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 2800K


LEDS GO® 4Q ON S2 BLUE ◇
302 10 22 BL ◇
◇ = ANO
INCL.4 x LED BLUE Ø5mm / 14V-DC / 0,5W


EXCL.LED POWER SUPPLY 14V-DC / 12W

CE 0,1 IP54

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 14V-DC / 12W

Leds C®

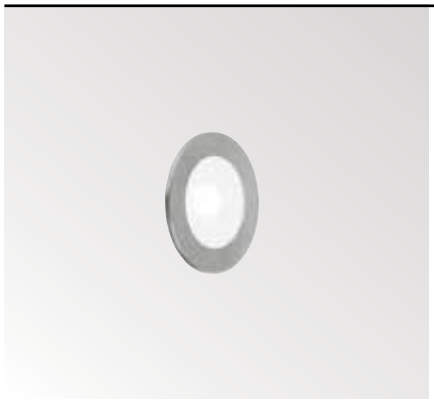



41 x 38

LEDS C R ST NW ◇
302 20 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K


LEDS C R ST WW ◇
302 20 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM





41 x 38

LEDS C® R NW ◇
302 20 10 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K


LEDS C® R WW ◇
302 20 12 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K


LEDS C® R BLUE ◇
302 20 11 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE 1W

EXCL.LED POWER SUPPLY 350mA-DC

IP54

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM

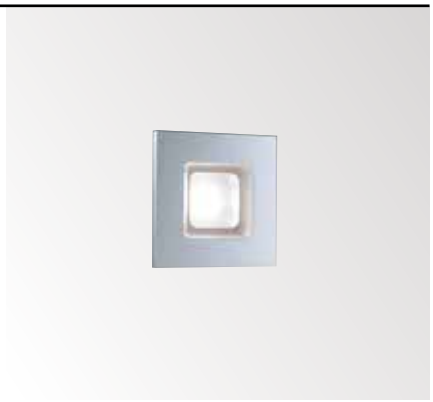



38 x 38 x 38

LEDS C® S NW ◇
302 20 44 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K


LEDS C® S WW ◇
302 20 42 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K

LEDS C® S BLUE ◇
302 20 41 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE 1W

EXCL.LED POWER SUPPLY 350mA-DC

IP54

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 350mA-DC / DIM

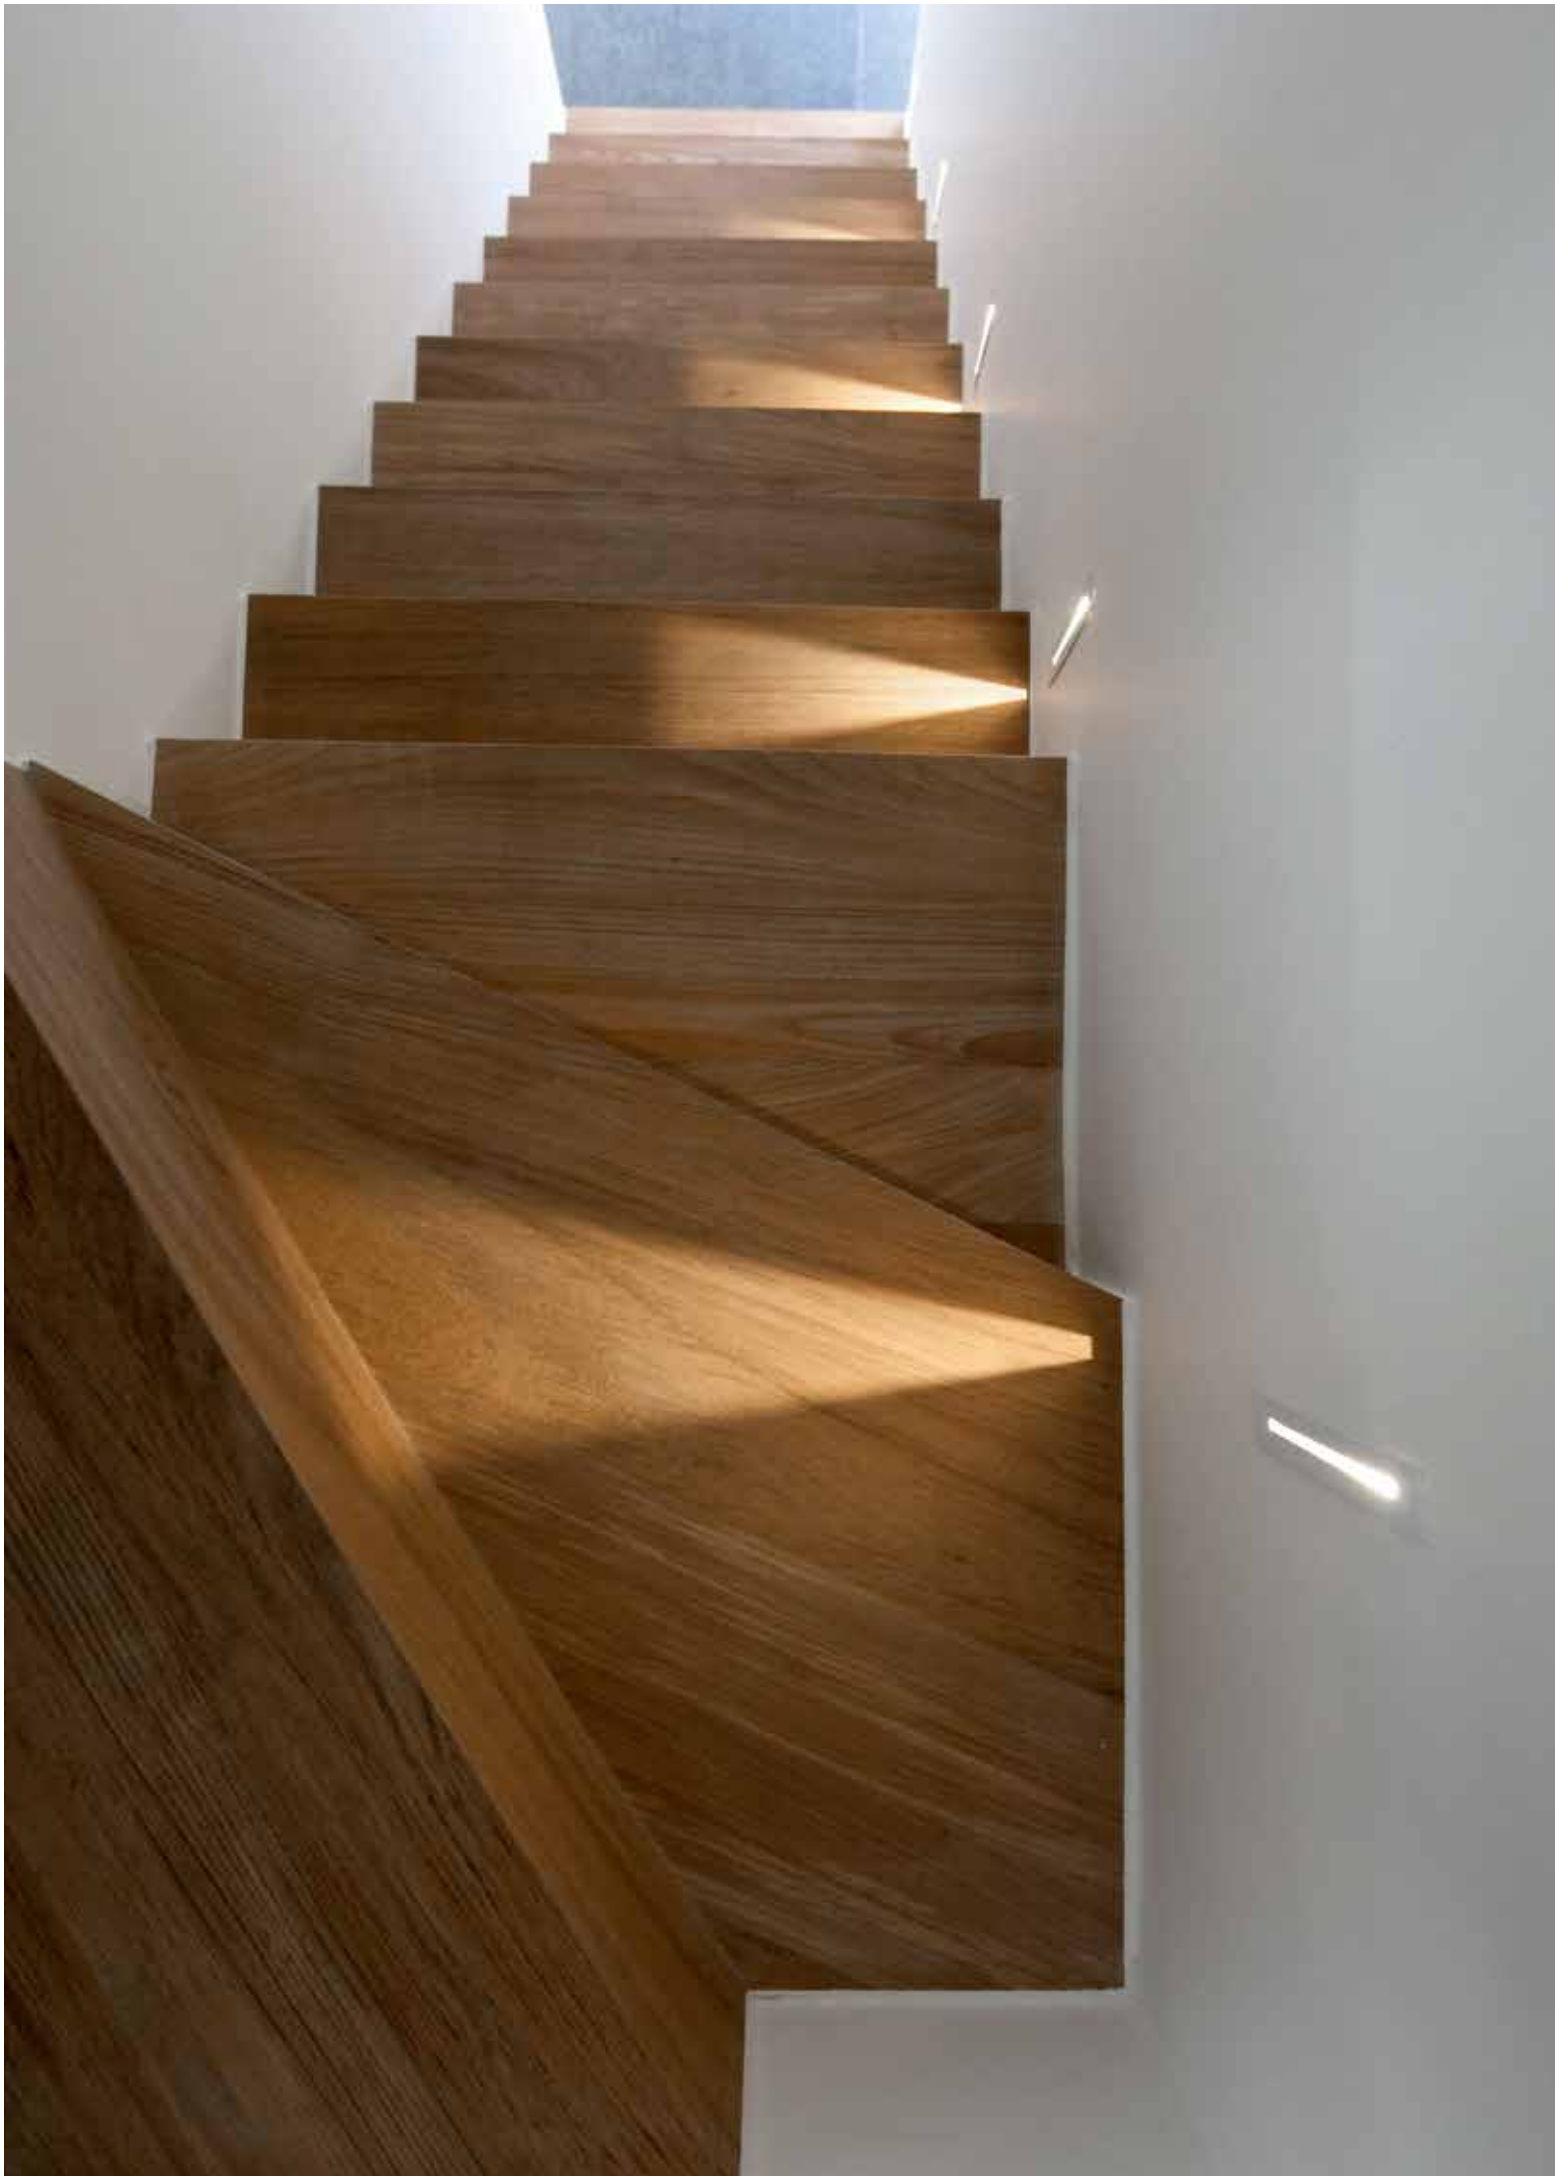


FULL INFO / PAG TEC


Options

INSTALLATION		
PLASTERKIT 145 **304 05 99**	140 x 235	110 x 180
CONCRETE BOX 145 **304 05 98**	150 x 210 x 75	155 x 215
CONCRETE BOX 165 **270 11 165**	62 x 97 x 50	45 x 75

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Inlet MS

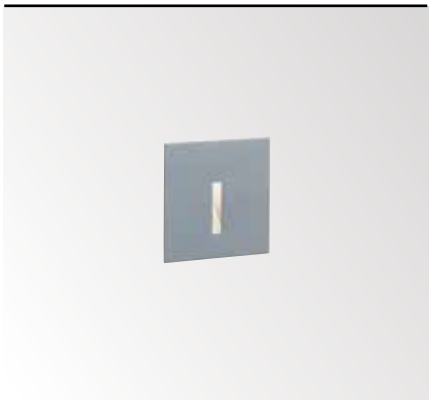



35 x 62 x 40 min.12

INLET MS NW ◇
304 18 14 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 4000K

INLET MS WW ◇
304 18 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 3000K

INLET MS BLUE ◇
304 18 11 BL ◇
◇ = A
INCL.1 x POWERLED BLUE 1W


EXCL.LED POWER SUPPLY 350mA-DC

CE 0,2 IP20

OPTIONS
CONCRETE BOX 165
LED POWER SUPPLY 350mA-DC / DIM

Inlet S





22 x 170 x 45 min.12

INLET S NW ◇
304 05 14 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 4000K

INLET S WW ◇
304 05 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 3000K

INLET S HW ◇
304 05 13 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 2700K

INLET S BLUE ◇
304 05 11 BL ◇
◇ = A
INCL.1 x POWERLED BLUE 1W

EXCL.LED POWER SUPPLY 350mA-DC


CE 0,2 IP20

OPTIONS
PLASTERKIT 145
CONCRETE BOX 145
LED POWER SUPPLY 350mA-DC / DIM



INLET MS W

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

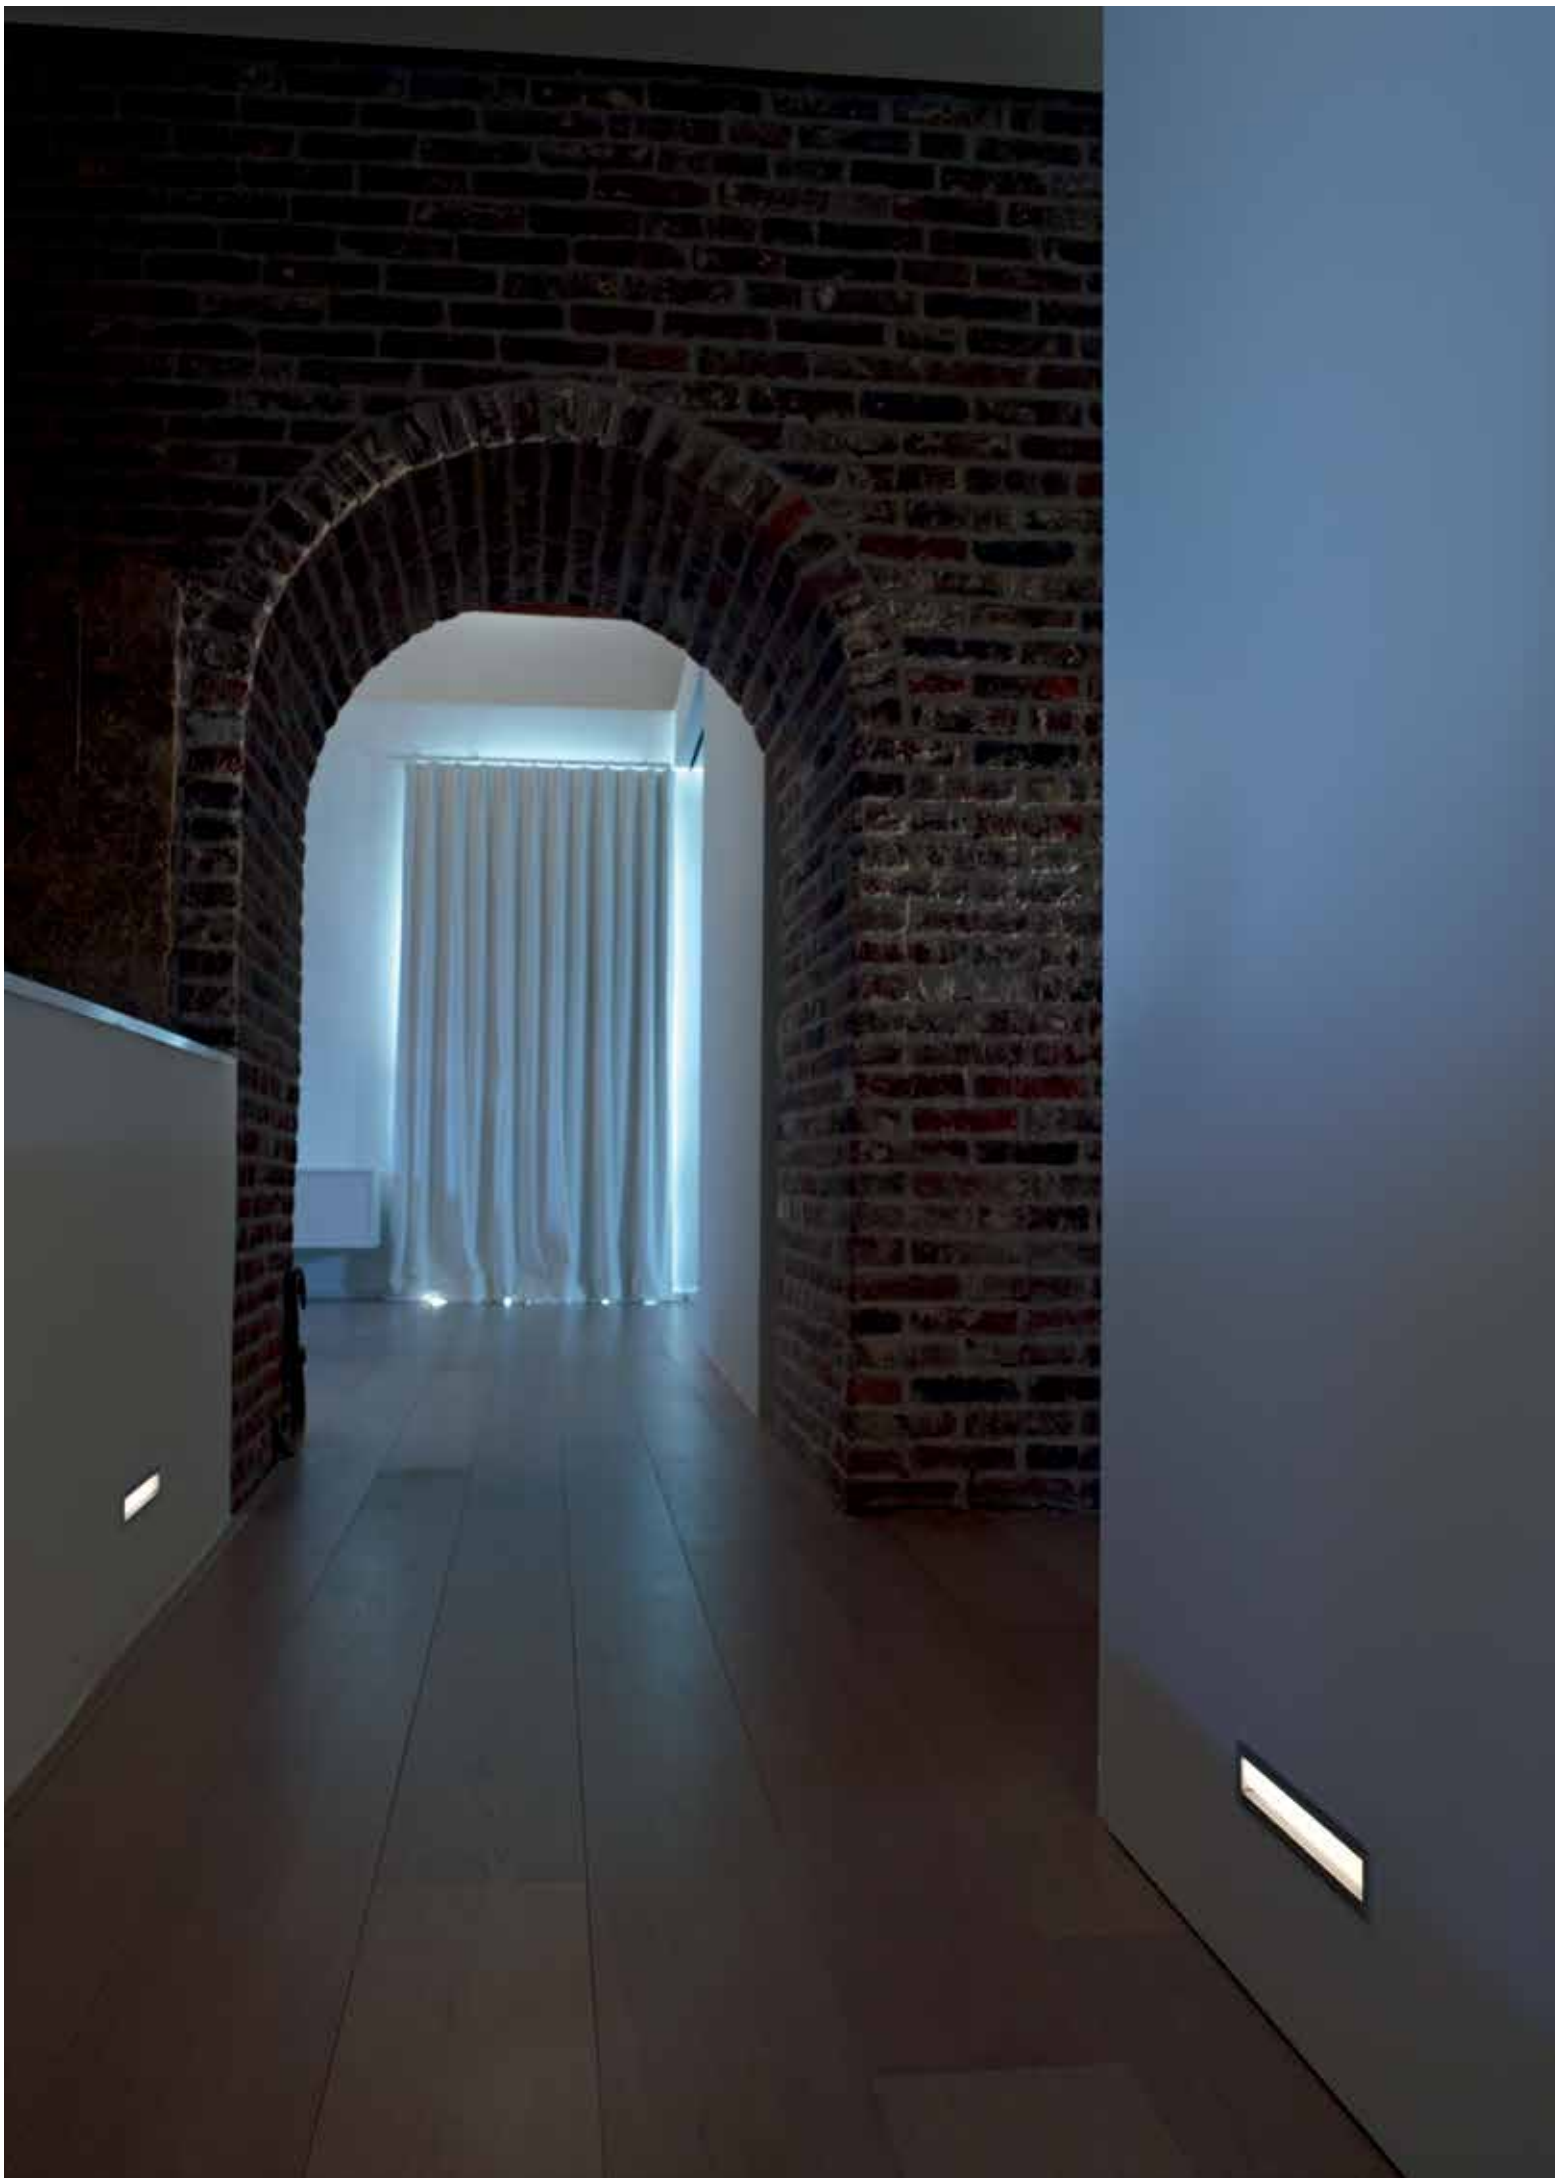

FULL INFO / PAG TEC

Options


INSTALLATION	A B C	
PLASTERKIT 184 **207 01 184**	304 x 85	222 x 54
CONCRETE BOX 184 **270 11 184**	270 x 91 x 65	273 x 94

CONTROL GEAR	A B C
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	146 x 55 x 19
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	242 x 46 x 36
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	211 x 43 x 28
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	260 x 60 x 49

led

Femtoline





219 x 38 x 65


FEMTOLINE 145 NW ◇
376 01 244 ◇
◇ = ANO
INCL.1 x LEDSTRIP WHITE 4000K / 1,5W

FEMTOLINE 145 WW ◇
376 01 242 ◇
◇ = ANO
INCL.1 x LEDSTRIP WHITE 3000K / 1,5W

INCL.1 x PC SBL
EXCL.LED POWER SUPPLY 24V-DC

0,4 IP22

OPTIONS
PLASTERKIT 184
CONCRETE BOX 184
LED POWER SUPPLY 24V-DC

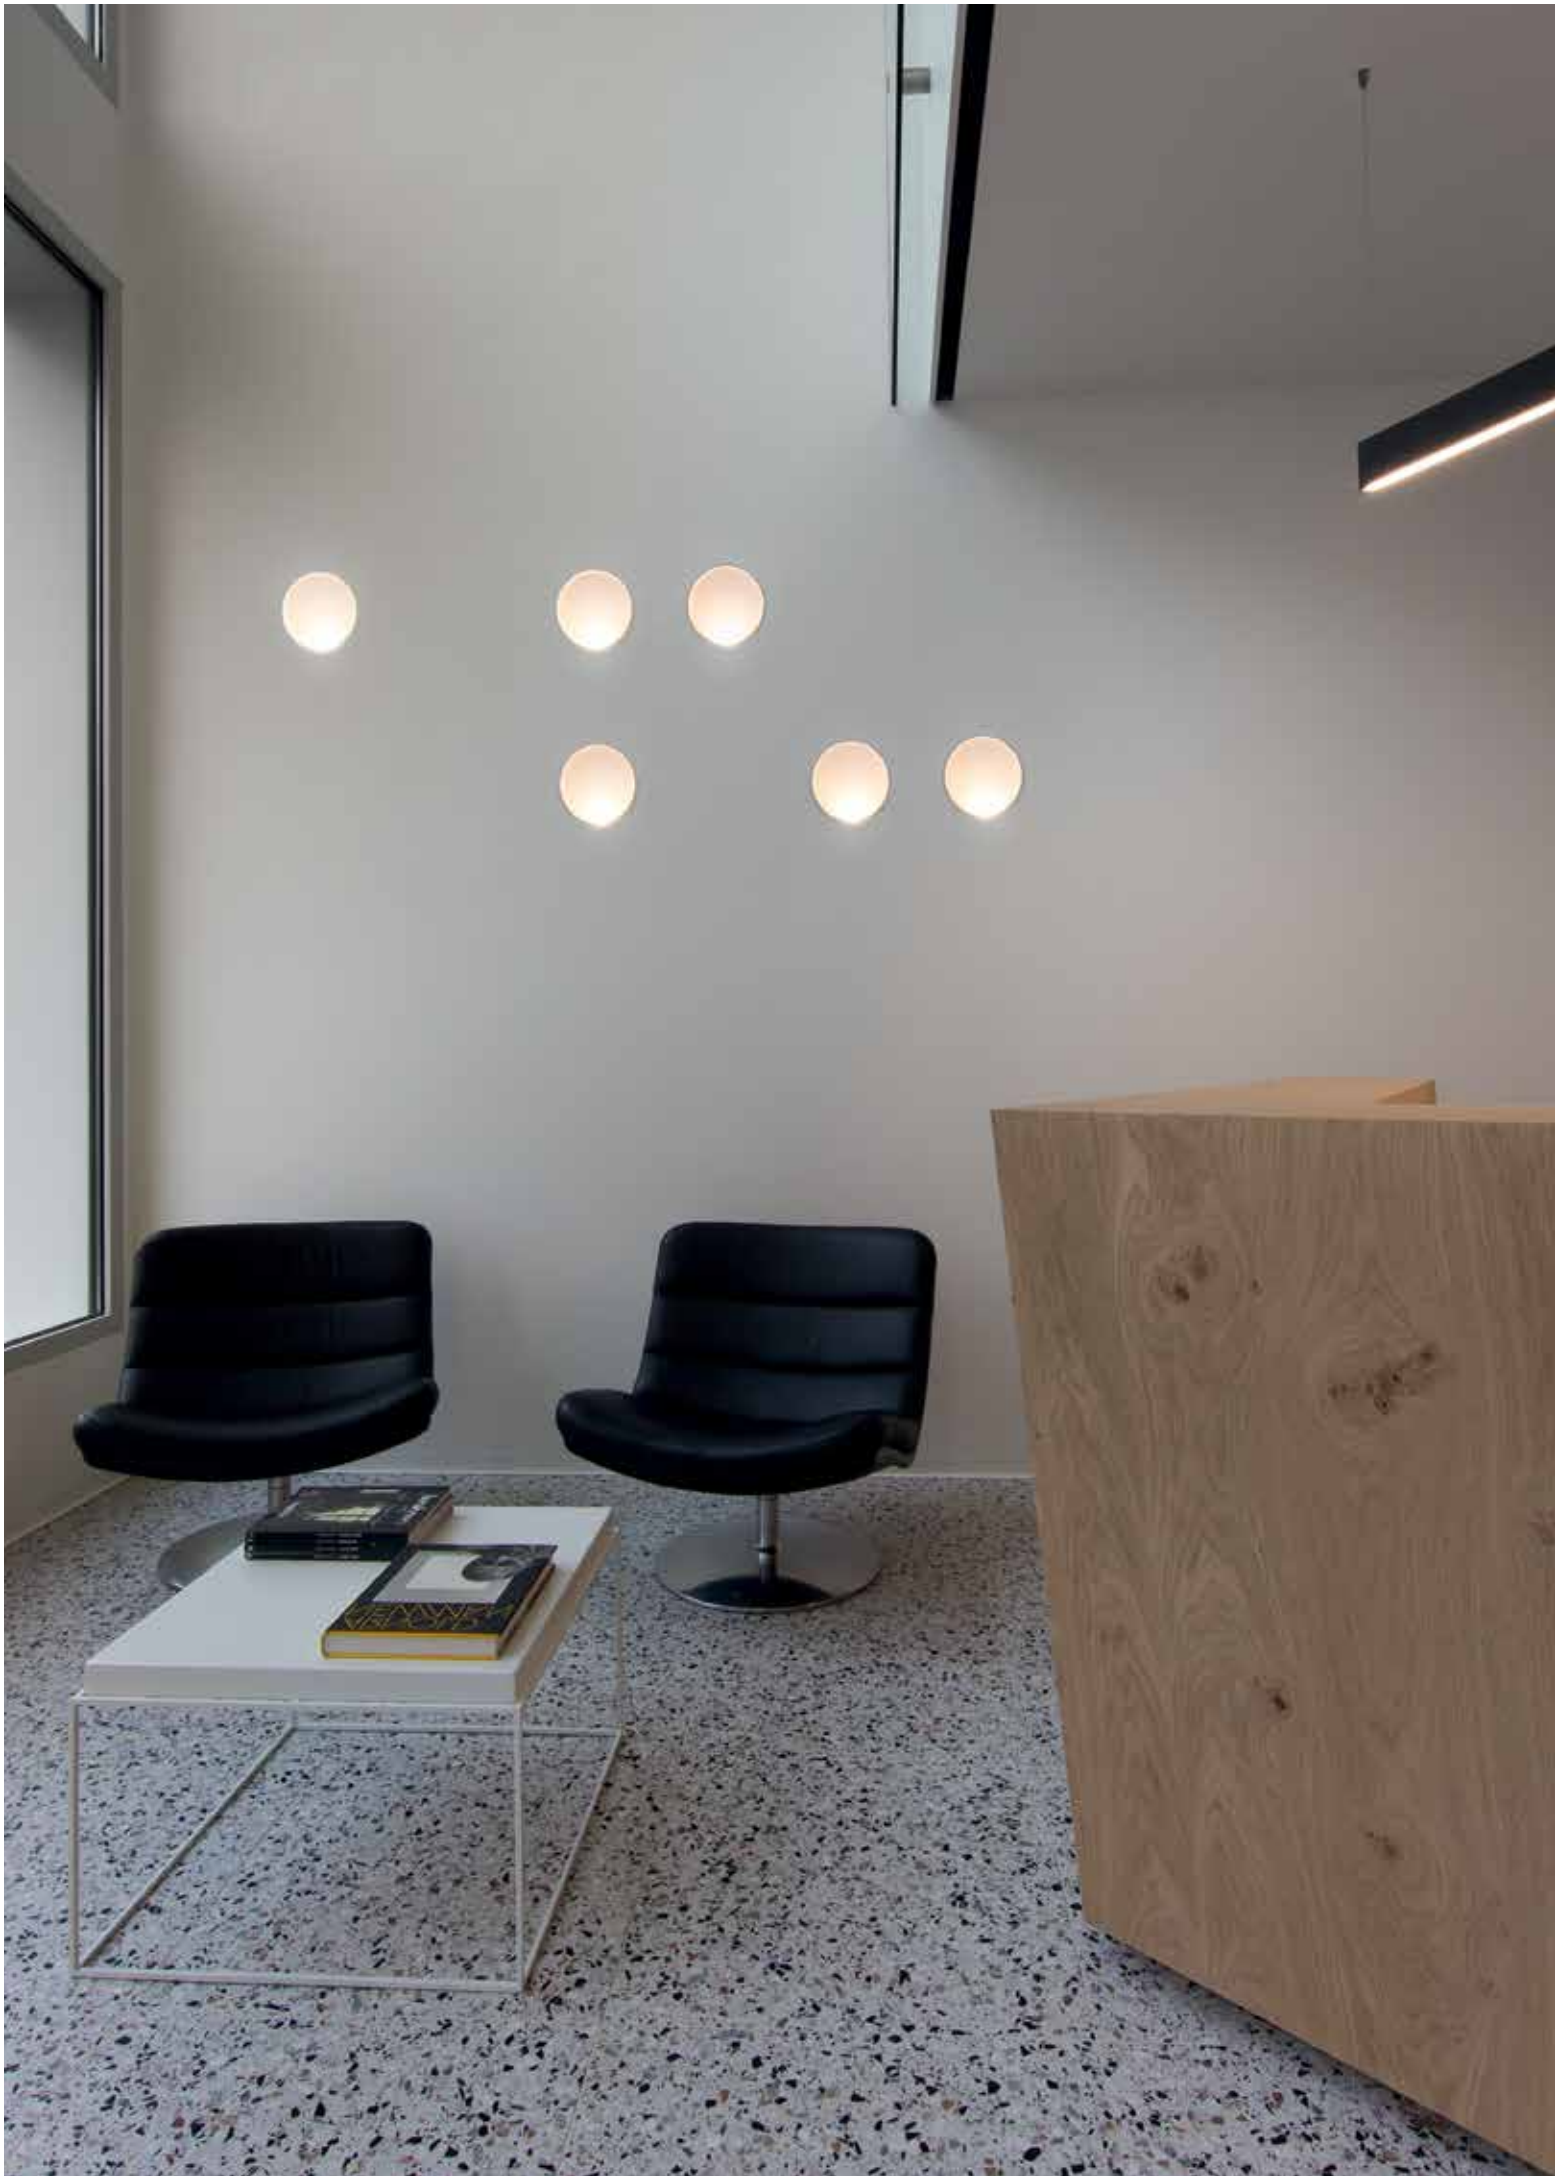


FULL INFO / PAG TEC

Requirements

MOUNTING KIT SKELP TRIMLESS
202 15 61 972

152 x 100 max.25

0,4



FULL INFO / PAG TEC

Options

INSTALLATION	A-B-C	
PLASTERKIT 181 **207 01 181**	250 x 250	170 x 170


new


led

Skelp





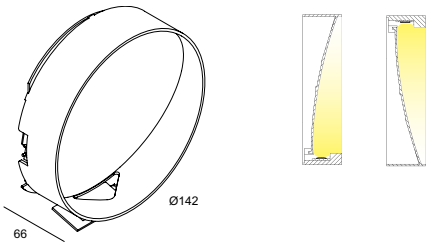

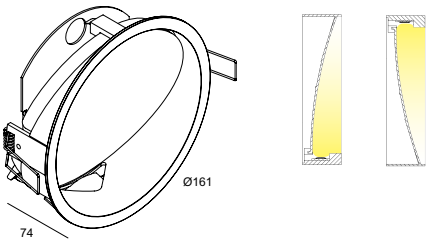

ØKIT x 100

SKELP TRIMLESS LED WW ◇
320 01 12 ◇
◇ = W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,4 IP20

REQUIREMENTS
MOUNTING KIT SKELP TRIMLESS

152 x 100

SKELP LED WW ◇
320 02 12 ◇
◇ = B-MMAT / W-W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,4 IP20

OPTIONS
PLASTERKIT 181

CRI>80 525lm (7W)


FULL INFO / PAG TEC


Options

INSTALLATION		
PLASTERKIT 177 **207 01 177**	240 x 331	190 x 295
PLASTERKIT 178 **207 01 178**	169 x 559	115 x 520
PLASTERKIT 179 **207 01 179**	290 x 489	240 x 465

M-T 1







185 x 185 x 90 max.35

M-T 1 ◇
276 10 01 ◇
◇ = ANO
MOUNTING BOX
EXCL.M-T 1 INSERT

0,9


OPTIONS
PLASTERKIT 177

led


M-T 1 INSERT LED WW
276 11 02
INCL.1 x POWERLED WHITE 3,5W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
EXCL.M-T 1
100-240V / 50-60Hz


0,3 IP20

Installation

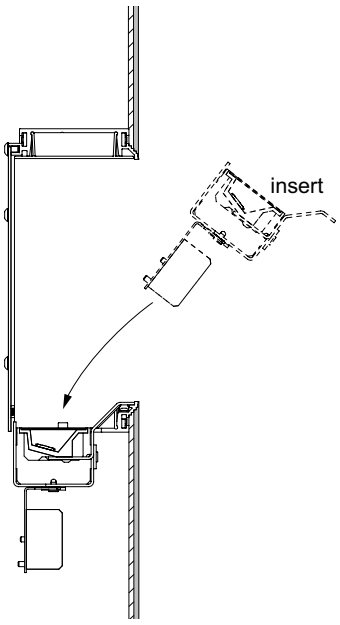

M-T 2

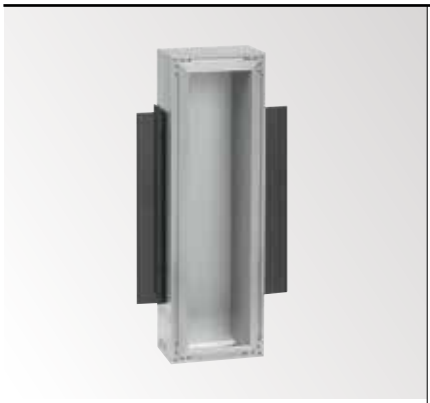




111 x 343 x 90 max.35

M-T 2 ◇
276 10 02 ◇
◇ = ANO
MOUNTING BOX
EXCL.M-T 2 INSERT

1,3

OPTIONS
PLASTERKIT 178






led

M-T 2 INSERT LED WW
276 12 12
INCL.1 x POWERLED WHITE 1W / 3000K
INCL.1 x LENS 25°
INCL.LED POWER SUPPLY 350mA-DC
EXCL.M-T 2
100-240V / 50-60Hz

CE 0,2 IP20




M-T 2 INSERT Hi
276 12 13
EXCL.M-T 2
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

CE 0,2 IP20 0,5

M-T 3






234 x 315 x 90 max.35

M-T 3 ◇
276 10 03 ◇
◇ = ANO
MOUNTING BOX
EXCL.M-T 3 INSERT

1,6


OPTIONS
PLASTERKIT 179



M-T 3 INSERT R7s
276 13 25
R7s / 100-240V / 50-60Hz
1 x QT-DE12 max.150W
EXCL.M-T 3


CE 0,5 IP20 0,5






M-T 3 INSERT TC
276 13 21
G24q-3 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x TC-DEL 26W
EXCL.M-T 3

CE 0,5 IP20 0,1

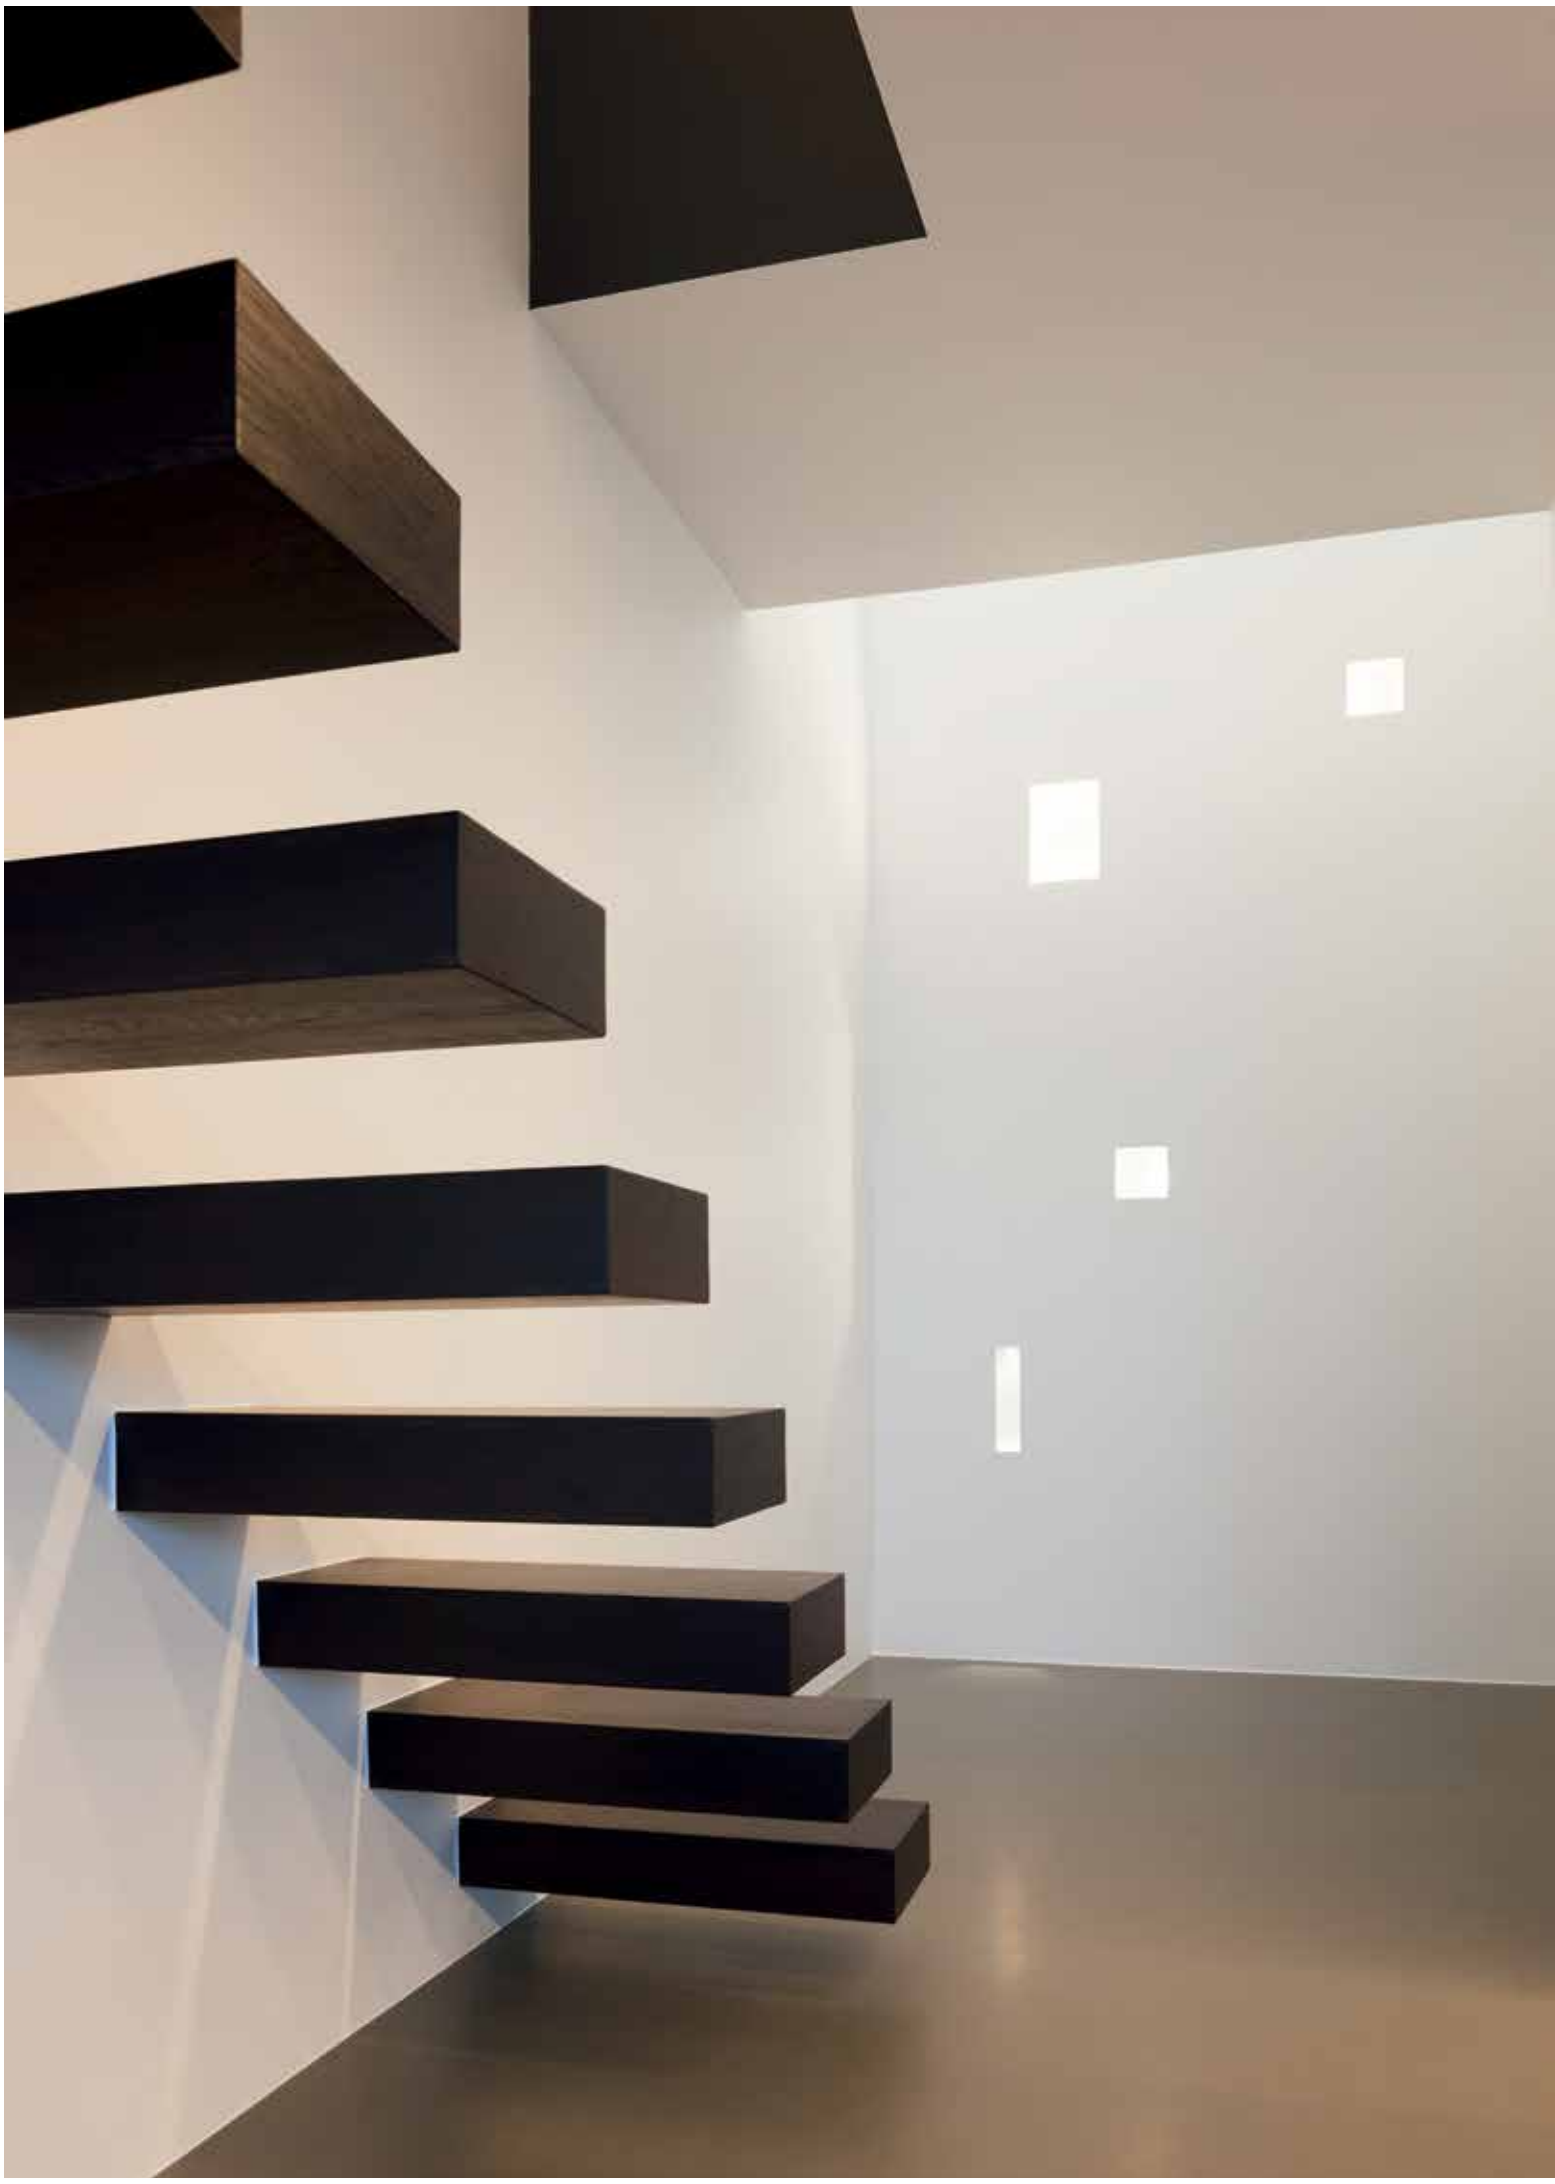



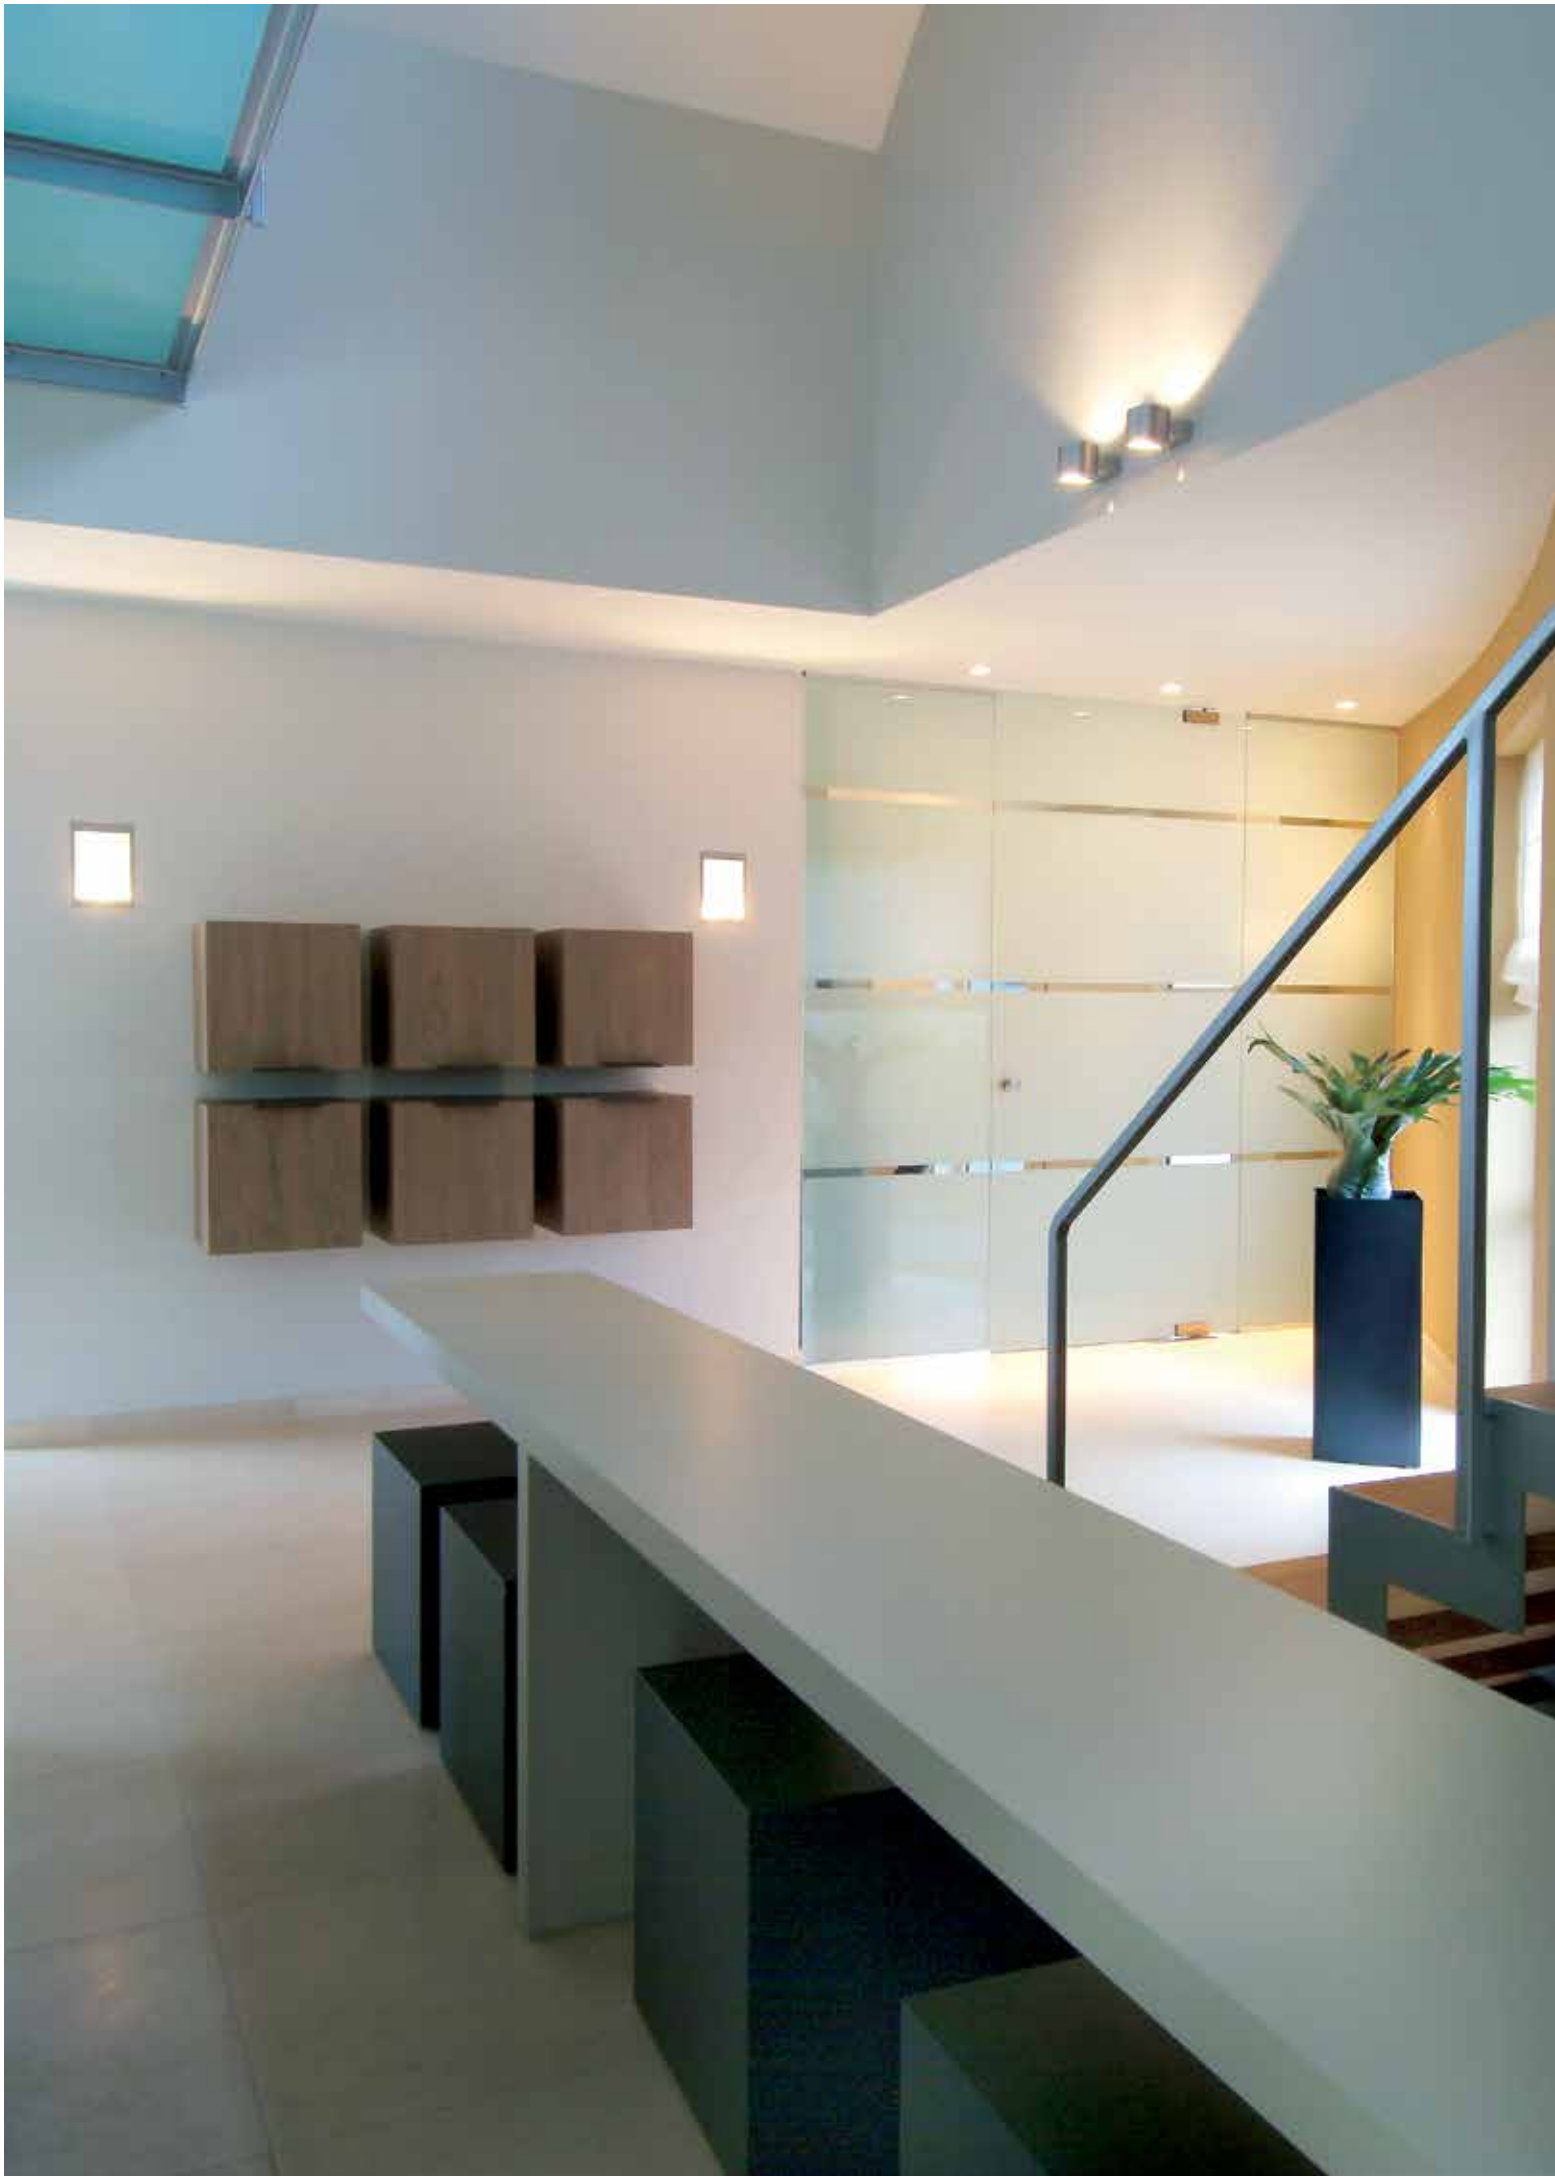


FULL INFO / PAG TEC


Options


INSTALLATION	C A B	
PLASTERKIT 139 **276 04 29**	252 x 347	180 x 270
PLASTERKIT 180 **207 01 180**	190 x 355	155 x 325
CONCRETE BOX 139 **276 04 98**	235 x 310 x 75	250 x 320
CONCRETE BOX 180 **270 11 180**	266 x 355 x 101	185 x 350

Vice Versa

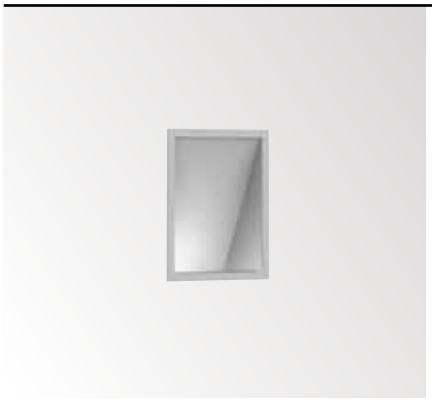







led

131 x 170 x 95 max.20

VICE VERSA F LED ◇
276 07 12 ◇
◇ = A-ANO / B-MMAT
INCL.1 x POWERLED WHITE 3,5W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

1,7 IP20

OPTIONS
PLASTERKIT 180
CONCRETE BOX 180

240 x 165 x 80 max.15

VICE VERSA S TC ◇
276 04 21 ◇
◇ = A
G24d-1 / 230-240V / 50Hz / 1 x 1~KVG
1 x TC-D 10W

1,3 IP20 0,1

OPTIONS
PLASTERKIT 139
CONCRETE BOX 139

131 x 170 x 95 max.20

VICE VERSA F R7s ◇
276 07 01 ◇
◇ = A-ANO / B-MMAT
R7s / 100-240V / 50-60Hz
1 x QT-DE12s max.100W

1,7 IP20 0,5

OPTIONS
PLASTERKIT 180
CONCRETE BOX 180

240 x 165 x 80 max.15

VICE VERSA S R7s ◇
276 04 25 ◇
◇ = A
R7s / 100-240V / 50-60Hz
1 x QT-DE12 max.150W

1,1 IP20 0,5

OPTIONS
PLASTERKIT 139
CONCRETE BOX 139



VICE VERSA F LED B-MMAT

INTERIOR
WALL SURFACE

The indoor wall mounted luminares are designed to direct the light up and/or down. These wall mounted downlights can perform many different functions, ranging from a diffuse illumination of the ceiling to an eyecatching composition or functional corridor lighting. Several wall luminaires in the collection combine led with a lens, resulting in tightly delineated light patterns, providing an expressive touch to your project. A powerful play of light.







interior wall surface

www.deltalight.com/IWS



B-SIDE
INT 450



SKELP ON
INT 463



FOYER
INT 479



B-FLEX
INT 451



ULTRA
INT 465



XILO W
INT 479




TOPIX
INT 455



NEC + ULTRA
INT 467



SPATIO W
INT 481




LOOK IN
INT 459



VISA
INT 471



CAMUS 10
INT 483



PUK
INT 461



GALA
INT 473



CAMUS
INT 483



VIKTOR
INT 463



VISION
INT 474



CANVAS
INT 485



VINCE
INT 487



YUPI
INT 493



T-LINER
INT 503



TIGA
INT 489



BACKSPACE
INT 496



T FLOR 2
INT 505



BOXY WL+
INT 491



FLATSCREEN
INT 497



CONNECT-A
INT 505




ORBIT
INT 492



I-BEAM
INT 499



JETI
INT 507



KUBIC
INT 493



I-LINER
INT 499



BE COOL
INT 509




TRANSIT
INT 493



MICROLINE 30+ WALL
INT 501

BACKSPACE	INT 496
BE COOL	INT 509
B-FLEX	INT 451
BOXY WL+	INT 491
B-SIDE	INT 450
CAMUS	INT 483
CAMUS 10	INT 483
CANVAS	INT 485
CONNECT-A	INT 505
FLATSCREEN	INT 497
FOYER	INT 479
GALA	INT 473
I-BEAM	INT 499
I-LINER	INT 499
JETI	INT 507
KUBIC	INT 493
LOOK IN	INT 459
MICROLINE 30+ WALL	INT 501
NEC+ULTRA	INT 467
ORBIT	INT 492
PUK	INT 461
SKELP ON	INT 463
SPATIO W	INT 481
T FLOR 2	INT 505
TIGA	INT 489
T-LINER	INT 503
TOPIX	INT 455
TRANSIT	INT 493
ULTRA	INT 465
VIKTOR	INT 463
VINCE	INT 487
VISA	INT 471
VISION	INT 474
XILO W	INT 479
YUPI	INT 493



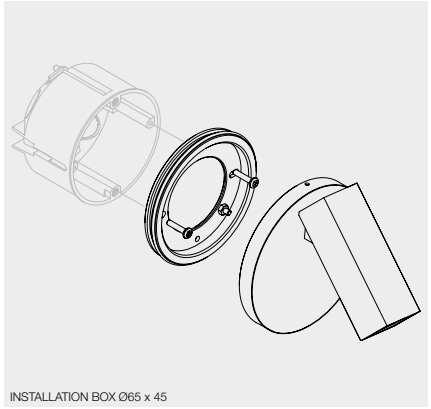

INSTALLATION BOX Ø65 x 45


FULL INFO / PAG TEC


Options

CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 6W **300 90 22 U**	45 x 45 x 25
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY 700mA-DC / 12W **300 90 43**	81 x 40 x 23
LED POWER SUPPLY 700mA-DC / 17W **300 90 93**	111 x 38 x 28
LED POWER SUPPLY 700mA-DC / 36W Dim8 **300 90 123**	133 x 40 x 30
LED POWER SUPPLY 700mA-DC / 40W Dim8 **300 90 7120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

led

B-Side

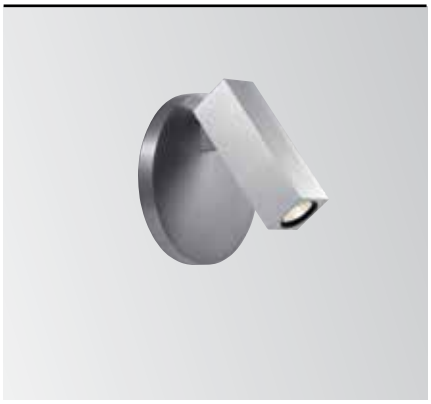



B-SIDE LED NW ◇
304 16 04 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 1-3W / 4000K

B-SIDE LED WW ◇
304 16 02 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 1-3W / 3000K

INCL.1 x LENS 10°
EXCL.LED POWER SUPPLY 350-700mA-DC

CE 0,3 IP20


OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM

DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

led

B-Flex






B-FLEX V2 NW ◇
303 23 14 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 3W / 4000K

B-FLEX V2 WW ◇
303 23 12 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 3W / 3000K

INCL.1 x LENS 25°
INCL.LED POWER SUPPLY 700mA-DC
INCL.1 x SWITCH ON/OFF + DIMMING
110-240V / 50-60Hz

□ CE 0,4 IP20






B-FLEX H2 NW ◇
303 13 14 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 3W / 4000K

B-FLEX H2 WW ◇
303 13 12 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 3W / 3000K

INCL.1 x LENS 25°
INCL.LED POWER SUPPLY 700mA-DC
INCL.1 x SWITCH ON/OFF + DIMMING
110-240V / 50-60Hz

□ CE 0,4 IP20



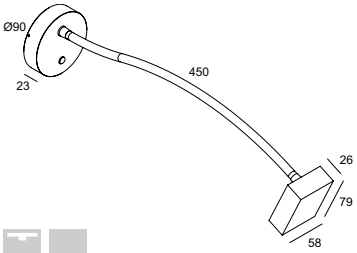

B-FLEX DH2 NW ◇
303 14 24 ◇
◇ = ALU
INCL.2 x POWERLED WHITE 3W / 4000K


B-FLEX DH2 WW ◇
303 14 22 ◇
◇ = ALU
INCL.2 x POWERLED WHITE 3W / 3000K

INCL.2 x LENS 25°
INCL.LED POWER SUPPLY 700mA-DC
INCL.1 x SWITCH ON/OFF + DIMMING
110-240V / 50-60Hz

□ CE 0,6 IP20





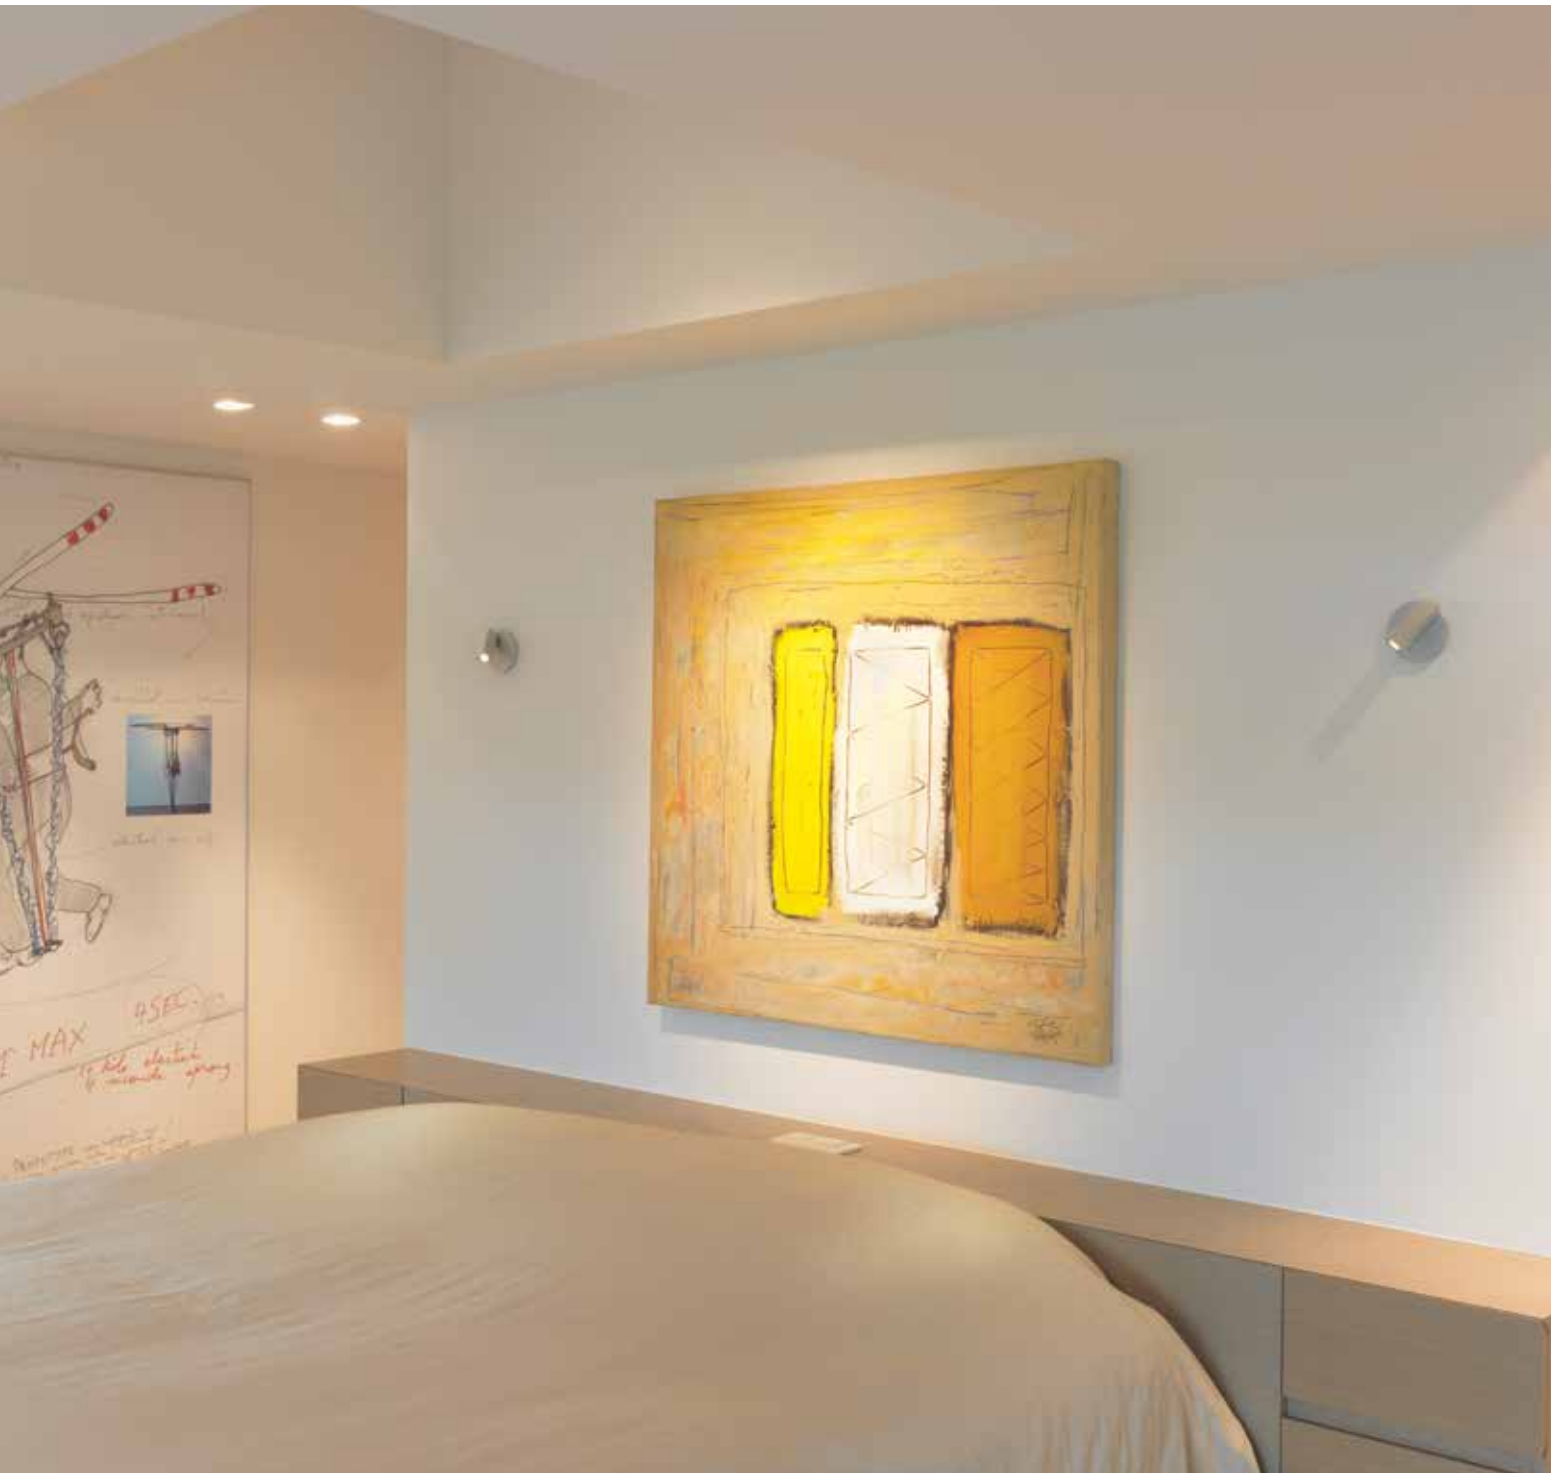



FULL INFO / PAG TEC


Options

INSTALLATION		
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Topix





41 x 38

TOPIX NW ◇
304 17 04 ◇
◇ = A / W
INCL.2 x POWERLED WHITE 1W / 4000K

TOPIX WW ◇
304 17 02 ◇
◇ = A / W
INCL.2 x POWERLED WHITE 1W / 3000K

TOPIX BLUE ◇
304 17 01 BL ◇
◇ = A
INCL.2 x POWERLED BLUE 1W


EXCL.LED POWER SUPPLY 350mA-DC


III CE 0,1 IP20


OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

reddot design award winner 2009

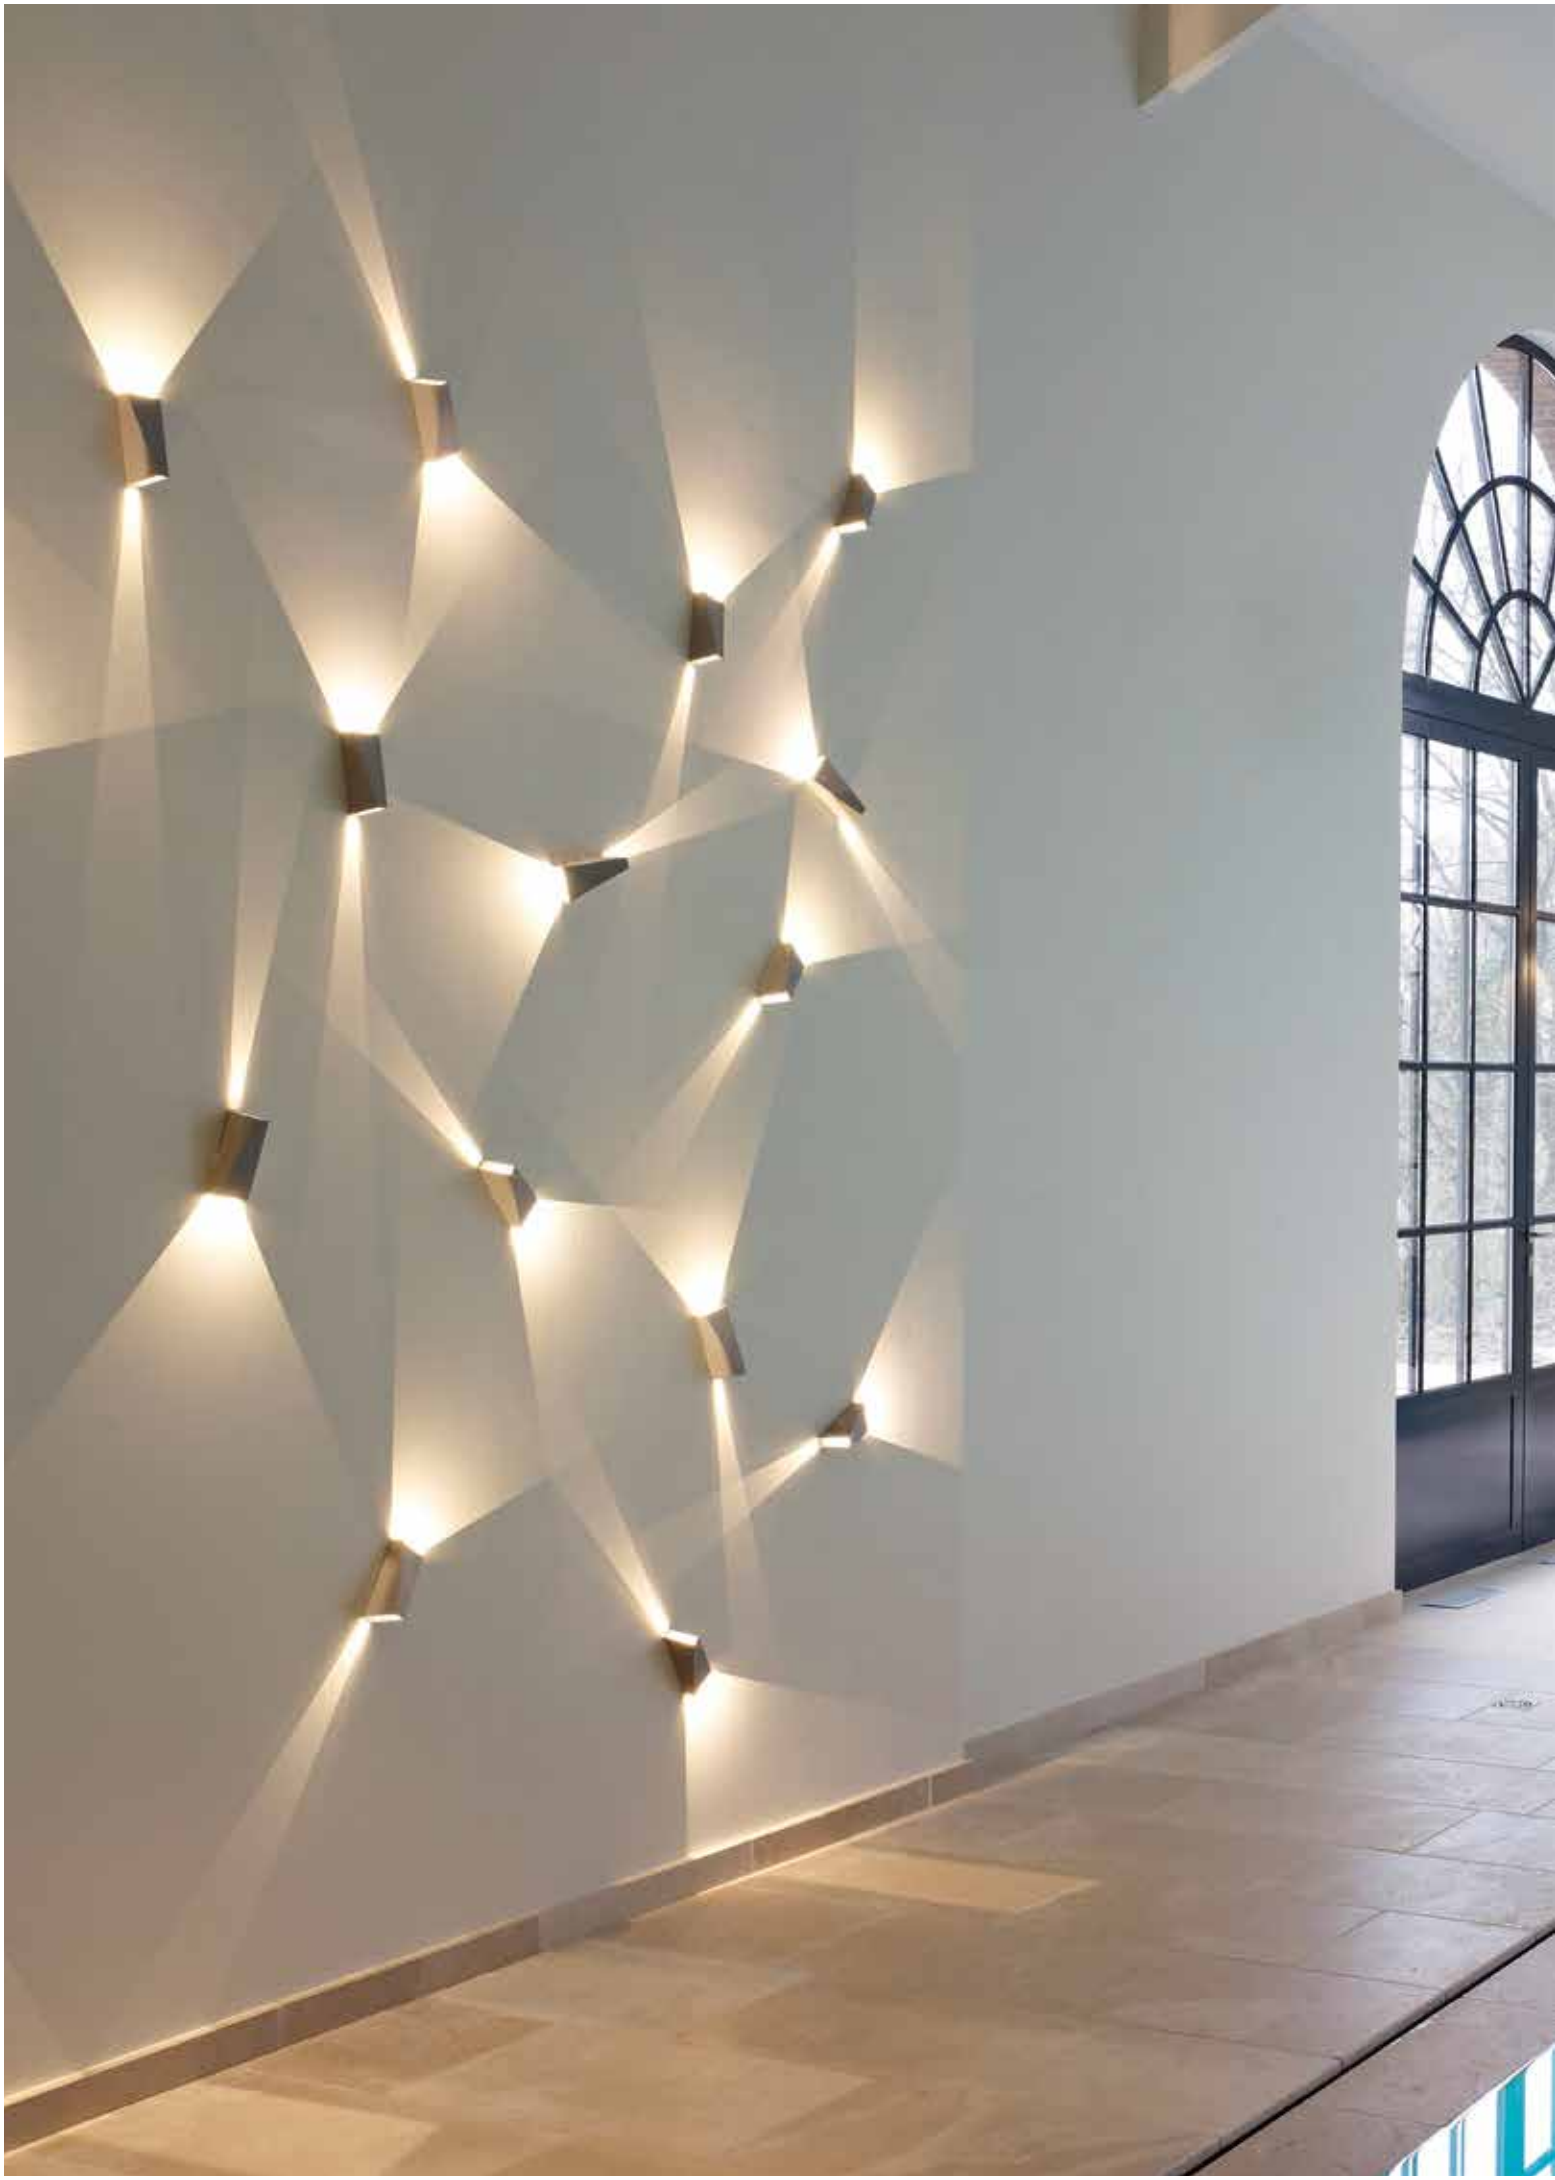

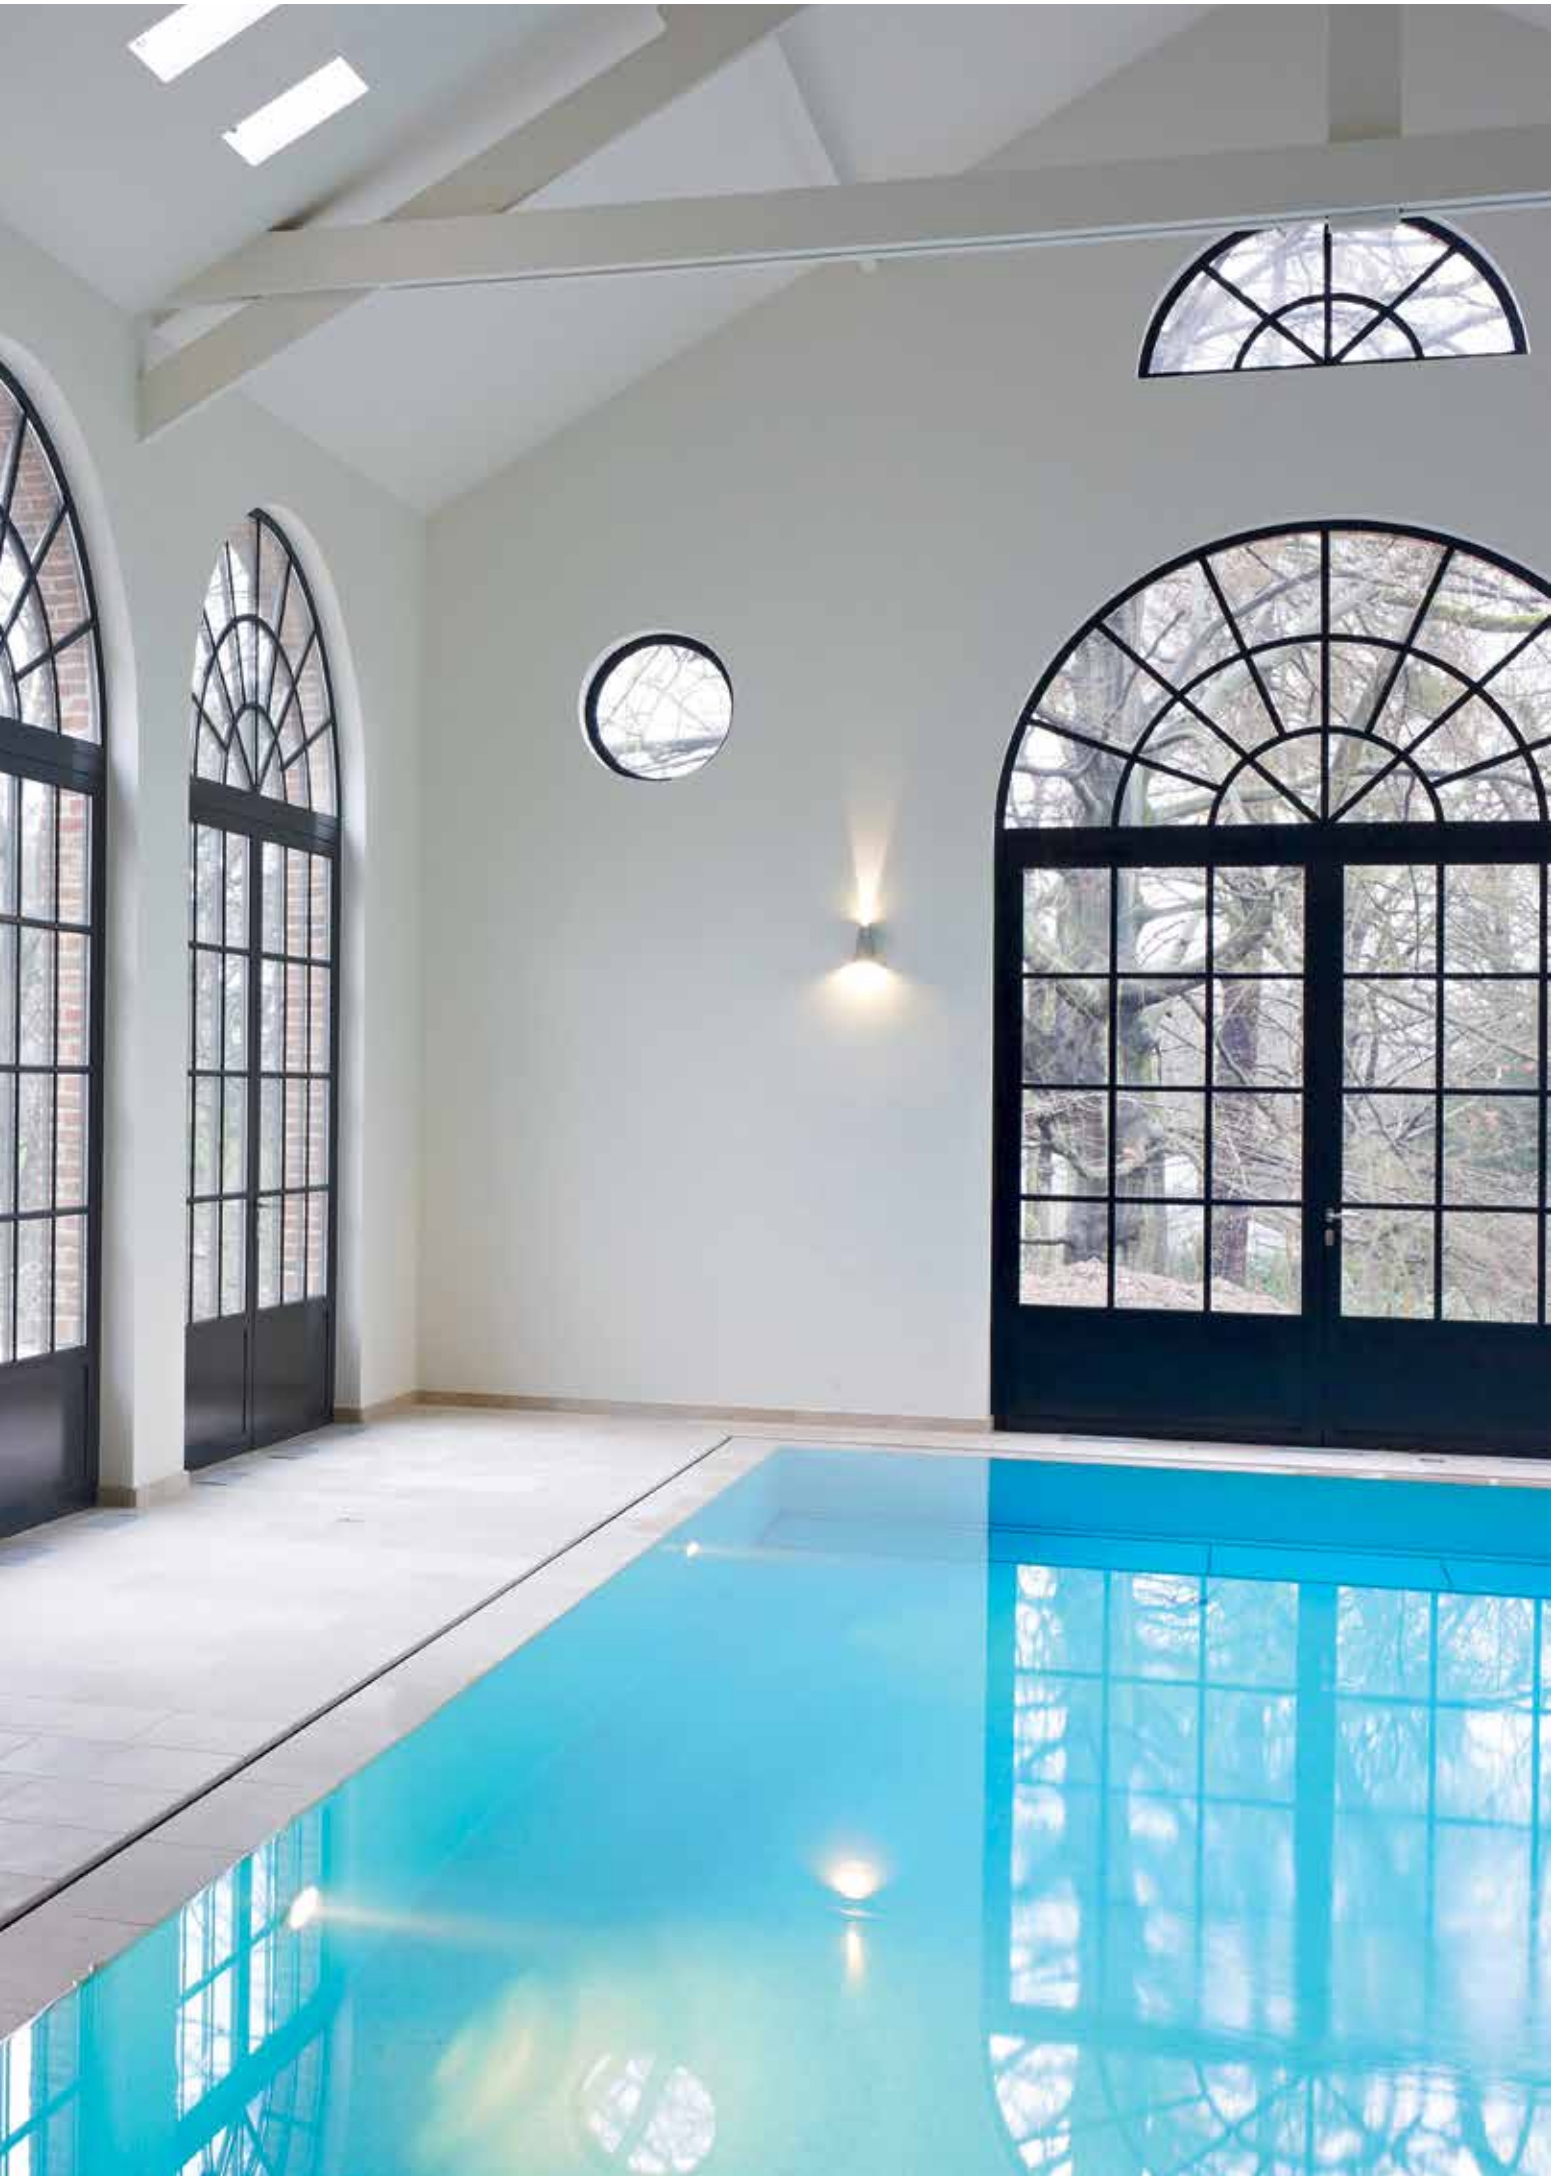

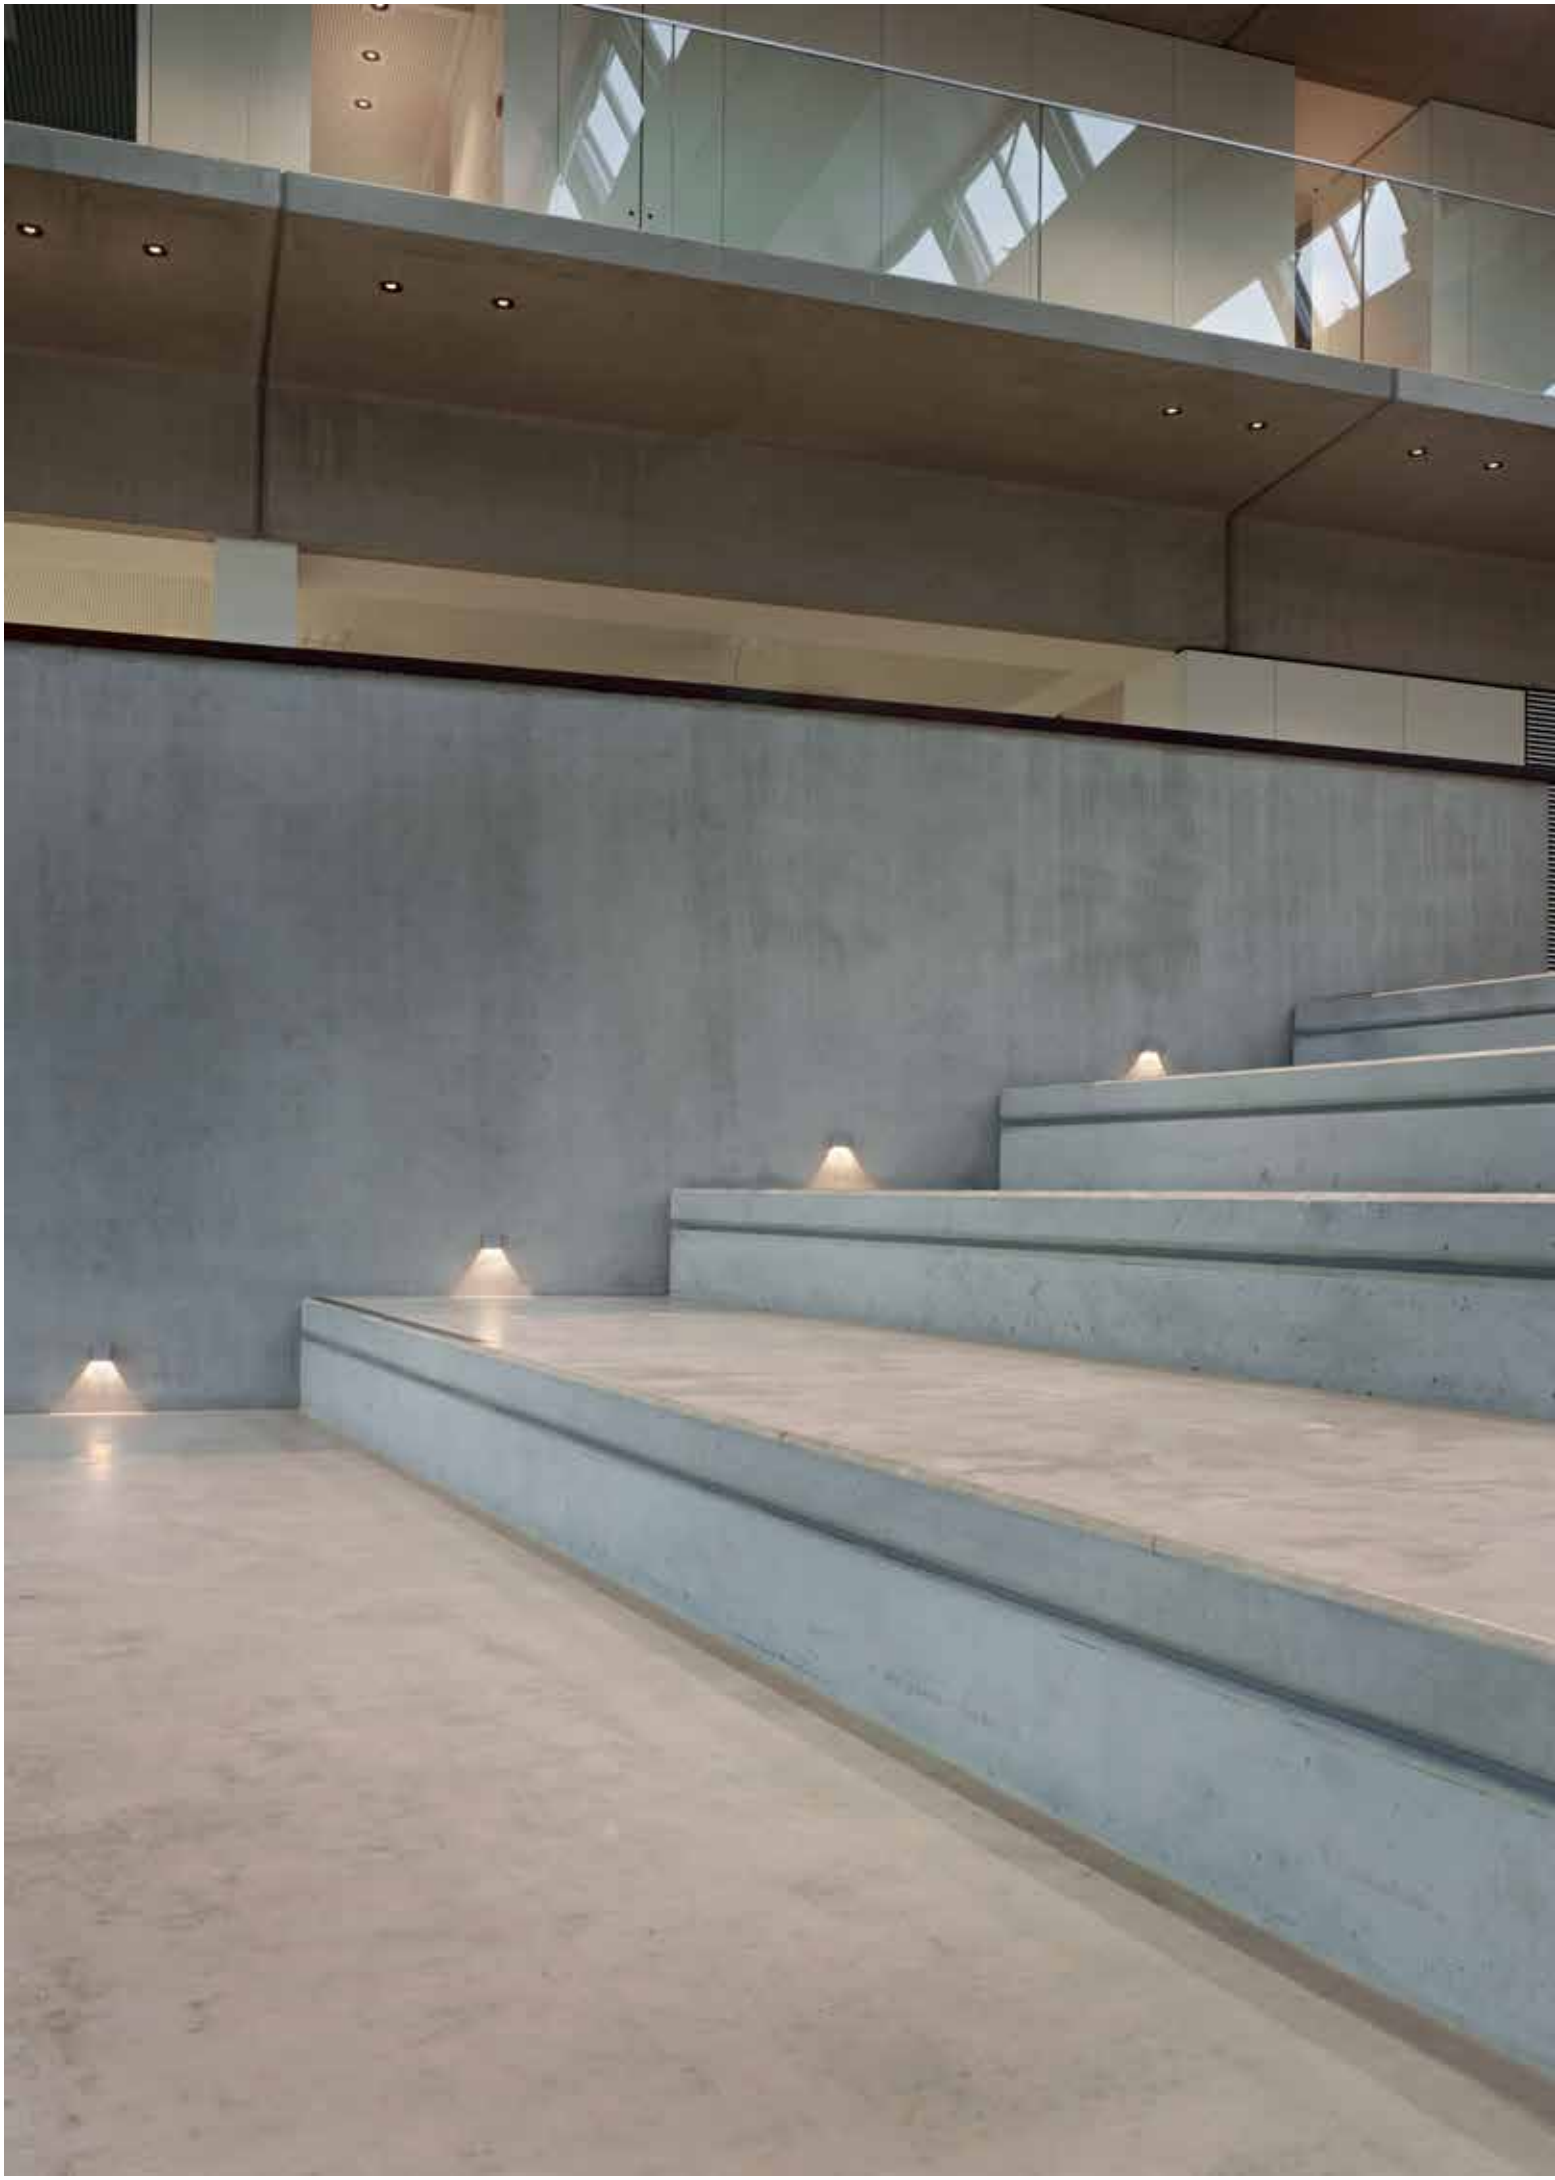

FULL INFO / PAG TEC

Options


INSTALLATION		
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Look In





41 x 38

LOOK IN NW ◇
304 13 04 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 4000K

LOOK IN WW ◇
304 13 02 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

0,1 IP20

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM

DESIGNPREIS 2009
NOMINEE


DE CLIÉNT

FULL INFO / PAG TEC


Options


CONTROL GEAR

LED POWER SUPPLY 14V-DC / 12W
300 90 90

100 x 48 x 28

Puk

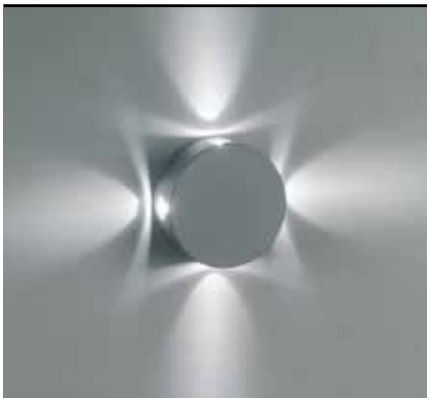



PUK 4 NW ◇
301 00 44 ◇
◇ = A
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 4000K

PUK 4 WW ◇
301 00 05 ◇
◇ = A
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 2800K

PUK 4 BLUE ◇
301 00 04 BL ◇
◇ = A
INCL.4 x LED BLUE Ø5mm / 14V-DC / 0,5W

EXCL.LED POWER SUPPLY 14V-DC / 0,8A

0,1 IP20


OPTIONS
LED POWER SUPPLY 14V-DC / 0,8A





Viktor



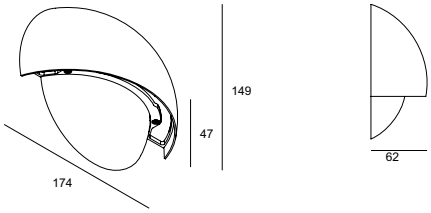


VIKTOR ◇
223 80 12 ◇
◇ = W
INCL.LED CLUSTER 8,4W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

IP65

CRI>80 580lm (8,4W)

Skelp On





SKELP ON LED WW ◇
320 03 12 ◇
◇ = W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

0,7 IP20


CRI>80 525lm (7W)







Ultra X LED



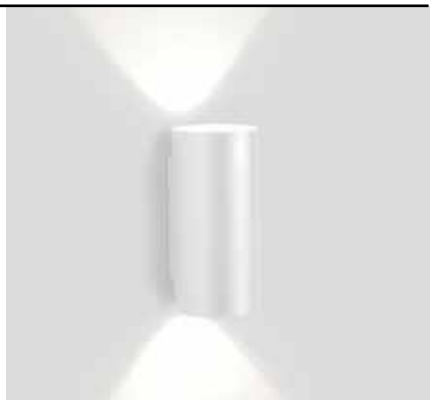





ULTRA X LED WW ◇
279 61 18102 ◇
◇ = A / N / W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


0,6 IP55

ULTRA X DOWN-UP LED WW ◇
279 61 18202 ◇
◇ = A / N / W
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

0,9 IP55

CRI>80 525lm (7W)



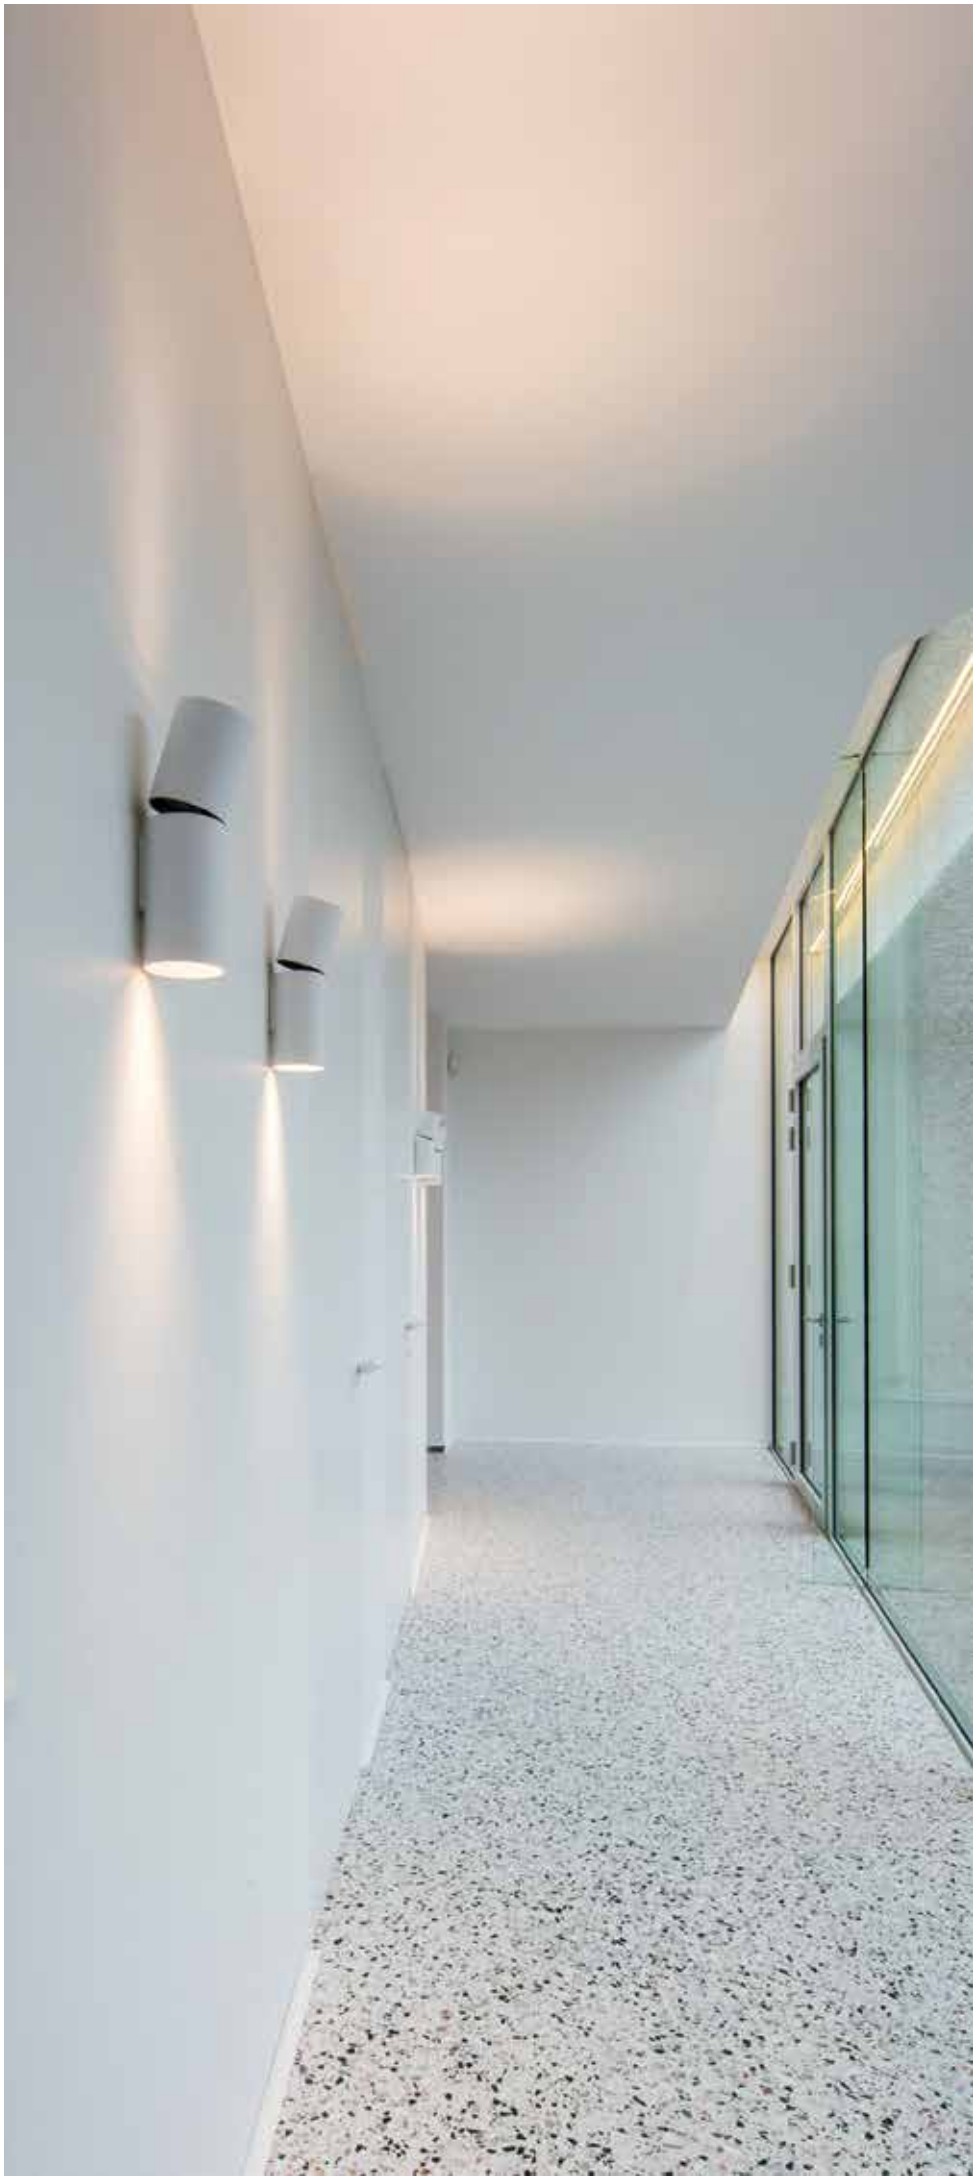



FULL INFO / PAG TEC

Accessories

	C A B	
CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
GLASS SBL 50 **201 30 05**	Ø50	

Ultra W

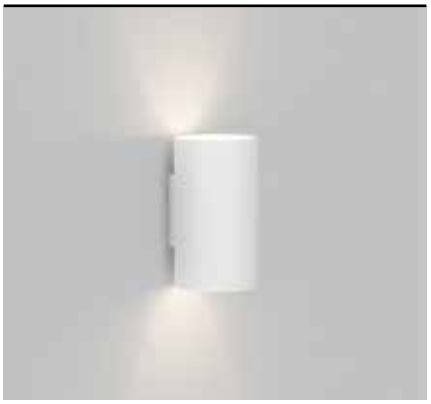





ULTRA W ◇
279 81 40 ◇
◇ = W
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,4 IP20 0,1

Ultra TW

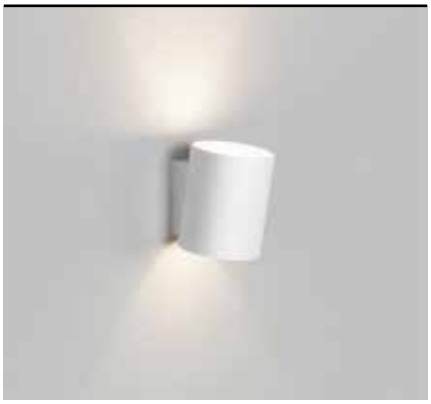




ULTRA TW HP ◇
279 51 40 ◇
◇ = W
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,3 IP20 0,1

Nec+Ultra





NEC+ULTRA 250 Hi ◇
279 52 62 ◇
◇ = W
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W

CE 1,0 IP20 0,5


ACCESSORIES
CLIP 50 + GLASS SBL 50


GOOD DESIGN award


ULTRA TW



ULTRA TW + CLIP 50 + GLASS SBL 50



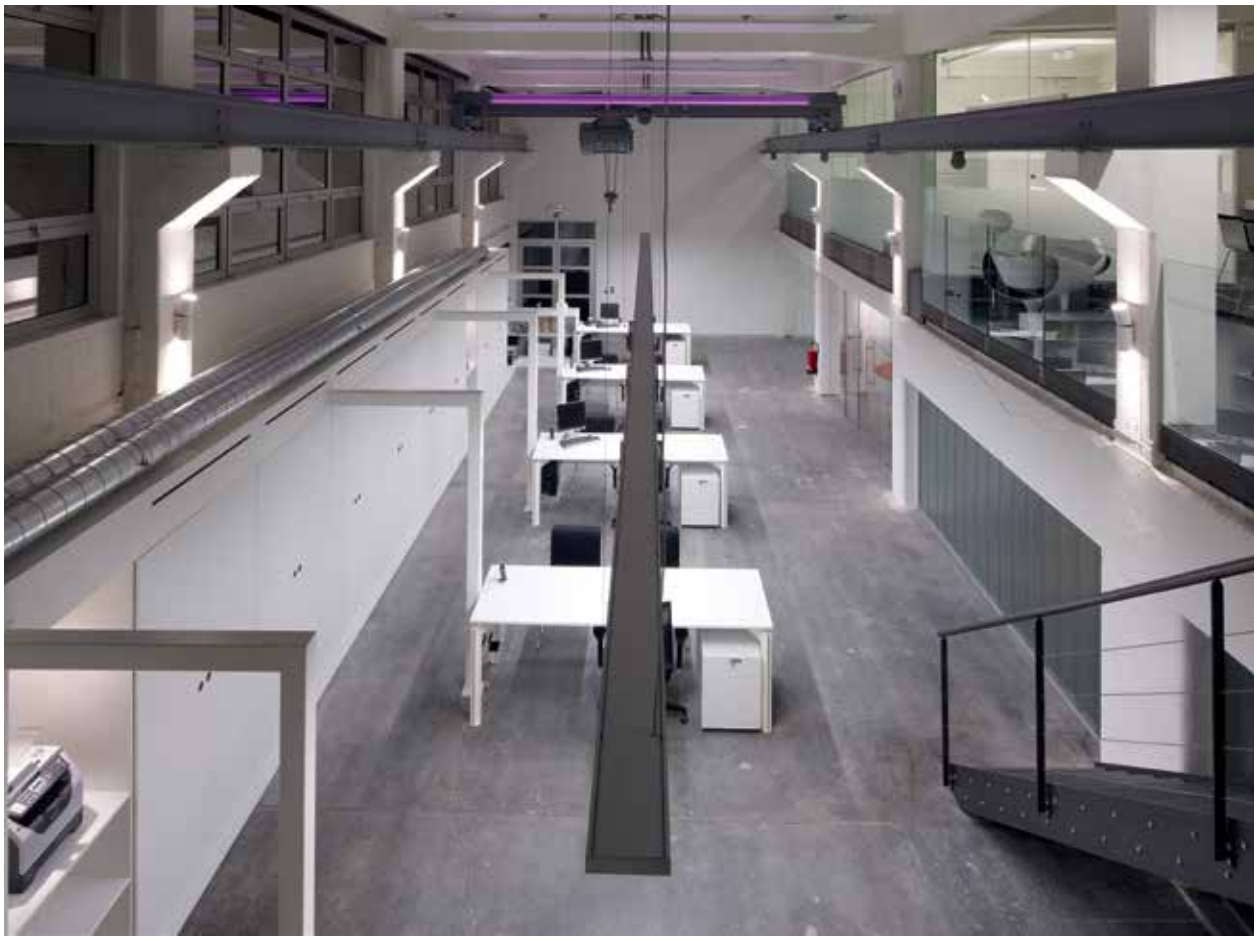


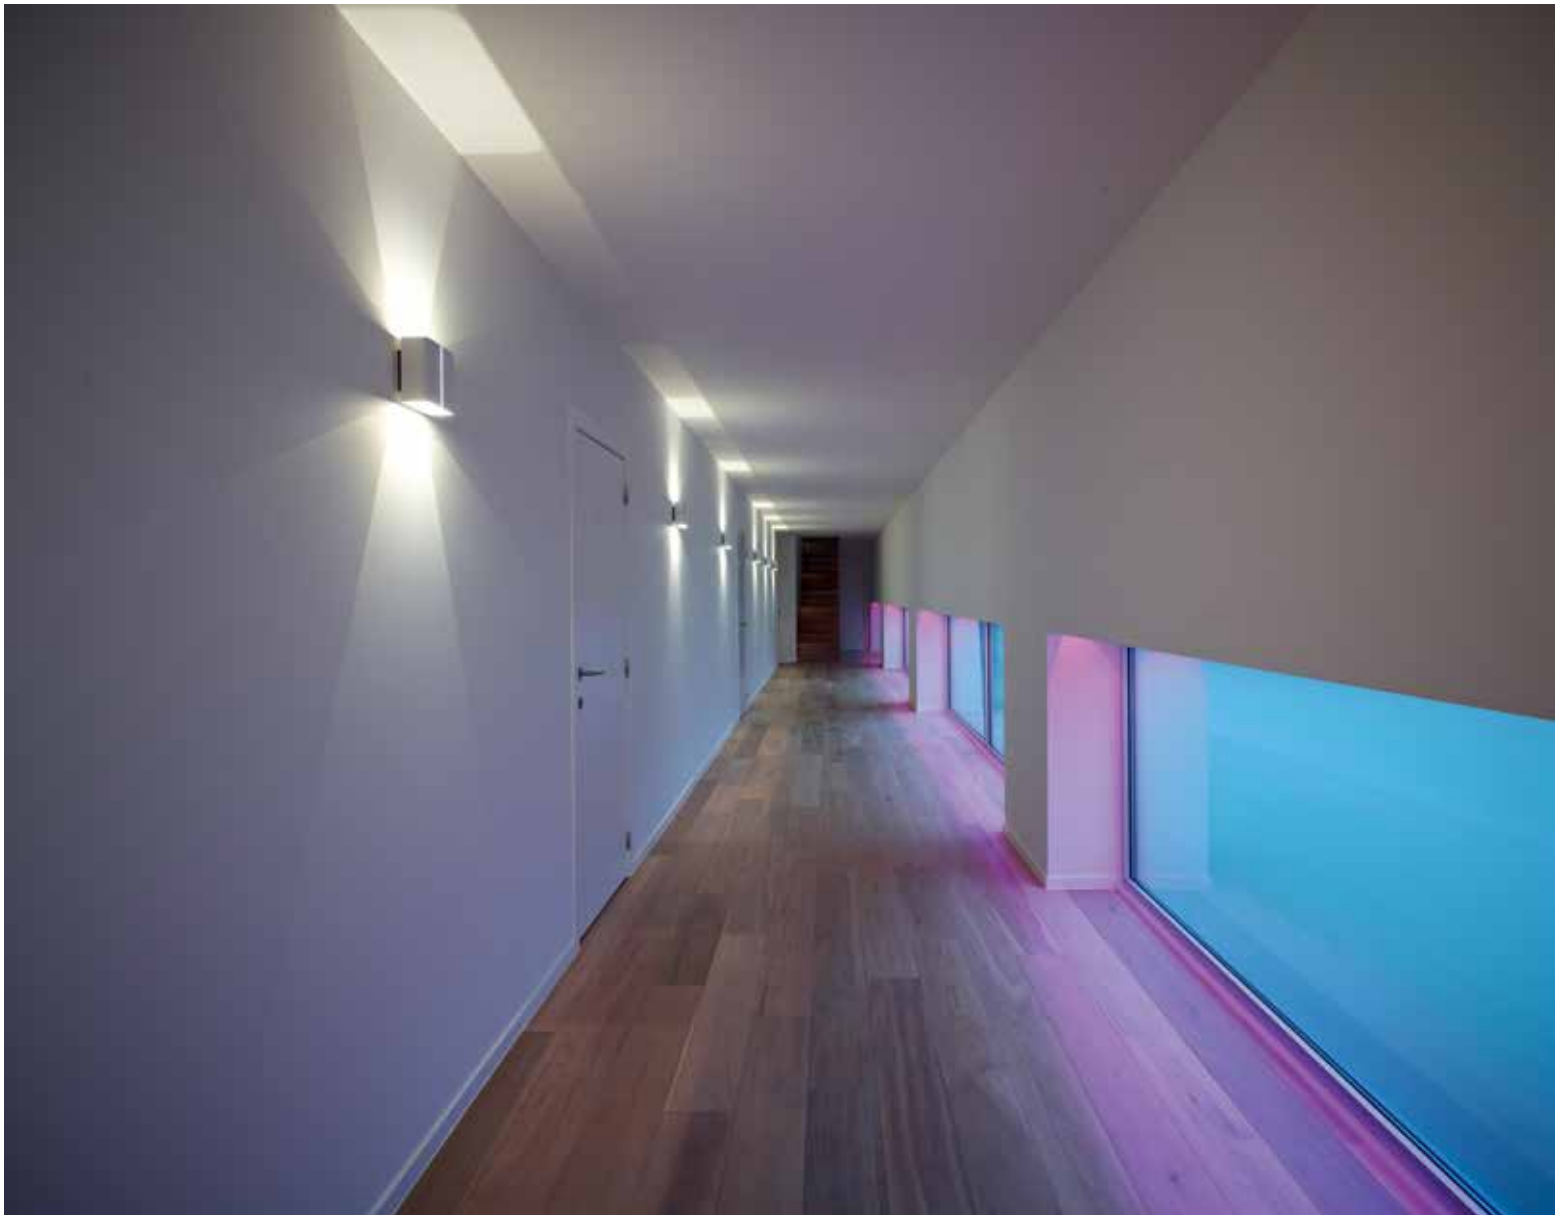


Visa

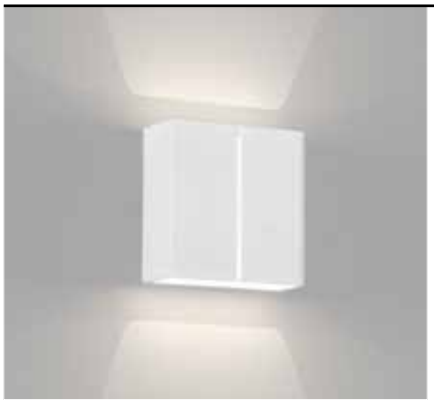







VISA LED WW ◇
275 07 24 ◇
◇ = W
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

0,9 IP55

VISA ◇
275 07 42 ◇
◇ = W
G9 / 100-240V / 50-60Hz
2 x QT14 max.60W


1,3 IP20 0,1





new

led

Gala L OK LED

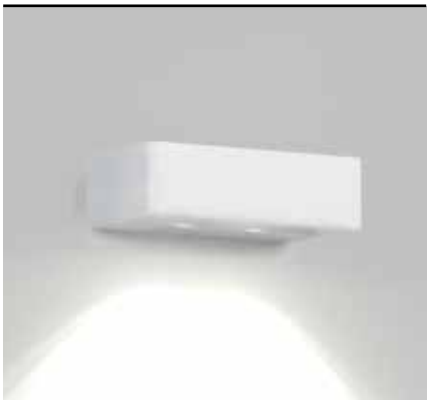





GALA L OK LED WW ◇
275 04 18202 ◇
◇ = W
ADJUSTABLE 20°
INCL.2 x POWERLED WHITE 5W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 240 mA-DC
100-240V / 50-60Hz

CE 1,0 IP55


CRI>80 380lm (5W)

new

led

Gala L LED






GALA L LED WW ◇
275 04 52 ◇
◇ = W
INCL.LED CLUSTER 6,7W / 3000K
INCL.LED POWER SUPPLY 350 mA-DC
220-240V / 50-60Hz


◇ CE 0,8 IP65

CRI>80 500lm (6,7W)

led

Gala LED

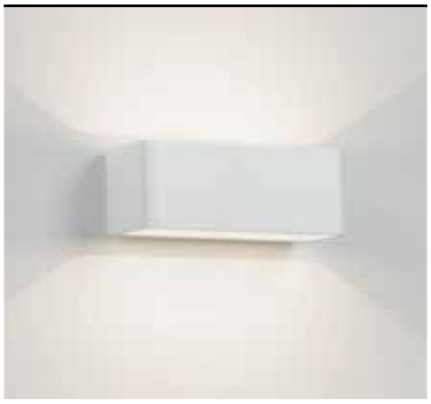




GALA LED WW ◇
275 04 24 ◇
◇ = W
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

◇ CE 0,6 IP20


Gala






GALA ◇
275 04 01 ◇
◇ = ALU / W
R7s / 100-240V / 50-60Hz
1 x QT-DE12s max.150W

◇ CE 0,5 IP20 0,5

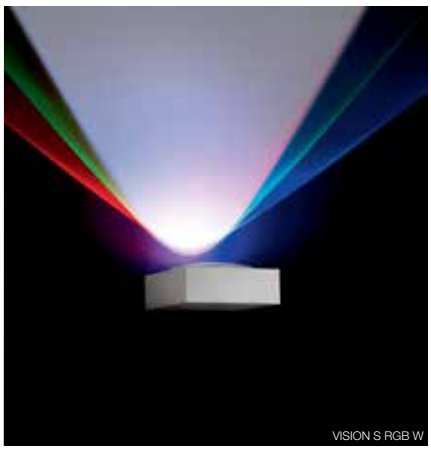
VISION S RGB W



VISION W-C

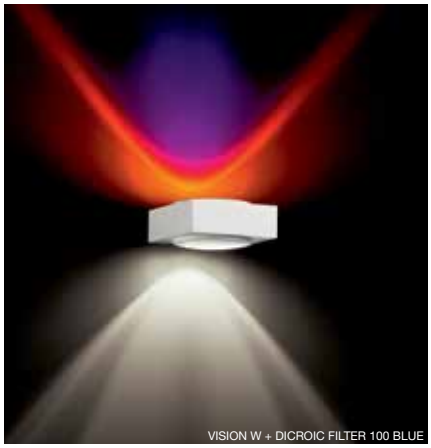

VISION W + DICROIC FILTER 100 BLUE

FULL INFO / PAG TEC

Accessories

DICROIC FILTER 100 Ø100
201 38 11 ●
max. 40W

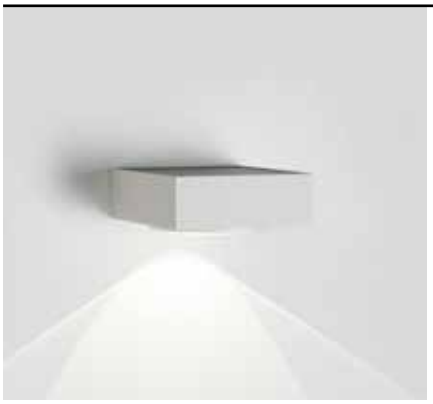





VISION S LED WW ◇
278 24 22 ◇
◇ = W / W-C
INCL.1 x LENS
INCL.2 x POWERLED WHITE 2W / 3000K
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz

IP20

Vision S

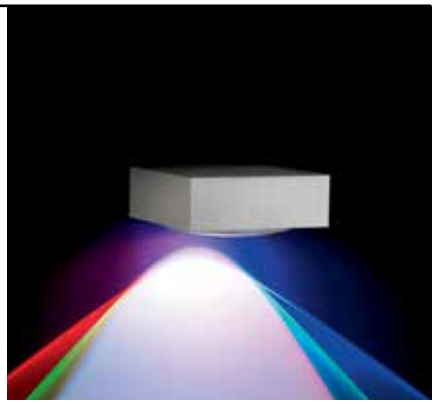





VISION S RGB ◇
278 24 33 ◇
◇ = W / W-C
INCL.1 x LENS
INCL.3 x POWERLED 2W / R - G - B
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz

CE 0,8 IP20

Vision

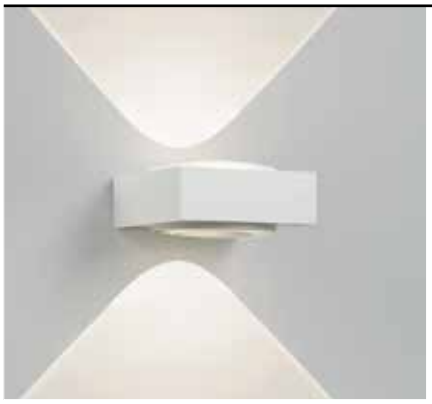




led


VISION LED NW ◇
278 25 24 ◇
◇ = W / W-C
INCL.2 x POWERLED WHITE 2W / 4000K

VISION LED WW ◇
278 25 22 ◇
◇ = W / W-C
INCL.2 x POWERLED WHITE 2W / 3000K

INCL.2 x LENS
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz

CE 0,9 IP20

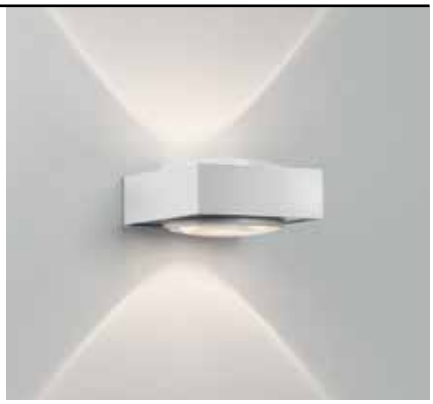



VISION ◇
278 25 40 ◇
◇ = W / W-C
INCL.2 x LENS
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,9 IP20 0,5

ACCESSORIES
DICROIC FILTER 100 BLUE



GOOD DESIGN award







FULL INFO / PAG TEC

Options


INSTALLATION	
COVERSET R ◇	
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	


FOYER BLACK


FOYER BLACK-GOLD

Foyer


FOYER WHITE



FOYER WHITE
273 41 27

FOYER BLACK
273 41 27 BK


FOYER BLACK-GOLD
273 41 27 BK-GD

E27Ls / 100-240V / 50-60Hz
1 x TC-TSE 15W
0,7 IP20 0,1

OPTIONS
COVERSET S

Xilo W





XILO W 250 Hi ◇
282 80 255 ◇
◇ = C
INCL.2 x CONE 111 C
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W
0,9 IP20 0,5

OPTIONS
COVERSET R 90-100







Spatio W









SPATIO W HP ◇
275 05 40 ◇
◇ = A
INCL. REFLECTOR WFL-100°
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W


IP20 0,5


SPATIO W R7s ◇
275 05 01 ◇
◇ = A
INCL. REFLECTOR WFL-100°
R7s / 100-240V / 50-60Hz
1 x QT-DE12s 100W

IP20 0,5



Camus 10

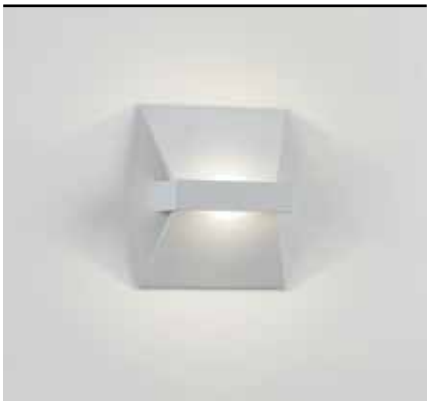




CAMUS 10 LED ◇
275 08 4102 ◇
◇ = W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


1,0 IP20

CRI>80 525lm

GREEN GOOD DESIGN award

Camus

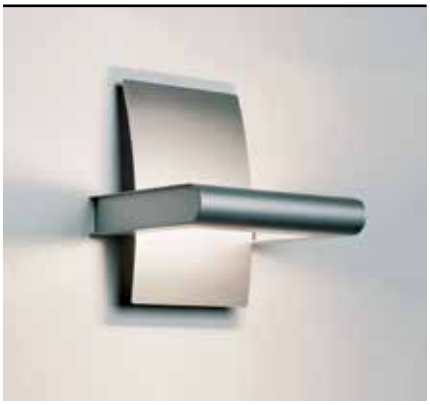





CAMUS ◇
275 01 01 ◇
◇ = ANO
R7s / 100-240V / 50-60Hz
1 x QT-DE12 max.150W


0,4 IP20 0,5



CAMUS 10 W

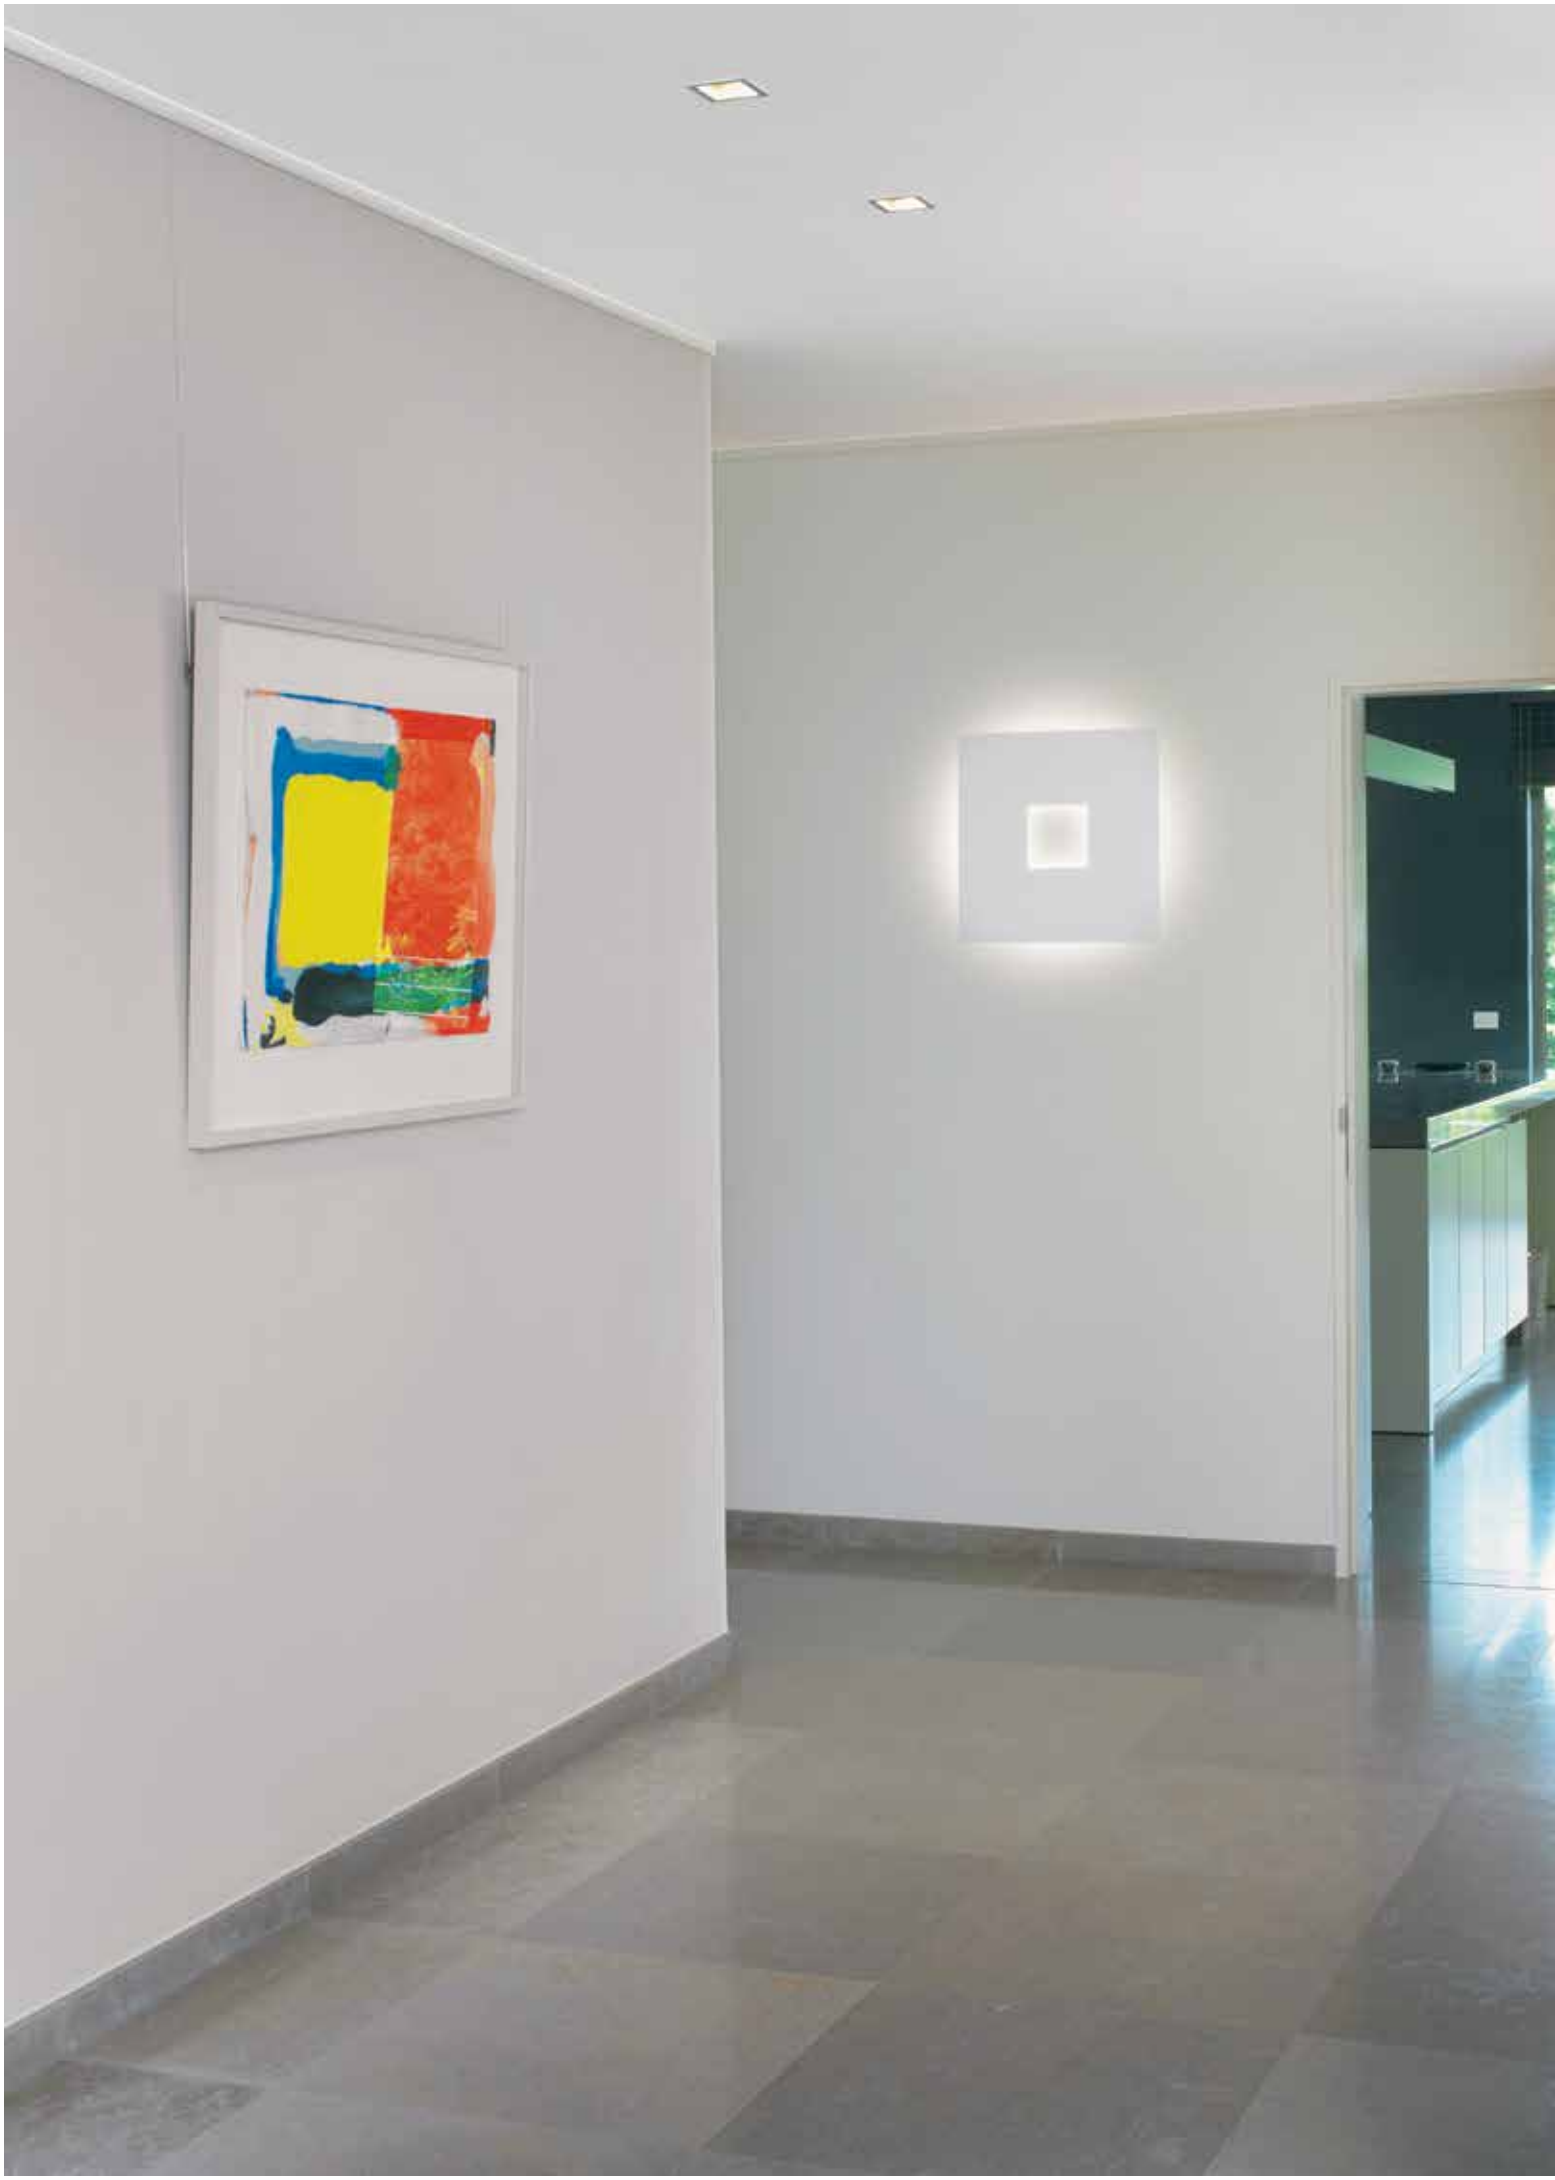


Canvas

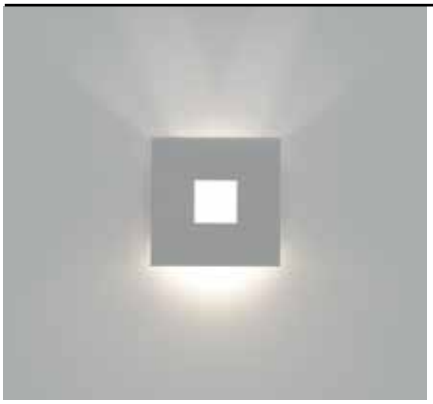

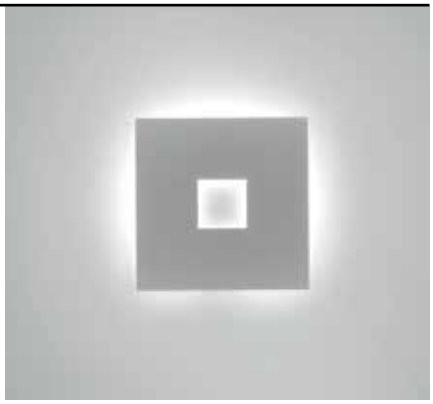





CANVAS ◇
286 45 42 ◇
◇ = W
G9 / 100-240V / 50-60Hz
1 x QT14 max.40W
1,5 IP20 0,1

CANVAS 122 ◇
286 45 22 ◇
◇ = W
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 22W
2,5 IP20 0,1



CANVAS W




new

led

Vince

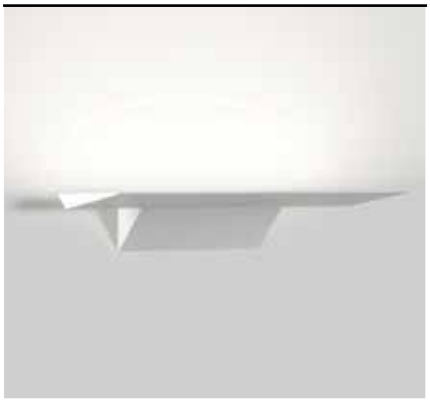

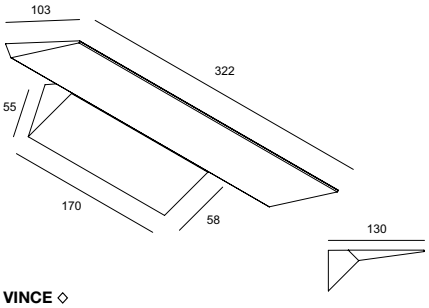

VINCE ◇
275 10 12 ◇
◇ = W
INCL.LED CLUSTER 8,5W / 3000K / 705lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz


CE 1,1 IP20 0,1










Tiga LED BS

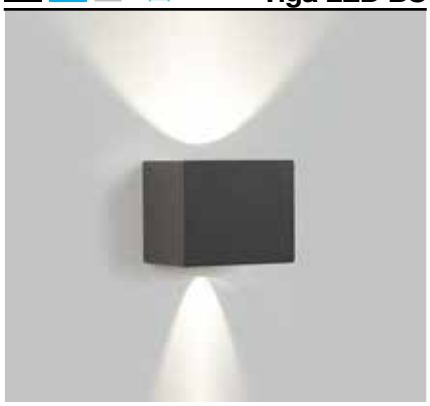



Tiga LED

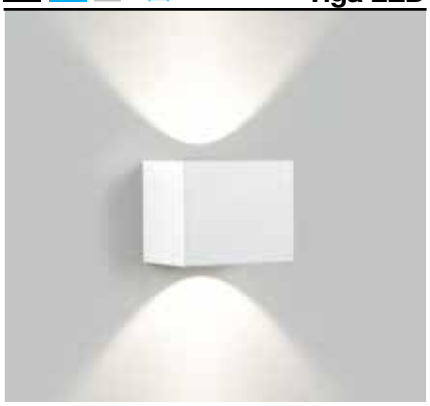





	CRI > 80	**CRI > 80**
4000K		
	ON REQUEST	ON REQUEST
3000K	660 lm	660 lm
	TIGA LED BS 3024 ◇ **223 752 8102** ◇ ◇ = A / G / W	**TIGA LED 3024** ◇ **223 751 8102** ◇ ◇ = A / G / W
2700K	620 lm	620 lm
	TIGA LED BS 2724 ◇ **223 752 8103** ◇ ◇ = A / G / W	**TIGA LED 2724** ◇ **223 751 8103** ◇ ◇ = A / G / W
	INCL.1 x POWERLED WHITE 7W / 3000K INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz CE 1,4 IP65	INCL.1 x POWERLED WHITE 7W / 3000K INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz CE 1,4 IP65





Boxy WL+

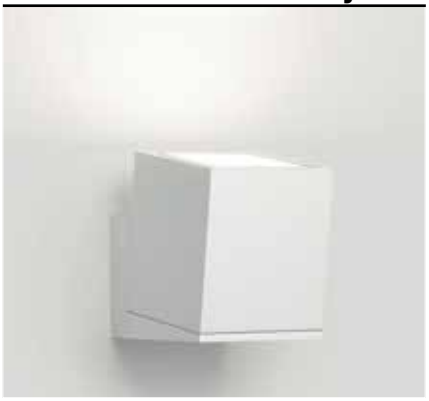



	CRI > 80
4000K	
	ON REQUEST
3000K	660 lm
REFLECTOR FL-33°	**BOXY WL+ LED 3033** ◇ **251 69 8122** ◇ ◇ = W-W
2700K	620 lm
REFLECTOR FL-33°	**BOXY WL+ LED 2733** ◇ **251 69 8123** ◇ ◇ = W-W

INCL.1 x POWERLED WHITE 7W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

0,9 IP20 IP53



FULL INFO / PAG TEC

Options

INSTALLATION

COVERSET S ◇

204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90


◇ = ANO / B / W

CONTROL GEAR

LED POWER SUPPLY 350mA-DC / 6W 300 90 104	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W 300 90 91	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 300 90 3112	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W 300 90 913	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W 300 90 112	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 20W 300 90 92	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 300 90 5120	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER 300 90 914	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 300 90 64	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 300 90 61	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 300 90 60	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 300 90 63	111 x 79 x 22

Orbit







ORBIT ◇
271 11 40 ◇
◇ = ALU / C
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W
IP20

OPTIONS
COVERSET S 80-90

AWARD
DESIGN PLUS
light+building

Kubic

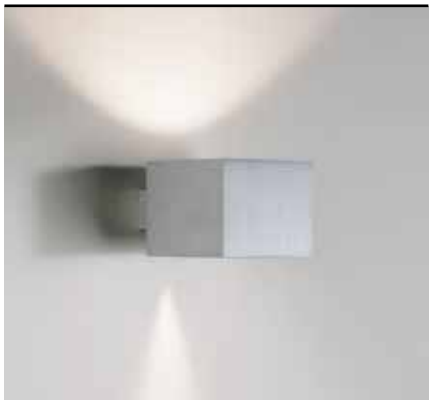





KUBIC ◇
271 41 80 ◇
◇ = ALU
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,5 IP20 0,5

OPTIONS
COVERSET S 62-80-90

Transit

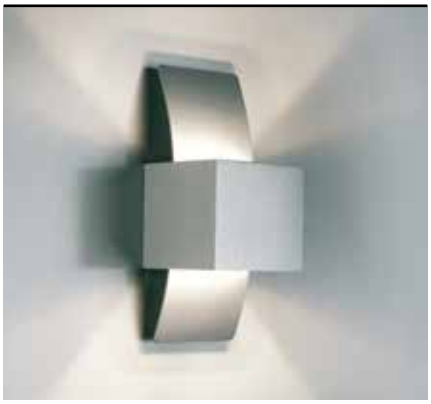





TRANSIT ◇
275 03 40 ◇
◇ = ALU
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,6 IP20 0,5

Yupi

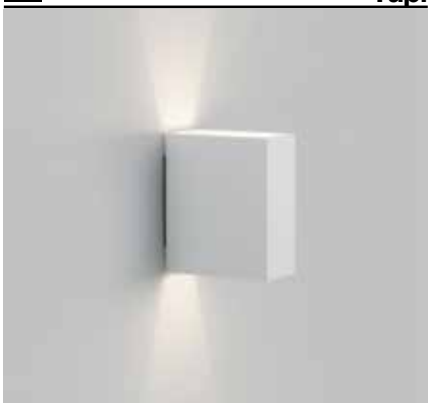



YUPI ◇
279 92 40 ◇
◇ = A / W
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,4 IP20 0,1

led

YUPI X LED WW ◇
279 91 22 ◇
◇ = A
INCL.2 x POWERLED WHITE 1-2W / 3000K
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,5 IP65

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM




Martin's Hotel






Backspace





BACKSPACE 26 EVG ◇
274 80 26 E ◇
◇ = ANO
INCL.1 x BACKSPACE 26 PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-DEL 26W
CE 1,1 IP20 0,1




BACKSPACE 36 EVG ◇
274 80 36 E ◇
◇ = ANO
INCL.1 x BACKSPACE 36 PC SBL
2G11 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-L 36W
CE 1,7 IP20 0,1




Flatscreen





FLATSCREEN 236 ◇
274 85 236 ◇
◇ = INOX
INCL.1 x FLATSCREEN 236 PC UP
INCL.1 x FLATSCREEN 236 PC OPAL DOWN
INOX 316 L
2G11 / 230-240V / 50Hz / 2 x 1~KVG
2 x TC-L 36W
CE 2,9 IP40 0,1




FLATSCREEN 255 ◇
274 85 255 ◇
◇ = INOX
INCL.1 x FLATSCREEN 255 GLASS UP
INCL.1 x FLATSCREEN 255 GLASS SBL DOWN
INOX 316 L
2G11 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-L 55W
CE 3,6 IP40 0,1


FLATSCREEN 255 INOX



i-Beam






i-BEAM 124 ◇
274 55 24 ◇
◇ = C / W
INCL.1 x PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 24W

0,9 IP44 0,1

i-Liner



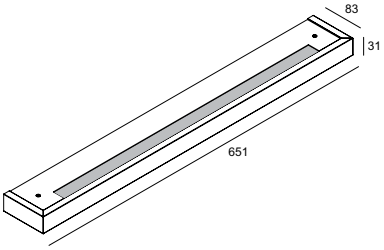

i-LINER 124 ◇
276 64 24 ◇
◇ = ALU-W / W-W / C-W
INCL. 1 x PC TUBE SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 24W


1,4 IP44 0,1




new

Microline 30+ Wall






MICROLINE 30+ WALL 124 ◇
347 02 124 ◇
◇ = ANO / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 14/24W
1,8 IP20 0,1

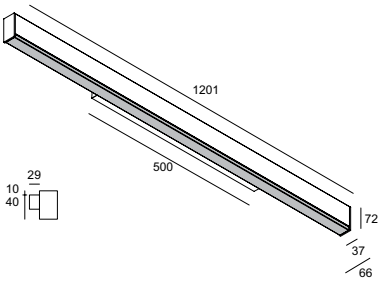

MICROLINE 30+ WALL 154 ◇
347 02 154 ◇
◇ = ANO / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W
2,6 IP20 0,1



T-Liner

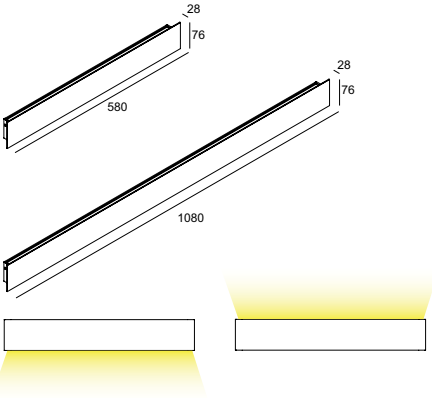

T-LINER 50 WW ◇
270 60 052 ◇
◇ = W

INCL.1 x LED CLUSTER 9,6W / 3000K / 631lm
INCL.1 x LED POWERSUPPLY
100-240V / 50-60Hz


CE 0,8 IP20 0,1

T-LINER 100 WW ◇
270 60 102 ◇
◇ = W

INCL.1 x LED CLUSTER 19,2W / 3000K / 1262lm
INCL.1 x LED POWERSUPPLY
100-240V / 50-60Hz

CE 1,5 IP20 0,1

T-Liner down-up

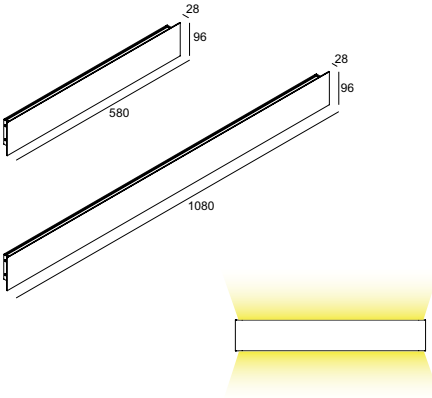

T-LINER 50 DOWN-UP WW ◇
270 61 052 ◇
◇ = W

INCL.2 x LED CLUSTER 9,6W / 3000K / 631lm
INCL.1 x LED POWERSUPPLY
100-240V / 50-60Hz

CE 1,0 IP20 0,1


T-LINER 100 DOWN-UP WW ◇
270 61 102 ◇
◇ = W


INCL.2 x LED CLUSTER 19,2W / 3000K / 1262lm
INCL.2 x LED POWERSUPPLY
100-240V / 50-60Hz

CE 1,9 IP20 0,1




T Flor 2

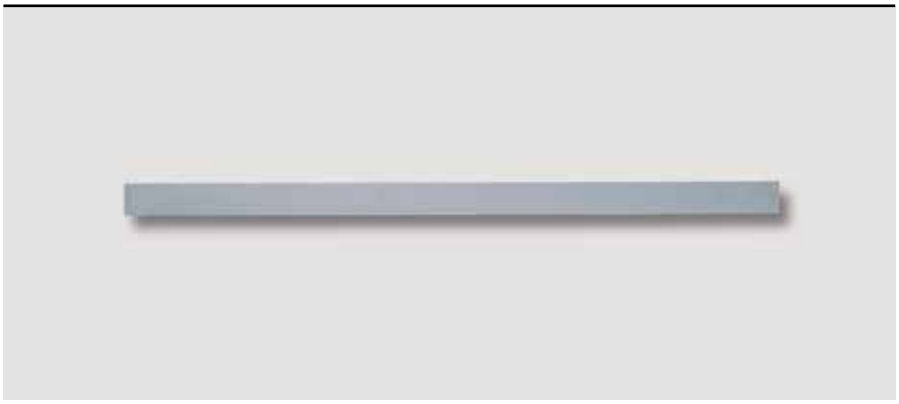



T FLOR 2 - 224 ◇
270 50 24 ◇
◇ = ANO / W
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 14/24W
1,1 IP20 0,1

T FLOR 2 - 224 EVG DIM 6 ◇
270 50 24 ED6 ◇
◇ = ANO / W
INCL.1 x SWITCH ON/OFF + DIMMING
DIMMING BY SWITCH DIM
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 14/24W
1,1 IP20 0,1




T FLOR 2 - 254 ◇
270 50 54 ◇
◇ = ANO / W
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
2,0 IP20 0,1


T FLOR 2 - 254 EVG DIM 6 ◇
270 50 54 ED6 ◇
◇ = ANO / W
INCL.1 x SWITCH ON/OFF + DIMMING
DIMMING BY SWITCH DIM
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 28/54W
2,0 IP20 0,1

Connect-A







CONNECT-A 224 ◇
274 14 24 ◇
◇ = ANO
INCL.2 x CONNECT 24 PC SBL
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 14/24W
2,0 IP20 0,1




CONNECT-A 254 ◇
274 14 54 ◇
◇ = ANO
INCL.2 x CONNECT 54 PC SBL
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
3,4 IP20 0,1


CONNECT-A 254 EVG DIM 2 ◇
274 14 54 ED2 ◇
◇ = ANO
INCL.2 x CONNECT 54 PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 | 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 28/54W
3,4 IP20 0,1

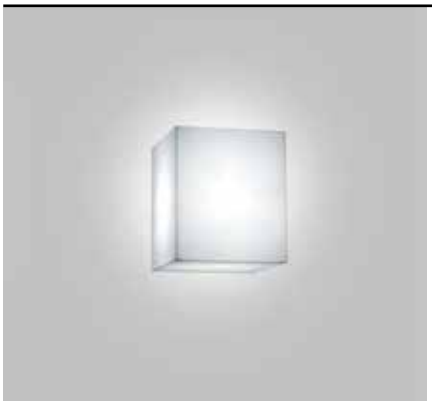




JETI SW
271 61 23
E27Ls / 100-240V / 50-60Hz
1 x A60 max.60W
1 x TC-TSE max.23W
1 x TCA-SE max.20W
CE 1,5 IP40 0,1

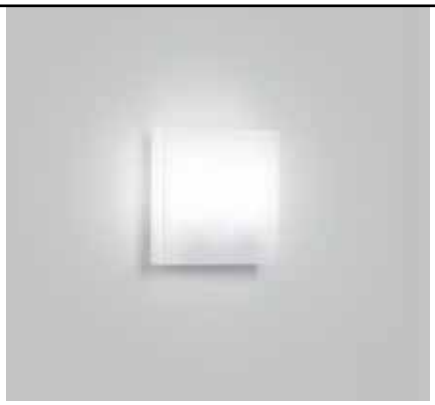





JETI PLANO L 218
271 52 218
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 18W
CE 0,9 IP44 0,1


Jeti

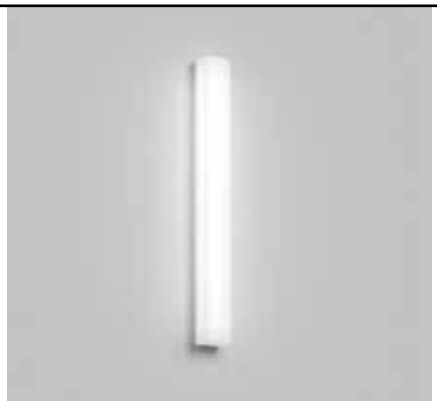




JETI L 124
271 51 124
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16-S 24W
0,8 IP20 0,1

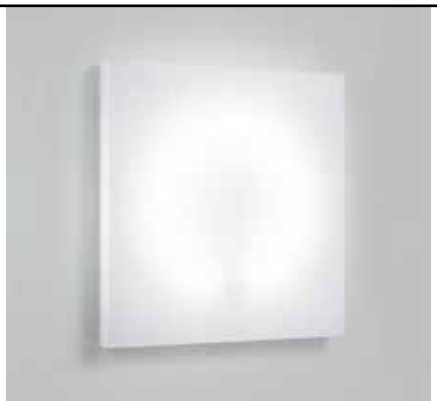



JETI PLANO L 160
271 52 160
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 60W
5,4 IP20 0,1






JETI PLANO L 424
271 52 424
G5 / 220-240V / 0 I 50-60Hz / 1 x 4~EVG
4 x T16 24W
5,9 IP20 0,1







Be Cool®




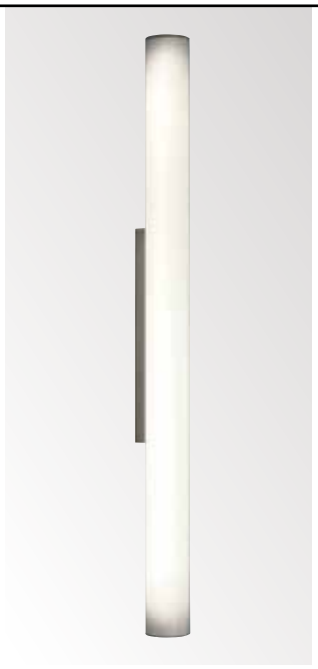







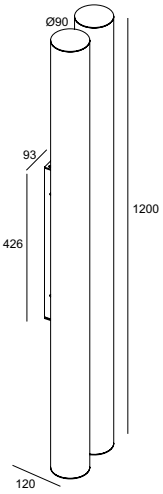

BE COOL® 155 ◇
274 25 55 ◇
◇ = ALU
2G11 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-L 55W
CE 1,7 IP40 0,1

BE COOL® 154 ◇
274 25 154 ◇
◇ = ALU
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 54W
CE 2,5 IP40 0,1


BE COOL® 254 ◇
274 25 254 ◇
◇ = A
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
CE 5,0 IP40 0,1

BE COOL® 254 EVG DIM 2 ◇
274 25 254 ED2 ◇
◇ = A
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG DIM
2 x T16 54W
CE 5,0 IP40 0,1

INTERIOR
STAND ALONE

Delta Light's collection of stand alone luminaires allow you to add the finishing touch to your interior design, upgrade your office environment or cater for a purely functional need. They can be placed easily anywhere in the room, providing direct or indirect lighting, while adding additional style and elegance thanks to their unique design and choice of material.



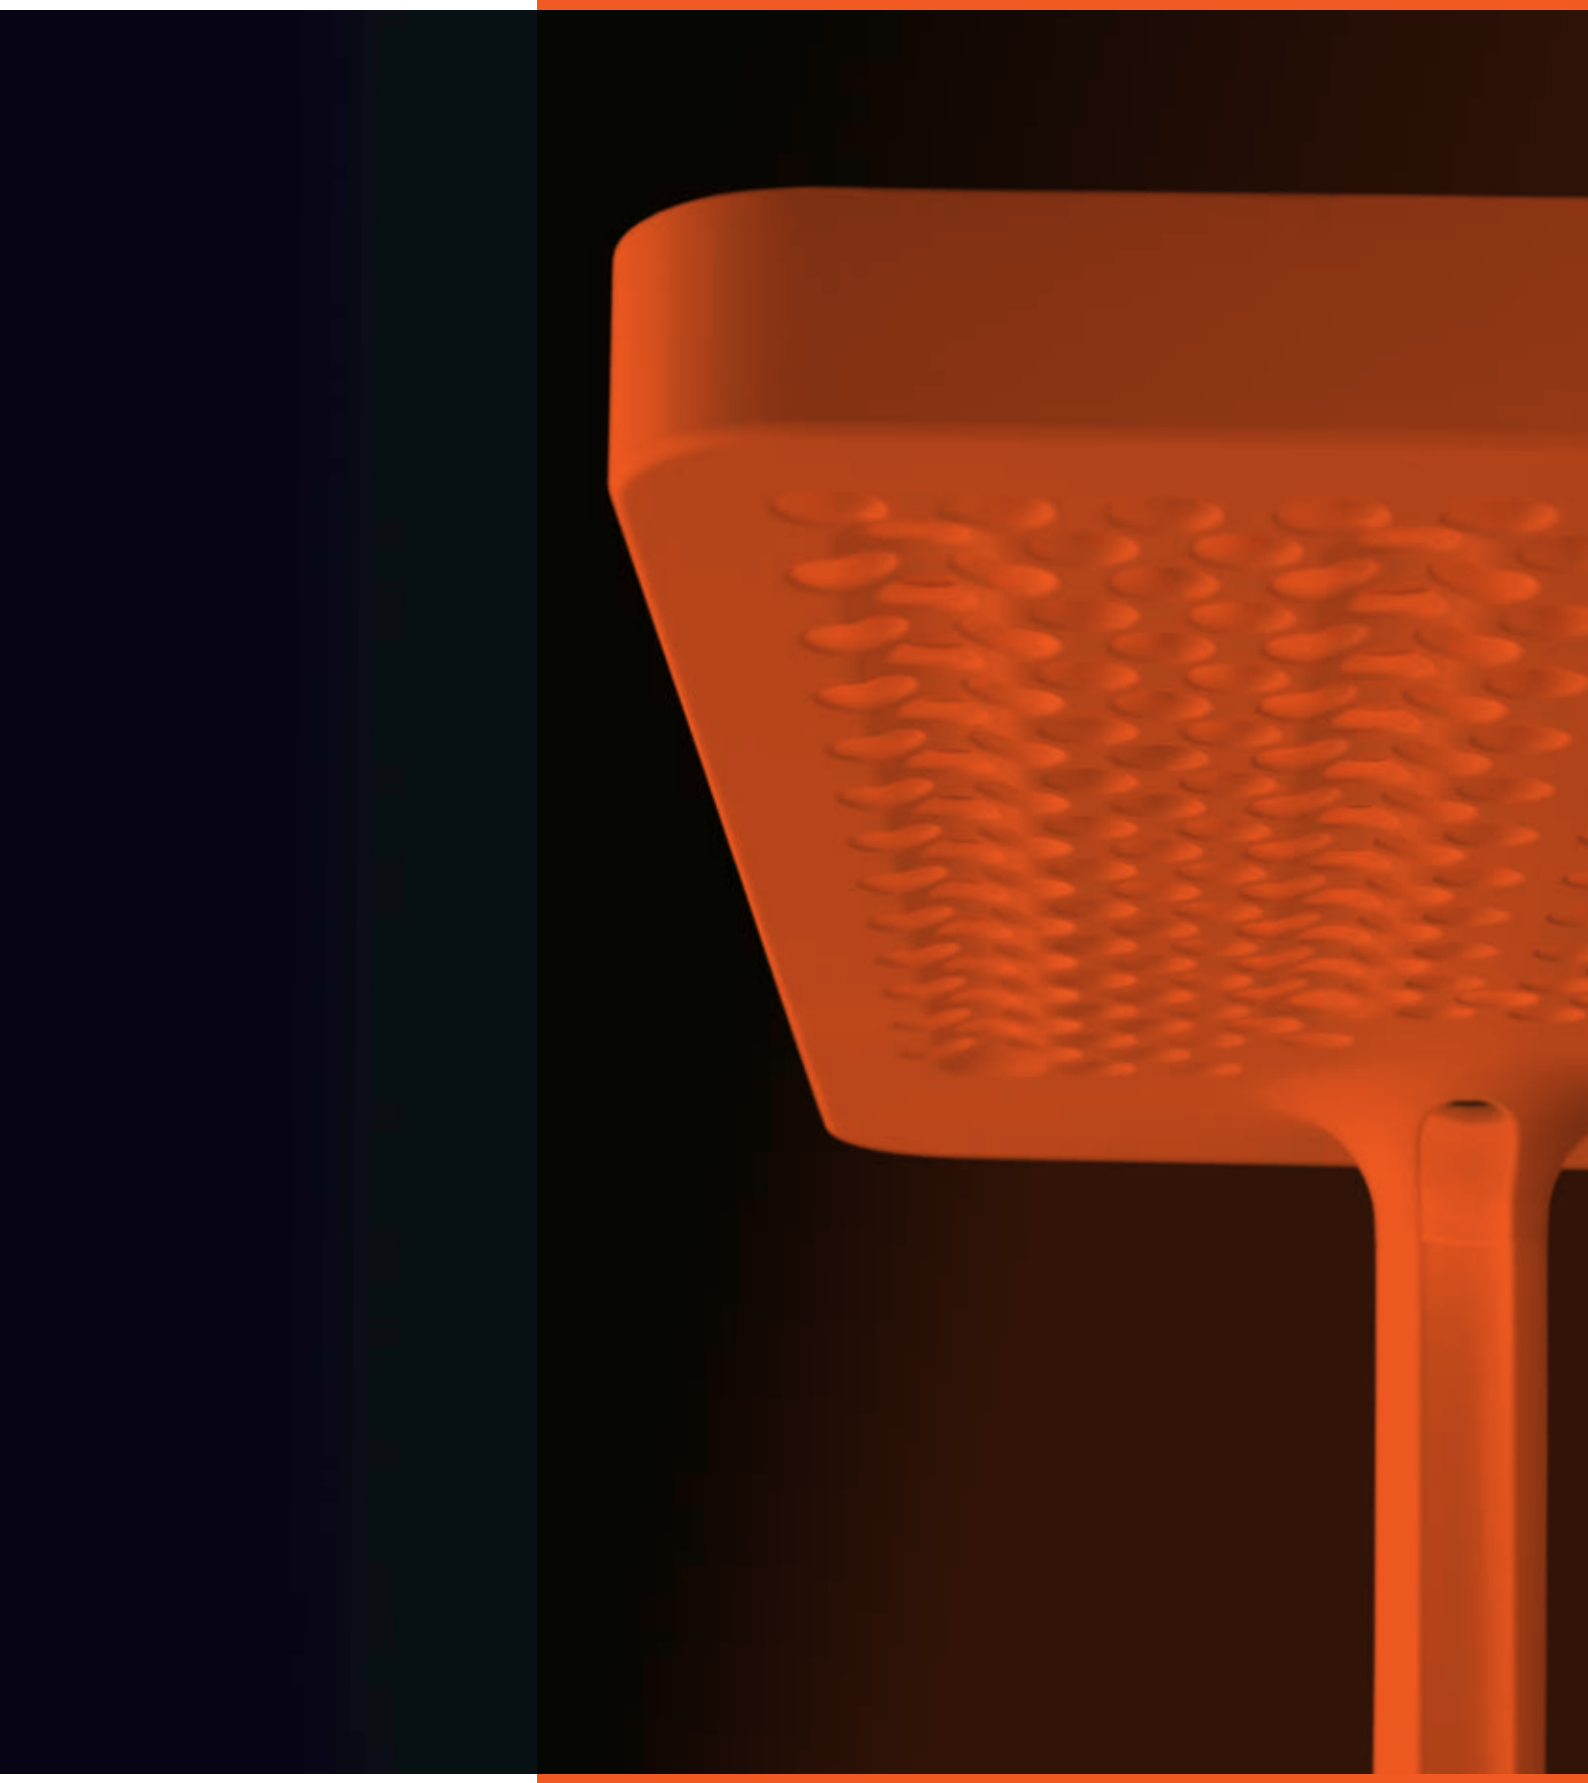


interior
stand
alone
www.deltalight.com/IFS
instore

GRAND CAFE FT50	INT 521
JETI TOWER	INT 527
NAUTILOO	INT 525
NICE 2 C	INT 523
OFFICER	INT 517
SUPERNOVA F	INT 515



SUPERNOVA F
INT 515



OFFICER
INT 517



GRAND CAFE FT50
INT 521



NICE 2C
INT 523



NAUTILOO
INT 525



JETI TOWER
INT 527






new

Supernova F



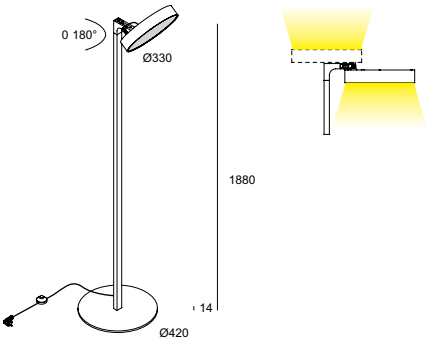


SUPERNOVA F
274 84 3224
INCL.1 x PC SBL
INCL.1 x CABLE 3 x 0,75 mm² 2m
INCL.1 x SWITCH
INCL.LED CLUSTER 25W / 3000K / 2155lm
INCL.LED POWER SUPPLY 1050 mA-DC
110-240V / 50-60Hz

CE 9,5 IP40





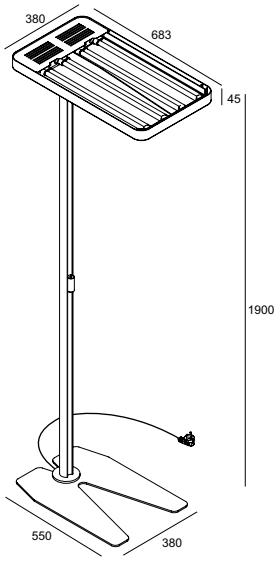

OFFICER ◇
205 05 455 E ◇
◇ = W
INCL.1 x SWITCH ON/OFF
INCL.1 x SWITCH FOR 50/100% LIGHT
INCL.1 x CABLE 3 x 0.75mm² 2m
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG
4 x TC-L 55W
15,0 IP20 650°C 0,1

OFFICER ED ◇
205 05 455 ED ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x CABLE 3 x 0.75mm² 2m
DIMMING BY SWITCH DIM
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
15,0 IP20 650°C 0,1

OFFICER EDL ◇
205 06 455 EDL ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x SWITCH FOR LED
INCL.1 x CABLE 3 x 0.75mm² 2m
DIMMING BY SWITCH DIM
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
INCL.1 x POWERLED WHITE 1W / 4000K
INCL.LED POWER SUPPLY 350mA-DC
15,0 IP20 650°C 0,1


1 x POWERLED WHITE 1W / 4000K


1 x SWITCH ON/OFF
1 x SWITCH FOR 50/100% LIGHT


1 x SWITCH ON/OFF + DIMMING 3-100%


1 x SWITCH ON/OFF + DIMMING 3-100%

Officer

OFFICER S ◇
205 05 455 S ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x CABLE 3 x 0.75mm² 2m
DAYLIGHT CONTROL
PRESENCE DETECTION
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
IP20 650°C 0,1

OFFICER SL ◇
205 06 455 SL ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x SWITCH FOR LED
INCL.1 x CABLE 3 x 0.75mm² 2m
DAYLIGHT CONTROL
PRESENCE DETECTION
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
INCL.1 x POWERLED WHITE 1W / 4000K
INCL.LED POWER SUPPLY 350mA-DC
IP20 650°C 0,1


DAYLIGHT CONTROL - PRESENCE DETECTION


DAYLIGHT CONTROL - PRESENCE DETECTION


1 x POWERLED WHITE 1W / 4000K


1 x SWITCH ON/OFF + DIMMING 3-100%


1 x SWITCH ON/OFF + DIMMING 3-100%



interior innovation award 2011
Winner






GLOSSARIO
DI URBANISTICA
GLOSSARIO
DI URBANISTICA


FULL INFO / PAG TEC

Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
COLOUR FILTER 111 **201 27 11** ● **201 27 12** ● **201 27 13** ● **201 27 14** ●	Ø100
LENS 111 **201 47 11**	Ø100

Grand Cafe FT50





GRAND CAFE FT50
287 31 35
INCL.1 x SWITCH ON/OFF
INCL.1 x CABLE 3 x 0.75mm² 2m
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W

IP20 850°C 1,5


ACCESSORIES
CLIP / CONE 111 + FRONTGLASS 111
CLIP / CONE 111 + COLOUR FILTER 111
CLIP / CONE 111 + LENS 111





Nice 2C®






NICE 2C®
271 71 25
INCL.1 x CABLE 2 x 0.75mm² 2m
DIMMING BY TOUCH DIM 1-100%
G9 / 110-240V / 50-60Hz
1 x QT14 max.60W


CE 2,1 IP20 650°C 0,1




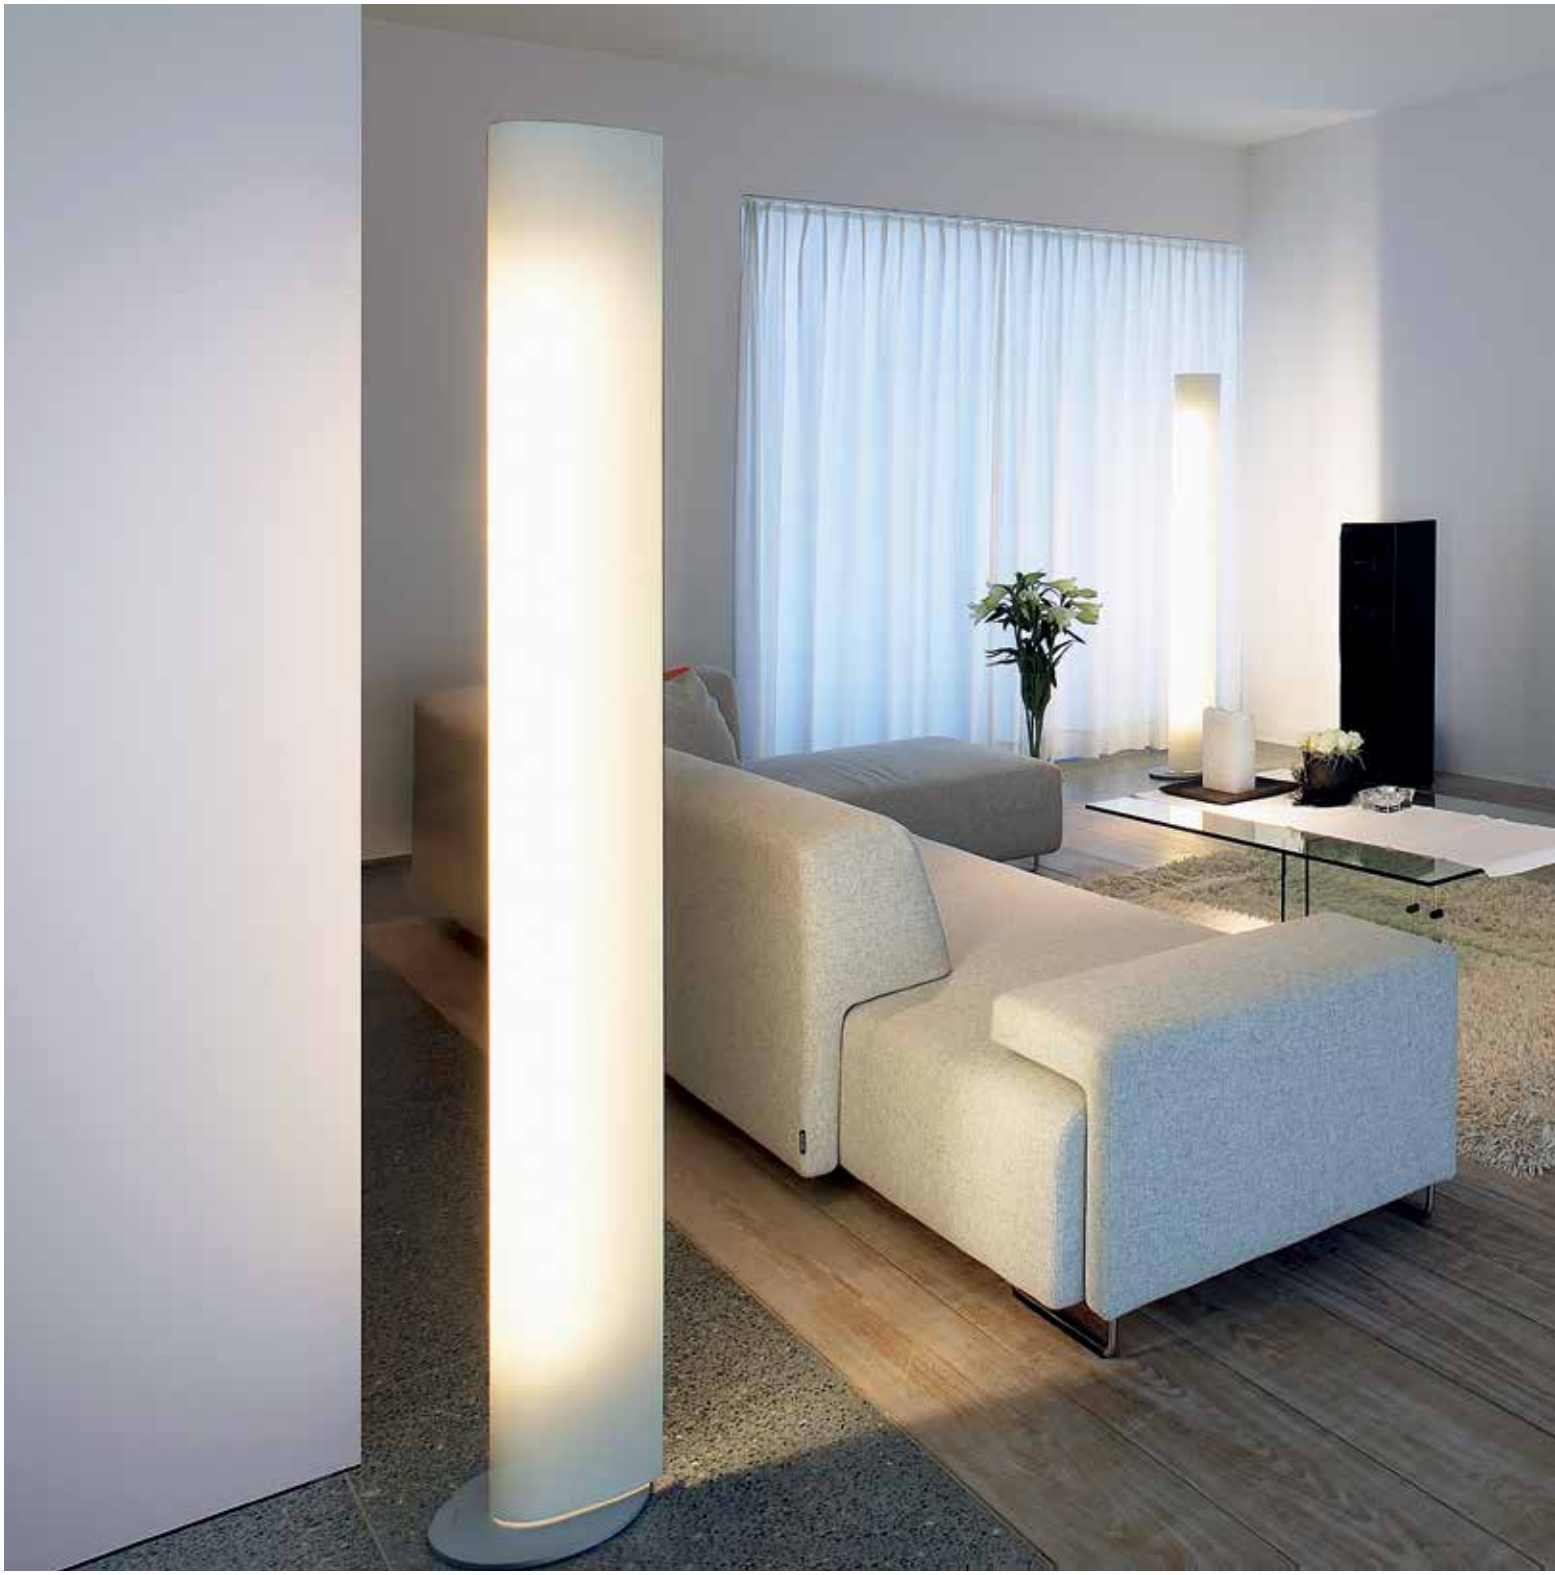



Nautiloo

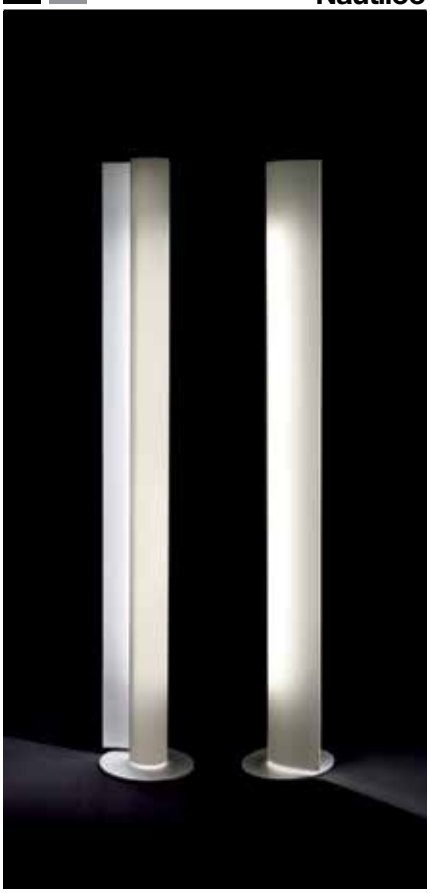



NAUTILOO
285 00 180
INCL.1 x SWITCH ON/OFF + DIMMING 1-100%
INCL.1 x CABLE 3 x 0.75mm² 2m
CORIAN® BODY
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG DIM
1 x T16 35/80W

CE 15,0 IP20 850°C 0,1


DESIGN BY **DELTA LIGHT®** & **DESIGN DD**

AWARD DESIGN PLUS light+building
DESIGNPREIS 2009 NOMINEE



Jeti Tower





JETI TOWER
271 64 25 ED
INCL.1 x SWITCH ON/OFF + DIMMING 1-100%
INCL.1 x CABLE 3 x 0.75mm² 2m
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG DIM
2 x T16 54W

CE 9,5 IP20 850°C 0,1

INTERIOR
TRACK LIGHTING

Track lighting forms the basis for variable and flexible lighting design, easy to adapt to the changing use and set-up of a space. Delta Light further upgrades these benefits by offering track ligthting luminaires with unrivaled flexibility in movement, supreme light performance and efficiency results, and award-winning designs. A comprehensive choice in light source and accessories offers solutions for musea, hospitality to residential, retail or public spaces.







interior track lighting

www.deltalight.com/IT

BOOSTER AD	INT 548
MOHOW	INT 551
SPATIO AD	INT 554
SUPERNOVA XS PIVOT AD	INT 553
ULTRA TWIN AD	INT 544
YOU-TURN ON AD	INT 534



YOU-TURN ON AD
INT 534



ULTRA TWIN AD
INT 544



BOOSTER AD
INT 548



MOHOW
INT 551




SUPERNOVA XS PIVOT AD
INT 553



SPATIO AD
INT 554

Composition


1 TRACK
2 ENDCAP / SUPPLY / CORNERS
3 FIXATION
4 CURRENT SUPPLY
5 ACCESSORIES
6 OPTIONS

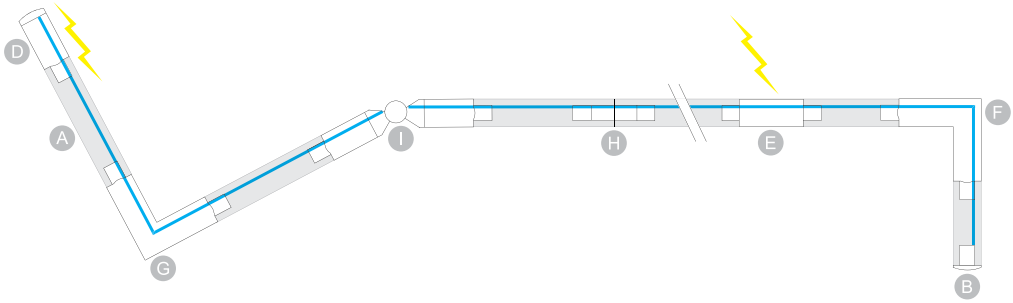


BOTTOM VIEW

1 Track

A






TRACK 1m ◇
200 01 410 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
0,8

TRACK 2m ◇
200 01 420 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
1,6

TRACK 3m ◇
200 01 430 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
2,4


2 Endcap / Supply / Corners

B




TRACK END CAP ◇
200 01 41 ◇
◇ = A / B / W
0,1

C




TRACK END SUPPLY 11 ◇
200 01 11 ◇
◇ = A / B / W
220-240V / 50-60Hz
0,1 IP20

D




TRACK END SUPPLY 12 ◇
200 01 12 ◇
◇ = A / B / W
220-240V / 50-60Hz
IP20
0,1

E




TRACK MIDDLE SUPPLY ◇
200 01 14 ◇
◇ = A / B / W
220-240V / 50-60Hz
0,1 IP20

F




TRACK CORNER 90° OUT ◇
200 01 35 ◇
◇ = A / B / W
0,1 IP20

G




TRACK CORNER 90° IN ◇
200 01 34 ◇
◇ = A / B / W
0,1 IP20


H



TRACK CORNER 180° ◇
200 01 21 ◇
◇ = A / B / W
0,1 IP20

I







TRACK CORNER 60°-300° ◇
200 01 24 ◇
◇ = A / B / W
0,1 IP20


BOTTOM VIEW

3 Fixation





TRACK DIRECT FIXATION ◇
200 01 02 ◇
◇ = ANO
0,1





TRACK SUSPENSION 3,0
200 01 13
L 3,0m
0,1






t


4 Current Supply


TRACK CURRENT SUPPLY 5 x 0,75mm² 3,0m
200 99 53
L 3,0m / 5 x 0,75mm²
0,3
OPTIONS
CABLE BASE R/S



5 Accessories

TRACK BENDING TOOL
200 00 01
0,1



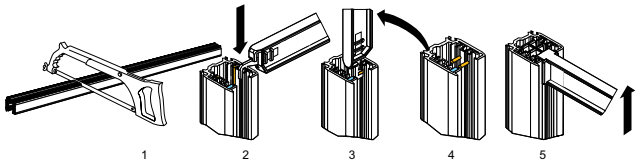


6 Options FULL INFO / PAG TEC

INSTALLATION	A B C	
CABLE BASE R ◇ **203 99 55 ◇** ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56 ◇** ◇ = ANO / W / B	57 x 57 x 41	
COVERSET R ◇ **204 00 62 ◇** **204 00 90 ◇** **204 00 100 ◇** ◇ = ANO / B / W	 Ø62 Ø90 Ø100	
COVERSET S ◇ **204 62 62 ◇** **204 80 80 ◇** **204 90 90 ◇** ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90	


You-Turn On Reo AD





You-Turn On Opto AD





	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	920 lm	810 lm	920 lm	810 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 3015 AD ◇** **313 021 12112 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 3015-9 AD ◇** **313 021 129112 AD ◇** ◇ = B-B / W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 3033 AD ◇** **313 020 12122 AD ◇** ◇ = W-B	**YOU-TURN ON REO 3033-9 AD ◇** **313 020 129122 AD ◇** ◇ = W-B	**YOU-TURN ON OPTO 3033 AD ◇** **313 021 12122 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 3033-9 AD ◇** **313 021 129122 AD ◇** ◇ = B-B / W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 3050 AD ◇** **313 020 12132 AD ◇** ◇ = W-B	**YOU-TURN ON REO 3050-9 AD ◇** **313 020 129132 AD ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 3055 AD ◇** **313 021 12132 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 3055-9 AD ◇** **313 021 129132 AD ◇** ◇ = B-B / W-B
2700K	865 lm	735 lm	865 lm	735 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 2715 AD ◇** **313 021 12113 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 2715-9 AD ◇** **313 021 129113 AD ◇** ◇ = B-B / W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 2733 AD ◇** **313 020 12123 AD ◇** ◇ = W-B	**YOU-TURN ON REO 2733-9 AD ◇** **313 020 129123 AD ◇** ◇ = W-B	**YOU-TURN ON OPTO 2733 AD ◇** **313 021 12123 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 2733-9 AD ◇** **313 021 129123 AD ◇** ◇ = B-B / W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 2750 AD ◇** **313 020 12133 AD ◇** ◇ = W-B	**YOU-TURN ON REO 2750-9 AD ◇** **313 020 129133 AD ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 2755 AD ◇** **313 021 12133 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 2755-9 AD ◇** **313 021 129133 AD ◇** ◇ = B-B / W-B
	ADJUSTABLE 0°- 90° / 350° INCL.1 x 3F MULTI ADAPTOR INCL.1 x POWERLED WHITE 10W INCL.DIMMABLE LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz CE 1,1 IP20		ADJUSTABLE 0°- 90° / 350° INCL.1 x 3F MULTI ADAPTOR INCL.1 x POWERLED WHITE 10W INCL.1 x EFT FILTER* INCL.DIMMABLE LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz CE 1,2 IP20	


*EFT / EQUALISING FILTER TECHNOLOGY



new

You-Turn On AD





YOU-TURN ON 111 T50 AD ◇
313 02 12 AD ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W


1,1 IP20 1,0

t

reddot design award
winner 2012


You-Turn On Reo AD





You-Turn On Opto AD





	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	2130 lm	1750 lm	2130 lm	1750 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 203015 AD ◇** **313 021 20112 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 203015-9 AD ◇** **313 021 209112 AD ◇** ◇ = B-B / W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 203033 AD ◇** **313 020 20122 AD ◇** ◇ = W-B	**YOU-TURN ON REO 203033-9 AD ◇** **313 020 209122 AD ◇** ◇ = W-B	**YOU-TURN ON OPTO 203033 AD ◇** **313 021 20122 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 203033-9 AD ◇** **313 021 209122 AD ◇** ◇ = B-B / W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 203050 AD ◇** **313 020 20132 AD ◇** ◇ = W-B	**YOU-TURN ON REO 203050-9 AD ◇** **313 020 209132 AD ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 203055 AD ◇** **313 021 20132 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 203055-9 AD ◇** **313 021 209132 AD ◇** ◇ = B-B / W-B
2700K	1990 lm	1735 lm	1990 lm	1735 lm
REFLECTOR SP-15°			**YOU-TURN ON OPTO 202715 AD ◇** **313 021 20113 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 202715-9 AD ◇** **313 021 209113 AD ◇** ◇ = B-B / W-B
REFLECTOR FL-33°	**YOU-TURN ON REO 202733 AD ◇** **313 020 20123 AD ◇** ◇ = W-B	**YOU-TURN ON REO 202733-9 AD ◇** **313 020 209123 AD ◇** ◇ = W-B	**YOU-TURN ON OPTO 202733 AD ◇** **313 021 20123 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 202733-9 AD ◇** **313 021 209123 AD ◇** ◇ = B-B / W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 202750 AD ◇** **313 020 20133 AD ◇** ◇ = W-B	**YOU-TURN ON REO 202750-9 AD ◇** **313 020 209133 AD ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN ON OPTO 202755 AD ◇** **313 021 20133 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 202755-9 AD ◇** **313 021 209133 AD ◇** ◇ = B-B / W-B
	ADJUSTABLE 0°- 90° / 350° INCL.1 x 3F MULTI ADAPTOR INCL.1 x POWERLED WHITE 25W INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz ◇ CE 1,6 IP20		ADJUSTABLE 0°- 90° / 350° INCL.1 x 3F MULTI ADAPTOR INCL.1 x POWERLED WHITE 25W INCL.1 x EFT FILTER* INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz ◇ CE 1,7 IP20	

*EFT / EQUALISING FILTER TECHNOLOGY





new

You-Turn On AD









YOU-TURN ON H111-35 AD ◇
313 02 1935 AD ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 35W
IP20 1,0

YOU-TURN ON HIT-35 AD SP15 ◇
313 02 133 AD SP15 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-35 AD FL24 ◇
313 02 133 AD FL24 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-35 AD WFL43 ◇
313 02 133 AD WFL43 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W
IP20 1,0

YOU-TURN ON H111-70 AD ◇
313 02 1970 AD ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 70W
IP20 1,0

YOU-TURN ON HIT-70 AD SP15 ◇
313 02 137 AD SP15 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-70 AD FL24 ◇
313 02 137 AD FL24 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-70 AD WFL43 ◇
313 02 137 AD WFL43 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W
IP20 1,0

reddot design award
winner 2012






Vandecandelaere







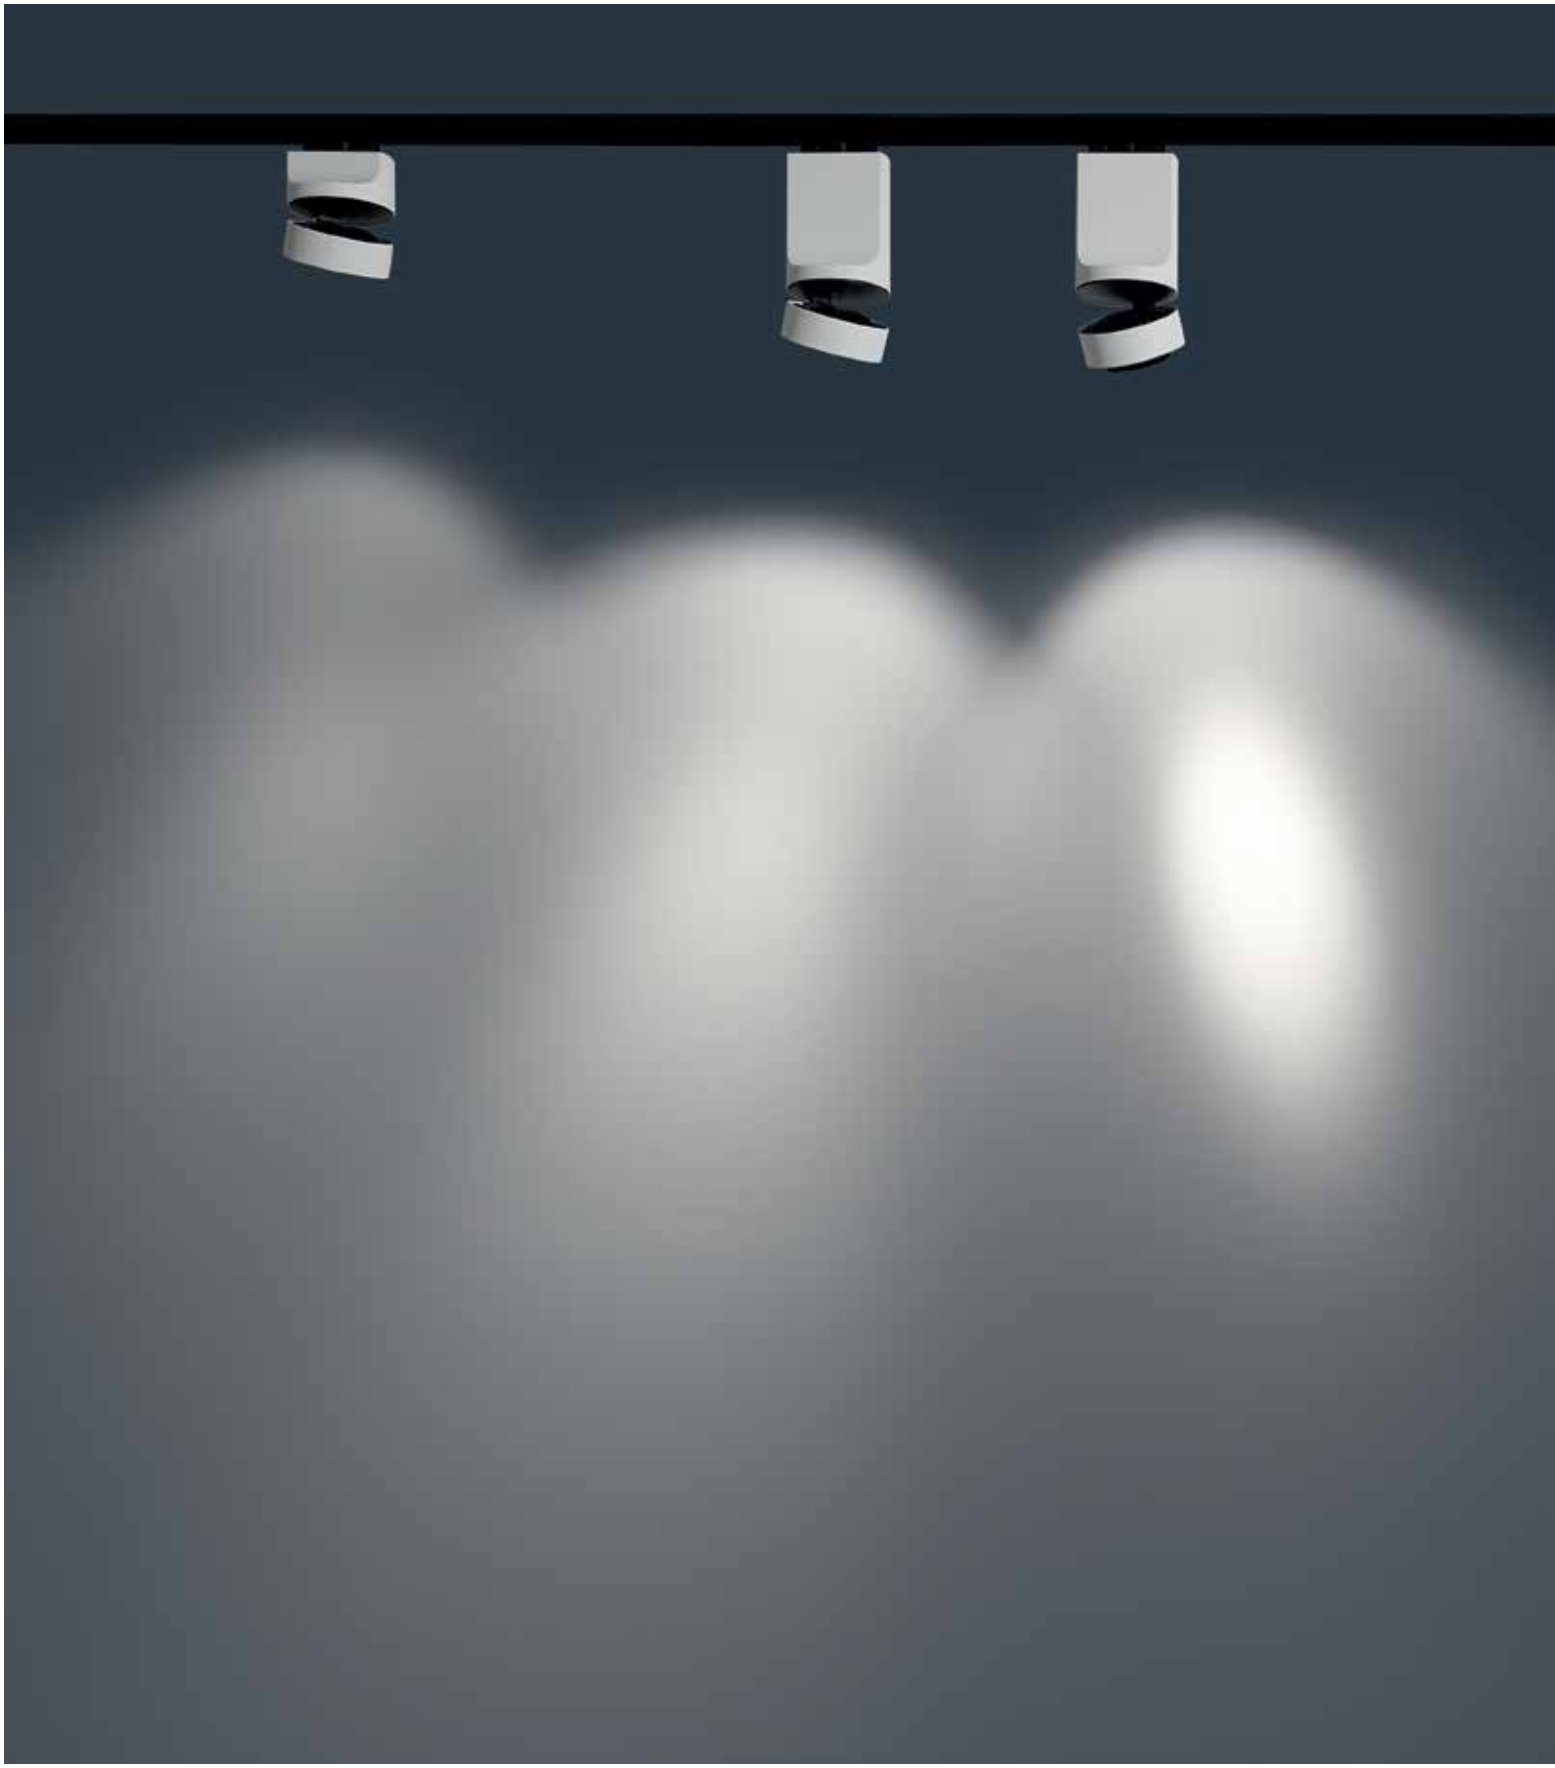

YOU-TURN ON REO 3033 AD
Carefully selected high performance leds matching 35-50 Watt halogen lamps, consuming less than 12 Watt, and delivering a powerful, warm light. Conical shape for improved lighting aesthetics. A perfect balance between lighting quality and energy efficiency.

YOU-TURN ON REO 203033 AD
Compact high flux LED solution that delivers uniform high quality illumination, without pixilation or multiple shadow effect. Dimmable 2000 lumen LED spot.

YOU-TURN ON OPTO 203033 AD
Led specific optic improves performance and efficiency with 15%. Combining the Equalising Filter Technology with specially designed cooling system provides optimal optic performance and extended durability, with 2000 lumen dimmable LED.



YOU-TURN ON 111 AD
Classic halogen solution with all its typic characteristics, for accent or general lighting.

YOU-TURN ON H111 AD
Efficient anti-glare spot with wide choice in light beam.
Ideal for use in retail.


YOU-TURN ON HIT AD
Specially designed segmented reflector in sheet metal plate provides superior reflection abilities. Up to 93% efficiency thanks to use of advanced reflector material, guaranteeing reduced energy consumption. Available in spot 15°, flood 24° and wide flood 43° it can be applied for accent lighting and/or general lighting.


up to 93% efficiency

Ultra Twin LED AD










	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST			
3000K	660 lm	580 lm	1420 lm	
REFLECTOR SP-20°			**ULTRA TWIN LED SP20 AD ◇** **316 08 32 AD ◇** ◇ = W	
REFLECTOR FL-33°	**ULTRA TWIN LED 3033 AD ◇** **316 06 8122 AD ◇** ◇ = W	**ULTRA TWIN LED 3033-9 AD ◇** **316 06 89122 AD ◇** ◇ = W		
REFLECTOR FL-40°			**ULTRA TWIN LED FL40 AD ◇** **316 08 34 AD ◇** ◇ = W	
REFLECTOR WFL-50°	**ULTRA TWIN LED 3050 AD ◇** **316 06 8132 AD ◇** ◇ = W	**ULTRA TWIN LED 3050-9 AD ◇** **316 06 89132 AD ◇** ◇ = W		
2700K	620 lm	525 lm		
REFLECTOR SP-20°				
REFLECTOR FL-33°	**ULTRA TWIN LED 2733 AD ◇** **316 06 8123 AD ◇** ◇ = W	**ULTRA TWIN LED 2733-9 AD ◇** **316 06 89123 AD ◇** ◇ = W		
REFLECTOR WFL-50°	**ULTRA TWIN LED 2750 AD ◇** **316 06 8133 AD ◇** ◇ = W	**ULTRA TWIN LED 2750-9 AD ◇** **316 06 89133 AD ◇** ◇ = W		
	INCL.1 x 3F MULTI ADAPTOR INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz CE 1,0 IP20		INCL.1 x 3F MULTI ADAPTOR INCL.1 x POWERLED WHITE 18W INCL.LED POWER SUPPLY 220-240V / 50-60Hz CE 1,7 IP20	

Ultra Twin AD






ULTRA TWIN 50 AD ◇
316 06 05 AD ◇
◇ = W
INCL.1 x 3F MULTI ADAPTOR
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W

CE 1,0 IP20 0,5






ULTRA TWIN C50-20 AD ◇
316 06 44 20 AD ◇
◇ = W
INCL.1 x 3F MULTI ADAPTOR
GX10 / 220-240V / 50-60Hz / 1 x 1~EVG 1,5kV
1 x HIPAR51 20W

CE 1,0 IP20 0,5





ULTRA TWIN HIC-35 AD SP10 ◇
316 08 66 35 AD SP10 ◇
◇ = W
INCL. REFLECTOR SP-10° + GLASS

ULTRA TWIN HIC-35 AD FL30 ◇
316 08 66 35 AD ◇
◇ = W
INCL. REFLECTOR FL-30° + GLASS

ULTRA TWIN HIC-35 AD WFL46 ◇
316 08 66 35 AD WFL46 ◇
◇ = W
INCL. REFLECTOR WFL-46° + GLASS

INCL.1 x 3F MULTI ADAPTOR
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-TC 35W

CE 1,4 IP20 0,5



ULTRA TWIN HIC-70 AD SP10 ◇
316 08 66 70 AD SP10 ◇
◇ = W
INCL. REFLECTOR SP-10° + GLASS

ULTRA TWIN HIC-70 AD FL30 ◇
316 08 66 70 AD ◇
◇ = W
INCL. REFLECTOR FL-30° + GLASS

ULTRA TWIN HIC-70 AD WFL46 ◇
316 08 66 70 AD WFL46 ◇
◇ = W
INCL. REFLECTOR WFL-46° + GLASS

INCL.1 x 3F MULTI ADAPTOR
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-TC 70W

CE 1,4 IP20 1,0


reddot design award winner 2011





ASPASIA +

Booster HP AD



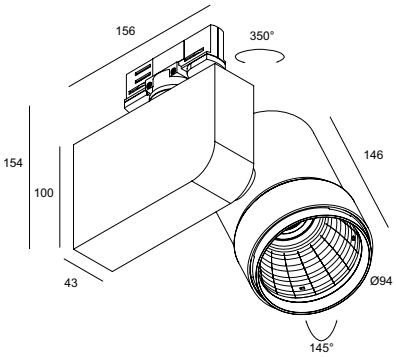



	CRI > 80	CRI > 80
3000K	1500 lm	3000 lm
REFLECTOR SP-20°	**BOOSTER HP 3020 AD ◇** **313 22 28122 AD ◇** ◇ = B / W	
REFLECTOR FL-27°		**BOOSTER HP 3027 AD ◇** **313 22 48122 AD ◇** ◇ = B / W
REFLECTOR WFL-40°	**BOOSTER HP 3040 AD ◇** **313 22 28132 AD ◇** ◇ = B / W	
REFLECTOR WFL-50°		**BOOSTER HP 3050 AD ◇** **313 22 48132 AD ◇** ◇ = B / W
	ADJUSTABLE 145° / 350° INCL.1 x POWERLED WHITE 17W INCL. LED POWER SUPPLY 700mA-DC 220-240V / 50-60Hz CE 1,6 IP20	ADJUSTABLE 145° / 350° ACTIVE COOLING INCL.1 x POWERLED WHITE 29W INCL. LED POWER SUPPLY 700mA-DC 220-240V / 50-60Hz CE 1,6 IP20


ON REQUEST CRI>90



new

Booster HIC AD



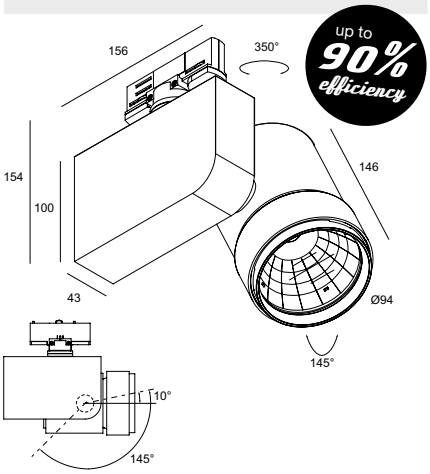

up to 90% efficiency

t

BOOSTER HIC-35 SP18 AD ◇
313 22 1935-18 AD ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-35 FL28 AD ◇
313 22 1935-28 AD ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-35 WFL52 AD ◇
313 22 1935-52 AD ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 35W

BOOSTER HIC-50 SP18 AD ◇
313 22 1950-18 AD ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-50 FL28 AD ◇
313 22 1950-28 AD ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-50 WFL52 AD ◇
313 22 1950-52 AD ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 50W



BOOSTER HIC-70 SP18 AD ◇
313 22 1970-18 AD ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-70 FL28 AD ◇
313 22 1970-28 AD ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-70 WFL52 AD ◇
313 22 1970-52 AD ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 70W

◇ = B / W
ADJUSTABLE 145° / 350°
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG

CE 1,5 IP20 1,0


solvas




new

led

Mohow



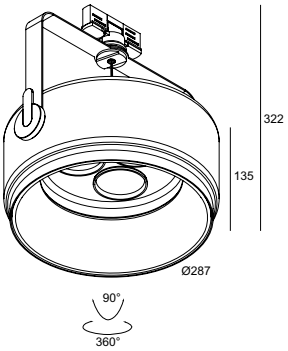

	CRI > 80
4000K	
	ON REQUEST
3000K	3x 920 lm
REFLECTOR SP-15°	**MOHOW LED 3015 AD ◇** **319 01 12312 AD ◇** ◇ = W
REFLECTOR FL-33°	**MOHOW LED 3033 AD ◇** **319 01 12322 AD ◇** ◇ = W
REFLECTOR WFL-45°	**MOHOW LED 3045 AD ◇** **319 01 12332 AD ◇** ◇ = W
2700K	3x 865 lm
REFLECTOR SP-15°	**MOHOW LED 2715 AD ◇** **319 01 12313 AD ◇** ◇ = W
REFLECTOR FL-33°	**MOHOW LED 2733 AD ◇** **319 01 12323 AD ◇** ◇ = W
REFLECTOR WFL-45°	**MOHOW LED 2745 AD ◇** **319 01 12333 AD ◇** ◇ = W
	ADJUSTABLE 0°- 90° / 360° INCL.1 x 3F MULTI ADAPTOR INCL.3 x POWERLED WHITE 10W INCL.3 x EFT FILTER* INCL.LED POWER SUPPLY 500mA-DC 110-240V / 0 I 50-60Hz □ CE 2,2 IP20

ON REQUEST CRI>90

*EFT / EQUALISING FILTER TECHNOLOGY


GOOD DESIGN award



'Dat is architectuur'

new

led


Supernova XS Pivot AD

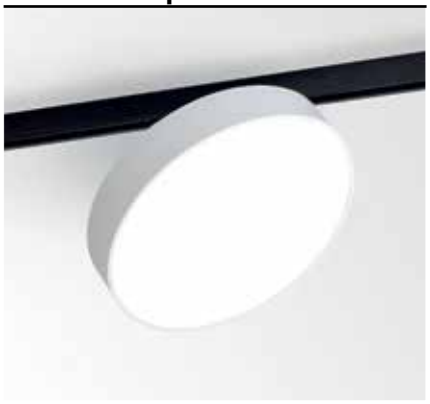



SUPERNOVA XS PIVOT 260 AD ◇
274 88 2515 AD ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 15W / 3000K ● / 1312lm
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

CE 1,2 IP40 0,1

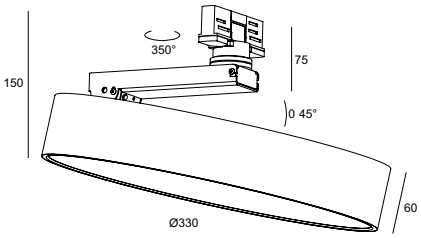

SUPERNOVA XS PIVOT 330 AD ◇
274 88 3224 AD ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 25W / 3000K ● / 2155lm
INCL.LED POWER SUPPLY 1050mA-DC
110-240V / 50-60Hz

CE 1,4 IP40 0,1



reddot design award winner 2013

GOOD DESIGN award

FULL INFO / PAG TEC

Accessories


CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
RING 66 ◇ **201 32 50** ◇ ◇ = A / W	Ø74	
RING 109 ◇ **201 28 01** ◇ ◇ = A / B / W	Ø116	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	
CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23	
CONE 66 ◇ **201 32 52** ◇ ◇ = B	Ø66 / Ø45 / H38	
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 109 **201 18 00**	Ø109	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 66 **201 33 11** 🔵 **201 33 12** 🟢 **201 33 13** 🔴 **201 33 14** 🟡	Ø66	
COLOUR FILTER 109 **201 28 11** 🔵 **201 28 12** 🟢 **201 28 13** 🔴 **201 28 14** 🟡	Ø109	
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100	
LENS 109 **201 48 01**	Ø109	
LENS 111 **201 47 11**	Ø100	
RASTER 66 ◇ **201 32 51** ◇ ◇ = B	Ø66	
RASTER 109 ◇ **201 28 02** ◇ ◇ = B	Ø109	

new

led

Spatio Reo AD





	CRI > 80	CRI > 90
4000K 🟡		
	ON REQUEST	
3000K 🟡	660 lm	580 lm
REFLECTOR FL-33°	**SPATIO REO 3033 AD** ◇ **311 13 8122 AD** ◇ ◇ = A / W	**SPATIO REO 3033-9 AD** ◇ **311 13 89122 AD** ◇ ◇ = A / W
REFLECTOR WFL-50°	**SPATIO REO 3050 AD** ◇ **311 13 8132 AD** ◇ ◇ = A / W	**SPATIO REO 3050-9 AD** ◇ **311 13 89132 AD** ◇ ◇ = A / W
2700K 🟡	620 lm	525 lm
REFLECTOR FL-33°	**SPATIO REO 2733 AD** ◇ **311 13 8123 AD** ◇ ◇ = A / W	**SPATIO REO 2733-9 AD** ◇ **311 13 89123 AD** ◇ ◇ = A / W
REFLECTOR WFL-50°	**SPATIO REO 2750 AD** ◇ **311 13 8133 AD** ◇ ◇ = A / W	**SPATIO REO 2750-9 AD** ◇ **311 13 89133 AD** ◇ ◇ = A / W

INCL.1 x 3F MULTI ADAPTOR
INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


CE 0,7 IP20




Spatio T50 AD









SPATIO 50 T50 AD ◇
311 10 105 AD ◇
◇ = A / W
INCL.1 x 3F MULTI ADAPTOR
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W


CE 0,5 IP20 0,5

ACCESSORIES
RING 66 + COLOUR FILTER 66
RING 66 + RASTER 66
RING 66 + CONE 66
CONE 50
CLIP 50 + DICROIC FILTER 50

SPATIO 111 T50 AD ◇
311 10 111 AD ◇
◇ = A / B / W
INCL.1 x 3F MULTI ADAPTOR
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W

CE 0,6 IP20 1,0

ACCESSORIES
RING 109 + FRONTGLASS 109
RING 109 + COLOUR FILTER 109
RING 109 + LENS 109
RING 109 + RASTER 109
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

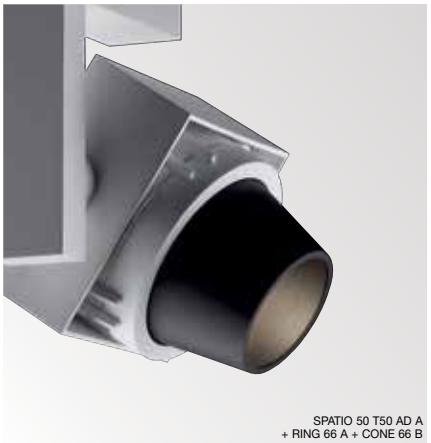

SPATIO 50 T50 AD A
+ RING 66 A + CONE 66 B



SPATIO 111 T50 AD A
+ RING 109 A + RASTER 109 B




FULL INFO / PAG TEC

Accessories

RING 109◇ **201 28 01◇** ◇ = A / B / W	Ø116
RASTER 109◇ **201 28 02◇** ◇ = B	Ø109

Spatio H111 AD






SPATIO H111-35 AD ◇
311 11 135 E AD ◇
◇ = A / B / W
INCL.1 x 3F MULTI ADAPTOR
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR-CE111 35W
CE 1,7 IP20 0,5

SPATIO H111-70 AD ◇
311 11 170 E AD ◇
◇ = A / B / W
INCL.1 x 3F MULTI ADAPTOR
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR-CE111 70W
CE 1,7 IP20 1,0

Spatio HIT AD





SPATIO HIT-35 AD FL28 ◇
311 12 135 E AD ◇
◇ = A / W
INCL. REFLECTOR FL-28° + GLASS + ANTI-GLARE

SPATIO HIT-35 AD SP15 ◇
311 12 135 E AD SP15 ◇
◇ = A / W
INCL.1x REFLECTOR SP-15° + GLASS + ANTI-GLARE

SPATIO HIT-35 AD WFL55 ◇
311 12 135 E AD WFL55 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-55° + GLASS

SPATIO HIT-35 AD WFL80 ◇
311 12 135 E AD WFL80 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-80° + GLASS

INCL.1 x 3F MULTI ADAPTOR
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W
CE 2,3 IP20 1,0

ACCESSORIES
RING 109 + RASTER 109

SPATIO HIT-70 AD FL28 ◇
311 12 170 E AD ◇
◇ = A / W
INCL. REFLECTOR FL-28° + GLASS + ANTI-GLARE

SPATIO HIT-70 AD SP15 ◇
311 12 170 E AD SP15 ◇
◇ = A / W
INCL.1x REFLECTOR SP-15° + GLASS + ANTI-GLARE

SPATIO HIT-70 AD WFL55 ◇
311 12 170 E AD WFL55 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-55° + GLASS


SPATIO HIT-70 AD WFL80 ◇
311 12 170 E AD WFL80 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-80° + GLASS

INCL.1 x 3F MULTI ADAPTOR
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W
CE 2,3 IP20 1,0

ACCESSORIES
RING 109 + RASTER 109

Spatio HIT AD





SPATIO HIT-150 AD FL28 ◇
311 12 1150 E AD ◇
◇ = A / W
INCL. REFLECTOR FL-28° + GLASS + ANTI-GLARE

SPATIO HIT-150 AD SP15 ◇
311 12 1150 E AD SP15 ◇
◇ = A / W
INCL.1x REFLECTOR SP-15° + GLASS + ANTI-GLARE

SPATIO HIT-150 AD WFL55 ◇
311 12 1150 E AD WFL55 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-55° + GLASS

SPATIO HIT-150 AD WFL80 ◇
311 12 1150 E AD WFL80 ◇
◇ = A / W
INCL.1x REFLECTOR WFL-80° + GLASS

INCL.1 x 3F MULTI ADAPTOR
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 150W
CE 2,5 IP20 2,0

ACCESSORIES
RING 109 + RASTER 109

t







Kinepolis



Expo Lieve Blancquaert









INTERIOR CEILING RECESSED INT 4

INTERIOR CEILING SURFACE INT 220

INTERIOR WALL RECESSED INT 426

INTERIOR WALL SURFACE INT 446

INTERIOR STAND ALONE INT 510

INTERIOR TRACK LIGHTING t INT 528

PROFILES p PRO 4

EXTERIOR CEILING RECESSED EXT 4

EXTERIOR CEILING SURFACE EXT 18

EXTERIOR WALL RECESSED EXT 30

EXTERIOR WALL SURFACE EXT 42

EXTERIOR FLOOR RECESSED EXT 96

EXTERIOR FLOOR SURFACE EXT 118

TECHNICAL INFO tech TEC 2

INDEX index IND 2

INTERIOR
EXTERIOR
PROFILES

Production of made-to-measure profile systems has become a vital and distinctive element of Delta Light®'s collection. For profiles especially, Delta Light® recently invested in stock and extra machinery to be able to keep up with the demand and cater for particular requests. As a result, Delta Light® scores a 99,83% success rate on its 10 day production promise, for all orders below 100m. Delivery of orders for custom profile designs above 100m are handled on a case by case basis, with extremely short term delivery terms as a standard.

The profile range includes various dimensions, diverse styles, different lamps and light modules, dimming and supply solutions, and a large number of accessories and combination options. Suspended, recessed or surface mounted, either for wall, floor or ceiling, interior and exterior, Delta Light® is your one-stop supplier for all profile lighting systems.

p

www.deltalight.com/IPR



Splitline / Split-It

	Splitline 29 PRO 17	Splitline 52 PRO 23	Splitline 25 PRO 31	Splitline 51 PRO 31	Split-It PRO 37
led	PRO 19	PRO 24-26	PRO 33	PRO 33	-
HALOGEN	-	PRO 27	-	-	PRO 39
DISCHARGE	-	PRO 27	-	-	PRO 39
T16	-	-	-	-	-
T16-S	PRO 19	-	PRO 34	PRO 34	-
T16-NS	-	-	-	-	-

Endless

	Endless 30 PRO 73	Endless 30+ PRO 79
led	PRO 75	PRO 81
HALOGEN	-	-
DISCHARGE	-	-
T16	-	-
T16-S	PRO 75	PRO 81
T16-NS	-	-

Microline

	Microline 50 PRO 85	Microline 30 PRO 91	Microline 30+ PRO 105
led	PRO 87	PRO 93	PRO 107
HALOGEN	PRO 87	PRO 93	-
DISCHARGE	-	-	-
T16	PRO 88	PRO 95	PRO 108
T16-S	-	-	PRO 108
T16-NS	-	-	-

Headliner


	Headliner 95 PRO 115	Headliner 75 PRO 115
led	PRO 117	PRO 117
HALOGEN	-	-
DISCHARGE	-	-
T16	-	-
T16-S	PRO 118	PRO 118
T16-NS	PRO 125	PRO 129

Uniline



Uniline TR
PRO 135

led	PRO 138
HALOGEN	PRO 138
DISCHARGE	-
T16	PRO 138
T16-S	PRO 139
T16-NS	PRO 139



Uniline TRT
PRO 135

led	PRO 138
HALOGEN	PRO 138
DISCHARGE	-
T16	PRO 138
T16-S	PRO 139
T16-NS	PRO 139




Uniline 85
PRO 135

led	PRO 138
HALOGEN	PRO 138
DISCHARGE	-
T16	PRO 138
T16-S	PRO 139
T16-NS	PRO 139



Uniline 70
PRO 135

led	PRO 138
HALOGEN	PRO 138
DISCHARGE	-
T16	PRO 138
T16-S	PRO 139
T16-NS	PRO 139



Uniline Twin
PRO 135

led	PRO 138
HALOGEN	PRO 138
DISCHARGE	-
T16	PRO 138
T16-S	PRO 139
T16-NS	PRO 139



Uniline Wall
PRO 135

led	PRO 138
HALOGEN	PRO 138
DISCHARGE	-
T16	PRO 138
T16-S	PRO 139
T16-NS	PRO 139

Midiline L



Midiline 100L
PRO 147


led	-
HALOGEN	PRO 149
DISCHARGE	-
T16	PRO 150
T16-S	PRO 150
T16-NS	-



Midiline 80L
PRO 147


led	-
HALOGEN	PRO 149
DISCHARGE	-
T16	PRO 150
T16-S	PRO 150
T16-NS	-

Macroline



Macroline 180
PRO 155


led	-
HALOGEN	PRO 157
DISCHARGE	PRO 157
T16	PRO 158
T16-S	-
T16-NS	-



Macroline 160
PRO 155


led	-
HALOGEN	PRO 157
DISCHARGE	PRO 157
T16	PRO 158
T16-S	-
T16-NS	-

NoBody



NoBody 140
PRO 163

led	PRO 165
HALOGEN	-
DISCHARGE	-
T16	PRO 166
T16-S	-
T16-NS	-



NoBody 200
PRO 171

led	PRO 173
HALOGEN	PRO 173
DISCHARGE	-
T16	PRO 174
T16-S	-
T16-NS	-



NoBody 300
PRO 181

led	PRO 183
HALOGEN	-
DISCHARGE	-
T16	PRO 184
T16-S	-
T16-NS	-

p

Borderline / Rendez-Vous

	Borderline	Rendez-Vous
		
	Borderline PRO 41	**Rendez-Vous** PRO 47
led STRIP	-	PRO 49
led FLEX	PRO 43	PRO 49



Femtoline

	Femtoline 45	Femtoline 25	Femtoline 25 T	Femtoline 25 F
				
	Femtoline 45 PRO 53	**Femtoline 25** PRO 53	**Femtoline 25 T** PRO 57	**Femtoline 25 F** PRO 57
led STRIP	-	-	-	-
led FLEX	PRO 55	PRO 55	PRO 59	PRO 59

Nanoline / Wall Line S

	Nanoline	Nanoline W	Wall Line S
			
	Nanoline PRO 61	**Nanoline W** PRO 61	**Wall Line S** PRO 67
led STRIP	PRO 63	PRO 63	PRO 69
led FLEX	PRO 63	PRO 63	PRO 69

B-Liner

		
	B-Liner 70 PRO 111	**B-Liner 65** PRO 111
led ARRAY	PRO 113	PRO 113
		


How to build your profile?

More information: *www.howtobuildyourprofile.com*


1 Select a profile.

Profile	led						◇
SPLITLINE 29	●	●					B
SPLITLINE 52	●	●			●		B
SPLITLINE 25	●	●			●		B
SPLITLINE 51	●	●			●		B
SPLIT-IT	●	●					B
BORDERLINE	●	●			●		W
RENDEZ-VOUS	●	●			●		ANO
FEMTOLINE 45	●	●			●		ANO / B / W
FEMTOLINE 25	●		●			●	ANO / B / W
FEMTOLINE 25 T	●		●			●	ANO / B / W
FEMTOLINE 25 F	●		●			●	ANO / B / W
NANOLINE	●		●			●	ANO
NANOLINE W	●		●			●	ANO
WALL LINE S	●					●	ANO
ENDLESS 30	●	●	●	●			B / W
ENDLESS 30+	●	●	●				B / W
MICROLINE 50	●	●					ANO / B / W
MICROLINE 30	●	●	●	●			ANO / W
MICROLINE 30+	●		●	●			ANO / B / W
B-LINER 70	●	●			●		ANO / B / W
B-LINER 65	●	●	●	●			ANO / B / W
HEADLINER 95	●	●					ANO / B / W
HEADLINER 75	●	●	●	●			ANO / B / W
UNILINE TR	●	●			●		ANO
UNILINE TRT	●	●			●		ANO
UNILINE 85	●	●					ANO / W
UNILINE 70	●	●	●	●			ANO / W
UNILINE TWIN	●			●			ANO / W
UNILINE WALL	●					●	ANO
MIDILINE 100L		●					ANO / W
MIDILINE 80L		●	●	●			ANO / W
MACROLINE 180		●					ANO
MACROLINE 160		●	●	●			ANO
NOBODY 140				●			ANO / W
NOBODY 200	●			●			ANO / W
NOBODY 300				●			ANO

2 Define dimensions.

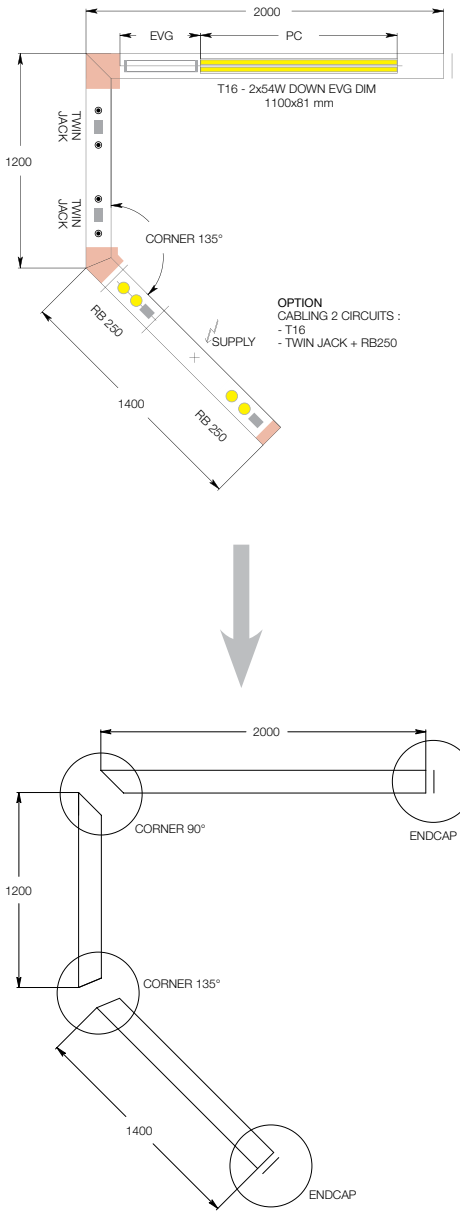


3 Select corner. Details may vary according to type of profile

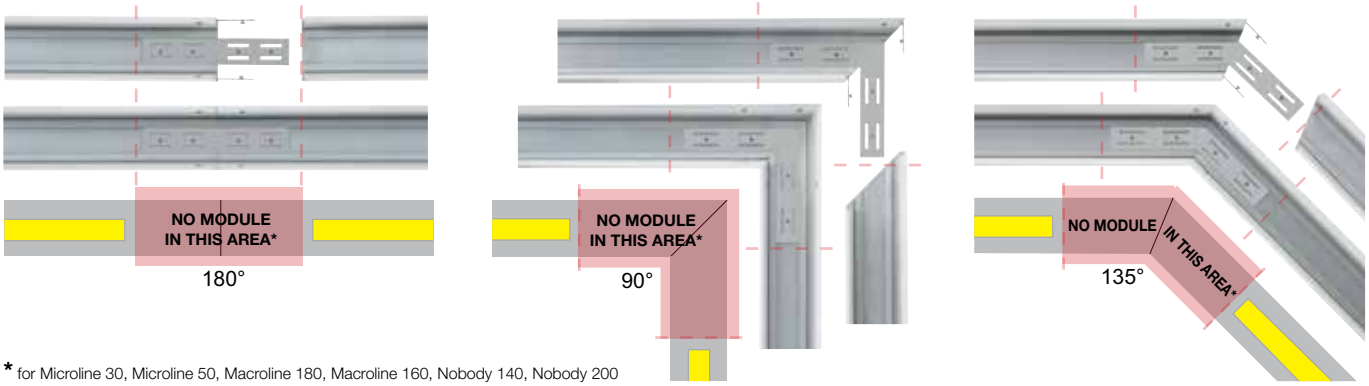


* for Microline 30, Microline 50, Macroline 180, Macroline 160, Nobody 140, Nobody 200


4 Select end cap.

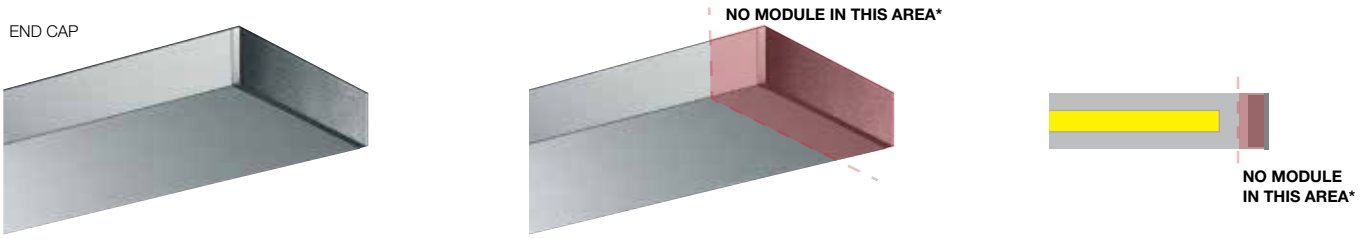



* for Femtoline 25, Nanoline, Wall line S, Endless 30/30+, Microline 30+, Uniline, Nobody 140, Nobody 200

5 Select fixation.

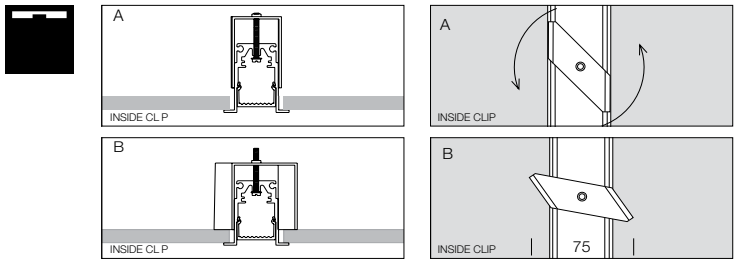



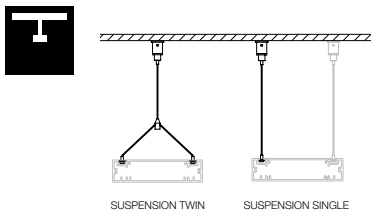



FIXATION



NO MODULE IN THIS AREA*

* for Endless 30/30+, Microline 30, Uniline 70, Uniline Twin, Midiline 80 L, Nobody 140/200/300

6 Select current supply cable.



CURRENT SUPPLY
L 1,6m / 3 x 0,75mm²
L 6,0m / 3 x 0,75mm²
L 1,6m / 5 x 0,75mm²
L 6,0m / 5 x 0,75mm² 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 /
S 62-80-90



NO MODULE IN THIS AREA*

* for Femtoline, Nanoline, Endless 30/30+, Microline 30, Uniline Twin, Nobody 140, Nobody 200

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41	
COVERSET R ◇ **204 00 62** ◇ **204 00 90** ◇ **204 00 100** ◇ ◇ = ANO / B / W	 Ø62 Ø90 Ø100	
COVERSET S ◇ **204 62 62** ◇ **204 80 80** ◇ **204 90 90** ◇ ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90	

How to build your profile?

7 Select light modules.

LED



L 162






L 200











HALOGEN



L 100




JACK



L 210



RB150




L 230





RB111

FLUORESCENT




T16

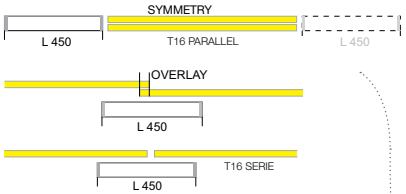





T16 SEAMLESS





T16 BAP





PC inclusive




PC non-inclusive
Continuous pc = Requirement

Requirements (continuous PC)


MIC - PC SBL PROFILE
296 02 05 SBL

EXAMPLE: MAX.L / PROFILE : 5.8m - 0,1 / m


DOWN / DOWN-UP / UP



PC / BAP / CONTINUOUS PC




PC / BAP / CONT NUOUS PC





8 Dimming.

EVG DIM 1




EVG DIM 2





REMOTE CONTROL : ON REQUEST

9 Define circuits.

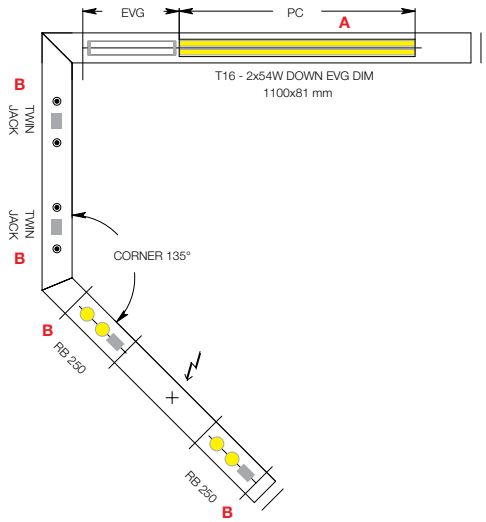

CIRCUIT **A** : T16 = 1 MODULE
CIRCUIT **B** : TWIN JACK + RB50 = 4 MODULES


MODULES B > # MODULES A
CIRCUIT **B** : STANDARD INCL.
CIRCUIT **A** : 1 x **328 90 01**

p

More information: *www.howtobuildyourprofile.com*

Trimless mounting options






60 x 80 max.25

SUSPENSION TRIMLESS
328 10 01

0,2






60 x 80 max.25

SUSPENSION + CONNECTION TRIMLESS
328 10 02

0,2





60 x 80 max.25

CONNECTION TRIMLESS
328 10 03

0,2

FULL INFO PAG TEC



ENDLESS 30+
+ SUSPENSION + CONNECTION TRIMLESS



ENDLESS 30+
+ SUSPENSION TRIMLESS
+ CONNECTION TRIMLESS





new


SPLITLINE 29

This graphically refined profile effortlessly integrates with architecture, upgrading the uniqueness of the room.

The new dimensions of the Splitline 29 facilitates installation, including perfect 90° corner constructions. Thanks to the easy-to-use inside cover cabling in between modules can be hidden.

Installation: www.deltalight.com/Splitline



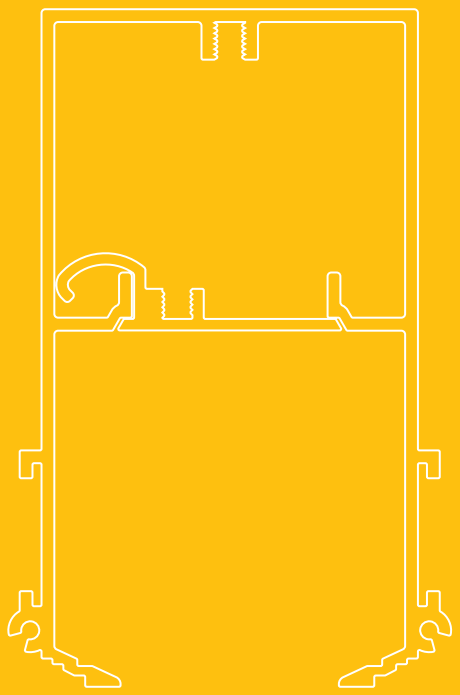

p


Splitline 29

PROFILE



SPL29 - PROFILE ◇
372 29 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m

1,0




TOL EN12020-2

END CAP



SPL29 - END CAP ◇
372 29 03 01 ◇
◇ = B


0,1



CORNER


SPL29 - CORNER 180°
372 29 06 01

0,3



SPL 29 - CORNER 90°
372 29 06 06

0,3




FIXATION


65 x (L + 5) x 125 max.25

SPL29 - CLIP
372 29 14 01


0,1



POSSIBLE INSTALLATION



SPL29
+ ENDLESS 30
+ ENDLESS T16-S DOWN



SPL29
+ ENDLESS 30+
+ ENDLESS T16-S DOWN

CURRENT SUPPLY

Splitline 29 M10

SPL29 - M10 ◇
372 29 61 01 ◇
◇ = B
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz
0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 525lm
EXCL.LED POWER SUPPLY 350mA-DC
0,3 IP20

L 160

PS



Splitline 29 LED

SPL29 - 4 LED WW ◇
372 29 61 42 ◇
◇ = B
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz
0,3 IP20


L 130

PS




Splitline 29 Modules T16 Seamless Down

SPL29 - SL-T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz
0,8 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**372 29 75 124 E**	**372 29 75 124 ED1**	**372 29 75 124 ED2**
1 x 21/39	885	**372 29 75 139 E**	**372 29 75 139 ED1**	**372 29 75 139 ED2**
1 x 28/54	1185	**372 29 75 154 E**	**372 29 75 154 ED1**	**372 29 75 154 ED2**






SPL29 - SL-T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
1,6 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**372 29 75 239 E**	**372 29 75 239 ED1**	**372 29 75 239 ED2**
2 x 28/54	2370	**372 29 75 254 E**	**372 29 75 254 ED1**	**372 29 75 254 ED2**





T16 SEAMLESS LAMP - PAG TEC

p










new

SPLITLINE 52

This recessed profile can be interpreted in very varied ways, depending on what the space needs, both functionally and in terms of design. The bigger Splitline 52 offers new opportunities thanks to the extended range of flexible modules, such as led modules or the You Turn Pro module, enabling an eye-catching combination of Splitline and You-Turn.

Installation: www.deltalight.com/Splitline



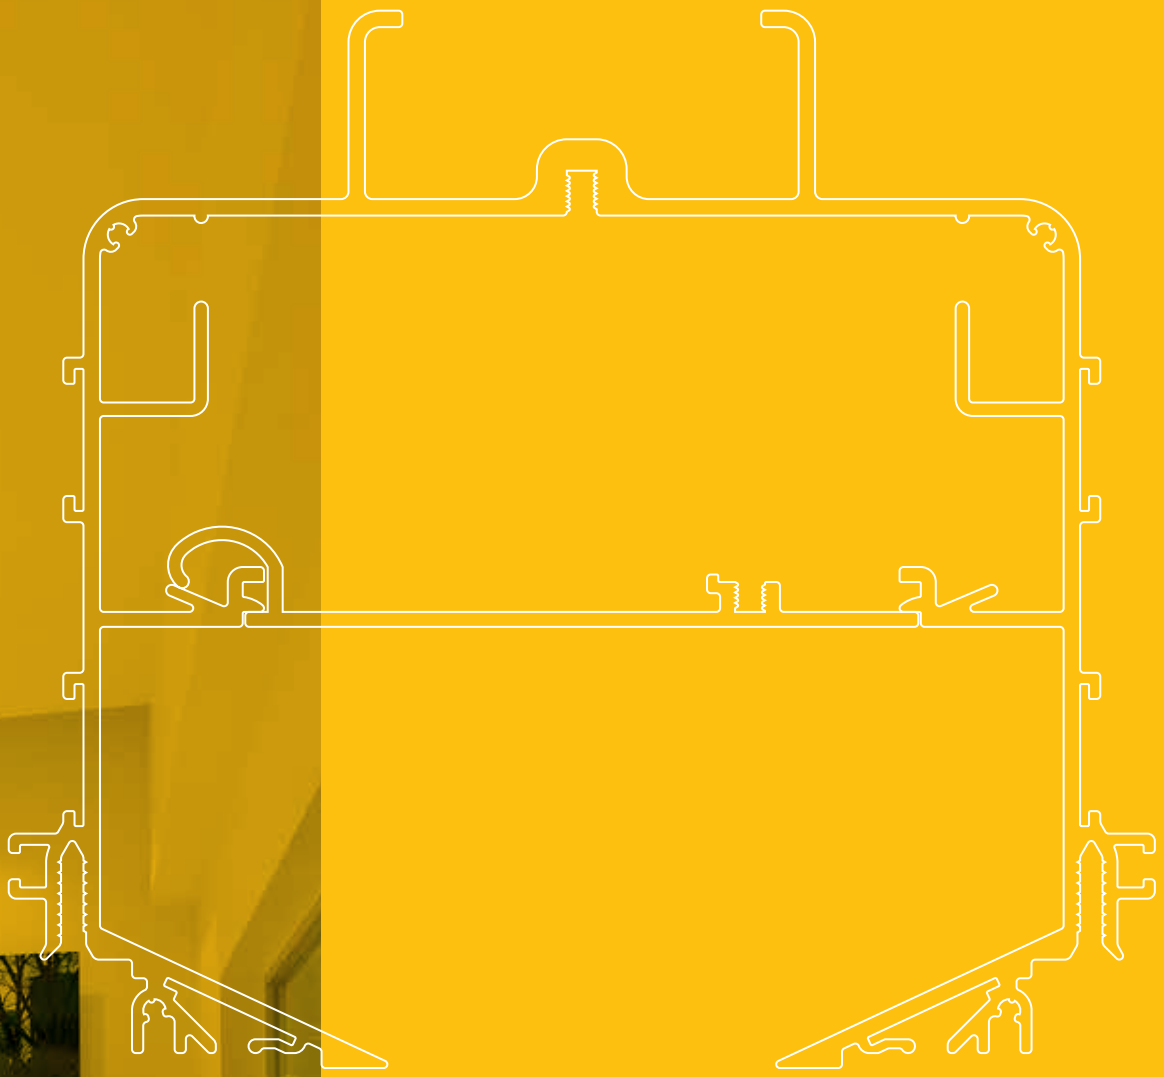


Splitline 52

PROFILE




SPL 52 - PROFILE ◇
372 52 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m
5,0



TOL EN12020-2

END CAP







SPL 52 - END CAP ◇
372 52 03 01 ◇
◇ = B
0,1

CORNER

SPL 52 - CORNER 180°
372 52 06 01
0,3




SPL 52 - CORNER 90°
372 52 06 06
0,3



FIXATION

max.12

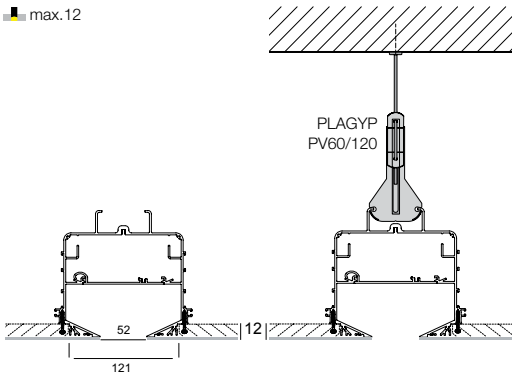

CURRENT SUPPLY

Splitline 52 M10

SPL52 - M10 ◇
372 52 61 01 ◇
◇ = B
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz
0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 525lm
EXCL.LED POWER SUPPLY 350mA-DC
0,3 IP20
L 160
PS



4000K

3000K

REFLECTOR FL-33°

REFLECTOR WFL-50°

2700K

REFLECTOR FL-33°

REFLECTOR WFL-50°

Splitline 52 LED




L 130 L 170 L 205

Splitline 52 LED D




L 130 L 170 L 205

Splitline 52 RB LED

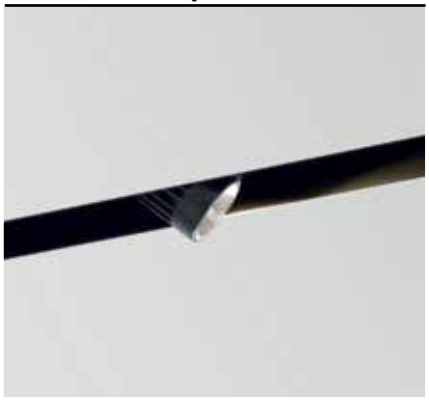

L 185 L 365

CRI > 80	CRI > 90	CRI > 80	CRI > 90	CRI > 80	CRI > 90
ON REQUEST		ON REQUEST		ON REQUEST	
660 lm	580 lm	660 lm	580 lm	660 lm	580 lm
SPL52 - 1 LED 3033 **372 52 61 8122**	**SPL52 - 1 LED 3033-9** **372 52 61 89122**	**SPL52 - 1 LED D 3033** **372 52 61 8122 D**	**SPL52 - 1 LED D 3033-9** **372 52 61 89122 D**	**SPL52 - 1 RB LED 3033** **372 52 63 8122**	**SPL52 - 1 RB LED 3033-9** **372 52 63 89122**
SPL52 - 2 LED 3033 **372 52 61 8222**	**SPL52 - 2 LED 3033-9** **372 52 61 89222**	**SPL52 - 2 LED D 3033** **372 52 61 8222 D**	**SPL52 - 2 LED D 3033-9** **372 52 61 89222 D**	**SPL52 - 2 RB LED 3033** **372 52 63 8222**	**SPL52 - 2 RB LED 3033-9** **372 52 63 89222**
SPL52 - 3 LED 3033 **372 52 61 8322**	**SPL52 - 3 LED 3033-9** **372 52 61 89322**	**SPL52 - 3 LED D 3033** **372 52 61 8322 D**	**SPL52 - 3 LED D 3033-9** **372 52 61 89322 D**		
SPL52 - 1 LED 3050 **372 52 61 8132**	**SPL52 - 1 LED 3050-9** **372 52 61 89132**			**SPL52 - 1 RB LED 3050** **372 52 63 8132**	**SPL52 - 1 RB LED 3050-9** **372 52 63 89132**
SPL52 - 2 LED 3050 **372 52 61 8232**	**SPL52 - 2 LED 3050-9** **372 52 61 89232**			**SPL52 - 2 RB LED 3050** **372 52 63 8232**	**SPL52 - 2 RB LED 3050-9** **372 52 63 89232**
SPL52 - 3 LED 3050 **372 52 61 8332**	**SPL52 - 3 LED 3050-9** **372 52 61 89332**				
620 lm	525 lm	620 lm	525 lm	620 lm	525 lm
SPL52 - 1 LED 2733 **372 52 61 8123**	**SPL52 - 1 LED 2733-9** **372 52 61 89123**	**SPL52 - 1 LED D 2733** **372 52 61 8123 D**	**SPL52 - 1 LED D 2733-9** **372 52 61 89123 D**	**SPL52 - 1 RB LED 2733** **372 52 63 8123**	**SPL52 - 1 RB LED 2733-9** **372 52 63 89123**
SPL52 - 2 LED 2733 **372 52 61 8223**	**SPL52 - 2 LED 2733-9** **372 52 61 89223**	**SPL52 - 2 LED D 2733** **372 52 61 8223 D**	**SPL52 - 2 LED D 2733-9** **372 52 61 89223 D**	**SPL52 - 2 RB LED 2733** **372 52 63 8223**	**SPL52 - 2 RB LED 2733-9** **372 52 63 89223**
SPL52 - 3 LED 2733 **372 52 61 8323**	**SPL52 - 3 LED 2733-9** **372 52 61 89323**	**SPL52 - 3 LED D 2733** **372 52 61 8323 D**	**SPL52 - 3 LED D 2733-9** **372 52 61 89323 D**		
SPL52 - 1 LED 2750 **372 52 61 8133**	**SPL52 - 1 LED 2750-9** **372 52 61 89133**			**SPL52 - 1 RB LED 2750** **372 52 63 8133**	**SPL52 - 1 RB LED 2750-9** **372 52 63 89133**
SPL52 - 2 LED 2750 **372 52 61 8233**	**SPL52 - 2 LED 2750-9** **372 52 61 89233**			**SPL52 - 2 RB LED 2750** **372 52 63 8233**	**SPL52 - 2 RB LED 2750-9** **372 52 63 89233**
SPL52 - 3 LED 2750 **372 52 61 8333**	**SPL52 - 3 LED 2750-9** **372 52 61 89333**				
FIXED INCL.POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 0,3 IP20		FIXED INCL.POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 0,3 IP20		ADJUSTABLE 0-30° / 350° INCL.POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 0,3 IP20	





led

Splitline You-Turn LED










p

	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	2130 lm	1750 lm	2130 lm	1750 lm
REFLECTOR SP-15°			**YOU-TURN SPL OPTO 203015 ◇** **313 121 20112 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 203015-9 ◇** **313 121 209112 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN SPL REO 203033 ◇** **313 120 20122 ◇** ◇ = W-B	**YOU-TURN SPL REO 203033-9 ◇** **313 120 209122 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 203033 ◇** **313 121 20122 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 203033-9 ◇** **313 121 209122 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN SPL REO 203050 ◇** **313 120 20132 ◇** ◇ = W-B	**YOU-TURN SPL REO 203050-9 ◇** **313 120 209132 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN SPL OPTO 203055 ◇** **313 121 20132 ◇** ◇ = W-B	**YOU-TURN ON OPTO 203055-9 ◇** **313 121 209132 ◇** ◇ = W-B
2700K	1990 lm	1735 lm	1990 lm	1735 lm
REFLECTOR SP-15°			**YOU-TURN SPL OPTO 202715 ◇** **313 121 20113 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 202715-9 ◇** **313 121 209113 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN SPL REO 202733 ◇** **313 120 20123 ◇** ◇ = W-B	**YOU-TURN SPL REO 202733-9 ◇** **313 120 209123 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 202733 ◇** **313 121 20123 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 202733-9 ◇** **313 121 209123 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN SPL REO 202750 ◇** **313 120 20133 ◇** ◇ = W-B	**YOU-TURN SPL REO 202750-9 ◇** **313 120 209133 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN SPL OPTO 202755 ◇** **313 121 20133 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 202755-9 ◇** **313 121 209133 ◇** ◇ = W-B
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 25W INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz ◇ CE 1,6 IP20		ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 25W INCL.1 x EFT FILTER* INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz ◇ CE 1,7 IP20	

*EFT / EQUALISING FILTER TECHNOLOGY


Splitline You-Turn






YOU-TURN SPL 111 XL T50 ◇
313 12 121 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
IP20 1,0





YOU-TURN SPL H111-35 ◇
313 12 1935 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 35W
IP20 1,0



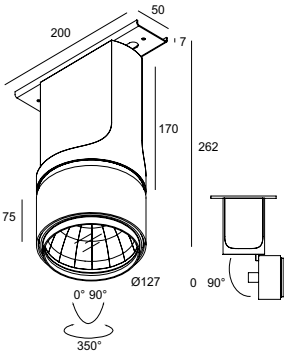

YOU-TURN SPL HIT-35 SP15 ◇
313 12 133 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN SPL HIT-35 FL24 ◇
313 12 133 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN SPL HIT-35 WFL43 ◇
313 12 133 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W
CE 1,6 IP20 1,0



YOU-TURN SPL H111-70 ◇
313 12 1975 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 70W
CE 1,6 IP20 1,0

YOU-TURN SPL HIT-70 SP15 ◇
313 12 137 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN SPL HIT-70 FL24 ◇
313 12 137 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN SPL HIT-70 WFL43 ◇
313 12 137 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W
CE 1,6 IP20 1,0

reddot design award
winner 2012





SPLITLINE 25/51

With Splitline narrow and wide streets draw black lines through space and literally form a ‘lighting path’ that dialogues with the architecture of room. LED modules for accent lighting, T5 Seamless lamps for general light, or high-power LED modules for an extra-powerful solution. You can further upgrade your lighting design by combining the 25 with the 51 Splitline profiles.



Installation: www.deltalight.com/Splitline


Splitline 25

Splitline 51

PROFILE




SPL 25 - PROFILE ◇
372 25 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m
4,3



TOL EN12020-2



SPL 51 - PROFILE ◇
372 51 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m
4,3




TOL EN12020-2

END CAP




SPL 25 - END CAP ◇
372 25 03 01 ◇
◇ = B
0,1






SPL 51 - END CAP ◇
372 51 03 01 ◇
◇ = B
0,1




CORNER


SPL 25 - CORNER 180°
372 25 06 01
0,3




SPL 25 - CORNER 90°
372 25 06 06
0,3





SPL - CORNER SET 90° MIX L
372 25 51 06 L
1,3






SPL - CORNER SET 90° MIX R
372 25 51 06 R
1,3







SPL 51 - CORNER 180°
372 51 06 01
0,3




SPL 51 - CORNER 90°
372 51 06 06
0,3





SPL - CORNER SET 90° MIX L
372 25 51 06 L
1,3






SPL - CORNER SET 90° MIX R
372 25 51 06 R
1,3






FIXATION

INSTALLATION



INSTALLATION



CURRENT SUPPLY

led

Splitline 25 LED

SPL25 - 4 LED WW ◇
372 61 42 ◇
◇ = B
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 0,1 IP20

L 162

PS



led

Splitline 51 LED


	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**SPL51 - 1 LED 3033** **372 61 8122**	**SPL51 - 1 LED 3033-9** **372 61 89122**
	SPL51 - 2 LED 3033 **372 61 8222**	**SPL51 - 2 LED 3033-9** **372 61 89222**
	SPL51 - 3 LED 3033 **372 61 8322**	**SPL51 - 3 LED 3033-9** **372 61 89322**
REFLECTOR WFL-50°	**SPL51 - 1 LED 3050** **372 61 8132**	**SPL51 - 1 LED 3050-9** **372 61 89132**
	SPL51 - 2 LED 3050 **372 61 8232**	**SPL51 - 2 LED 3050-9** **372 61 89232**
	SPL51 - 3 LED 3050 **372 61 8332**	**SPL51 - 3 LED 3050-9** **372 61 89332**
2700K	620 lm	525 lm
REFLECTOR FL-33°	**SPL51 - 1 LED 2733** **372 61 8123**	**SPL51 - 1 LED 2733-9** **372 61 89123**
	SPL51 - 2 LED 2733 **372 61 8223**	**SPL51 - 2 LED 2733-9** **372 61 89223**
	SPL51 - 3 LED 2733 **372 61 8323**	**SPL51 - 3 LED 2733-9** **372 61 89323**
REFLECTOR WFL-50°	**SPL51 - 1 LED 2750** **372 61 8133**	**SPL51 - 1 LED 2750-9** **372 61 89133**
	SPL51 - 2 LED 2750 **372 61 8233**	**SPL51 - 2 LED 2750-9** **372 61 89233**
	SPL51 - 3 LED 2750 **372 61 8333**	**SPL51 - 3 LED 2750-9** **372 61 89333**

FIXED
INCL.POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,3 IP20

L 130 L 170 L 205

PS PS PS

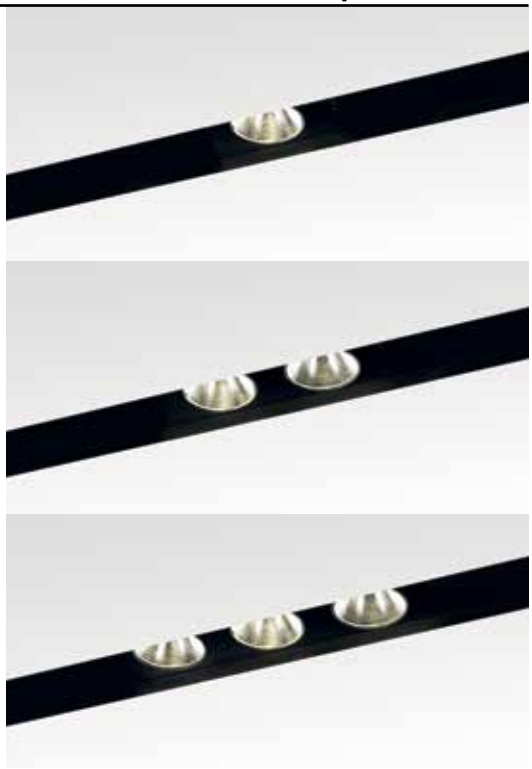

new

led

Splitline M10

SPL25 - M10 ◇
372 25 61 01 ◇
◇ = B
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

CE 0,3 IP20

SPL51 - M10 ◇
372 51 61 01 ◇
◇ = B
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

CE 0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 525lm
EXCL.LED POWER SUPPLY 350mA-DC

CE 0,3 IP20

L 160

PS






Splitline Modules T16 Seamless Down

SPL SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz

1,6 IP20 0,1







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**372 75 239 E**	**372 75 239 ED1**	**372 75 239 ED2**
2 x 28/54	2370	**372 75 254 E**	**372 75 254 ED1**	**372 75 254 ED2**



SPL SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz

0,8 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**372 75 124 E**		
1 x 21/39	885	**372 75 139 E**	**372 75 139 ED1**	**372 75 139 ED2**
1 x 28/54	1185	**372 75 154 E**	**372 75 154 ED1**	**372 75 154 ED2**



T16 SEAMLESS - PAG TEC



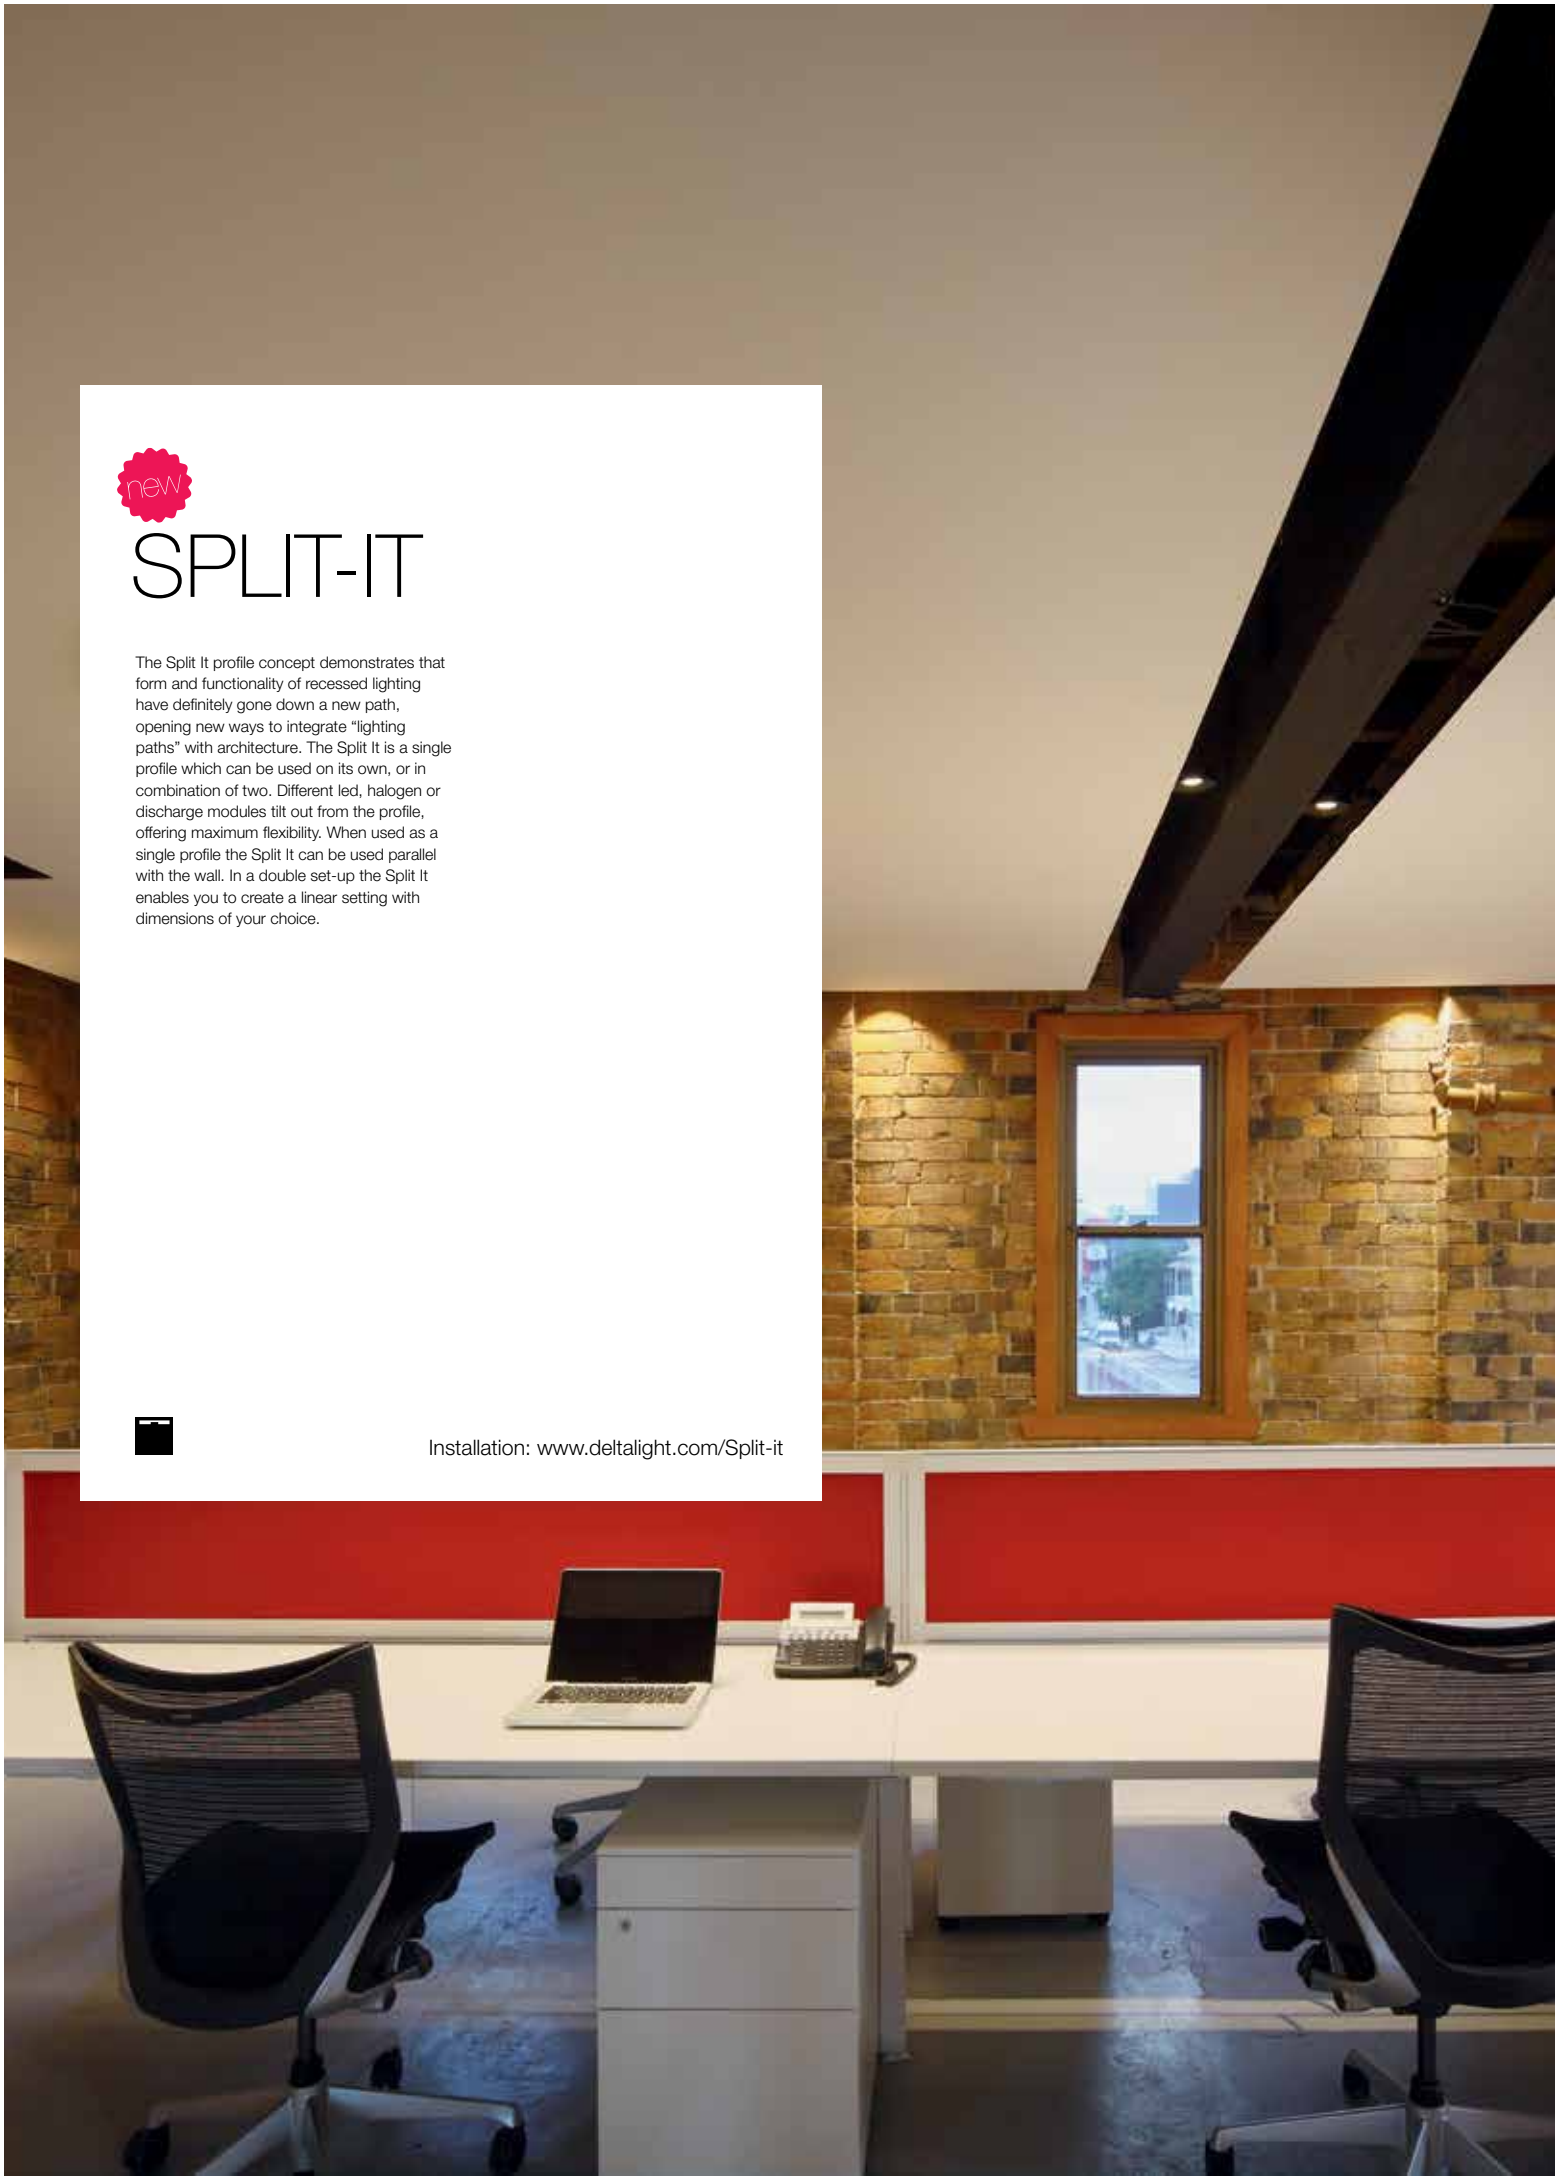



new

SPLIT-IT

The Split It profile concept demonstrates that form and functionality of recessed lighting have definitely gone down a new path, opening new ways to integrate “lighting paths” with architecture. The Split It is a single profile which can be used on its own, or in combination of two. Different led, halogen or discharge modules tilt out from the profile, offering maximum flexibility. When used as a single profile the Split It can be used parallel with the wall. In a double set-up the Split It enables you to create a linear setting with dimensions of your choice.

Installation: www.deltalight.com/Split-it

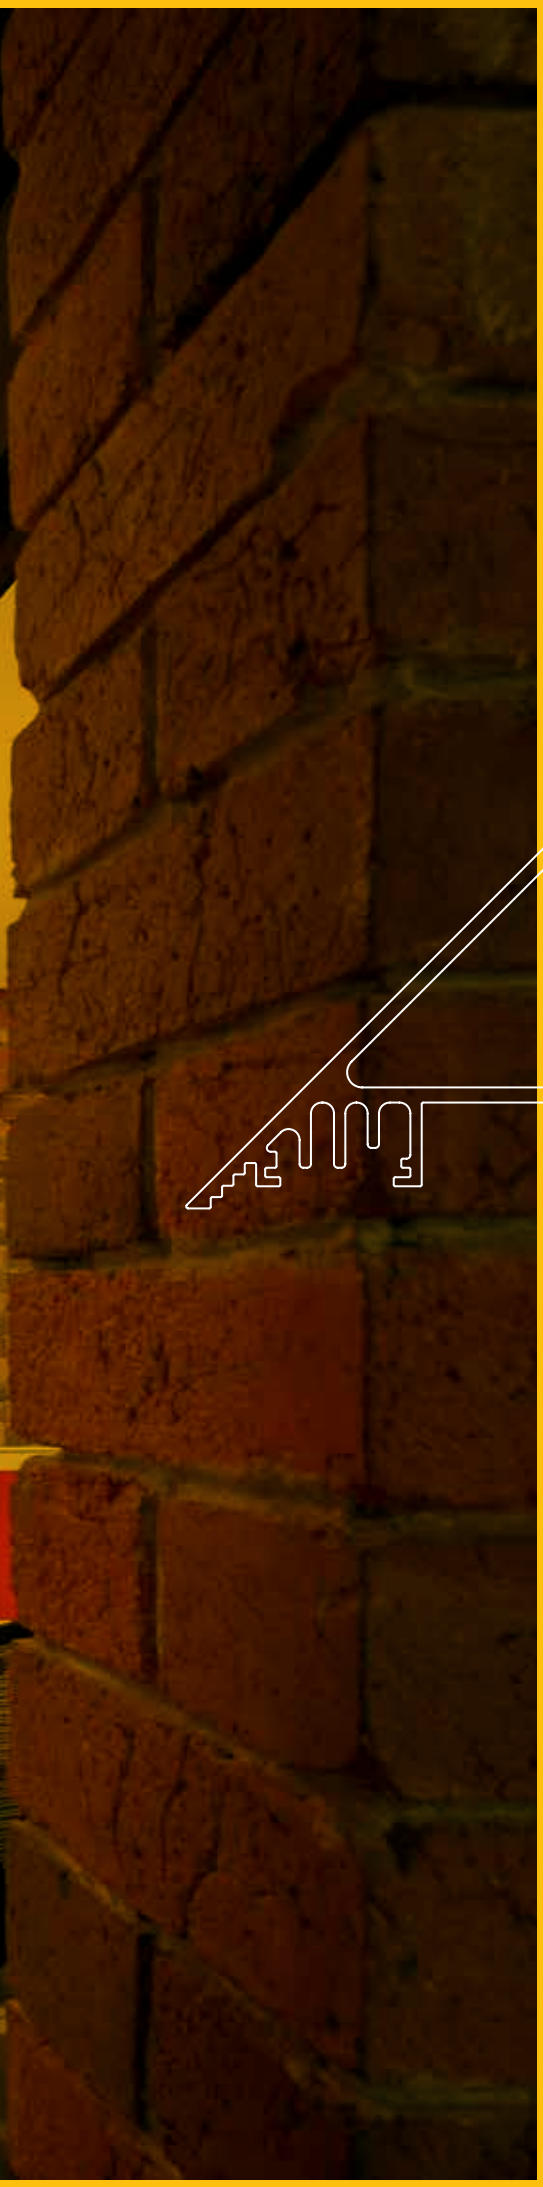

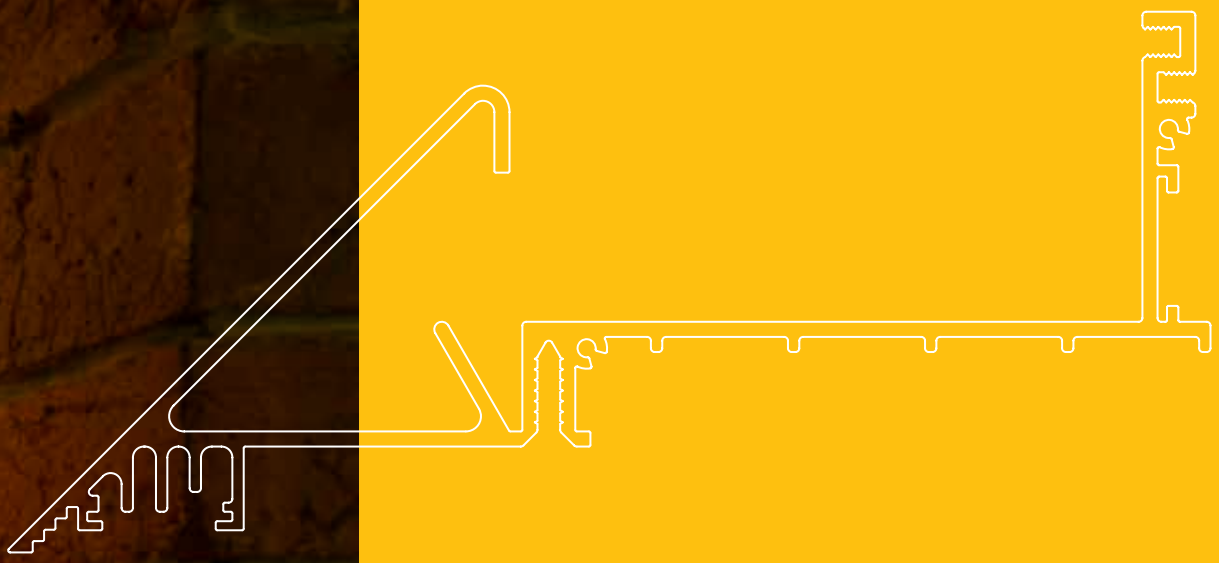


Split-it

PROFILE



SPT - PROFILE ◇
372 00 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m

2,2




TOL EN12020-2


END CAP

CORNER


SPT - CORNER 180°
372 00 06 01
0,3



SPT - CORNER 90° INT
372 00 06 06
0,3





SPT - CORNER 90° EXT
372 00 06 16
0,3



FIXATION


POSITION FOR INSTALLATION



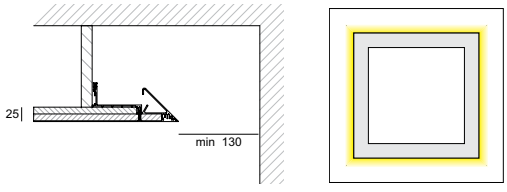

CURRENT SUPPLY


SPLIT-IT RB111 B + REO 111 3033 B

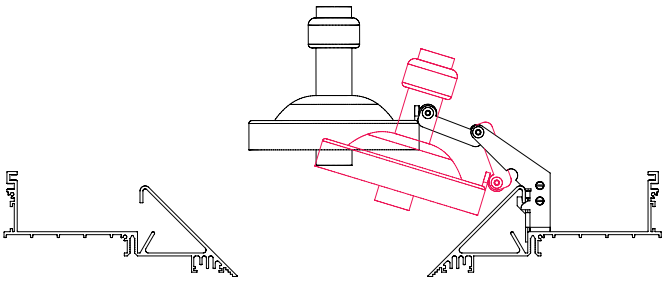

Split-it RB111

SPT - RB111 ◇
372 00 61 231 ◇
◇ = B
ADJUSTABLE 0°-30°
EXCL.MOUNTING
EXCL.CABLING
G53 / 220-240V / 50-60Hz / TE
led SOLUTION - PAG TEC
1 x QR-LP111 max.50W
CE 0,5 IP20 1,0

L 390
TE



Split-it H111

SPT - H111-35 EVG ◇
372 00 61 1135 E ◇
1 x HIR111-CE-P 35W

SPT - H111-70 EVG ◇
372 00 61 1170 E ◇
1 x HIR111-CE-P 70W

◇ = B
ADJUSTABLE 0°-30°
EXCL.MOUNTING
EXCL.CABLING
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
CE 1,6 IP20 0,5

L 350
EVG






p

BORDERLINE

The Borderline enables you to frame the room with light using led, creating a contemporary and atmospheric look and feel. This profile can be used for both wall and ceiling application and features a remarkable trimless finishing, although easy to install and finish. A contemporary indirect lighting solution with exceptional eye for architectural detail.





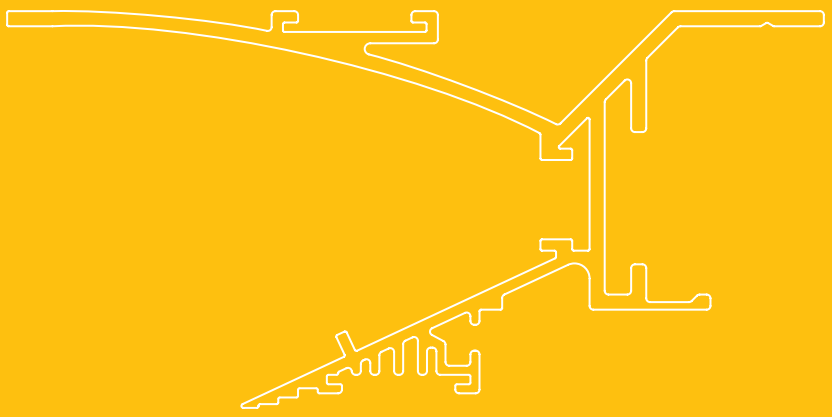


Borderline

PROFILE



BL - PROFILE ◇
371 00 00 ◇
◇ = W
MAX.L / PROFILE : 6m
Kg / m
1,5




TOL EN12020-2


END CAP

CORNER


BL - CORNER 180°
371 06 01
0,3



BL - CORNER 90° INT
371 06 06
0,3




BL - CORNER 90° EXT
371 06 16
0,3



FIXATION

POSITION FOR INSTALLATION

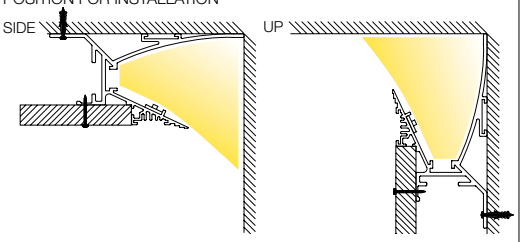

CURRENT SUPPLY



Ledflex


5m - 24V-DC 0,3




	White		RGB
	Dividable per 100mm 60 smd LED/m		Dividable per 167mm 30 smd LED/m
led	5W/m 360 lm/m	new 15W/m 1000 lm/m	8W/m
4000K			
IN	**LEDFLEX IN NW** **300 91 52 04**	**LEDFLEX IN FP NW** **300 91 53 04**	
OUT IP65	**LEDFLEX OUT NW** **300 91 62 04**	**LEDFLEX OUT FP NW** **300 91 63 04**	
3000K			
IN	**LEDFLEX IN WW** **300 91 52 02**	**LEDFLEX IN FP WW** **300 91 53 02**	
OUT IP65	**LEDFLEX OUT WW** **300 91 62 02**	**LEDFLEX OUT FP WW** **300 91 63 02**	
2700K new			
IN	**LEDFLEX IN HW** **300 91 52 03**	**LEDFLEX IN FP HW** **300 91 53 03**	
OUT IP65	**LEDFLEX OUT HW** **300 91 62 03**	**LEDFLEX OUT FP HW** **300 91 63 03**	
RGB			
IN			**LEDFLEX IN RGB** **300 91 52 33**
OUT IP65			**LEDFLEX OUT RGB** **300 91 62 33**
FULL INFO / PAG TEC			
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	max.4 m	max.1 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	max.8 m	max.2,5 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	max.12 m	max.4 m (max.3m / Powerline)	⊛ max.7,36 m
new **LED POWER SUPPLY 24V-DC / 80W DIM1** **300 89 24 80**	max.16 m	max.5 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	max.30 m	max.10 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 **300 90 60**	max.4 m	max.1 m	
LED POWER SUPPLY MULTI POWER DIM6 **300 90 61**	max.4 m	max.1 m	
RGB DRIVER 12/24V-DC 75/150W **300 90 331**			⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX **300 90 330**			⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

p

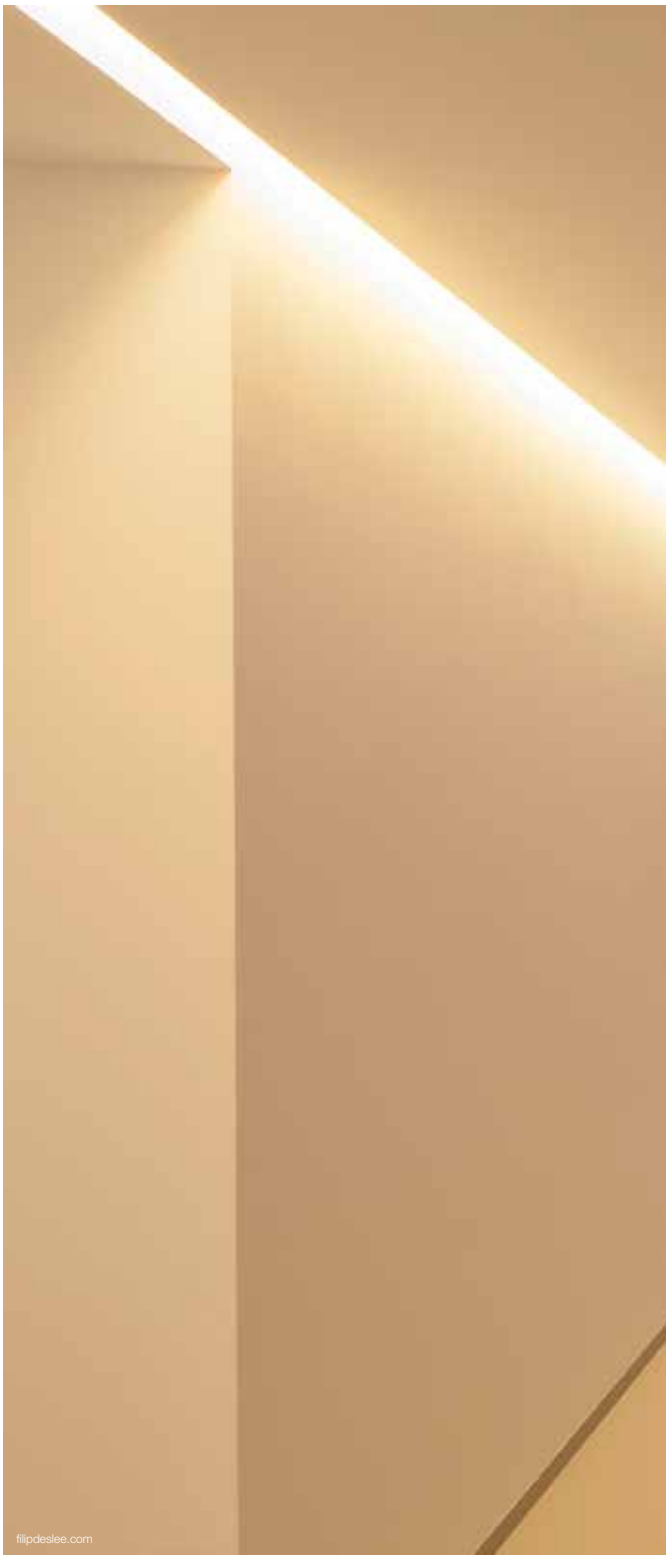
filipdeslee.com

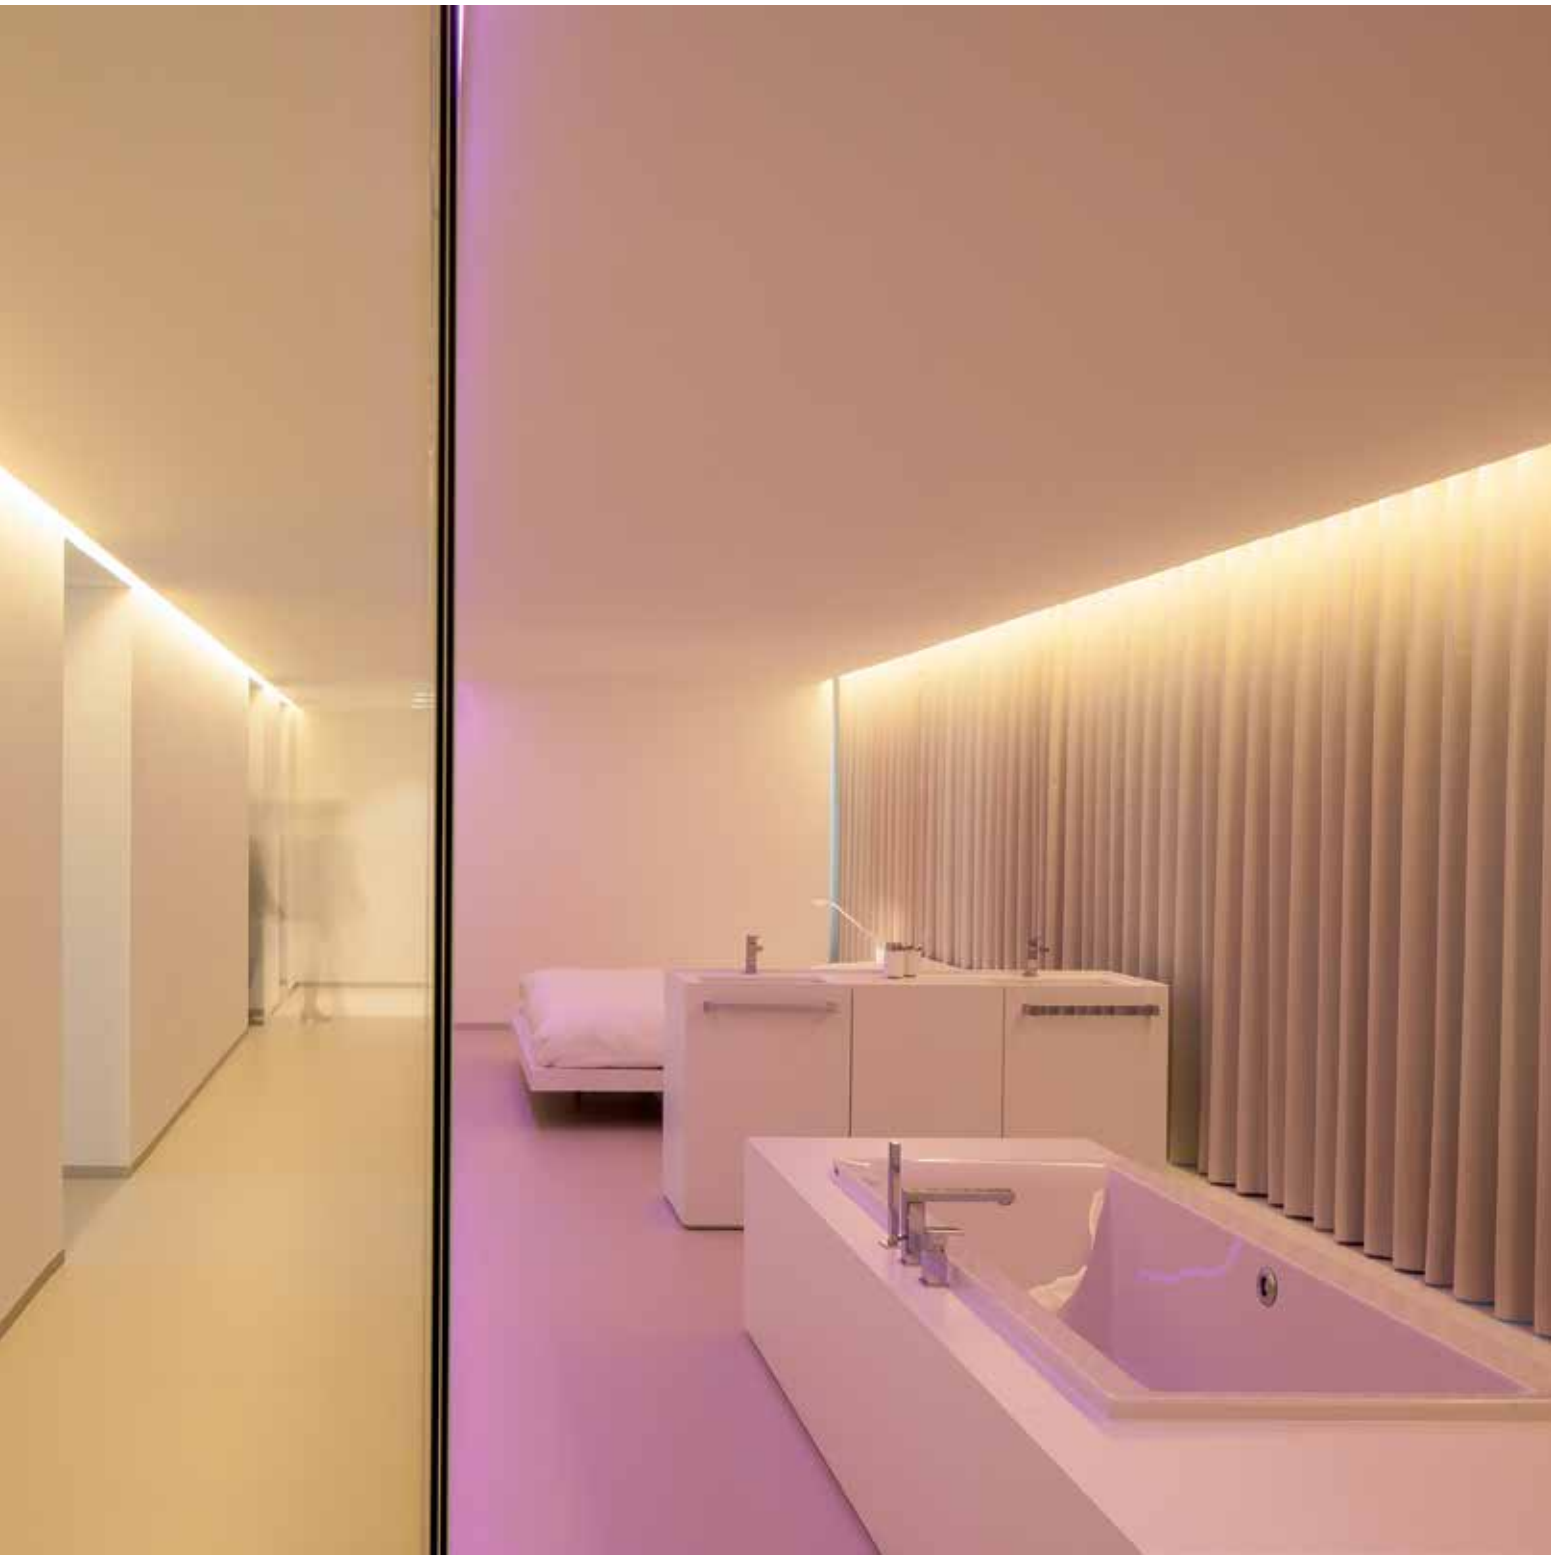


RENDEZ-VOUS

The Rendez-vous is an anodized profile offering a variety of led solutions. It was designed as a skirting-board profile, but can also be invisibly worked into the wall or ceiling. A lighting rendez-vous where floor or ceiling meets the wall.






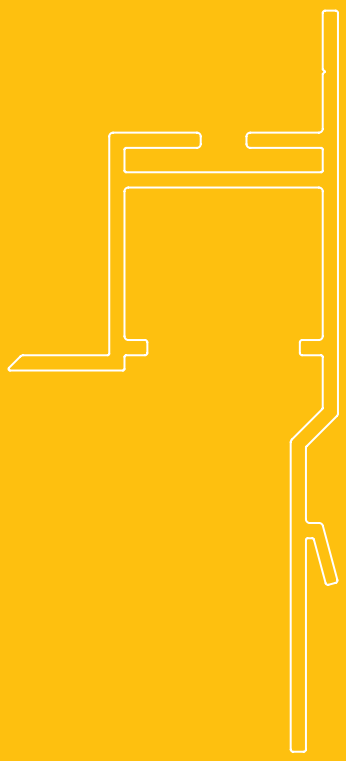

p


Rendez-Vous

PROFILE

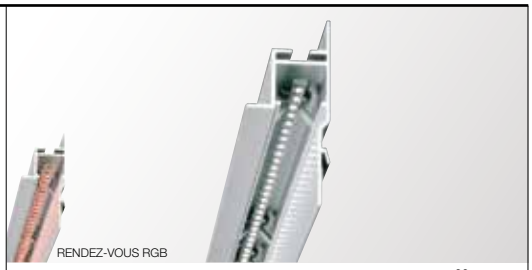

RV - PROFILE ◇
333 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m

1,1




TOL EN12020-2


END CAP

CORNER


RV - CORNER 180°
333 06 01
0,3



RV - CORNER 90° INT
333 06 06
0,3




RV - CORNER 90° EXT
333 06 16
0,3




FIXATION


RV - WALL FIXATION
333 06 10



POSITION FOR INSTALLATION

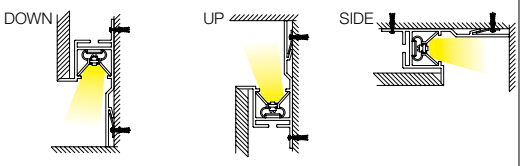

CURRENT SUPPLY

	Ledstrip 0,5m - 24V-DC 0,1 			Ledflex 5m - 24V-DC 0,3 		
	White Dividable per 100mm 30 smd LED +/- 50K		**RGB** Dividable per 100mm 30 smd LED	**White** Dividable per 100mm 60 smd LED/m		**RGB** Dividable per 167mm 30 smd LED/m
led	**6W/m 440 lm/m**	**new 20W/m 1260 lm/m**	**15W/m**	**5W/m 360 lm/m**	**new 15W/m 1000 lm/m**	**8W/m**
4000K						
IN	**LEDSTRIP 11 F NW 300 91 10 11 F NW**	**LEDSTRIP 11 FP NW 300 91 10 11 FP NW**		**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**	
OUT IP65				**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**	
3000K						
IN	**LEDSTRIP 11 F WW 300 91 10 11 F WW**	**LEDSTRIP 11 FP WW 300 91 10 11 FP WW**		**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	
OUT IP65				**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**	
2700K new						
IN	**LEDSTRIP 11 F HW 300 91 10 11 F HW**	**LEDSTRIP 11 FP HW 300 91 10 11 FP HW**		**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	
OUT IP65				**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**	
RGB						
IN			**LEDSTRIP 11 RGB 300 91 33 11**			**LEDFLEX IN RGB 300 91 52 33**
OUT IP65						**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC						
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.6	max.2	⊛ max.2	max.4 m	max.1 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.13	max.4	⊛ max.5	max.8 m	max.2,5 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.20	max.6	⊛ max.7	max.12 m	max.4 m (max.3m / Powerline)	⊛ max.7,36 m
new **LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80**	max.26	max.8 (max.6 / Powerline)		max.16 m	max.5 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.50	max.15 (max.6 / Powerline)	⊛ max.18	max.30 m	max.10 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.6	max.2		max.4 m	max.1 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.6	max.2		max.4 m	max.1 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331			⊛ use in combination with Led Power Supply 24V-DC			⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330			⊛ use in combination with RGB Driver			⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V



filipdeslee.com








FEMTOLINE 45/25


Multifunctional in use, the Femtoline led profile can be used in both interior and exterior lighting concepts. The ultra-minimalistic design and extensive options in flexible RGB, warm and cold white LED allow you to create endless lines of light, either recessed or surface mounted. The polycarbonate guarantees a pleasurable light effect, and unifies single led dots to one continuous line.

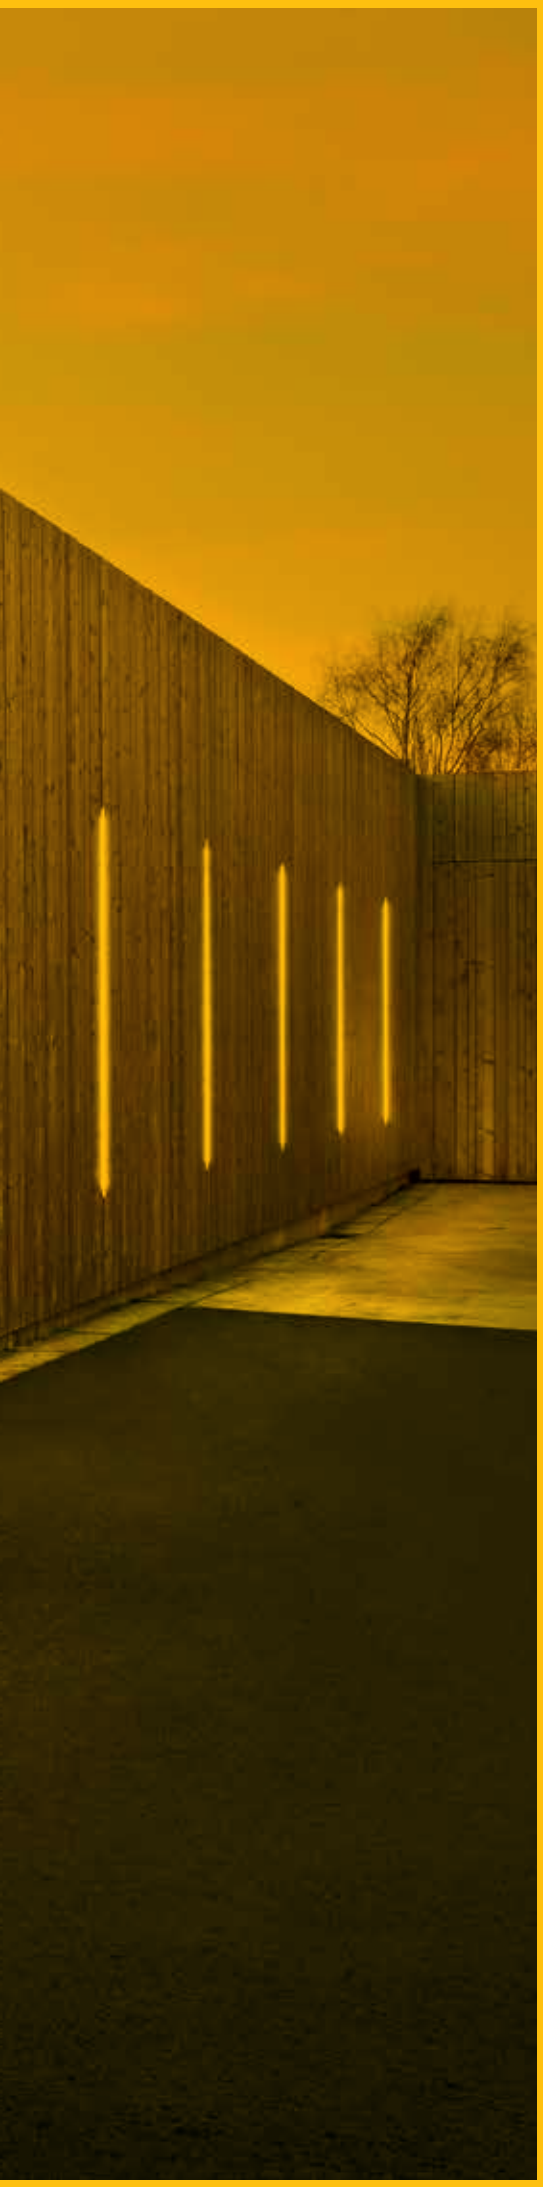

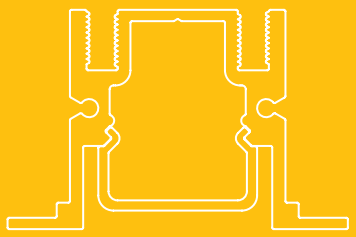







p


Femtoline 45

PROFILE



FTL45 - PROFILE ◇
376 00 00 ◇
◇ = ANO / B / W
INCL. PC SBL
MAX.L / PROFILE : 6m
Kg / m


0,8



TOL EN12020-2

END CAP






FTL45 - END CAP SET ◇
376 03 01 ◇
◇ = ANO / B / W
SET OF 2 PCS

0,2

CORNER

FTL45 - CORNER 90°
376 06 06

0,2




FIXATION

37 x (L + 12) x 40 max.13


FTL45 - FIXATION
376 14 01
SET OF 2 PIECES

0,1




POSITION FOR INSTALLATION

DOWN



SIDE



CURRENT SUPPLY

NO MODULE IN THIS AREA 10 mm



Femtoline 25




FTL25 - PROFILE ◇
375 00 00 ◇
◇ = ANO / B / W
INCL. PC SBL
MAX.L / PROFILE : 6m
Kg / m

0,4



TOL EN12020-2





FTL25 - END CAP SET ◇
375 03 01 ◇
◇ = A / B / W
SET OF 2 PCS


0,1

NO MODULE IN THIS AREA 5 mm




FTL25 - CORNER 90°
375 06 06

0,2




POSITION FOR INSTALLATION


UP



DOWN



SIDE



NO MODULE IN THIS AREA 10 mm



Ledflex

5m - 24V-DC 0,3



	White		RGB
	Dividable per 100mm 60 smd LED/m		Dividable per 167mm 30 smd LED/m
led	5W/m 360 lm/m	new 15W/m 1000 lm/m	8W/m
4000K			
IN	**LEDFLEX IN NW** **300 91 52 04**	**LEDFLEX IN FP NW** **300 91 53 04**	
OUT IP65	**LEDFLEX OUT NW** **300 91 62 04**	**LEDFLEX OUT FP NW** **300 91 63 04**	
3000K			
IN	**LEDFLEX IN WW** **300 91 52 02**	**LEDFLEX IN FP WW** **300 91 53 02**	
OUT IP65	**LEDFLEX OUT WW** **300 91 62 02**	**LEDFLEX OUT FP WW** **300 91 63 02**	
2700K new			
IN	**LEDFLEX IN HW** **300 91 52 03**	**LEDFLEX IN FP HW** **300 91 53 03**	
OUT IP65	**LEDFLEX OUT HW** **300 91 62 03**	**LEDFLEX OUT FP HW** **300 91 63 03**	
RGB			
IN			**LEDFLEX IN RGB** **300 91 52 33**
OUT IP65			**LEDFLEX OUT RGB** **300 91 62 33**
FULL INFO / PAG TEC			
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	max.4 m	max.1 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	max.8 m	max.2,5 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	max.12 m	max.4 m (max.3m / Powerline)	⊛ max.7,36 m
new **LED POWER SUPPLY 24V-DC / 80W DIM1** **300 89 24 80**	max.16 m	max.5 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	max.30 m	max.10 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 **300 90 60**	max.4 m	max.1 m	
LED POWER SUPPLY MULTI POWER DIM6 **300 90 61**	max.4 m	max.1 m	
RGB DRIVER 12/24V-DC 75/150W **300 90 331**			⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX **300 90 330**			⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V










p






Femtoline 25 T

Femtoline 25 F

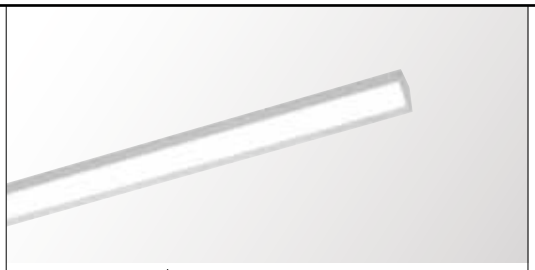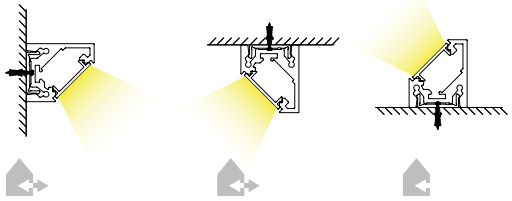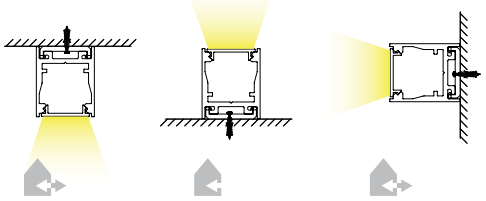	Femtoline 25 T	Femtoline 25 F
PROFILE	 **FTL25 T - PROFILE ◇** **381 00 00 ◇** ◇ = ANO / B / W INCL. PC SBL MAX.L / PROFILE : 6m Kg / m 0,7  TOL EN12020-2	 **FTL25 F - PROFILE ◇** **382 00 00 ◇** ◇ = ANO / B / W INCL. PC SBL MAX.L / PROFILE : 6m Kg / m 0,6  TOL EN12020-2
END CAP	 **FTL25 T - END CAP SET ◇** **381 03 01 ◇** ◇ = A / B / W SET OF 2 PCS 0,2  **NO MODULE IN THIS AREA** 5 mm 	 **FTL25 F - END CAP SET ◇** **382 03 01 ◇** ◇ = A / B / W SET OF 2 PCS 0,1  **NO MODULE IN THIS AREA** 5 mm 
CORNER		
FIXATION	POSITION FOR INSTALLATION SIDE DOWN UP 	**NL - FIXATION SET** **364 06 11** SET OF 10 PCS 0,1  POSITION FOR INSTALLATION DOWN UP SIDE 
CURRENT SUPPLY	**NO MODULE IN THIS AREA** 10 mm 	**NO MODULE IN THIS AREA** 10 mm 

	Ledstrip 0,5m - 24V-DC 0,1 			Ledflex 5m - 24V-DC 0,3 		
	White Dividable per 100mm 30 smd LED +/- 50K		**RGB** Dividable per 100mm 30 smd LED	**White** Dividable per 100mm 60 smd LED/m		**RGB** Dividable per 167mm 30 smd LED/m
led	**6W/m 440 lm/m**	new **20W/m 1260 lm/m**	**15W/m**	**5W/m 360 lm/m**	new **15W/m 1000 lm/m**	**8W/m**
4000K						
IN	**LEDSTRIP 12 F NW 300 91 10 12 F NW**	**LEDSTRIP 12 FP NW 300 91 10 12 FP NW**		**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**	
OUT IP65				**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**	
3000K						
IN	**LEDSTRIP 12 F WW 300 91 10 12 F WW**	**LEDSTRIP 12 FP WW 300 91 10 12 FP WW**		**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	
OUT IP65				**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**	
2700K new						
IN	**LEDSTRIP 12 F HW 300 91 10 12 F HW**	**LEDSTRIP 12 FP HW 300 91 10 12 FP HW**		**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	
OUT IP65				**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**	
RGB						
IN			**LEDSTRIP 12 RGB 300 91 33 12**			**LEDFLEX IN RGB 300 91 52 33**
OUT IP65						**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC						
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.6	max.2	⊛ max.2	max.4 m	max.1 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.13	max.4	⊛ max.5	max.8 m	max.2,5 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.20	max.6	⊛ max.7	max.12 m	max.4 m (max.3m / Powerline)	⊛ max.7,36 m
new **LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80**	max.26	max.8 (max.6 / Powerline)		max.16 m	max.5 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.50	max.15 (max.6 / Powerline)	⊛ max.18	max.30 m	max.10 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.6	max.2		max.4 m	max.1 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.6	max.2		max.4 m	max.1 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331			⊛ use in combination with Led Power Supply 24V-DC			⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330			⊛ use in combination with RGB Driver			⊛ use in combination with RGB Driver


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V





NANOLINE / W










Nanoline is a very slim and multifunctional led profile, which can be used in both interior and exterior lighting concepts.


Isagen / AIA

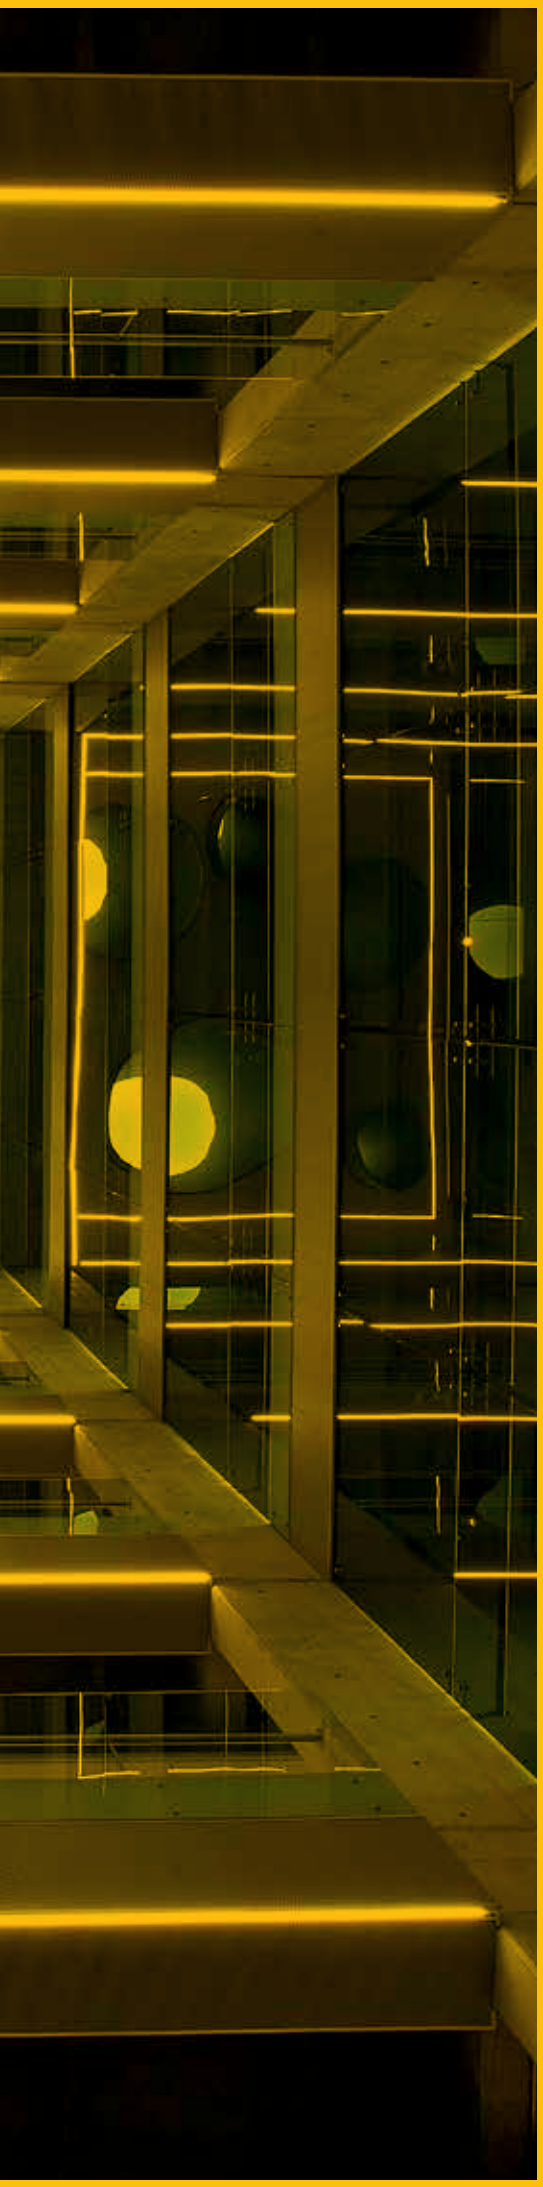





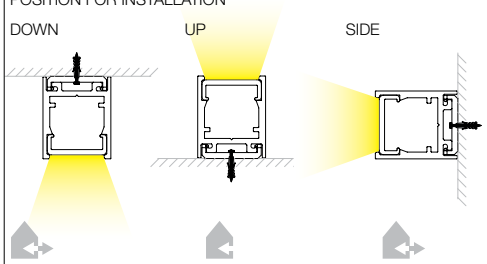
	Nanoline	Nanoline W
PROFILE	 NANOLINE / LEDSTRIP NEUTRAL WHITE **NL - PROFILE CL ◇** **364 00 00 CL ◇** ◇ = ANO INCL.NANOLINE - PC CLEAR **NL - PROFILE SBL ◇** **364 00 00 SBL ◇** ◇ = ANO INCL.NANOLINE - PC SBL MAX.L / PROFILE : 6m Kg / m 1,1 TOL EN12020-2 	 NANOLINE W / LEDSTRIP WARM WHITE **NL W - PROFILE CL ◇** **366 00 00 CL ◇** ◇ = ANO INCL.NANOLINE - PC CLEAR **NL W - PROFILE SBL ◇** **366 00 00 SBL ◇** ◇ = ANO INCL.NANOLINE - PC SBL MAX.L / PROFILE : 6m Kg / m 1,1 TOL EN12020-2 
END CAP	 **NL - END CAP SET ◇** **364 03 01 ◇** ◇ = A SET OF 2 PCS 0,1  **NO MODULE IN THIS AREA** 5 mm 	 **NL - END CAP SET ◇** **364 03 01 ◇** ◇ = A SET OF 2 PCS 0,1  **NO MODULE IN THIS AREA** 5 mm 
CORNER		
FIXATION	**NL - FIXATION SET** **364 06 11** SET OF 10 PCS 0,1  POSITION FOR INSTALLATION DOWN UP SIDE 	**NL - FIXATION SET** **364 06 11** SET OF 10 PCS 0,1  POSITION FOR INSTALLATION DOWN UP 
CURRENT SUPPLY	**NO MODULE IN THIS AREA** 10 mm 	**NO MODULE IN THIS AREA** 10 mm 

	Ledstrip 0,5m - 24V-DC 0,1 			Ledflex 5m - 24V-DC 0,3 		
	White Dividable per 100mm 30 smd LED +/- 50K		**RGB** Dividable per 100mm 30 smd LED	**White** Dividable per 100mm 60 smd LED/m		**RGB** Dividable per 167mm 30 smd LED/m
led	**6W/m 440 lm/m**	new **20W/m 1260 lm/m**	**15W/m**	**5W/m 360 lm/m**	new **15W/m 1000 lm/m**	**8W/m**
4000K						
IN	**LEDSTRIP 12 F NW 300 91 10 12 F NW**	**LEDSTRIP 12 FP NW 300 91 10 12 FP NW**		**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**	
OUT IP65				**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**	
3000K						
IN	**LEDSTRIP 12 F WW 300 91 10 12 F WW**	**LEDSTRIP 12 FP WW 300 91 10 12 FP WW**		**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	
OUT IP65				**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**	
2700K new						
IN	**LEDSTRIP 12 F HW 300 91 10 12 F HW**	**LEDSTRIP 12 FP HW 300 91 10 12 FP HW**		**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	
OUT IP65				**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**	
RGB						
IN			**LEDSTRIP 12 RGB 300 91 33 12**			**LEDFLEX IN RGB 300 91 52 33**
OUT IP65						**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC						
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.6	max.2	⊛ max.2	max.4 m	max.1 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.13	max.4	⊛ max.5	max.8 m	max.2,5 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.20	max.6	⊛ max.7	max.12 m	max.4 m (max.3m / Powerline)	⊛ max.7,36 m
new **LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80**	max.26	max.8 (max.6 / Powerline)		max.16 m	max.5 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.50	max.15 (max.6 / Powerline)	⊛ max.18	max.30 m	max.10 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.6	max.2		max.4 m	max.1 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.6	max.2		max.4 m	max.1 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331			⊛ use in combination with Led Power Supply 24V-DC			⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330			⊛ use in combination with RGB Driver			⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V






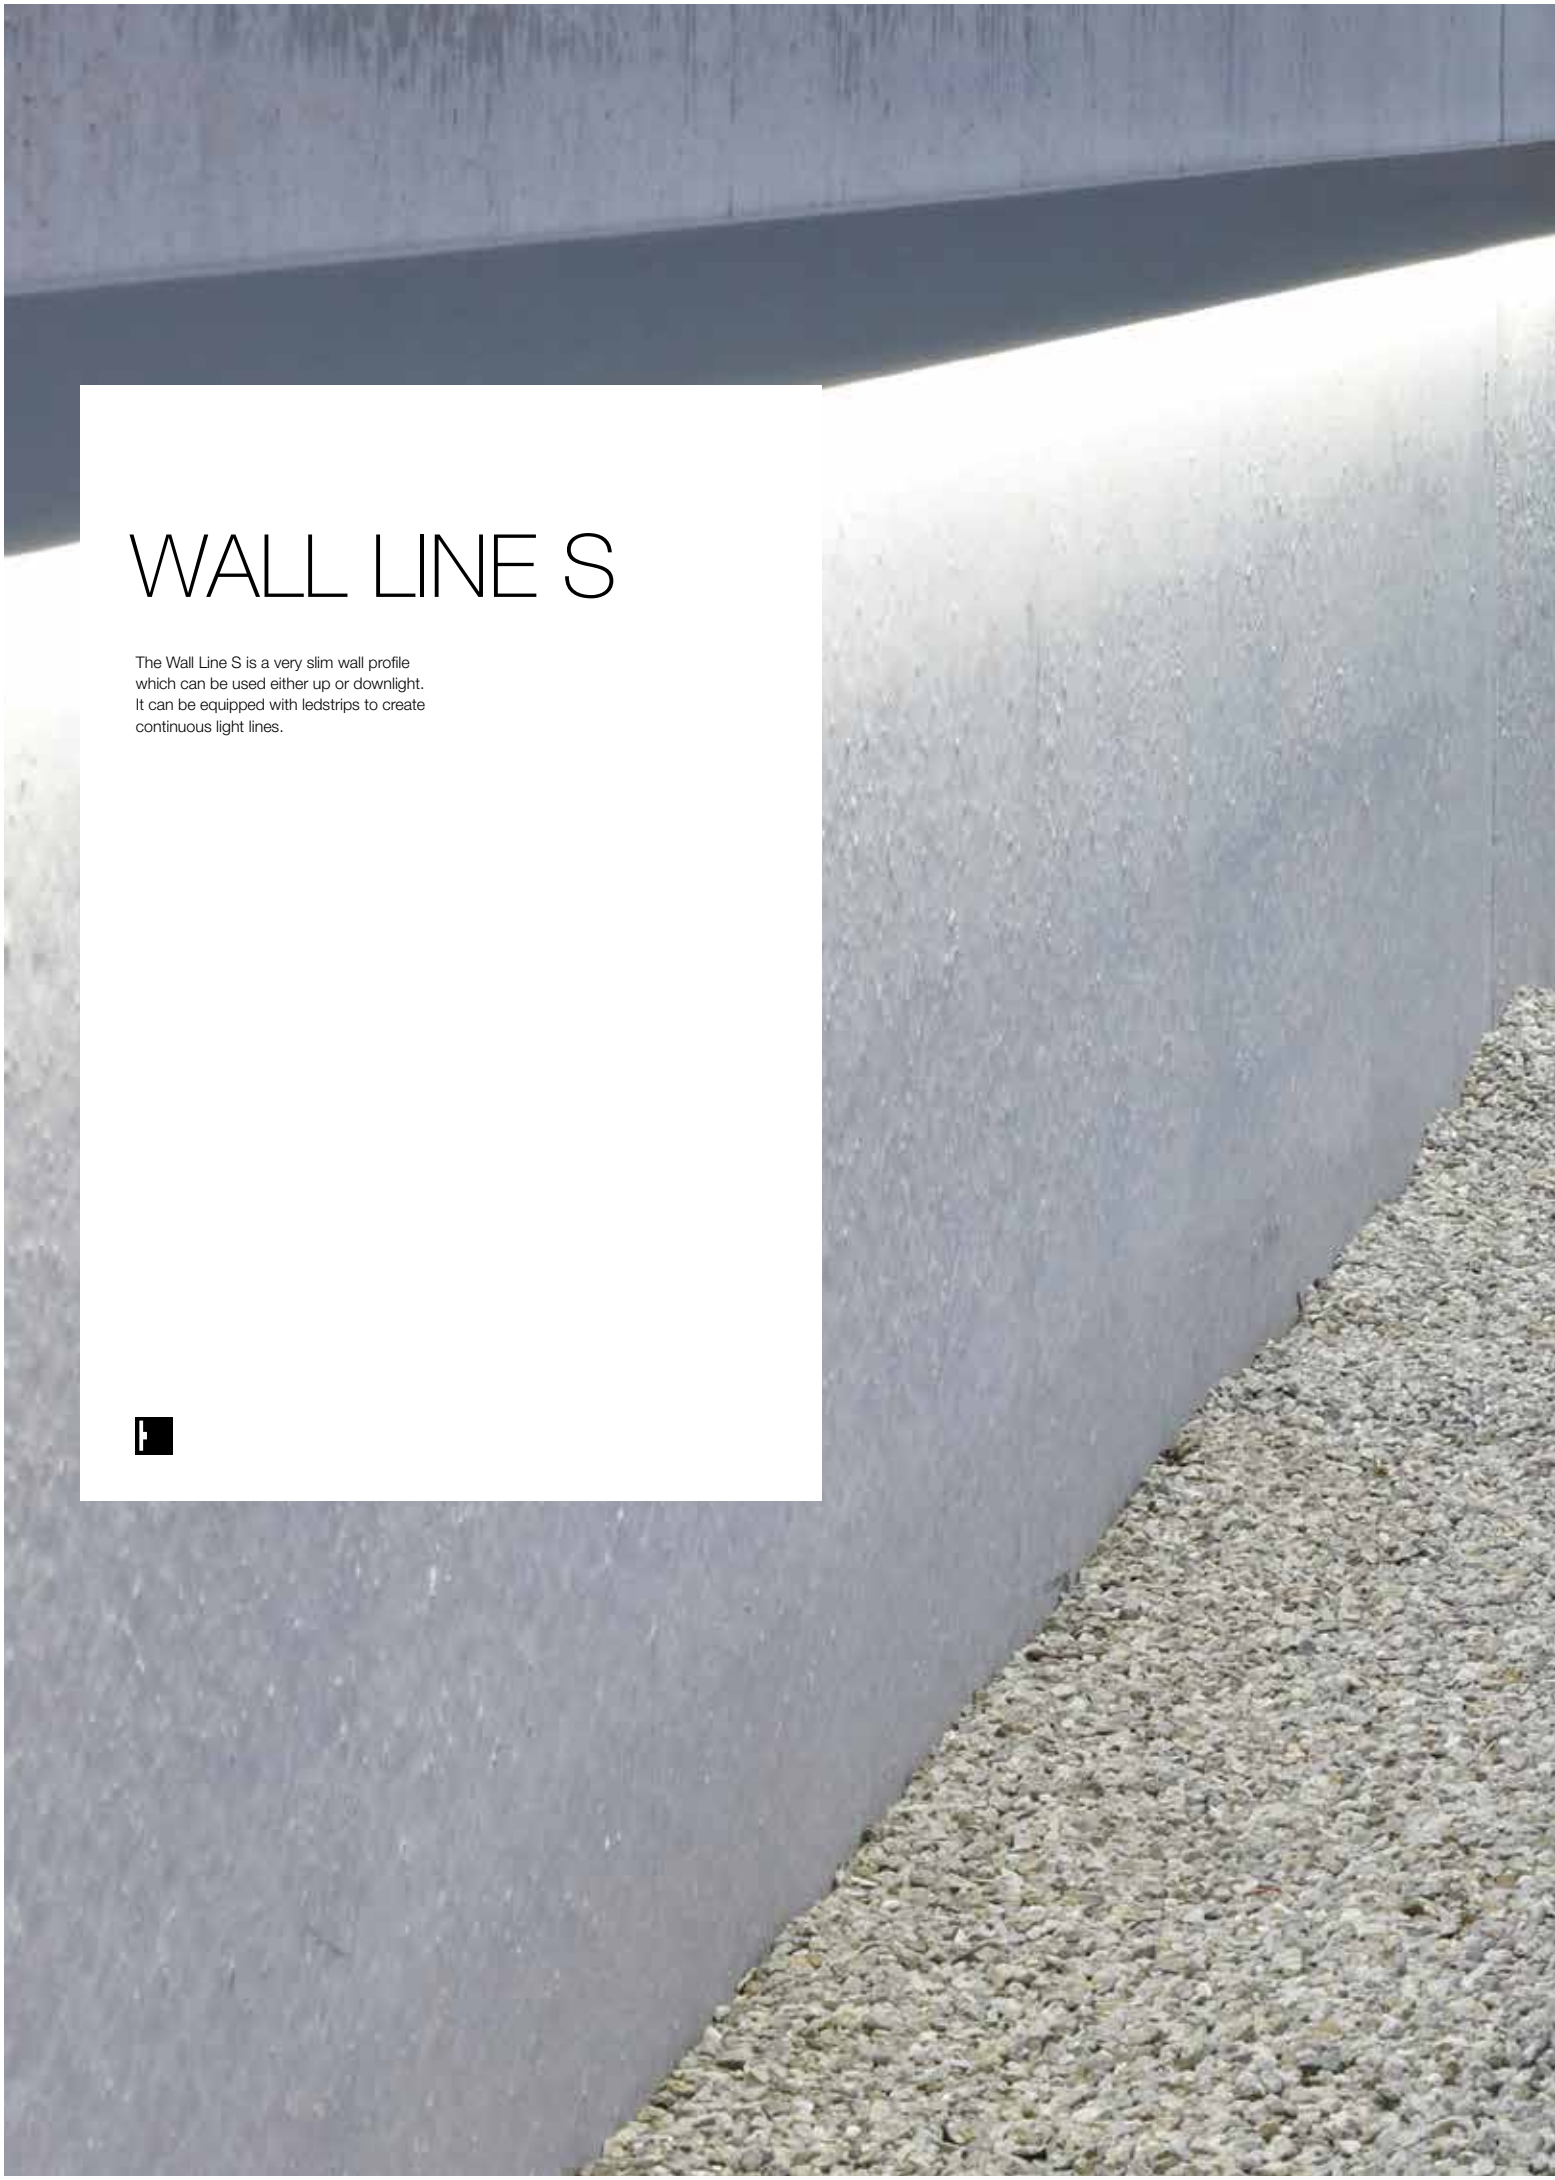

WALL LINE S

The Wall Line S is a very slim wall profile which can be used either up or downlight. It can be equipped with ledstrips to create continuous light lines.



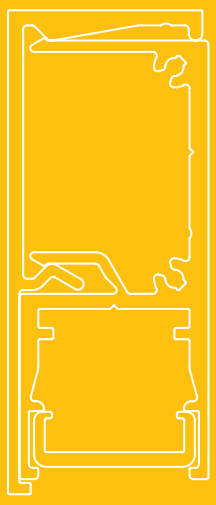

p

Wall Line S

PROFILE



WALL LINE S / LEDSTRIP NEUTRAL WHITE


WL S - PROFILE CL ◇
358 00 00 CL ◇
◇ = ANO
INCL.WALL LINE S - PC CLEAR

WL S - PROFILE SBL ◇
358 00 00 SBL ◇
◇ = ANO
INCL.WALL LINE S - PC SBL

MAX.L / PROFILE : 6m
Kg / m


1,4

TOL EN12020-2



END CAP






WL S - END CAP SET ◇
358 03 01 ◇
◇ = ANO
SET OF 2 PCS

0,1


CORNER

FIXATION

POSITION FOR INSTALLATION
UP DOWN




INSTALLATION LIMIT
BETWEEN 2 WALLS



CURRENT SUPPLY

NO MODULE IN THIS AREA 10 mm



	Ledstrip 0,5m - 24V-DC 0,1 			Ledflex 5m - 24V-DC 0,3 		
	White Dividable per 100mm 30 smd LED +/- 50K		RGB Dividable per 100mm 30 smd LED	White Dividable per 100mm 60 smd LED/m		RGB Dividable per 167mm 30 smd LED/m
led	6W/m 440 lm/m	new 20W/m 1260 lm/m	15W/m	5W/m 360 lm/m	new 15W/m 1000 lm/m	8W/m
4000K						
IN	**LEDSTRIP 12 F NW** **300 91 10 12 F NW**	**LEDSTRIP 12 FP NW** **300 91 10 12 FP NW**		**LEDFLEX IN NW** **300 91 52 04**	**LEDFLEX IN FP NW** **300 91 53 04**	
OUT IP65				**LEDFLEX OUT NW** **300 91 62 04**	**LEDFLEX OUT FP NW** **300 91 63 04**	
3000K						
IN	**LEDSTRIP 12 F WW** **300 91 10 12 F WW**	**LEDSTRIP 12 FP WW** **300 91 10 12 FP WW**		**LEDFLEX IN WW** **300 91 52 02**	**LEDFLEX IN FP WW** **300 91 53 02**	
OUT IP65				**LEDFLEX OUT WW** **300 91 62 02**	**LEDFLEX OUT FP WW** **300 91 63 02**	
2700K new						
IN	**LEDSTRIP 12 F HW** **300 91 10 12 F HW**	**LEDSTRIP 12 FP HW** **300 91 10 12 FP HW**		**LEDFLEX IN HW** **300 91 52 03**	**LEDFLEX IN FP HW** **300 91 53 03**	
OUT IP65				**LEDFLEX OUT HW** **300 91 62 03**	**LEDFLEX OUT FP HW** **300 91 63 03**	
RGB						
IN			**LEDSTRIP 12 RGB** **300 91 33 12**			**LEDFLEX IN RGB** **300 91 52 33**
OUT IP65						**LEDFLEX OUT RGB** **300 91 62 33**
FULL INFO / PAG TEC						
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	max.6	max.2	⊛ max.2	max.4 m	max.1 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	max.13	max.4	⊛ max.5	max.8 m	max.2,5 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	max.20	max.6	⊛ max.7	max.12 m	max.4 m (max.3m / Powerline)	⊛ max.7,36 m
new **LED POWER SUPPLY 24V-DC / 80W DIM1** **300 89 24 80**	max.26	max.8 (max.6 / Powerline)		max.16 m	max.5 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	max.50	max.15 (max.6 / Powerline)	⊛ max.18	max.30 m	max.10 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 **300 90 60**	max.6	max.2		max.4 m	max.1 m	
LED POWER SUPPLY MULTI POWER DIM6 **300 90 61**	max.6	max.2		max.4 m	max.1 m	
RGB DRIVER 12/24V-DC 75/150W **300 90 331**			⊛ use in combination with Led Power Supply 24V-DC			⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX **300 90 330**			⊛ use in combination with RGB Driver			⊛ use in combination with RGB Driver


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V






ENDLESS 30

Building on the success of the standard size Endless, the entire range is now also available in the profile chapter, offering tailor-made endless lighting solutions. The Endless profile is known for its exceptionally small body, enabling you to create an endless line of light without shadows by use of T5 seamless lamps. Besides T5 seamless lamps Endless is now also available with powerled modules, either surface mounted or suspended.

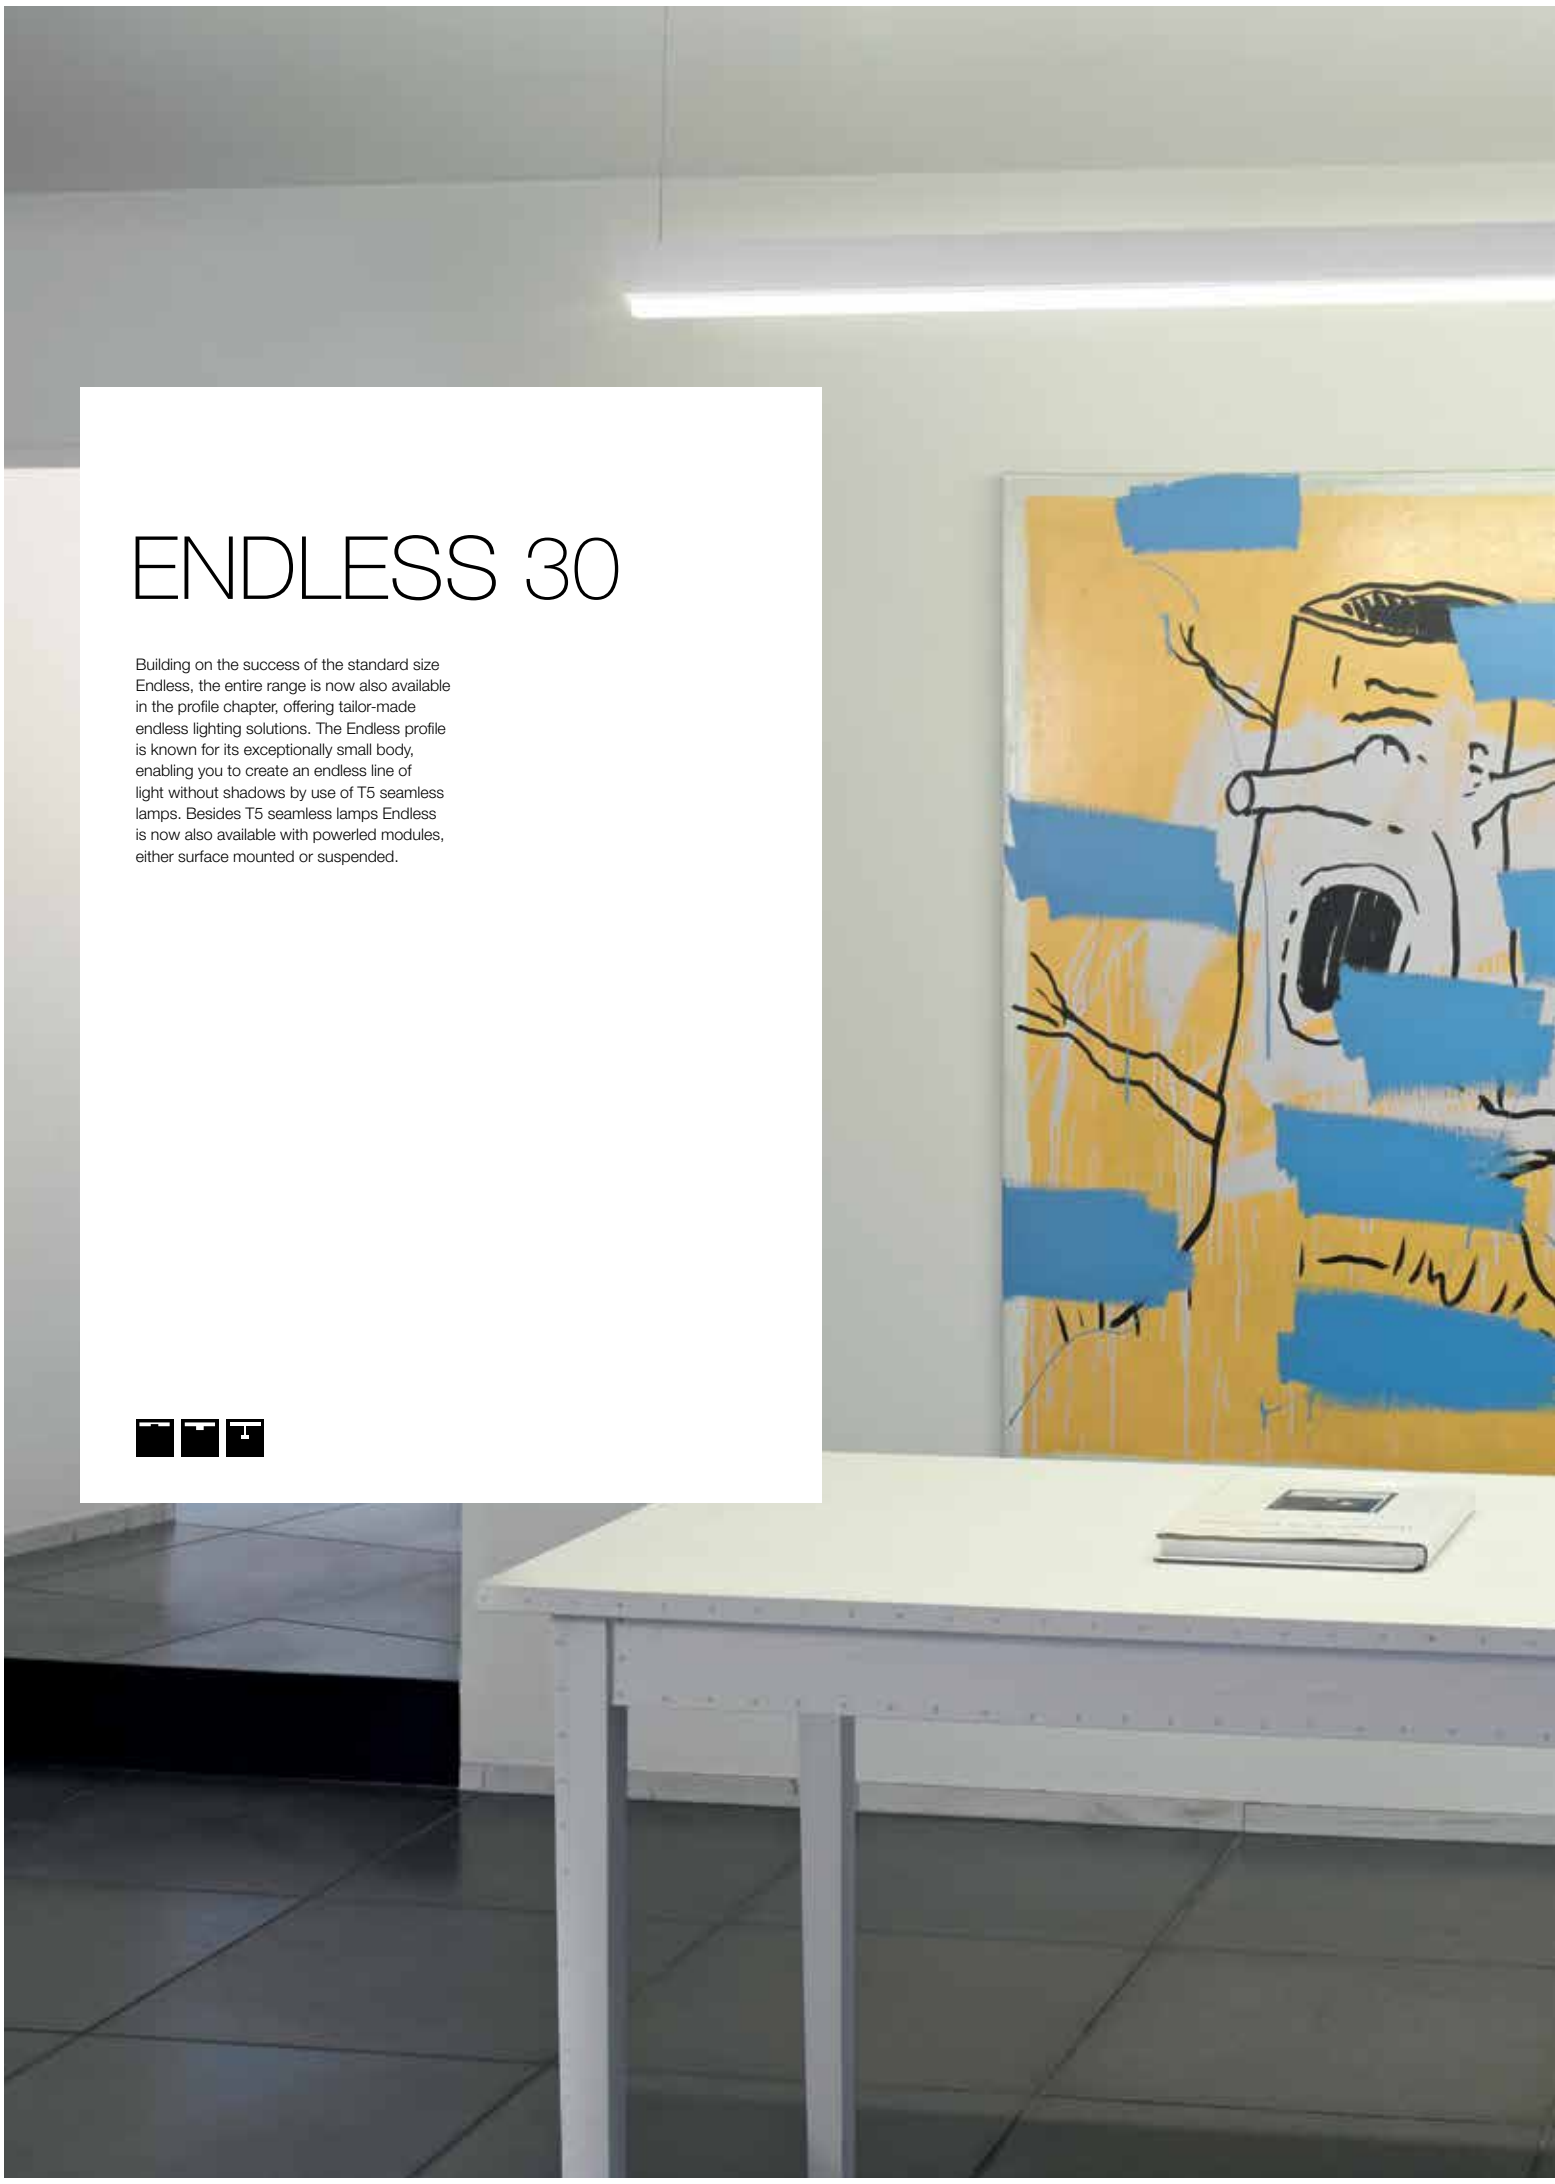



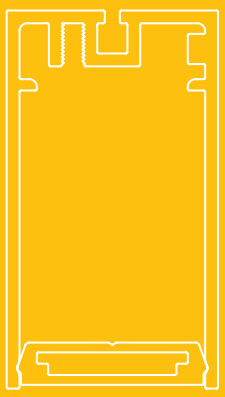

p


Endless 30

PROFILE



END30 - PROFILE ◇
369 00 00 ◇
◇ = B / W
MAX.L / PROFILE : 6m
Kg / m


1,0



TOL EN12020-2

END CAP





NO MODULE IN THIS AREA 5 mm




END30 - END CAP ◇
369 03 01 ◇
◇ = B / W

0,1

CORNER

END - CORNER 180°
369 06 01

0,3



FIXATION

SUSPENSION 6 SINGLE 1,6
328 17 01
L 1,6m

SUSPENSION 6 SINGLE 6,0
328 17 06
L 6,0m

0,1




CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **369 98 51**
L 6,0m / 3 x 0,75mm² **369 98 56**
L 1,6m / 5 x 0,75mm² **369 99 51**
L 6,0m / 5 x 0,75mm² **369 99 56** 0,3



OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 55 ◇
◇ = ANO / B / W

203 99 56 ◇
◇ = ANO / B / W

0,1

led

Endless LED

END - 4 LED WW ◇
369 61 42 ◇
◇ = B / C
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

◇ CE 0,3 IP20

L 300


PS



Endless Modules T16 Seamless Down

END SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz

◇ CE 0,8 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**369 75 124 E**		
1 x 21/39	885	**369 75 139 E**	**369 75 139 ED1**	**369 75 139 ED2**
1 x 28/54	1185	**369 75 154 E**	**369 75 154 ED1**	**369 75 154 ED2**



END SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz

◇ CE 1,6 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**369 75 239 E**	**369 75 239 ED1**	**369 75 239 ED2**
2 x 28/54	2370	**369 75 254 E**	**369 75 254 ED1**	**369 75 254 ED2**



T16 SEAMLESS - PAG TEC


p






ENDLESS 30+


The Endless 30+ is a very minimalistic and well thought out designed profile, specifically developed for the extremely thin T5 fluorescent seamless lamps. The 30+ version differs from the standard Endless 30 profile as the lamp is placed inside the profile, and as such completely covered.

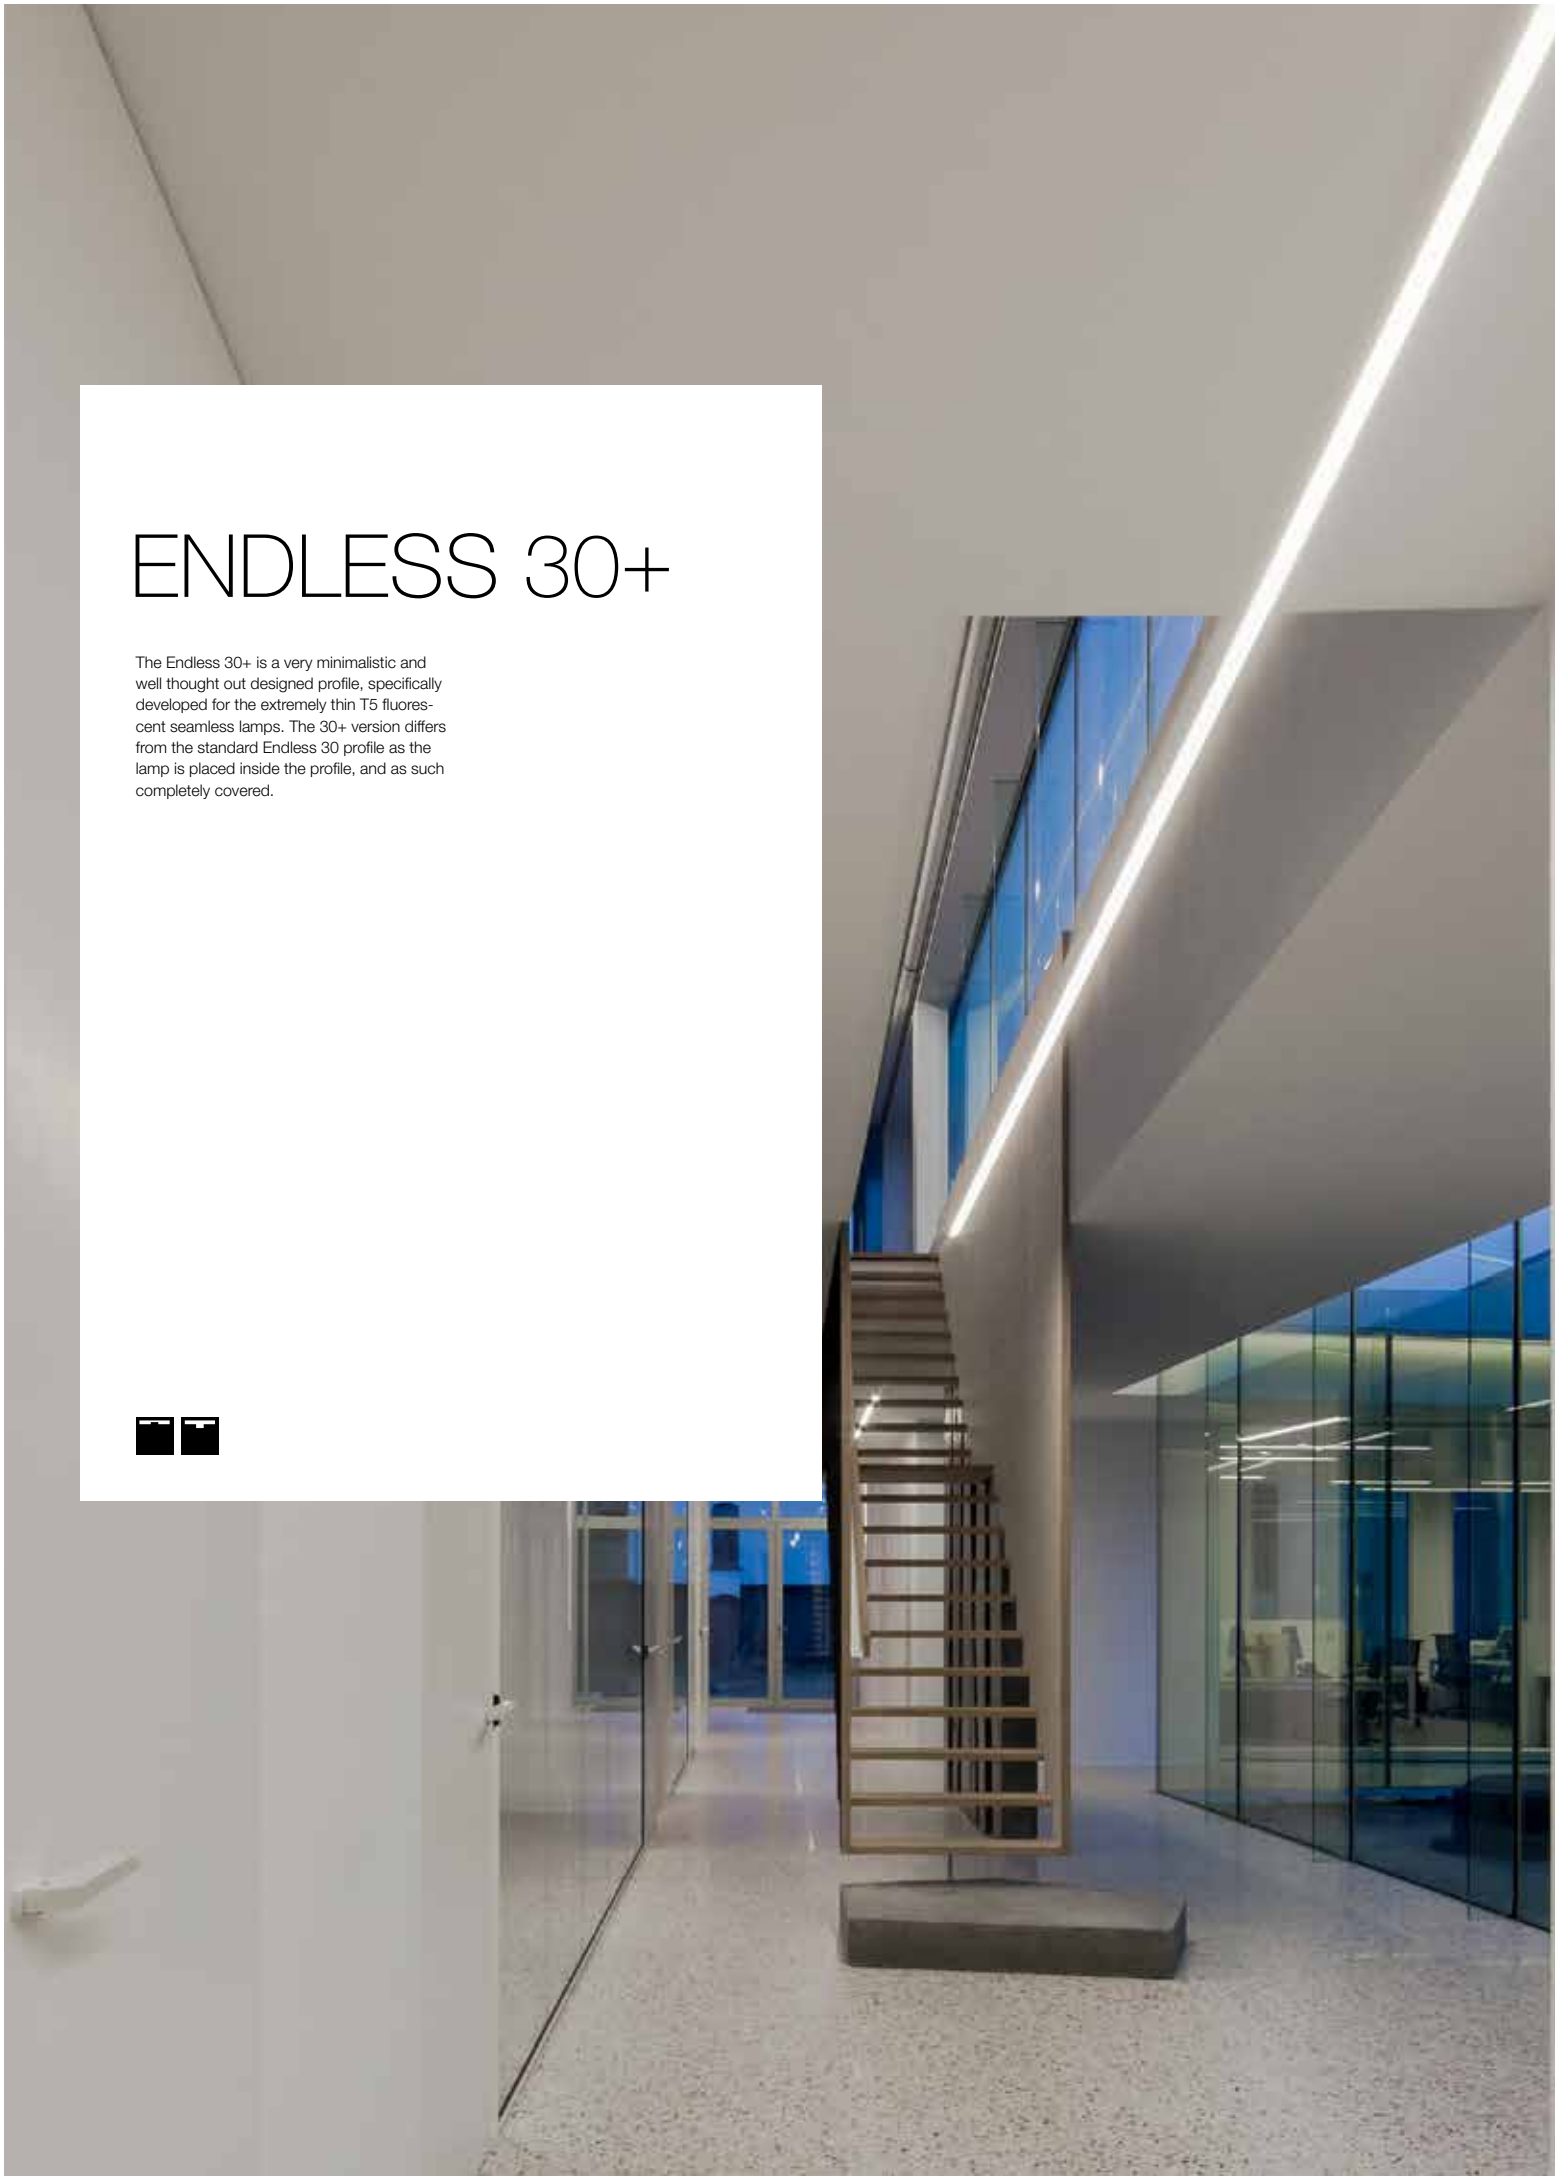

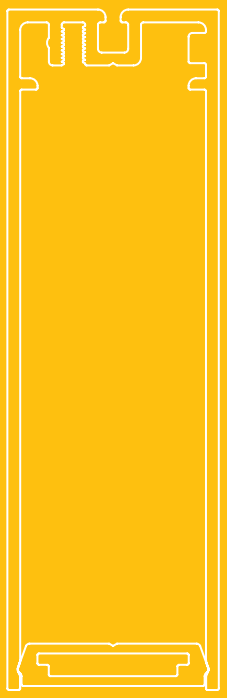

Endless 30+


PROFILE

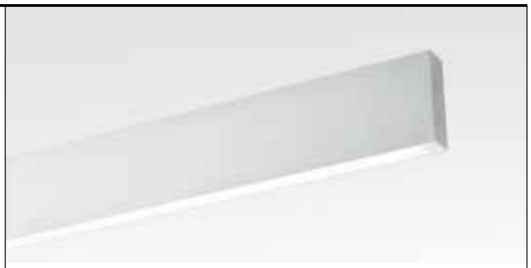

END30+ - PROFILE ◇
374 00 00 ◇
◇ = B / W
MAX.L / PROFILE : 3.6m
Kg / m

1,3

TOL EN12020-2




END CAP



END30+ - END CAP ◇
374 03 01 ◇
◇ = B / W

0,1



NO MODULE IN THIS AREA 5 mm



CORNER

FIXATION

CURRENT SUPPLY

led

Endless 30+ LED

END30+ - 4 LED ◇
374 61 42 ◇
◇ = B / C
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 0,3 IP20



L 300


PS

Endless 30+ Modules T16 Seamless Down

END30+ SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz

CE 1,6 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**374 75 239 E**	**374 75 239 ED1**	**374 75 239 ED2**
2 x 28/54	2370	**374 75 254 E**	**374 75 254 ED1**	**374 75 254 ED2**



END30+ SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz

CE 0,8 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**374 75 124 E**		
1 x 21/39	885	**374 75 139 E**	**374 75 139 ED1**	**374 75 139 ED2**
1 x 28/54	1185	**374 75 154 E**	**374 75 154 ED1**	**374 75 154 ED2**



T16 SEAMLESS - PAG TEC

p




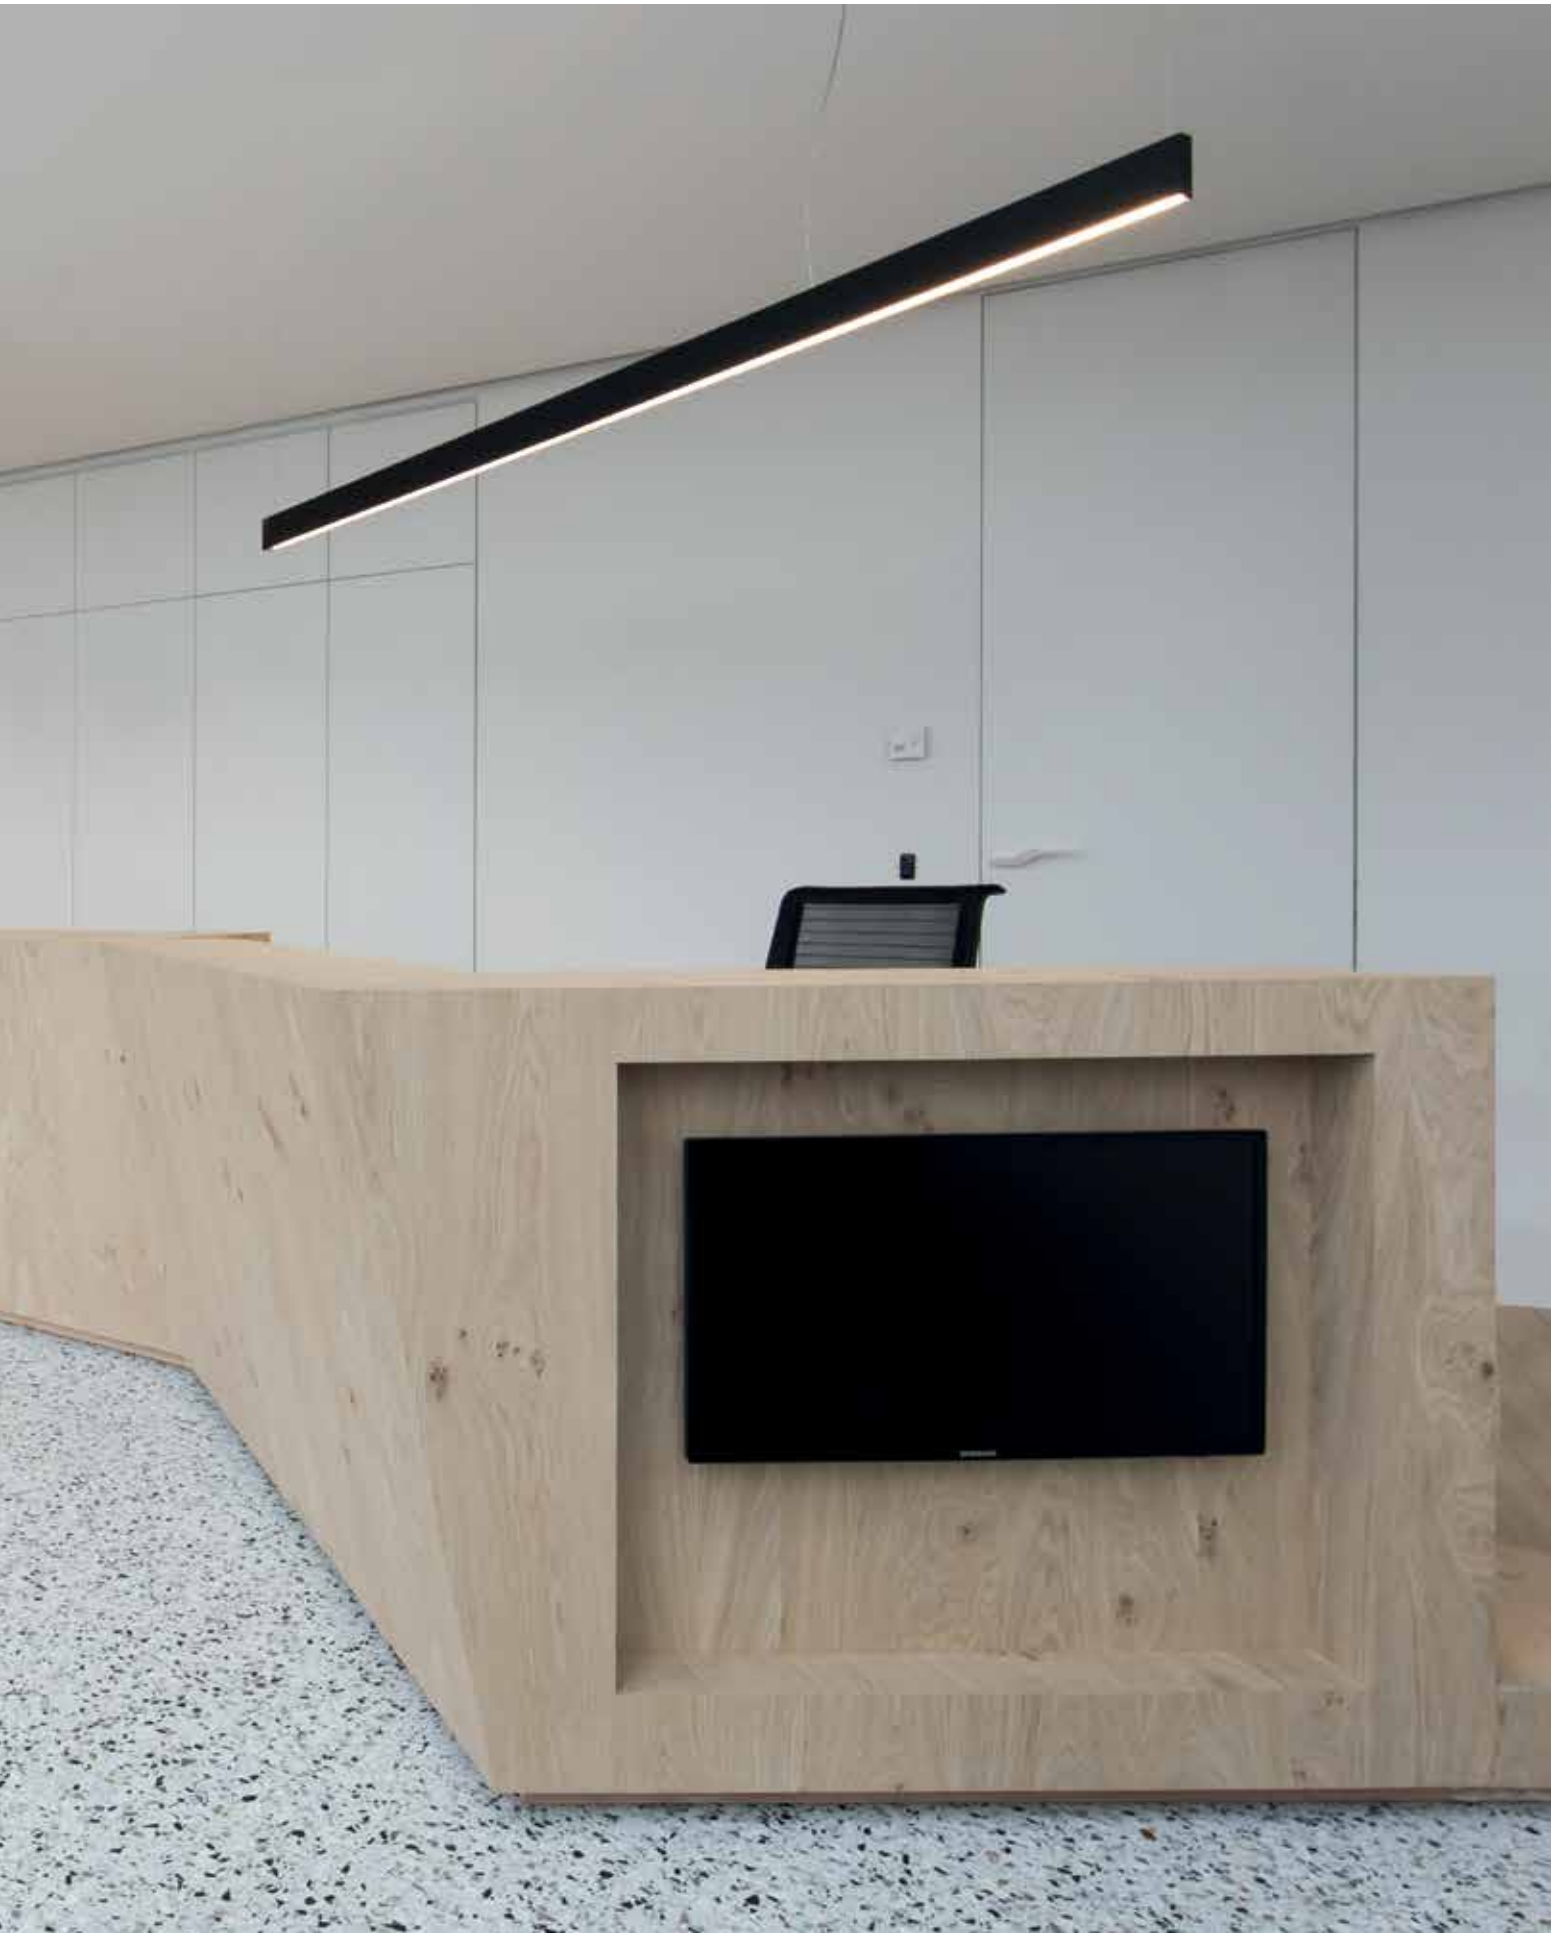


MICROLINE 50

The Microline 50 is a recessed profile which can be used in ceiling and/or wall. The various models can be equipped with T16 fluorescent lamps, halogen or ledstrips, providing you with multiple options to create an appealing lighting scenario.




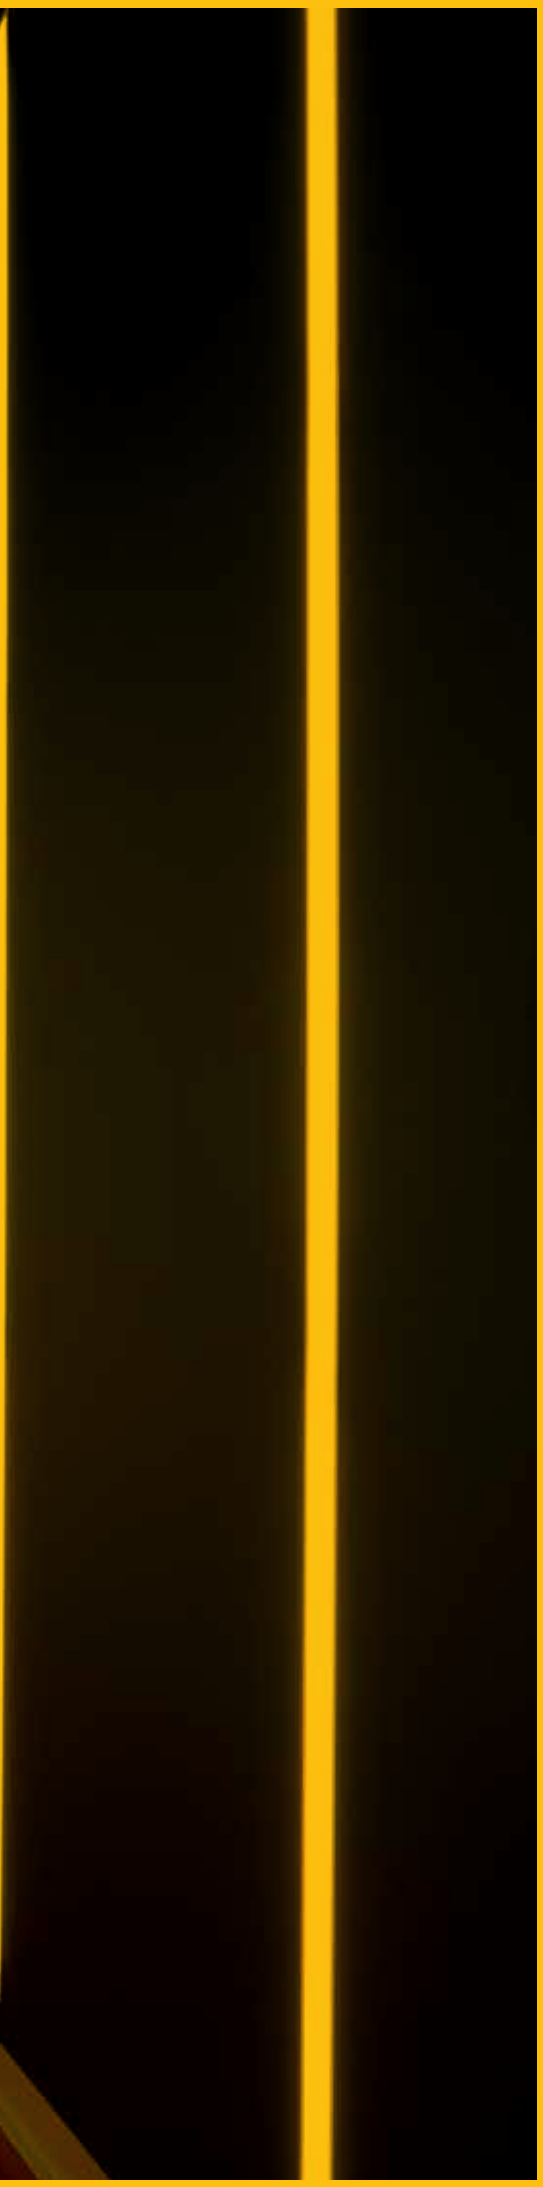

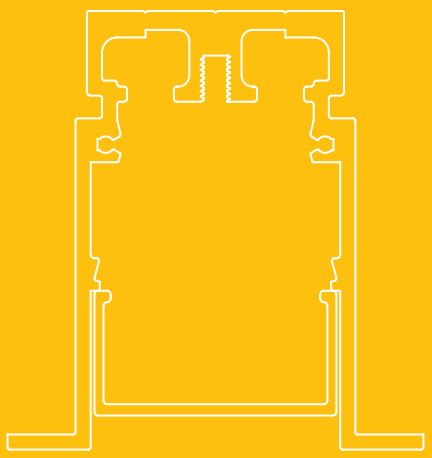


Microline 50

PROFILE

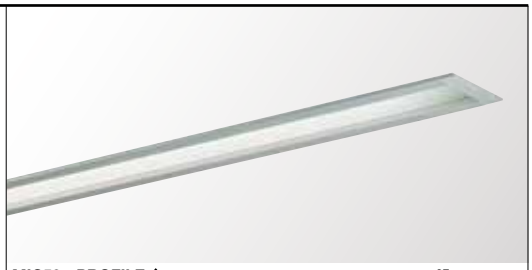

MIC50 - PROFILE ◇
297 00 00 ◇
◇ = ANO / B / W
MAX.L / PROFILE : 6m
Kg / m

1,8




TOL EN12020-2

END CAP



MIC50 - END CAP ◇
297 03 01 ◇
◇ = ANO / B / W


0,1



CORNER


MIC50 - CORNER 180°
297 06 01

0,3




MIC50 - CORNER 135°
297 06 05


0,3



MIC50 - CORNER 90°
297 06 06

0,3



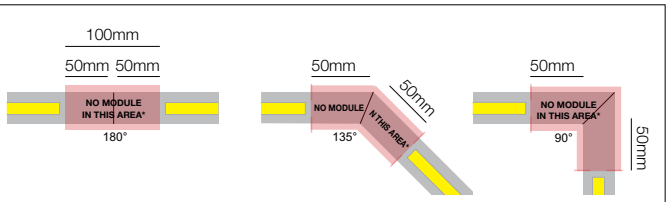


FIXATION

45 x (L + 5) x 100 max.22

MIC50 - INSIDE CLIP
297 14 01

0,1



CURRENT SUPPLY

Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
RAND JAC	PAG INT 339


EXCL.MIC - PC SBL PROFILE

Requirements

MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

Ledstrip

0,5m - 24V-DC 0,1



		White		RGB
		Dividable per 100mm 30 smd LED +/- 50K		Dividable per 100mm 30 smd LED
led		**6W/m 440 lm/m**	new **20W/m 1260 lm/m**	**15W/m**
4000K				
	IN	**LEDSTRIP 14 F NW 300 91 10 14 F NW**	**LEDSTRIP 14 FP NW 300 91 10 14 FP NW**	
	OUT IP65			
3000K				
	IN	**LEDSTRIP 14 F WW 300 91 10 14 F WW**	**LEDSTRIP 14 FP WW 300 91 10 14 FP WW**	
	OUT IP65			
2700K new				
	IN	**LEDSTRIP 14 F HW 300 91 10 14 F HW**	**LEDSTRIP 14 FP HW 300 91 10 14 FP HW**	
	OUT IP65			
RGB				
	IN			**LEDSTRIP 14 RGB 300 91 33 14**
	OUT IP65			
FULL INFO / PAG TEC				
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20		max.6	max.2	⊛ max.2
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40		max.13	max.4	⊛ max.5
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60		max.20	max.6	⊛ max.7
new **LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80**		max.26	max.8 (max.6 / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150		max.50	max.15 (max.6 / Powerline)	⊛ max.18
LED POWER SUPPLY MULTI POWER DIM7 300 90 60		max.6	max.2	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61		max.6	max.2	
RGB DRIVER 12/24V-DC 75/150W 300 90 331				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330				⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

Microline 50 Single Jack

MIC50 - SINGLE JACK
297 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

CE 0,3 IP20



L 300




Microline 50 Twin Jack

MIC50 - TWIN JACK
297 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

CE 0,3 IP20




L 355



Microline 50 Modules T16 Down


MIC50 - T16 DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.MIC - PC SBL PROFILE

CE 0,8 IP20 0,1




Requirements
MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	605	**297 71 124 E**	**297 71 124 ED1**	**297 71 124 ED2**
1 x 21/39	905	**297 71 139 E**	**297 71 139 ED1**	**297 71 139 ED2**
1 x 28/54	1205	**297 71 154 E**	**297 71 154 ED1**	**297 71 154 ED2**
1 x 35/80	1505	**297 71 180 E**	**297 71 180 ED1**	**297 71 180 ED2**

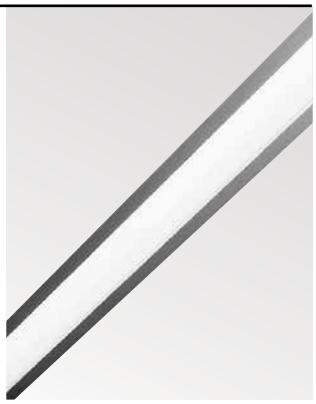

MIC50 - T16 SERIE DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.MIC - PC SBL PROFILE

CE 1,6 IP20 0,1




Requirements
MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1810	**297 71 239 E**	**297 71 239 ED1**	**297 71 239 ED2**
2 x 28/54	2410	**297 71 254 E**	**297 71 254 ED1**	**297 71 254 ED2**
2 x 35	3010	**297 71 235 E**	**297 71 235 ED1**	**297 71 235 ED2**



MIC50 - T16 BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 1,0 IP20 0,1




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1205	**297 61 154 EB**	**297 61 154 ED1B**	**297 61 154 ED2B**



MIC50 - T16 SERIE BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x BAP DOWN

CE 2,0 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	2410	**297 61 254 EB**	**297 61 254 ED1B**	**297 61 254 ED2B**





Requirement

MIC - PC SBL profile



MIC - PC SBL PROFILE

MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m


MICROLINE 30

Microline 30 can be used either for recessed, surface mounted or suspended application. It enables you to create narrow light lines, equipped either with T16 fluorescent lamps, halogen or ledstrips.







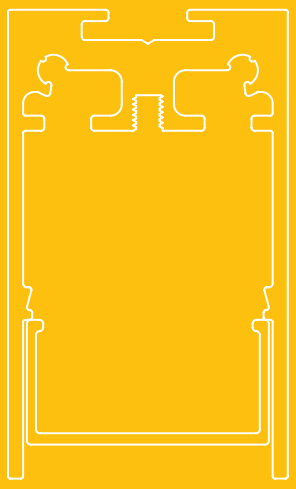

Microline 30


Microline 30 M10

PROFILE



MIC30 - PROFILE ◇
296 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

1,8



TOL EN12020-2

MIC30 - M10
297 61 01 ◇
◇ = ANO / W
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 525lm
EXCL.LED POWER SUPPLY 350mA-DC


0,3 IP20

L 210
PS



END CAP





MIC30 - END CAP ◇
296 03 01 ◇
◇ = ANO / W

0,1

CORNER

MIC30 - CORNER 180°
296 06 01


0,3


MIC30 - CORNER 135°
296 06 05

0,3

MIC30 - CORNER 90°
296 06 06

0,3




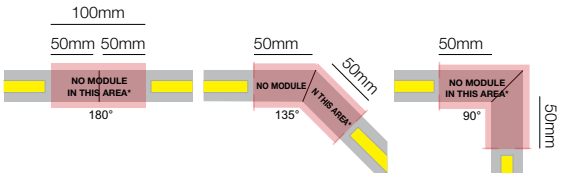

FIXATION

MIC30 - WALL FIXATION 90°
296 06 10

0,3




NO MODULE IN THIS AREA 55 mm




SUSPENSION 3 SINGLE 1,6
328 13 01
L 1,6m

SUSPENSION 3 SINGLE 6,0
328 13 06
L 6,0m


0,1



RECESSED FIXATION



DIRECT FIXATION



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **296 98 51**
L 6,0m / 3 x 0,75mm² **296 98 56**
L 1,6m / 5 x 0,75mm² **296 99 51**
L 6,0m / 5 x 0,75mm² **296 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



NO MODULE IN THIS AREA 70 mm




EXCL.MIC - PC SBL PROFILE

Requirements
MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

Ledstrip

0,5m - 24V-DC 0,1



		White		RGB
		Dividable per 100mm 30 smd LED +/- 50K		Dividable per 100mm 30 smd LED
led		**6W/m 440 lm/m**	**new 20W/m 1260 lm/m**	**15W/m**
4000K				
	IN	**LEDSTRIP 13 F NW 300 91 10 13 F NW**	**LEDSTRIP 13 FP NW 300 91 10 13 FP NW**	
	OUT IP65			
3000K				
	IN	**LEDSTRIP 13 F WW 300 91 10 13 F WW**	**LEDSTRIP 13 FP WW 300 91 10 13 FP WW**	
	OUT IP65			
2700K new				
	IN	**LEDSTRIP 13 F HW 300 91 10 13 F HW**	**LEDSTRIP 13 FP HW 300 91 10 13 FP HW**	
	OUT IP65			
RGB				
	IN			**LEDSTRIP 13 RGB 300 91 33 13**
	OUT IP65			
FULL INFO / PAG TEC				
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20		max.6	max.2	⊛ max.2
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40		max.13	max.4	⊛ max.5
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60		max.20	max.6	⊛ max.7
new **LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80**		max.26	max.8 (max.6 / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150		max.50	max.15 (max.6 / Powerline)	⊛ max.18
LED POWER SUPPLY MULTI POWER DIM7 300 90 60		max.6	max.2	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61		max.6	max.2	
RGB DRIVER 12/24V-DC 75/150W 300 90 331				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330				⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
RAND JAC	PAG INT 339

Microline 30 Single Jack

MIC30 - SINGLE JACK
296 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

CE 0,3 IP20



L 300




Microline 30 Twin Jack


MIC30 - TWIN JACK
296 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

CE 0,3 IP20



L 355



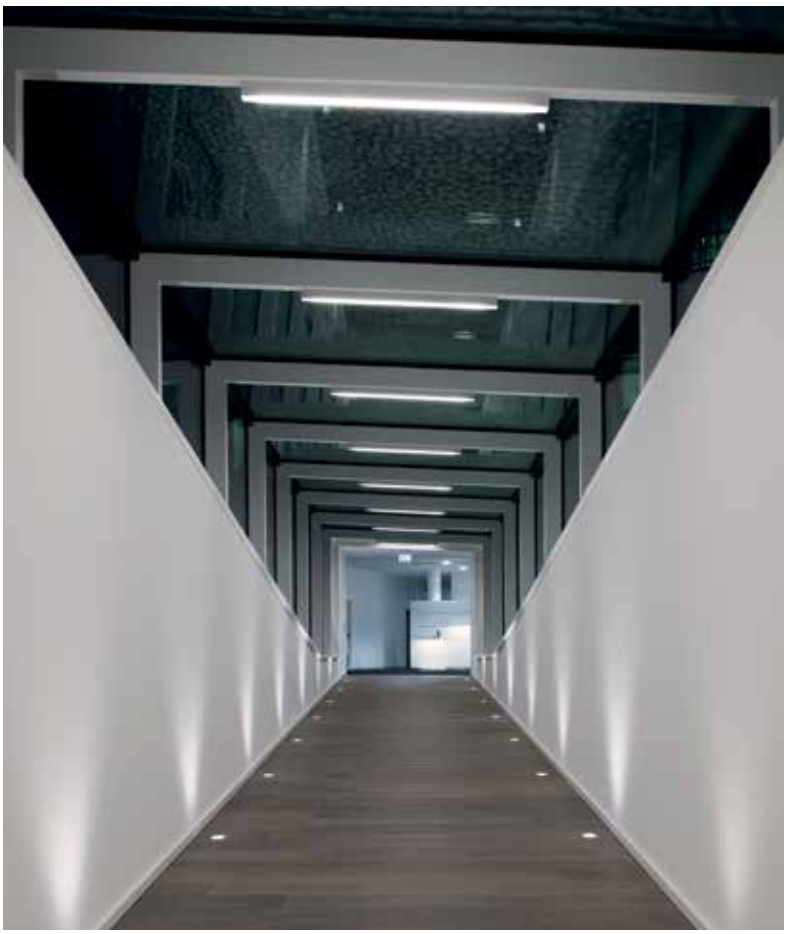


p

Microline 30 Modules T16 Down - Compressed


MIC30 - T16 DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.MIC - PC SBL PROFILE

CE 0,8 IP20 0,1



Watt	Lmm	EVG
1 x 14	605	**296 76 114 E**
1 x 21	905	**296 76 121 E**
1 x 28	1205	**296 76 128 E**

Requirements
MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m





Requirement

MIC - PC SBL profile



MIC - PC SBL PROFILE

MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

Microline 30 Modules T16 Down

MIC30 - T16 PC SBL DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC SBL DOWN

CE 0,8 IP20 0,1






Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	1085	**296 61 124 E**	1145	**296 61 124 ED1**	**296 61 124 ED2**
1 x 21/39	1385	**296 61 139 E**	1445	**296 61 139 ED1**	**296 61 139 ED2**
1 x 28/54	1685	**296 61 154 E**	1745	**296 61 154 ED1**	**296 61 154 ED2**
1 x 35/80	1985	**296 61 180 E**	2045	**296 61 180 ED1**	**296 61 180 ED2**



MIC30 - T16 SERIE PC SBL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x PC SBL DOWN

CE 1,6 IP20 0,1





Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	1710	**296 61 224 E**	1770	**296 61 224 ED1**	**296 61 224 ED2**
2 x 21/39	2310	**296 61 239 E**	2370	**296 61 239 ED1**	**296 61 239 ED2**
2 x 28/54	2910	**296 61 254 E**	2970	**296 61 254 ED1**	**296 61 254 ED2**



MIC30 - T16 BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 0,8 IP20 0,1






Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1685	**296 61 154 EB**	1745	**296 61 154 ED1B**	**296 61 154 ED2B**




MIC30 - T16 SERIE BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x BAP DOWN


CE 1,6 IP20 0,1





Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	2910	**296 61 254 EB**	2970	**296 61 254 ED1B**	**296 61 254 ED2B**

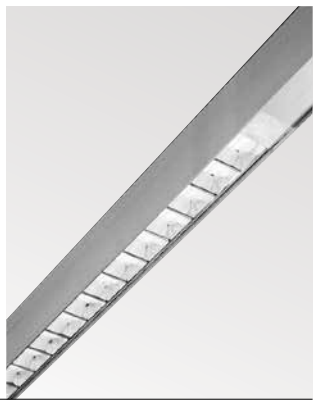

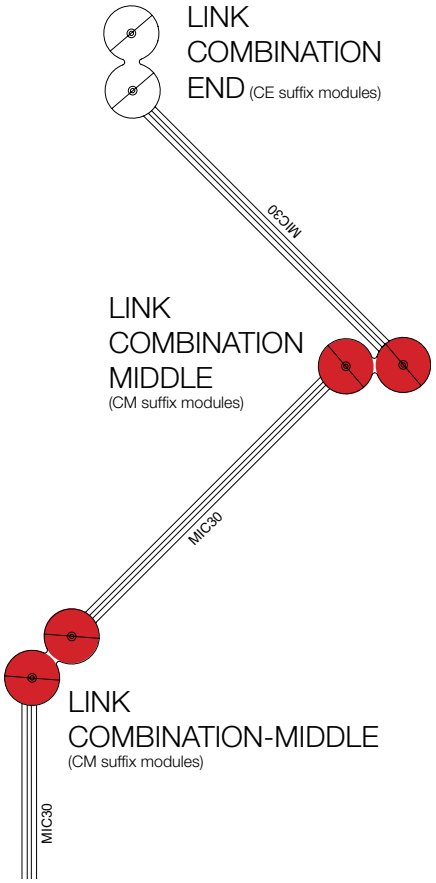


p

led

Microline 30 Link Combination-Middle






	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**LINK 2 REO 3033 CM ◇** **315 41 8222 CM ◇** ◇ = W	**LINK 2 REO 3033-9 CM ◇** **315 41 89222 CM ◇** ◇ = W
2700K	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**LINK 2 REO 2733 CM ◇** **315 41 8223 CM ◇** ◇ = W	**LINK 2 REO 2733-9 CM ◇** **315 41 89223 CM ◇** ◇ = W


ADJUSTABLE 0°- 30° / 350°
INCL.2 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,8 IP20



Microline 30 Link Combination-Middle

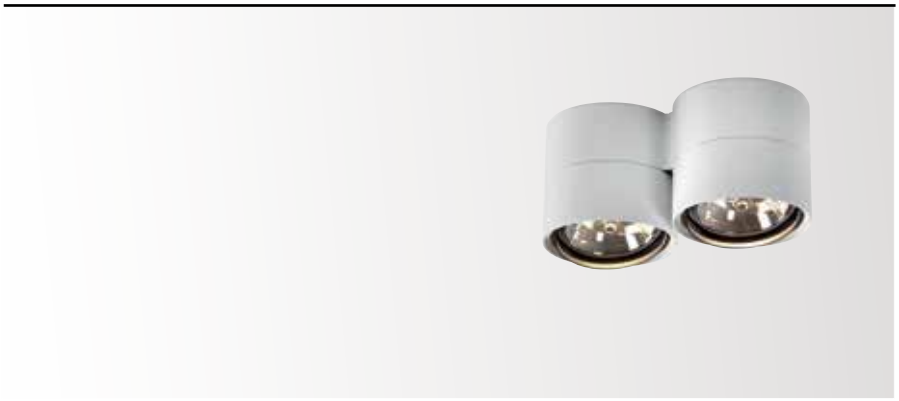



LINK 211 CM ◇
315 12 00 CM ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W


CE 1,4 IP20 1,0

p

reddot design award winner 2011

GOOD DESIGN award



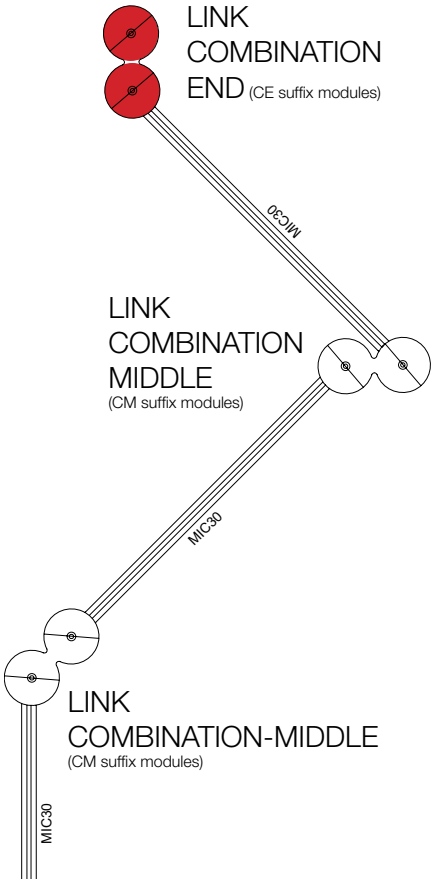

4000K

3000K

REFLECTOR FL-33°

2700K

REFLECTOR FL-33°


led


Microline 30 Link Combination-End













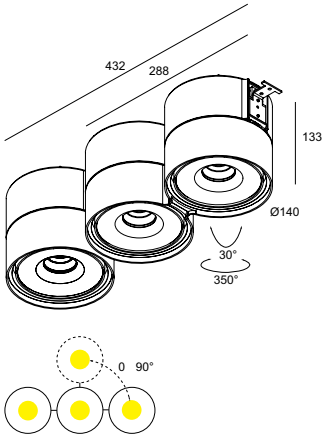

CRI > 80	CRI > 90	CRI > 80	CRI > 90	CRI > 80	CRI > 90
ON REQUEST		ON REQUEST		ON REQUEST	
660 lm	580 lm	2x 660 lm	2x 580 lm	3x 660 lm	3x 580 lm
LINK 1 REO 3033 CE ◇ **315 41 8122 CE ◇** ◇ = W	**LINK 1 REO 3033-9 CE ◇** **315 41 89122 CE ◇** ◇ = W	**LINK 2 REO 3033 CE ◇** **315 41 8222 CE ◇** ◇ = W	**LINK 2 REO 3033-9 CE ◇** **315 41 89222 CE ◇** ◇ = W	**LINK 3 REO 3033 CE ◇** **315 41 8322 CE ◇** ◇ = W	**LINK 3 REO 3033-9 CE ◇** **315 41 89322 CE ◇** ◇ = W
620 lm	525 lm	2x 620 lm	2x 525 lm	3x 620 lm	32x 525 lm
LINK 1 REO 2733 CE ◇ **315 41 8123 CE ◇** ◇ = W	**LINK 1 REO 2733-9 CE ◇** **315 41 89123 CE ◇** ◇ = W	**LINK 2 REO 2733 CE ◇** **315 41 8223 CE ◇** ◇ = W	**LINK 2 REO 2733-9 CE ◇** **315 41 89223 CE ◇** ◇ = W	**LINK 3 REO 2733 CE ◇** **315 41 8323 CE ◇** ◇ = W	**LINK 3 REO 2733-9 CE ◇** **315 41 89323 CE ◇** ◇ = W
ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz 0,9 IP20		ADJUSTABLE 0°- 30° / 350° INCL.2 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz 1,8 IP20		ADJUSTABLE 0°- 30° / 350° INCL.3 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz 2,7 IP20	


reddot design award winner 2011


GOOD DESIGN award

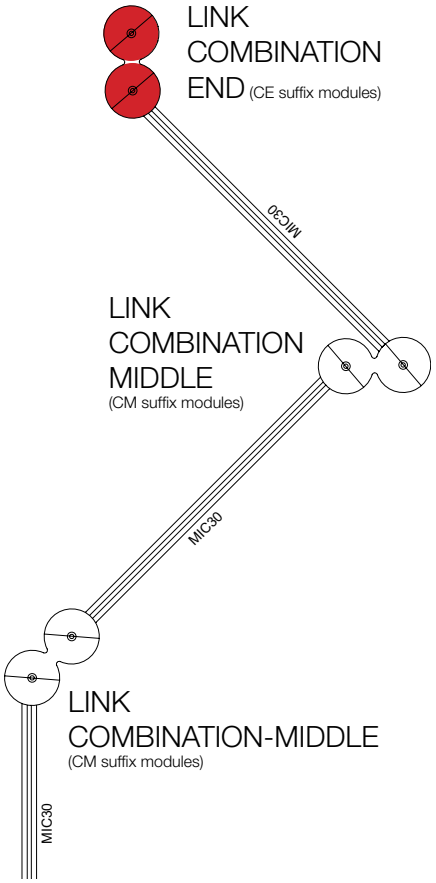





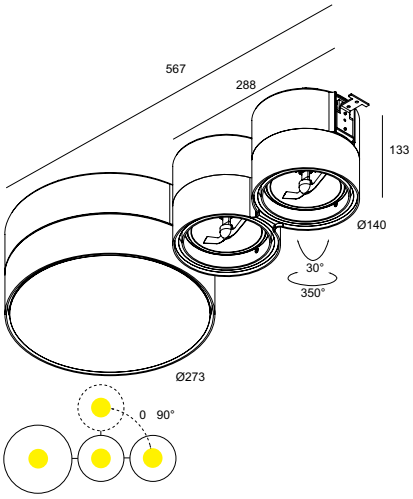



LINK 3 226-211 CE ◇
315 226 12 CE ◇
◇ = W
FIXED
INCL.PC SBL
G24q-3 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-DEL 26W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 3,2 IP20 1,0


LINK 1 226 CE ◇
315 226 00 CE ◇
◇ = W
FIXED
INCL.PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 26W
CE 1,8 IP20 0,1


Microline 30 Link Combination-End

















LINK 111 CE ◇
315 11 00 CE ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
CE 0,7 IP20 1,0


LINK 211 CE ◇
315 12 00 CE ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 1,4 IP20 1,0

LINK 311 CE ◇
315 13 00 CE ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W
CE 2,1 IP20 1,0

p

reddot design award winner 2011

GOOD DESIGN award

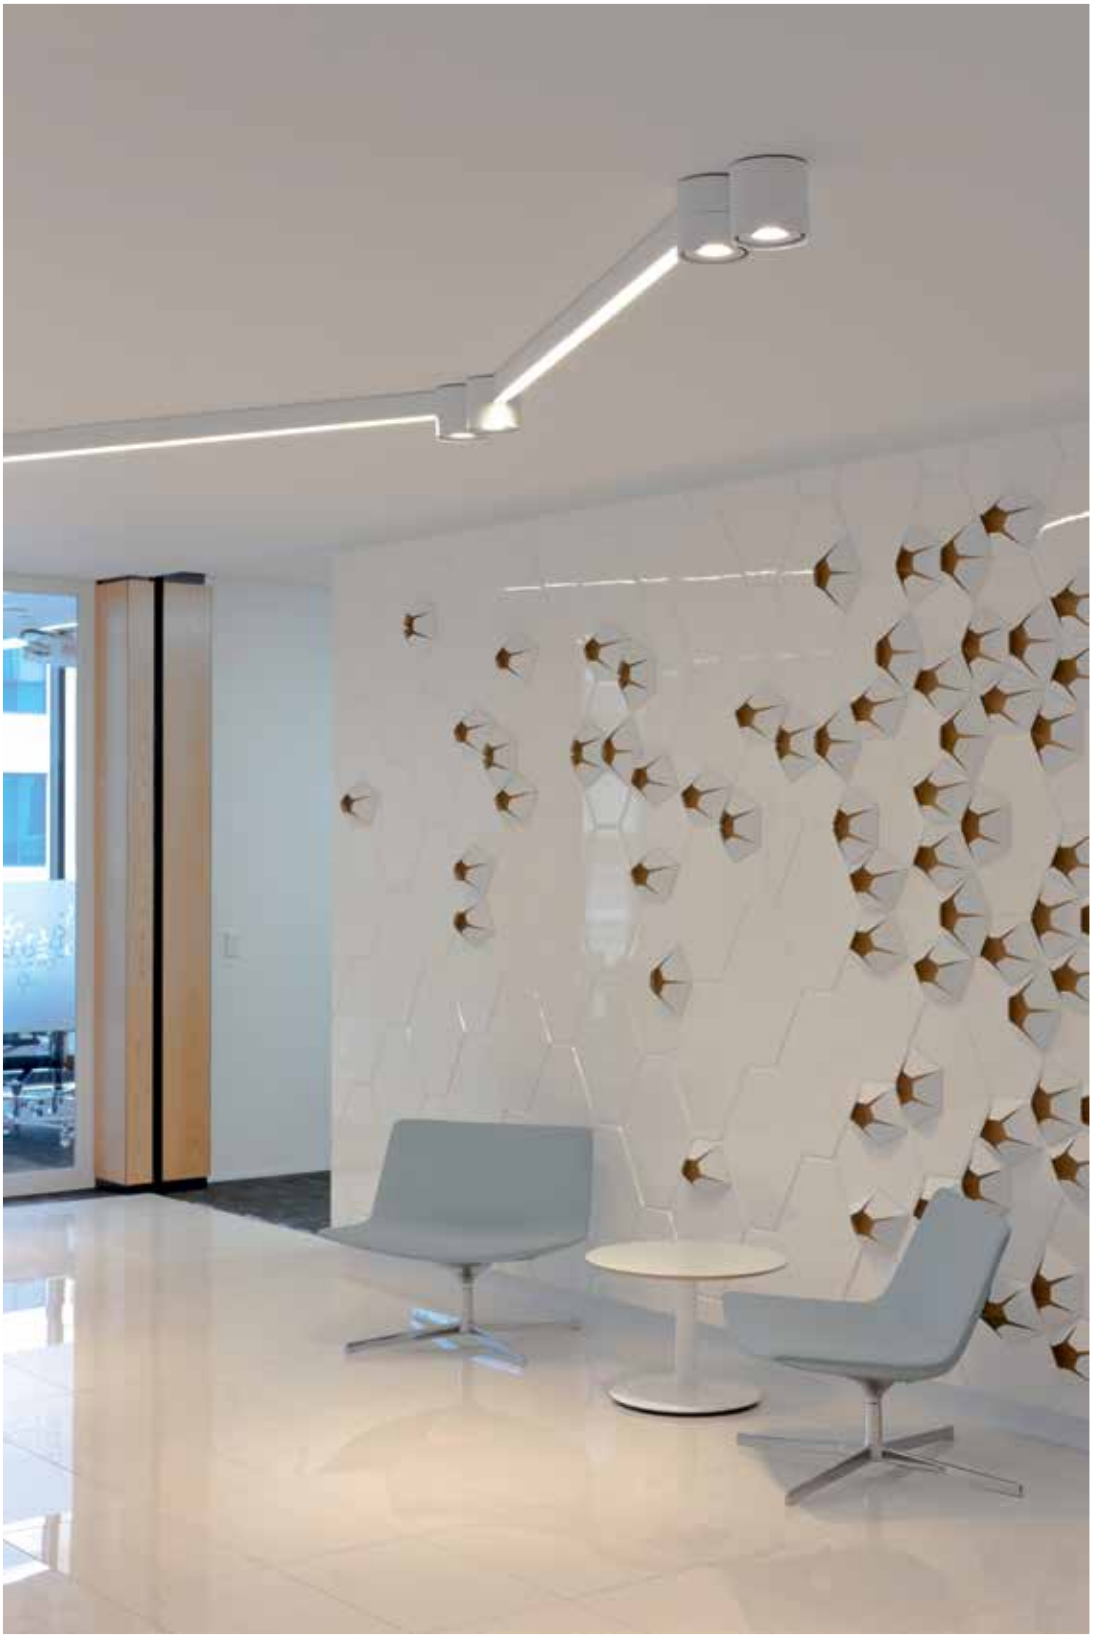






MICROLINE 30+

All the benefits of the Microline 30 T16 profile with an additional plus… as it is possible to equip the Microline 30+ profile with seamless lamps or ledstrips. This profile enables you to create uniformly illuminated light lines, preventing any dark spots along the line.



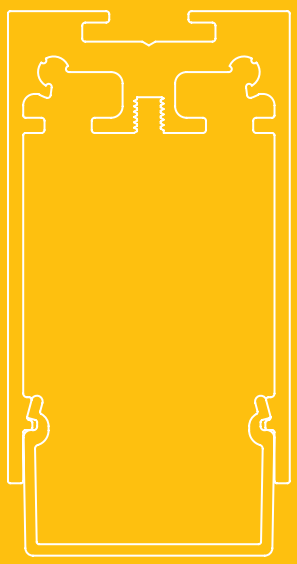

p

Microline 30+




PROFILE



MIC30+ - PROFILE ◇
346 00 00 ◇
◇ = ANO / B / W
INCL.MICROLINE 30 - PC SBL
MAX.L / PROFILE : 6m
Kg / m


1,8



TOL EN12020-2

END CAP





NO MODULE IN THIS AREA 10 mm




MIC30+ - END CAP ◇
346 03 01 ◇
◇ = ALU / B / W

0,1

CORNER


MIC30+ - CORNER 180°
346 06 01

0,3



MIC30+ - CORNER 90°
346 06 06

0,3




FIXATION

MIC30+ - WALL FIXATION 90°
296 06 10


0,3

NO MODULE IN THIS AREA 55 mm





DIRECT FIXATION



SUSPENSION 3 SINGLE 1,6
328 13 01
L 1,6m

SUSPENSION 3 SINGLE 6,0
328 13 06
L 6,0m




0,1

CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **296 98 51**
L 6,0m / 3 x 0,75mm² **296 98 56**
L 1,6m / 5 x 0,75mm² **296 99 51**
L 6,0m / 5 x 0,75mm² **296 99 56** 0,3



OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90




203 99 55 ◇
◇ = ANO / B / W
203 99 56 ◇
◇ = ANO / B / W

0,1

Ledstrip

0,5m - 24V-DC 0,1




	White		RGB
	Dividable per 100mm 30 smd LED +/- 50K		Dividable per 100mm 30 smd LED
led	6W/m 440 lm/m	new 20W/m 1260 lm/m	15W/m
4000K			
IN	**LEDSTRIP 13 F NW** **300 91 10 13 F NW**	**LEDSTRIP 13 FP NW** **300 91 10 13 FP NW**	
OUT IP65			
3000K			
IN	**LEDSTRIP 13 F WW** **300 91 10 13 F WW**	**LEDSTRIP 13 FP WW** **300 91 10 13 FP WW**	
OUT IP65			
2700K new			
IN	**LEDSTRIP 13 F HW** **300 91 10 13 F HW**	**LEDSTRIP 13 FP HW** **300 91 10 13 FP HW**	
OUT IP65			
RGB			
IN			**LEDSTRIP 13 RGB** **300 91 33 13**
OUT IP65			
FULL INFO / PAG TEC			
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	max.6	max.2	⊛ max.2
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	max.13	max.4	⊛ max.5
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	max.20	max.6	⊛ max.7
new **LED POWER SUPPLY 24V-DC / 80W DIM1** **300 89 24 80**	max.26	max.8 (max.6 / Powerline)	
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	max.50	max.15 (max.6 / Powerline)	⊛ max.18
LED POWER SUPPLY MULTI POWER DIM7 **300 90 60**	max.6	max.2	
LED POWER SUPPLY MULTI POWER DIM6 **300 90 61**	max.6	max.2	
RGB DRIVER 12/24V-DC 75/150W **300 90 331**			⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX **300 90 330**			⊛ use in combination with RGB Driver


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

Microline 30+ Modules T16 Down

MIC30+ - T16 SERIE DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz

1,6 IP20 0,1







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	1210	**346 61 224 E**	**346 61 224 ED1**	**346 61 224 ED2**
2 x 21/39	1810	**346 61 239 E**	**346 61 239 ED1**	**346 61 239 ED2**
2 x 28/54	2410	**346 61 254 E**	**346 61 254 ED1**	**346 61 254 ED2**
2 x 35	3010	**346 61 235 E**	**346 61 235 ED1**	**346 61 235 ED2**
2 x 80	3010	**346 61 280 E**	**346 61 280 ED1**	**346 61 280 ED2**



MIC30+ - T16 DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz

0,8 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	605	**346 61 124 E**	**346 61 124 ED1**	**346 61 124 ED2**
1 x 21/39	905	**346 61 139 E**	**346 61 139 ED1**	**346 61 139 ED2**
1 x 28/54	1205	**346 61 154 E**	**346 61 154 ED1**	**346 61 154 ED2**
1 x 35/80	1505	**346 61 180 E**	**346 61 180 ED1**	**346 61 180 ED2**



p

Microline 30+ Modules T16 Seamless Down

MIC30+ SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz

1,6 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**346 75 239 E**	**346 75 239 ED1**	**346 75 239 ED2**
2 x 28/54	2370	**346 75 254 E**	**346 75 254 ED1**	**346 75 254 ED2**



MIC30+ SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz

0,8 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 24	585	**346 75 124 E**		
1 x 21/39	885	**346 75 139 E**	**346 75 139 ED1**	**346 75 139 ED2**
1 x 28/54	1185	**346 75 154 E**	**346 75 154 ED1**	**346 75 154 ED2**



T16 SEAMLESS - PAG TEC



Isagen / AIA





new

B-LINER

Despite its remarkably slim dimensions, the B-liner wows you with its outstanding performance and efficiency. Thanks to the use of highly powerful led arrays, the B-liner scores a very high light output. The perfect solution if you are looking for a very compact but powerful and energy-efficient lighting solution, for both down and down-up light, with LED.



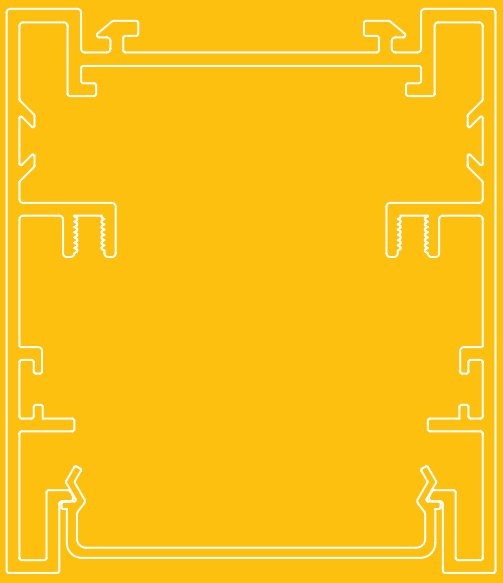

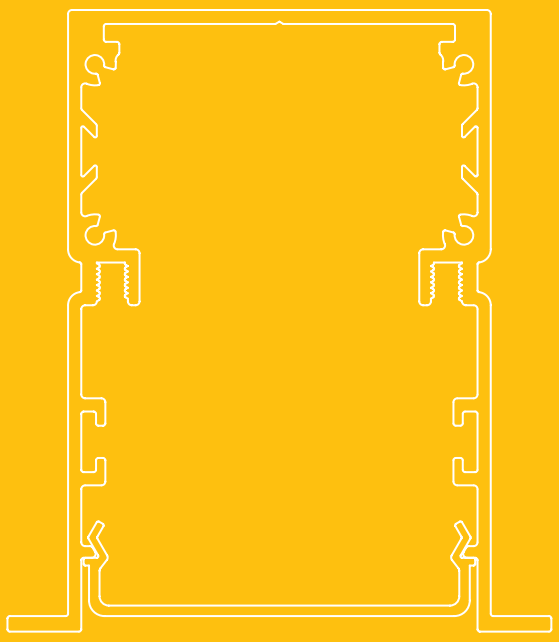

B-Liner 70


B-Liner 65

PROFILE




BLN 70 - PROFILE ◇
385 00 00 ◇
◇ = ANO / B / W
INCL.PC SBL
MAX.L / PROFILE : 6m
Kg / m

1,6




TOL EN12020-2

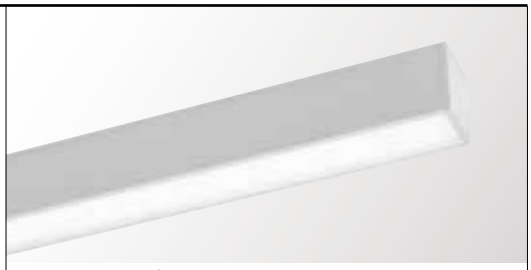

BLN 65 - PROFILE ◇
384 00 00 ◇
◇ = ANO / B / W
INCL.PC SBL
MAX.L / PROFILE : 6m
Kg / m

1,7




TOL EN12020-2


END CAP



BLN 70 - END CAP ◇
385 03 01 ◇
◇ = ANO / B / W


0,1





BLN 65 - END CAP ◇
384 03 01 ◇
◇ = A / B / W

0,1




NO MODULE IN THIS AREA

CORNER


BLN 70 - CORNER 180°
385 06 01

0,3




BLN 70 - CORNER 90°
385 06 06

0,3




BLN 65 - CORNER 180°
385 06 01

0,3



BLN 65 - CORNER 90°
385 06 06

0,3




FIXATION

62 x (L + 5) x 125 max.35


BLN 70 - INSIDE CLIP
385 14 01

0,1



BLN 65/HDL 75 - WALL FIXATION 90°
377 06 10

0,3



BLN 65/HDL 75 - DIRECT FIXATION SET
377 12 00

0,3



SUSPENSION 20 SINGLE 1,6
377 20 21
L 1,6m

SUSPENSION 20 SINGLE 6,0
377 20 26
L 6m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **298 98 51**
L 6,0m / 3 x 0,75mm² **298 98 56**
L 1,6m / 5 x 0,75mm² **298 99 51**
L 6,0m / 5 x 0,75mm² **298 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 55 ◇
◇ = ANO / B / W

203 99 56 ◇
◇ = ANO / B / W


0,1




B-Liner Led Array Down

BLN - LED ARRAY DOWN
110-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY 280mm - 3000K - 7,5W/array - 2678lm/m - 100lm/W
EXCL.BLN - PC SBL PROFILE

1,6 IP20 0,1








Watt	L (mm)	EVG DIM 1 10V	EVG DIM DALI
2 x 7,5	560	**385 610 22 ED1**	**385 610 22 ED1 + 385 610 ED5***
4 x 7,5	1120	**385 610 42 ED1**	**385 610 42 ED1 + 385 610 ED5***


*max. 10x ED1/385 610 ED5

B-Liner Led Array Up

BLN - LED ARRAY UP (1)
110-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY 280mm - 3000K - 7,5W/array - 2678lm/m - 100lm/W
INCL.BLN - PC CLEAR UP PROFILE

1,6 IP20 0,1








Watt	L (mm)	EVG DIM 1 10V	EVG DIM DALI
2 x 7,5	560	**384 620 22 ED1**	**384 620 22 ED1 + 385 610 ED5***
4 x 7,5	1120	**384 620 42 ED1**	**384 620 42 ED1 + 385 610 ED5***

*max. 10x ED1/385 610 ED5

(1) only in combination with B-LINER LED ARRAY DOWN

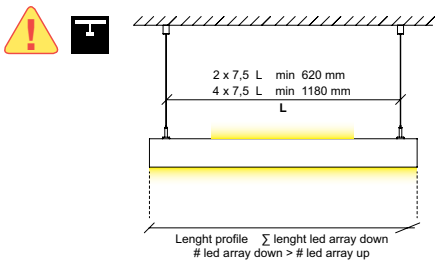



new


HEADLINER 95/75


The Headliner is a no-nonsense made-to-measure or ready-made profile solution, with superior efficiency and light output results thanks to the use of specially designed segmented reflectors. Pure light in homogeneously illuminated lines, using T16 fluorescent lamps, halogen or new generation leds. The Headliner enables you to easily take light around the corner. The easy-to-use L-modules enable more options in creative design, connecting endless light lines in 90°angles, without compromise on the quality of light.



Antwerp Management School / Edward Sorgeloose



















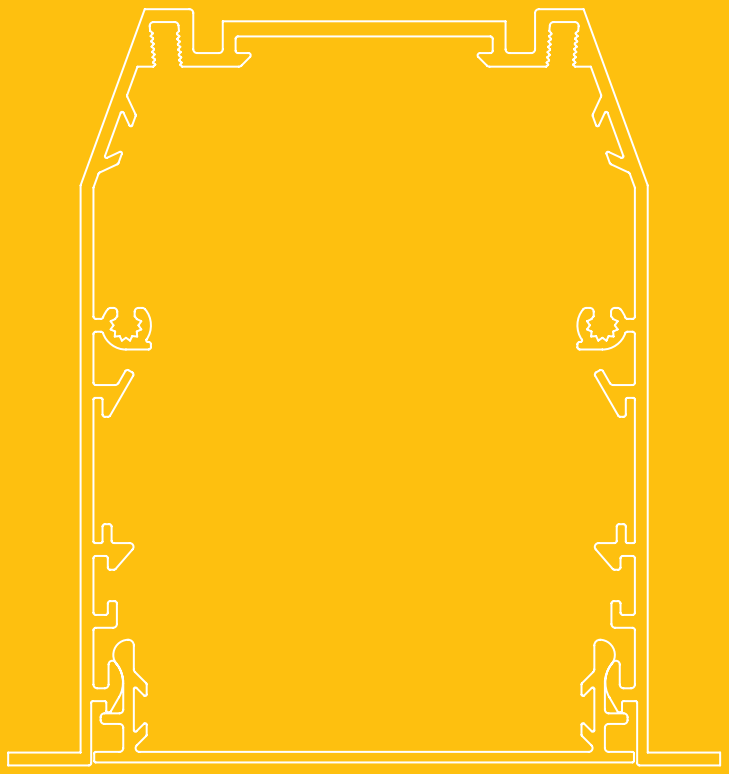

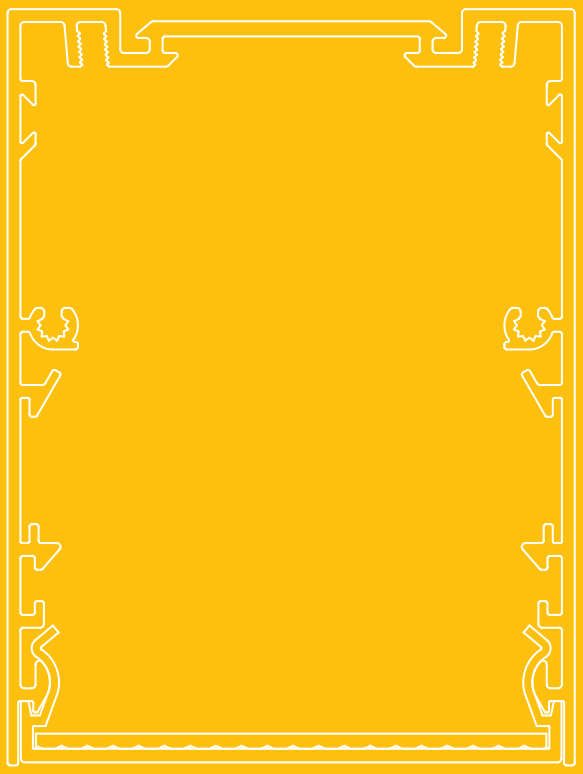

Headliner 95

Headliner 75

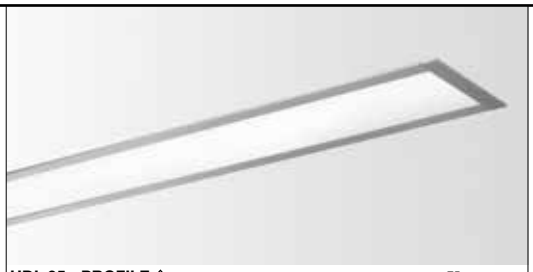	Headliner 95	Headliner 75
PROFILE	 **HDL 95 - PROFILE ◇** **378 00 00 ◇** ◇ = ANO / B / W MAX.L / PROFILE : 6m Kg / m 2,0  TOL EN12020-2	 **HDL 75 - PROFILE ◇** **377 00 00 ◇** ◇ = ANO / B / W MAX.L / PROFILE : 6m Kg / m 1,9  TOL EN12020-2
END CAP	  **HDL 95 - END CAP ◇** **378 03 01 ◇** ◇ = ANO / B / W 0,2	  **HDL 75 - END CAP ◇** **377 03 01 ◇** ◇ = A / B / W 0,2
CORNER	**HDL - CORNER 180°** **378 06 01** 0,3  **HDL - CORNER 90°** **378 06 06** 0,3 	**HDL - CORNER 180°** **378 06 01** 0,3  **HDL - CORNER 90°** **378 06 06** 0,3 
FIXATION	82 x (L+5) x 145 max.35 **HDL 95 - INSIDE CLIP** **378 14 01** 0,3 	**BLN 65/HDL 75 - WALL FIXATION 90°** **377 06 10** 0,3  **BLN 65/HDL 75 - DIRECT FIXATION SET** **377 12 00** 0,3  **SUSPENSION 20 SINGLE 1,6** **377 20 21** L 1,6m **SUSPENSION 20 SINGLE 6,0** **377 20 26** L 6m 0,1 
CURRENT SUPPLY	**CURRENT SUPPLY CONNECTOR 5P** **378 98 05** 0,1 	**CURRENT SUPPLY CONNECTOR 5P** **378 98 05** 0,1  **CURRENT SUPPLY** L 1,6m / 3 x 0,75mm² **377 98 51** L 6,0m / 3 x 0,75mm² **377 98 56** L 1,6m / 5 x 0,75mm² **377 99 51** L 6,0m / 5 x 0,75mm² **377 99 56** 0,3  OPTIONS CABLE BASE R/S COVERSET R 62-90-100 / S 62-80-90 **203 99 55 ◇** ◇ = ANO / B / W **203 99 56 ◇** ◇ = ANO / B / W 0,1

Headliner Custom-Made

Headliner M10

HDL - M10
378 61 01 ◇
◇ = ANO / B / W
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 525lm
EXCL.LED POWER SUPPLY 350mA-DC

0,3 IP20

L 160





Headliner 1 Reo




L 220



Headliner 2 Reo



L 295



	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	660 lm	580 lm	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**HDL - 1 REO 3033** **378 61 8122**	**HDL - 1 REO 3033-9** **378 61 89122**	**HDL - 2 REO 3033** **378 61 8222**	**HDL - 2 REO 3033-9** **378 61 89222**
REFLECTOR WFL-50°	**HDL - 1 REO 3050** **378 61 8132**	**HDL - 1 REO 3050-9** **378 61 89132**	**HDL - 2 REO 3050** **378 61 8232**	**HDL - 2 REO 3050-9** **378 61 89232**
2700K	620 lm	525 lm	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**HDL - 1 REO 2733** **378 61 8123**	**HDL - 1 REO 2733-9** **378 61 89123**	**HDL - 2 REO 2733** **378 61 8223**	**HDL - 2 REO 2733-9** **378 61 89223**
REFLECTOR WFL-50°	**HDL - 1 REO 2750** **378 61 8133**	**HDL - 1 REO 2750-9** **378 61 89133**	**HDL - 2 REO 2750** **378 61 8233**	**HDL - 2 REO 2750-9** **378 61 89233**
	FIXED INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 0,3 IP20		FIXED INCL.2 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 0,4 IP20	


Headliner Modules T16 Seamless Down

HDL SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.HDL - PC SBL/PRISMATIC PROFILE

CE 1,6 IP20 0,1

OPTIONS
HDL - HE REFLECTOR T16 SEAMLESS DOWN








Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**378 75 239 E**	**378 75 239 ED1**	**378 75 239 ED2**
2 x 28/54	2370	**378 75 254 E**	**378 75 254 ED1**	**378 75 254 ED2**

HDL SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.HDL - PC SBL/PRISMATIC PROFILE


CE 0,8 IP20 0,1

OPTIONS
HDL - HE REFLECTOR T16 SEAMLESS DOWN



Requirements
HDL - PC SBL PROFILE
378 02 05 SBL
or
HDL - PC PRISMATIC PROFILE
378 02 06 PR
MAX.L / PROFILE : 5.8m - 0,2 / m

T16 SEAMLESS LAMP - PAG TEC






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 24	585	**378 75 124 E**		
1 x 21/39	885	**378 75 139 E**	**378 75 139 ED1**	**378 75 139 ED2**
1 x 28/54	1185	**378 75 154 E**	**378 75 154 ED1**	**378 75 154 ED2**

new led


Headliner Led Array Down

HDL - LED ARRAY DOWN
110-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY 280mm - 3000K - 7,5W/array - 2678lm/m - 100lm/W
EXCL.HDL - PC SBL PROFILE

CE 1,6 IP20 0,1







Requirements
HDL - PC SBL PROFILE
378 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m


Watt	L (mm)	EVG DIM 1 10V	EVG DIM DALI
2 x 7,5	560	**378 610 22 ED1**	**378 610 22 ED1 + 385 610 ED5***
4 x 7,5	1120	**378 610 42 ED1**	**378 610 42 ED1 + 385 610 ED5***

*max. 10x ED1/385 610 ED5

Requirement



HDL - PC SBL PROFILE




HDL - PC SBL PROFILE
378 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

HDL - PC profile



HDL - PC PRISMATIC PROFILE




HDL - PC PRISMATIC PROFILE
378 02 06 PR
MAX.L / PROFILE : 5.8m - 0,2 / m

OPTIONS

HDL - HE REFLECTOR T16 SEAMLESS DOWN [1]
HIGH EFFICIENT REFLECTOR
Kg / m
0,2

Watt	Lmm	
1 x 24	585	**378 52 124**
1 x 21/39	885	**378 52 139**
1 x 28/54	1185	**378 52 154**

Headliner HE Reflector T16 Seamless Down





[1] only with module T16 Seamless Down

Efficiency



HEADLINER
T16 SEAMLESS DOWN

+




HEADLINER HE REFLECTOR
T16 SEAMLESS DOWN


=



HEADLINER T16 SEAMLESS
DOWN + HE REFLECTOR



HEADLINER MODULE SBL
T16 SEAMLESS DOWN



HIGH EFFICIENCY

up to 71% efficiency

The Headliner

is a no-nonsense made-to-measure profile solution, with excellent efficiency and light output results.

The white lacquered reflector of the standard Headliner is optimized to produce perfect lighting conditions, achieving a light output of 53%.

+

HE Reflector
Specially designed reflector in sheet metal plate provides superior reflection abilities.
Resulting in increase of efficiency of 34%, guaranteeing reduced energy consumption.


=

Exceptional output results are achieved by adding the HE Reflector to the standard Headliner module, resulting in 71% efficiency.


Headliner T16 Down

HDL - T16 BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 1,2 IP20 0,1




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1185	**378 61 154 EB**	**378 61 154 ED1B**	**378 61 154 ED2B**








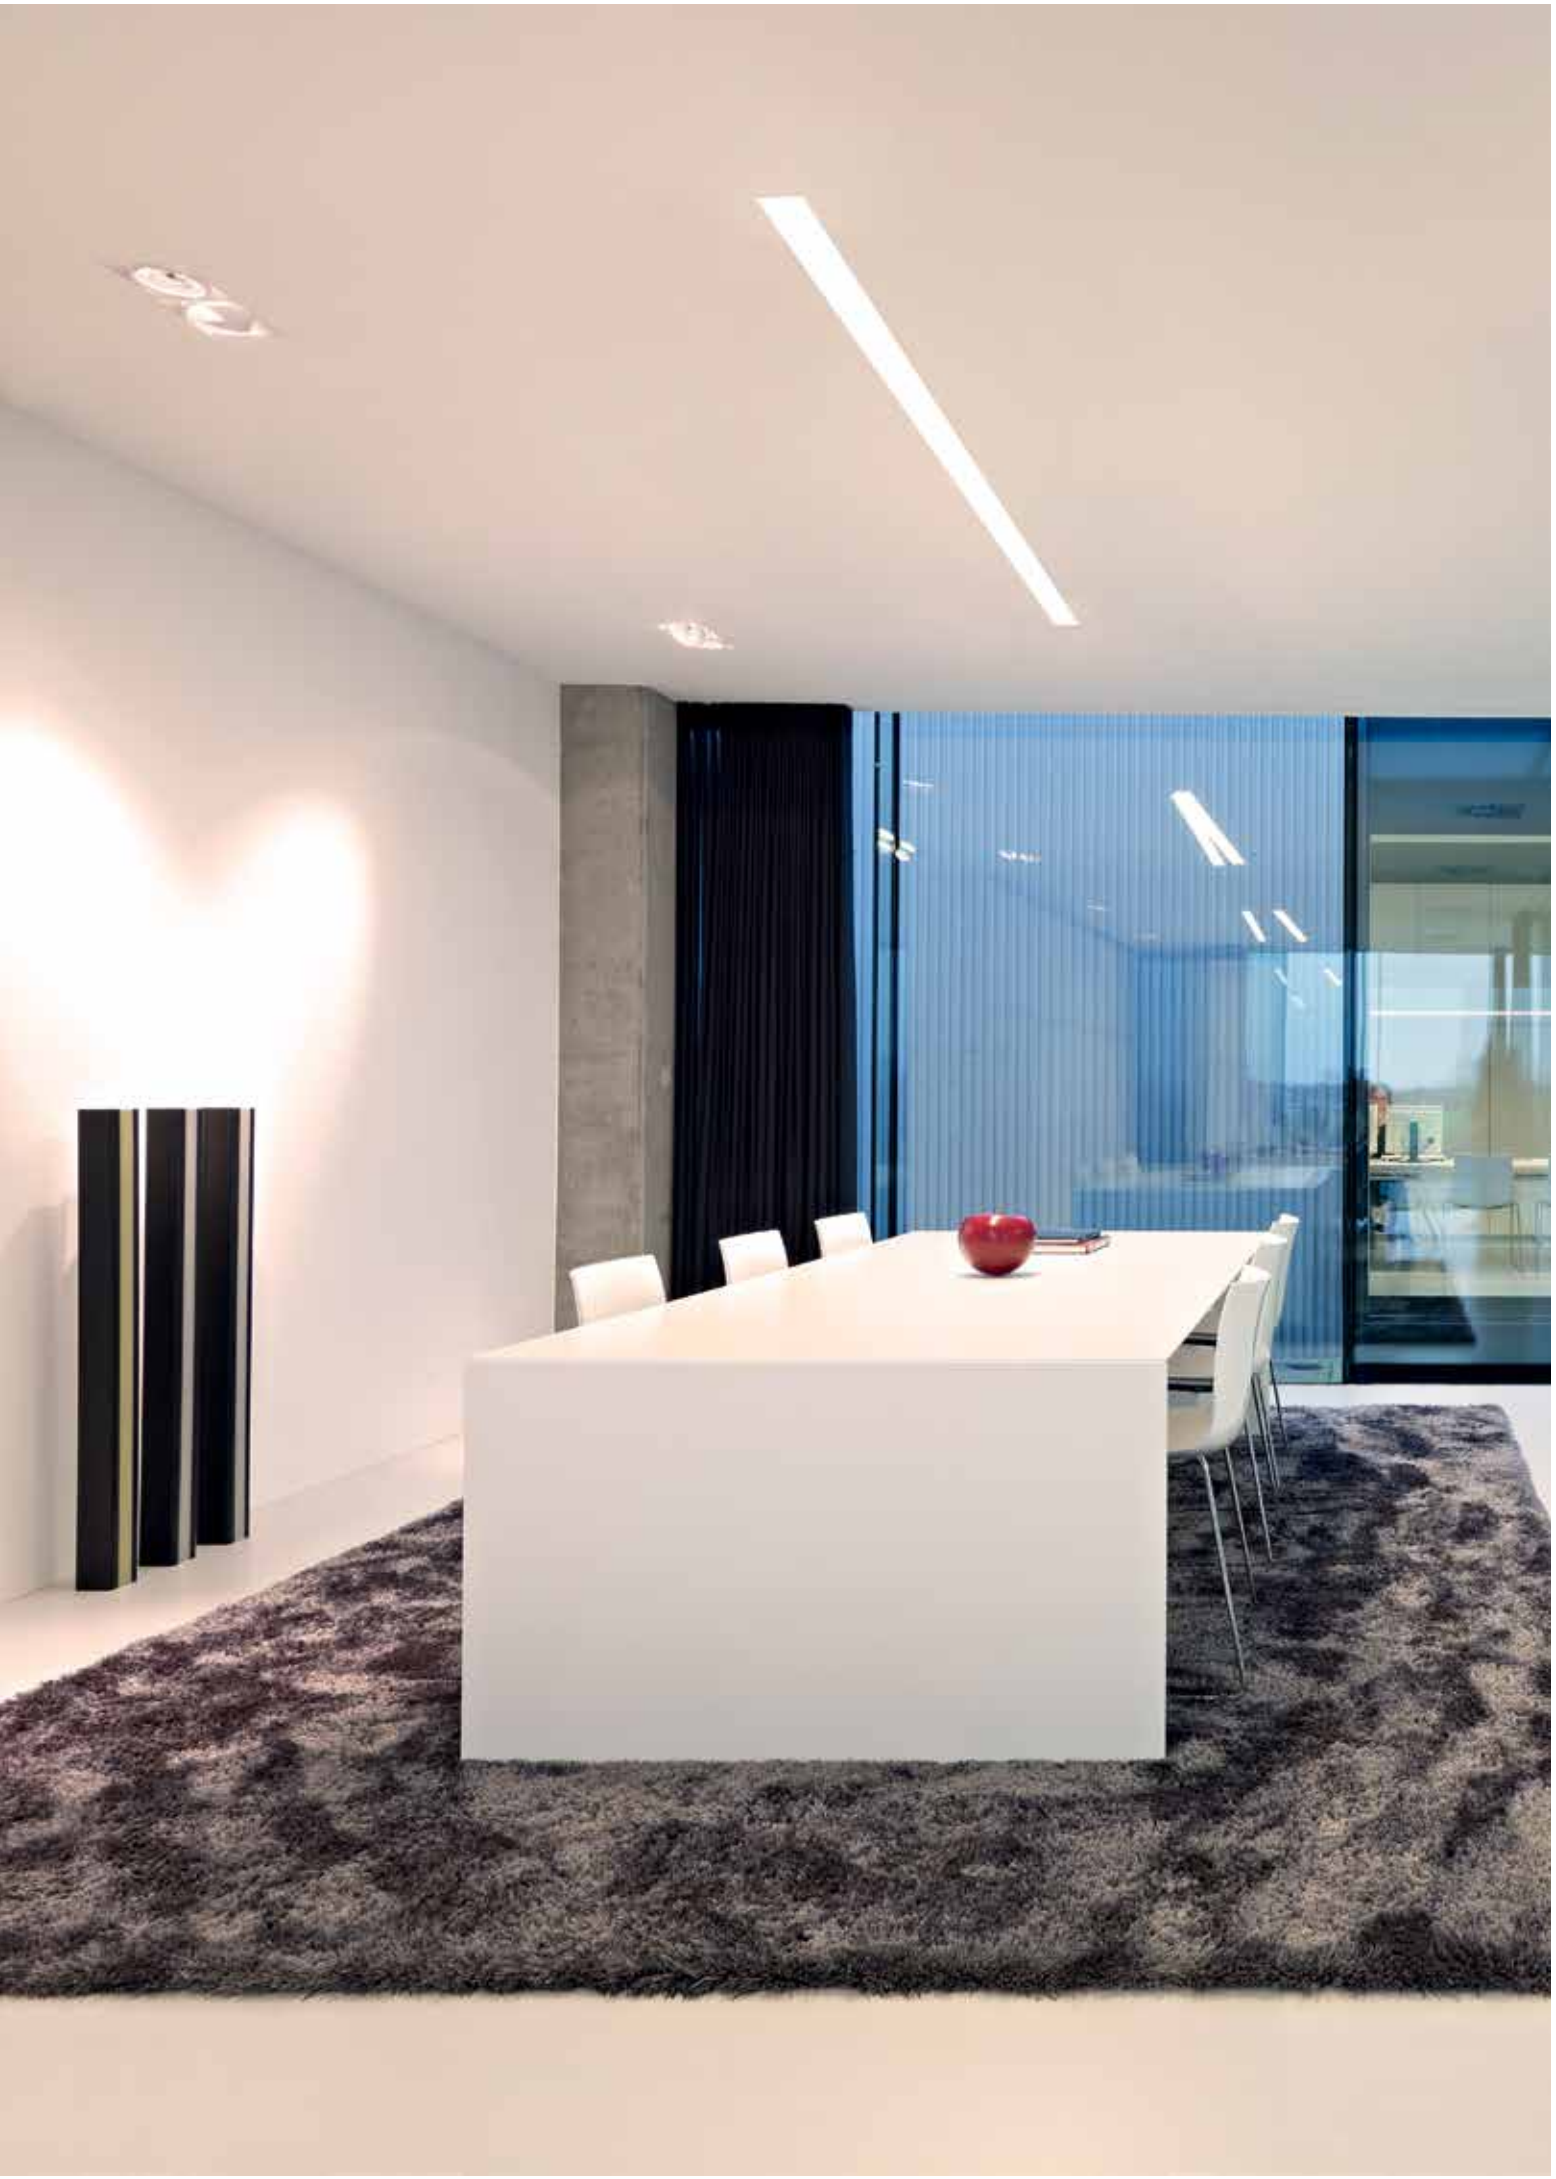

1 Each Luminaire Includes


- PROFILE
- CONTINUOUS PC
- GEAR TRAY WITH BALLAST
- THROUGH WIRING
- INSIDE CLIP ONLY FOR HDL 95

CHOICES
PC SBL OR PC PRISMATIC PROFILE
EVG / EVG DIM1 / EVG DIM2
WITH OR WITHOUT HE REFLECTOR




2 Make Configuration with FIX System Lengths

2.1. SINGLE LINE T16	14/24	21/39	28/54	35/49
1 LAMP	590	890	1190	1490
2 LAMP	-	-	2250	2850
3 LAMP	-	-	3310	4210




EXAMPLE: 3 LAMPS SINGLE LINE

2.2. CONTINUOUS LINE T16	14/24	21/39	28/54	35/49
1 LAMP	-	-	1061	1361
2 LAMP	-	-	2126	2726
3 LAMP	-	-	3189	4089



EXAMPLE: 3 LAMPS CONTINUOUS LINE

2.3. CORNER T16	14/24	21/39	28/54	35/49
2 LAMP HDL 75	495 x 495	795 x 795		-
2 LAMP HDL 95	505 x 505	805 x 805	-	-

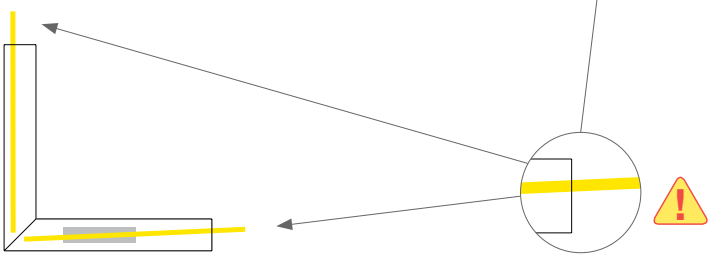
EXAMPLE: 2 LAMPS CORNER T16

IMPORTANT!
ALWAYS TERMINATE CONFIGURATION WITH A 1- TO 3- LAMP SINGLE LINE
EXAMPLE: 7 x 28/54W



3 Order Accessories Seperately

- FIXATION SETS
  HDL 75 - DIRECT FIXATION SET
  HDL 75 - SUSPENSION SINGLE


- END CAP
  HDL 75
  HDL 95

- CONNECTION 180°

4 Options

- CABLE BASE R/S
- COVERSET R/S
- SUPPLY CONNECTOR 5P
  5 POSSIBLE WIRING METHODS

5P	L	⏚	N	1	2
1	L	⏚	N	L_1	L_2
2	L	⏚	N	L_1	N_1
3	L	⏚	N	D_1	D_2




Headliner Ready-Made

Example

HDL 75 - SUSPENDED
PC SBL
EVG
WITH HE REFLECTOR

ORDER OVERVIEW
2 x (3 x 28/54) SINGLE LINE SBL
1 x (1 x 28/54) CONTINUOUS LINE SBL
1 x (3 x 28/54) CONTINUOUS LINE SBL
1 x (2 x 21/39) CORNER SBL



ACCESSORIES
2 x END CAP
4 x CONNECTION 180°
7 x SUSPENSION SINGLE
2 x CURRENT SUPPLY CABLE
2 x CABLE BASE

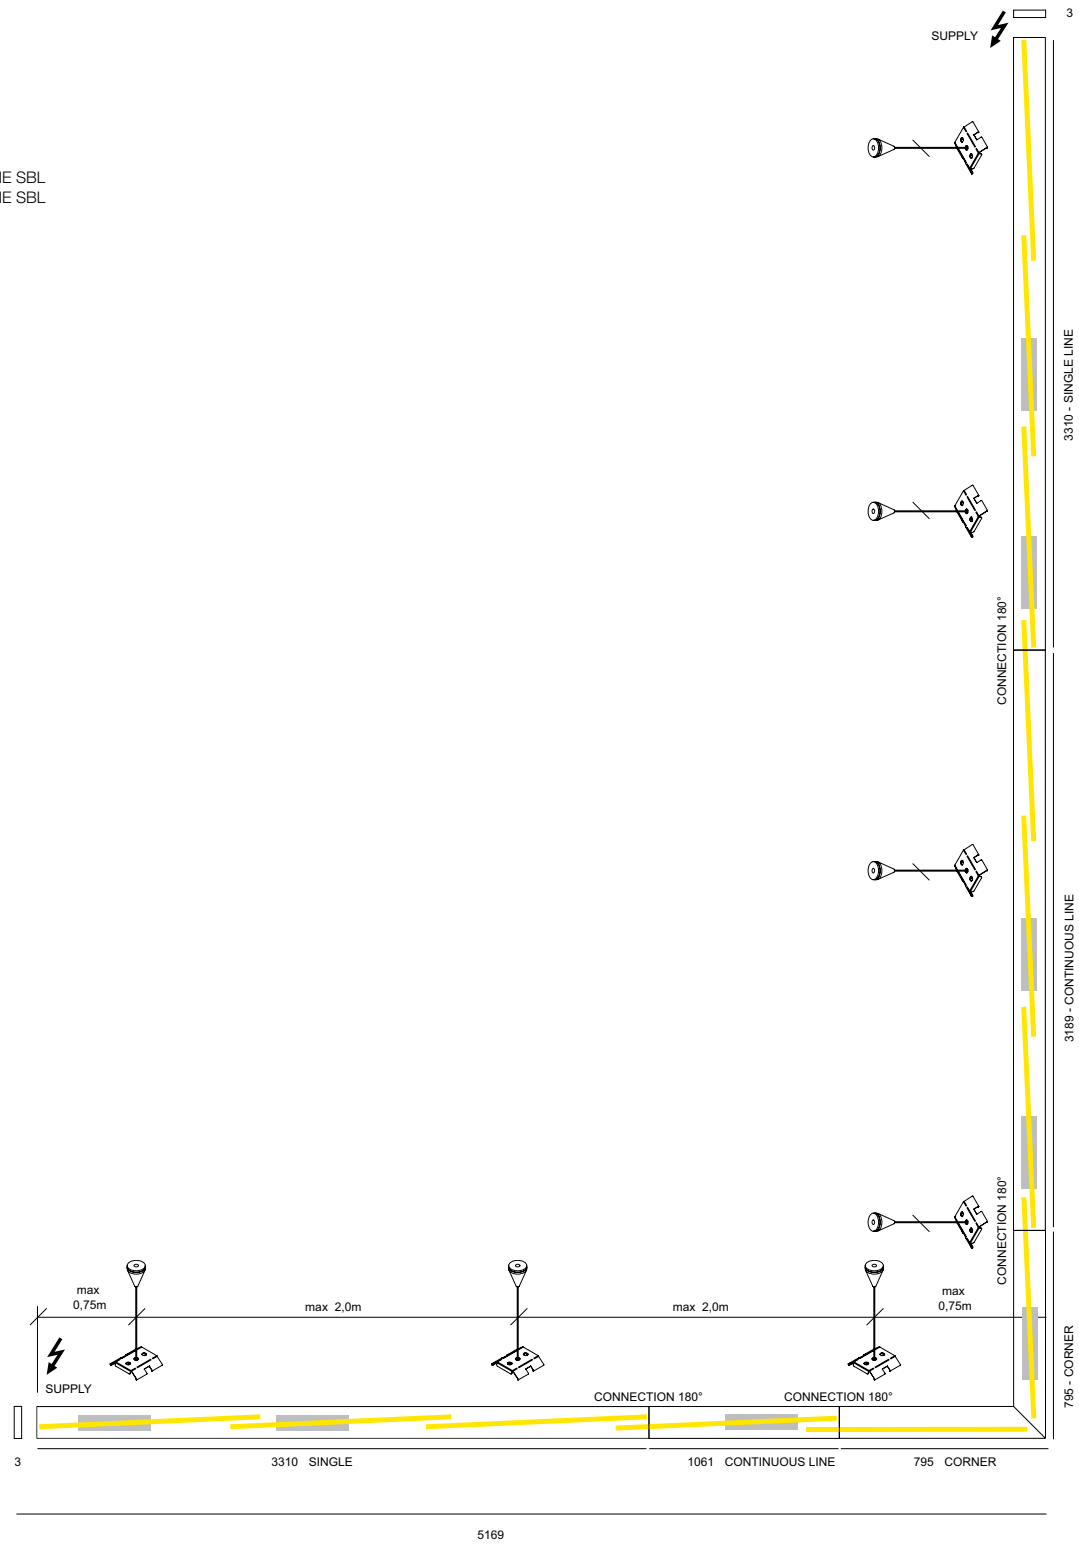



p

7297

Headliner 95 Ready-Made

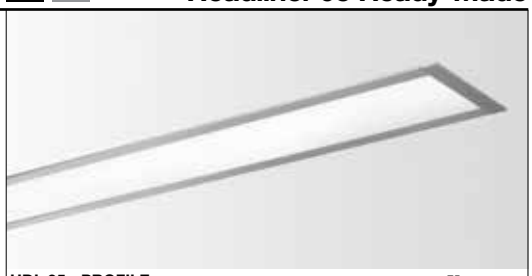PROFILE	 **HDL 95 - PROFILE**  TOL EN12020-2

Accessories Headliner 95 Ready-Made

END CAP	 **HDL 95 - END CAP ◇** **378 03 01 ◇** ◇ = ANO / B / W 0,2 
CORNER	**HDL - CONNECTION SET RM 180°** **378 06 018** 0,3 
FIXATION	82 x (L+5) x 145 max.35
CURRENT SUPPLY	**CURRENT SUPPLY CONNECTOR 5P** **378 98 05** 0,1 



HDL95 - RM T16 SINGLE LINE



HDL95 - RM T16 SINGLE LINE + HE REFLECTOR



HDL95 - RM T16 CONTINUOUS LINE



HDL95 - RM T16 CONTINUOUS LINE + HE REFLECTOR SBL



HDL - PC SBL



HDL - PC PRISMATIC

Headliner 95 Ready-Made T16 Single Line SBL

HDL95 - RM T16 SINGLE LINE SBL
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC SBL PROFILE
INCL.INSIDE CLIP
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz





◇ CE 1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 SINGLE LINE SBL					
	1 x 14/24	590	**378 20 124 E** ◇	**378 20 124 ED1** ◇	**378 20 124 ED2** ◇
	1 x 21/39	890	**378 20 139 E** ◇	**378 20 139 ED1** ◇	**378 20 139 ED2** ◇
	1 x 28/54	1190	**378 20 154 E** ◇	**378 20 154 ED1** ◇	**378 20 154 ED2** ◇
	1 x 35/49	1490	**378 20 149 E** ◇	**378 20 149 ED1** ◇	**378 20 149 ED2** ◇
115 OVERLAY	2 x 28/54	2250	**378 20 254 E** ◇	**378 20 254 ED1** ◇	**378 20 254 ED2** ◇
	2 x 35/49	2850	**378 20 249 E** ◇	**378 20 249 ED1** ◇	**378 20 249 ED2** ◇
115 OVERLAY	3 x 28/54	3310	**378 20 354 E** ◇	**378 20 354 ED1** ◇	**378 20 354 ED2** ◇
	3 x 35/49	4210	**378 20 349 E** ◇	**378 20 349 ED1** ◇	**378 20 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 SINGLE LINE SBL + HE REFLECTOR					
	1 x 14/24	590	**378 20 124 R E** ◇	**378 20 124 R ED1** ◇	**378 20 124 R ED2** ◇
	1 x 21/39	890	**378 20 139 R E** ◇	**378 20 139 R ED1** ◇	**378 20 139 R ED2** ◇
	1 x 28/54	1190	**378 20 154 R E** ◇	**378 20 154 R ED1** ◇	**378 20 154 R ED2** ◇
	1 x 35/49	1490	**378 20 149 R E** ◇	**378 20 149 R ED1** ◇	**378 20 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2250	**378 20 254 R E** ◇	**378 20 254 R ED1** ◇	**378 20 254 R ED2** ◇
	2 x 35/49	2850	**378 20 249 R E** ◇	**378 20 249 R ED1** ◇	**378 20 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3310	**378 20 354 R E** ◇	**378 20 354 R ED1** ◇	**378 20 354 R ED2** ◇
	3 x 35/49	4210	**378 20 349 R E** ◇	**378 20 349 R ED1** ◇	**378 20 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

Headliner 95 Ready-Made T16 Single Line Prismatic

HDL95 - RM T16 SINGLE LINE PRISMATIC
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC PRISMATIC PROFILE
INCL.INSIDE CLIP
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz






◇ CE 1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 SINGLE LINE PRISMATIC					
	1 x 14/24	590	**378 21 124 E** ◇	**378 21 124 ED1** ◇	**378 21 124 ED2** ◇
	1 x 21/39	890	**378 21 139 E** ◇	**378 21 139 ED1** ◇	**378 21 139 ED2** ◇
	1 x 28/54	1190	**378 21 154 E** ◇	**378 21 154 ED1** ◇	**378 21 154 ED2** ◇
	1 x 35/49	1490	**378 21 149 E** ◇	**378 21 149 ED1** ◇	**378 21 149 ED2** ◇
115 OVERLAY	2 x 28/54	2250	**378 21 254 E** ◇	**378 21 254 ED1** ◇	**378 21 254 ED2** ◇
	2 x 35/49	2850	**378 21 249 E** ◇	**378 21 249 ED1** ◇	**378 21 249 ED2** ◇
115 OVERLAY	3 x 28/54	3310	**378 21 354 E** ◇	**378 21 354 ED1** ◇	**378 21 354 ED2** ◇
	3 x 35/49	4210	**378 21 349 E** ◇	**378 21 349 ED1** ◇	**378 21 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 SINGLE LINE PRISMATIC + HE REFLECTOR					
	1 x 14/24	590	**378 21 124 R E** ◇	**378 21 124 R ED1** ◇	**378 21 124 R ED2** ◇
	1 x 21/39	890	**378 21 139 R E** ◇	**378 21 139 R ED1** ◇	**378 21 139 R ED2** ◇
	1 x 28/54	1190	**378 21 154 R E** ◇	**378 21 154 R ED1** ◇	**378 21 154 R ED2** ◇
	1 x 35/49	1490	**378 21 149 R E** ◇	**378 21 149 R ED1** ◇	**378 21 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2250	**378 21 254 R E** ◇	**378 21 254 R ED1** ◇	**378 21 254 R ED2** ◇
	2 x 35/49	2850	**378 21 249 R E** ◇	**378 21 249 R ED1** ◇	**378 21 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3310	**378 21 354 R E** ◇	**378 21 354 R ED1** ◇	**378 21 354 R ED2** ◇
	3 x 35/49	4210	**378 21 349 R E** ◇	**378 21 349 R ED1** ◇	**378 21 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

Headliner 95 Ready-Made T16 Continuous Line SBL

HDL95 - RM T16 CONTINUOUS LINE SBL
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC SBL PROFILE
INCL.INSIDE CLIP
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz





1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CONTINUOUS LINE SBL					
	1 x 28/54	1061	**378 30 154 E** ◇	**378 30 154 ED1** ◇	**378 30 154 ED2** ◇
	1 x 35/49	1361	**378 30 149 E** ◇	**378 30 149 ED1** ◇	**378 30 149 ED2** ◇
115 OVERLAY	2 x 28/54	2126	**378 30 254 E** ◇	**378 30 254 ED1** ◇	**378 30 254 ED2** ◇
	2 x 35/49	2726	**378 30 249 E** ◇	**378 30 249 ED1** ◇	**378 30 249 ED2** ◇
115 OVERLAY	3 x 28/54	3189	**378 30 354 E** ◇	**378 30 354 ED1** ◇	**378 30 354 ED2** ◇
	3 x 35/49	4089	**378 30 349 E** ◇	**378 30 349 ED1** ◇	**378 30 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W


RM T16 CONTINUOUS LINE SBL + HE REFLECTOR

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
	1 x 28/54	1061	**378 30 154 R E** ◇	**378 30 154 R ED1** ◇	**378 30 154 R ED2** ◇
	1 x 35/49	1361	**378 30 149 R E** ◇	**378 30 149 R ED1** ◇	**378 30 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2126	**378 30 254 R E** ◇	**378 30 254 R ED1** ◇	**378 30 254 R ED2** ◇
	2 x 35/49	2726	**378 30 249 R E** ◇	**378 30 249 R ED1** ◇	**378 30 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3189	**378 30 354 R E** ◇	**378 30 354 R ED1** ◇	**378 30 354 R ED2** ◇
	3 x 35/49	4089	**378 30 349 R E** ◇	**378 30 349 R ED1** ◇	**378 30 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

p

Headliner 95 Ready-Made T16 Continuous Line Prismatic

HDL95 - RM T16 SINGLE CONTINUOUS LINE PRISMATIC
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC PRISMATIC PROFILE
INCL.INSIDE CLIP
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz





1,6 IP20 0,1


	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CONTINUOUS LINE PRISMATIC					
	1 x 28/54	1061	**378 31 154 E** ◇	**378 31 154 ED1** ◇	**378 31 154 ED2** ◇
	1 x 35/49	1361	**378 31 149 E** ◇	**378 31 149 ED1** ◇	**378 31 149 ED2** ◇
115 OVERLAY	2 x 28/54	2126	**378 31 254 E** ◇	**378 31 254 ED1** ◇	**378 31 254 ED2** ◇
	2 x 35/49	2726	**378 31 249 E** ◇	**378 31 249 ED1** ◇	**378 31 249 ED2** ◇
115 OVERLAY	3 x 28/54	3189	**378 31 354 E** ◇	**378 31 354 ED1** ◇	**378 31 354 ED2** ◇
	3 x 35/49	4089	**378 31 349 E** ◇	**378 31 349 ED1** ◇	**378 31 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

RM T16 CONTINUOUS LINE PRISMATIC + HE REFLECTOR

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
	1 x 28/54	1061	**378 31 154 R E** ◇	**378 31 154 R ED1** ◇	**378 31 154 R ED2** ◇
	1 x 35/49	1361	**378 31 149 R E** ◇	**378 31 149 R ED1** ◇	**378 31 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2126	**378 31 254 R E** ◇	**378 31 254 R ED1** ◇	**378 31 254 R ED2** ◇
	2 x 35/49	2726	**378 31 249 R E** ◇	**378 31 249 R ED1** ◇	**378 31 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3189	**378 31 354 R E** ◇	**378 31 354 R ED1** ◇	**378 31 354 R ED2** ◇
	3 x 35/49	4089	**378 31 349 R E** ◇	**378 31 349 R ED1** ◇	**378 31 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W



Headliner 95 Ready-Made Corners SBL

HDL95 - RM CORNERS SBL
INCL.2 x HDL - PROFILE
INCL.2 x HDL - T16 MODULE
INCL.2 x HDL - PC SBL PROFILE
INCL.1 x HDL - CORNER 90°
INCL.INSIDE CLIP
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz






1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CORNERS SBL					
	2 x 14/24	505 x 505	**378 40 224 E** ◇	**378 40 224 ED1** ◇	**378 40 224 ED2** ◇
	2 x 21/39	805 x 805	**378 40 239 E** ◇	**378 40 239 ED1** ◇	**378 40 239 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 CORNERS SBL + HE REFLECTOR					
	2 x 14/24	505 x 505	**378 40 224 R E** ◇	**378 40 224 R ED1** ◇	**378 40 224 R ED2** ◇
	2 x 21/39	805 x 805	**378 40 239 R E** ◇	**378 40 239 R ED1** ◇	**378 40 239 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

p



Headliner 95 Ready-Made Corners Prismatic

HDL95 - RM CORNERS PRISMATIC
INCL.2 x HDL - PROFILE
INCL.2 x HDL - T16 MODULE
INCL.2 x HDL - PC PRISMATIC PROFILE
INCL.1 x HDL - CORNER 90°
INCL.INSIDE CLIP
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz





1,6 IP20 0,1


	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CORNERS PRISMATIC					
	2 x 14/24	505 x 505	**378 41 224 E** ◇	**378 41 224 ED1** ◇	**378 41 224 ED2** ◇
	2 x 21/39	805 x 805	**378 41 239 E** ◇	**378 41 239 ED1** ◇	**378 41 239 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 CORNERS PRISMATIC + HE REFLECTOR					
	2 x 14/24	505 x 505	**378 41 224 R E** ◇	**378 41 224 R ED1** ◇	**378 41 224 R ED2** ◇
	2 x 21/39	805 x 805	**378 41 239 R E** ◇	**378 41 239 R ED1** ◇	**378 41 239 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

Headliner 75 Ready-Made

PROFILE



HDL 75 - PROFILE




TOL EN12020-2

Accessories Headliner 75 Ready-Made

END CAP





HDL 75 - END CAP ◇
377 03 01 ◇
◇ = A / W

0,2

CORNER

HDL - CONNECTION SET RM 180°
378 06 018


0,3



FIXATION


BLN 65/HDL 75 - WALL FIXATION 90°
377 06 10

0,3



BLN 65/HDL 75 - DIRECT FIXATION SET
377 12 00


0,3



SUSPENSION 20 SINGLE 1,6
377 20 21
L 1,6m

SUSPENSION 20 SINGLE 6,0
377 20 26
L 6m


0,1



CURRENT SUPPLY

CURRENT SUPPLY CONNECTOR 5P
378 98 05


0,1



CURRENT SUPPLY

L 1,6m / 3 x 0,75mm²	**377 98 51**
L 6,0m / 3 x 0,75mm²	**377 98 56**
L 1,6m / 5 x 0,75mm²	**377 99 51**
L 6,0m / 5 x 0,75mm²	**377 99 56**

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**



HDL75 - RM T16 SINGLE LINE



HDL75 - RM T16 SINGLE LINE + HE REFLECTOR



HDL75 - RM T16 CONTINUOUS LINE



HDL75 - RM T16 CONTINUOUS LINE + HE REFLECTOR SBL




HDL - PC SBL



HDL - PC PRISMATIC

Headliner 75 Ready-Made T16 Single Line SBL

HDL75 - RM T16 SINGLE LINE SBL
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC SBL PROFILE
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz






1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 SINGLE LINE SBL					
	1 x 14/24	590	**377 20 124 E** ◇	**377 20 124 ED1** ◇	**377 20 124 ED2** ◇
	1 x 21/39	890	**377 20 139 E** ◇	**377 20 139 ED1** ◇	**377 20 139 ED2** ◇
	1 x 28/54	1190	**377 20 154 E** ◇	**377 20 154 ED1** ◇	**377 20 154 ED2** ◇
	1 x 35/49	1490	**377 20 149 E** ◇	**377 20 149 ED1** ◇	**377 20 149 ED2** ◇
115 OVERLAY	2 x 28/54	2250	**377 20 254 E** ◇	**377 20 254 ED1** ◇	**377 20 254 ED2** ◇
	2 x 35/49	2850	**377 20 249 E** ◇	**377 20 249 ED1** ◇	**377 20 249 ED2** ◇
115 OVERLAY	3 x 28/54	3310	**377 20 354 E** ◇	**377 20 354 ED1** ◇	**377 20 354 ED2** ◇
	3 x 35/49	4210	**377 20 349 E** ◇	**377 20 349 ED1** ◇	**377 20 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 SINGLE LINE SBL + HE REFLECTOR					
	1 x 14/24	590	**377 20 124 R E** ◇	**377 20 124 R ED1** ◇	**377 20 124 R ED2** ◇
	1 x 21/39	890	**377 20 139 R E** ◇	**377 20 139 R ED1** ◇	**377 20 139 R ED2** ◇
	1 x 28/54	1190	**377 20 154 R E** ◇	**377 20 154 R ED1** ◇	**377 20 154 R ED2** ◇
	1 x 35/49	1490	**377 20 149 R E** ◇	**377 20 149 R ED1** ◇	**377 20 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2250	**377 20 254 R E** ◇	**377 20 254 R ED1** ◇	**377 20 254 R ED2** ◇
	2 x 35/49	2850	**377 20 249 R E** ◇	**377 20 249 R ED1** ◇	**377 20 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3310	**377 20 354 R E** ◇	**377 20 354 R ED1** ◇	**377 20 354 R ED2** ◇
	3 x 35/49	4210	**377 20 349 R E** ◇	**377 20 349 R ED1** ◇	**377 20 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

Headliner 75 Ready-Made T16 Single Line Prismatic

HDL75 - RM T16 SINGLE LINE PRISMATIC
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC PRISMATIC PROFILE
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz






1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 SINGLE LINE PRISMATIC					
	1 x 14/24	590	**377 21 124 E** ◇	**377 21 124 ED1** ◇	**377 21 124 ED2** ◇
	1 x 21/39	890	**377 21 139 E** ◇	**377 21 139 ED1** ◇	**377 21 139 ED2** ◇
	1 x 28/54	1190	**377 21 154 E** ◇	**377 21 154 ED1** ◇	**377 21 154 ED2** ◇
	1 x 35/49	1490	**377 21 149 E** ◇	**377 21 149 ED1** ◇	**377 21 149 ED2** ◇
115 OVERLAY	2 x 28/54	2250	**377 21 254 E** ◇	**377 21 254 ED1** ◇	**377 21 254 ED2** ◇
	2 x 35/49	2850	**377 21 249 E** ◇	**377 21 249 ED1** ◇	**377 21 249 ED2** ◇
115 OVERLAY	3 x 28/54	3310	**377 21 354 E** ◇	**377 21 354 ED1** ◇	**377 21 354 ED2** ◇
	3 x 35/49	4210	**377 21 349 E** ◇	**377 21 349 ED1** ◇	**377 21 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 SINGLE LINE PRISMATIC + HE REFLECTOR					
	1 x 14/24	590	**377 21 124 R E** ◇	**377 21 124 R ED1** ◇	**377 21 124 R ED2** ◇
	1 x 21/39	890	**377 21 139 R E** ◇	**377 21 139 R ED1** ◇	**377 21 139 R ED2** ◇
	1 x 28/54	1190	**377 21 154 R E** ◇	**377 21 154 R ED1** ◇	**377 21 154 R ED2** ◇
	1 x 35/49	1490	**377 21 149 R E** ◇	**377 21 149 R ED1** ◇	**377 21 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2250	**377 21 254 R E** ◇	**377 21 254 R ED1** ◇	**377 21 254 R ED2** ◇
	2 x 35/49	2850	**377 21 249 R E** ◇	**377 21 249 R ED1** ◇	**377 21 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3310	**377 21 354 R E** ◇	**377 21 354 R ED1** ◇	**377 21 354 R ED2** ◇
	3 x 35/49	4210	**377 21 349 R E** ◇	**377 21 349 R ED1** ◇	**377 21 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / B / W

Headliner 75 Ready-Made T16 Continuous Line SBL

HDL75 - RM T16 CONTINUOUS LINE SBL
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC SBL PROFILE
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz





1,6 IP20 0,1


	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CONTINUOUS LINE SBL					
	1 x 28/54	1061	**377 30 154 E** ◇	**377 30 154 ED1** ◇	**377 30 154 ED2** ◇
	1 x 35/49	1361	**377 30 149 E** ◇	**377 30 149 ED1** ◇	**377 30 149 ED2** ◇
115 OVERLAY	2 x 28/54	2126	**377 30 254 E** ◇	**377 30 254 ED1** ◇	**377 30 254 ED2** ◇
	2 x 35/49	2726	**377 30 249 E** ◇	**377 30 249 ED1** ◇	**377 30 249 ED2** ◇
115 OVERLAY	3 x 28/54	3189	**377 30 354 E** ◇	**377 30 354 ED1** ◇	**377 30 354 ED2** ◇
	3 x 35/49	4089	**377 30 349 E** ◇	**377 30 349 ED1** ◇	**377 30 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

RM T16 CONTINUOUS LINE SBL + HE REFLECTOR

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
	1 x 28/54	1061	**377 30 154 R E** ◇	**377 30 154 R ED1** ◇	**377 30 154 R ED2** ◇
	1 x 35/49	1361	**377 30 149 R E** ◇	**377 30 149 R ED1** ◇	**377 30 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2126	**377 30 254 R E** ◇	**377 30 254 R ED1** ◇	**377 30 254 R ED2** ◇
	2 x 35/49	2726	**377 30 249 R E** ◇	**377 30 249 R ED1** ◇	**377 30 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3189	**377 30 354 R E** ◇	**377 30 354 R ED1** ◇	**377 30 354 R ED2** ◇
	3 x 35/49	4089	**377 30 349 R E** ◇	**377 30 349 R ED1** ◇	**377 30 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

Headliner 75 Ready-Made T16 Continuous Line Prismatic

HDL75 - RM T16 CONTINUOUS LINE PRISMATIC
INCL.1 x HDL - PROFILE
INCL.1 x HDL - T16 MODULE
INCL.1 x HDL - PC PRISMATIC PROFILE
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz





1,6 IP20 0,1


	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CONTINUOUS LINE PRISMATIC					
	1 x 28/54	1061	**377 31 154 E** ◇	**377 31 154 ED1** ◇	**377 31 154 ED2** ◇
	1 x 35/49	1361	**377 31 149 E** ◇	**377 31 149 ED1** ◇	**377 31 149 ED2** ◇
115 OVERLAY	2 x 28/54	2126	**377 31 254 E** ◇	**377 31 254 ED1** ◇	**377 31 254 ED2** ◇
	2 x 35/49	2726	**377 31 249 E** ◇	**377 31 249 ED1** ◇	**377 31 249 ED2** ◇
115 OVERLAY	3 x 28/54	3189	**377 31 354 E** ◇	**377 31 354 ED1** ◇	**377 31 354 ED2** ◇
	3 x 35/49	4089	**377 31 349 E** ◇	**377 31 349 ED1** ◇	**377 31 349 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

RM T16 CONTINUOUS LINE PRISMATIC + HE REFLECTOR

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
	1 x 28/54	1061	**377 31 154 R E** ◇	**377 31 154 R ED1** ◇	**377 31 154 R ED2** ◇
	1 x 35/49	1361	**377 31 149 R E** ◇	**377 31 149 R ED1** ◇	**377 31 149 R ED2** ◇
115 OVERLAY	2 x 28/54	2126	**377 31 254 R E** ◇	**377 31 254 R ED1** ◇	**377 31 254 R ED2** ◇
	2 x 35/49	2726	**377 31 249 R E** ◇	**377 31 249 R ED1** ◇	**377 31 249 R ED2** ◇
115 OVERLAY	3 x 28/54	3189	**377 31 354 R E** ◇	**377 31 354 R ED1** ◇	**377 31 354 R ED2** ◇
	3 x 35/49	4089	**377 31 349 R E** ◇	**377 31 349 R ED1** ◇	**377 31 349 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W



Headliner 75 Ready-Made Corners SBL

HDL75 - RM CORNERS SBL
INCL.2 x HDL - PROFILE
INCL.2 x HDL - T16 MODULE
INCL.2 x HDL - PC SBL PROFILE
INCL.1 x HDL - CORNER 90°
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz






1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CORNERS SBL					
	2 x 14/24	495 x 495	**377 40 224 E** ◇	**377 40 224 ED1** ◇	**377 40 224 ED2** ◇
	2 x 21/39	795 x 795	**377 40 239 E** ◇	**377 40 239 ED1** ◇	**377 40 239 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 CORNERS SBL + HE REFLECTOR					
	2 x 14/24	495 x 495	**377 40 224 R E** ◇	**377 40 224 R ED1** ◇	**377 40 224 R ED2** ◇
	2 x 21/39	795 x 795	**377 40 239 R E** ◇	**377 40 239 R ED1** ◇	**377 40 239 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W

p



Headliner 75 Ready-Made Corners Prismatic

HDL75 - RM CORNERS PRISMATIC
INCL.2 x HDL - PROFILE
INCL.2 x HDL - T16 MODULE
INCL.2 x HDL - PC PRISMATIC PROFILE
INCL.1 x HDL - CORNER 90°
INCL.THROUGHWIRING + CONNECTORS
220-240V / 0 I 50-60Hz






1,6 IP20 0,1

	Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
RM T16 CORNERS PRISMATIC					
	2 x 14/24	495 x 495	**377 41 224 E** ◇	**377 41 224 ED1** ◇	**377 41 224 ED2** ◇
	2 x 21/39	795 x 795	**377 41 239 E** ◇	**377 41 239 ED1** ◇	**377 41 239 ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W
RM T16 CORNERS PRISMATIC + HE REFLECTOR					
	2 x 14/24	495 x 495	**377 41 224 R E** ◇	**377 41 224 R ED1** ◇	**377 41 224 R ED2** ◇
	2 x 21/39	795 x 795	**377 41 239 R E** ◇	**377 41 239 R ED1** ◇	**377 41 239 R ED2** ◇
			◇ = ANO / W	◇ = ANO / W	◇ = ANO / W



Antwerp Management School / Edward Sorgeloose



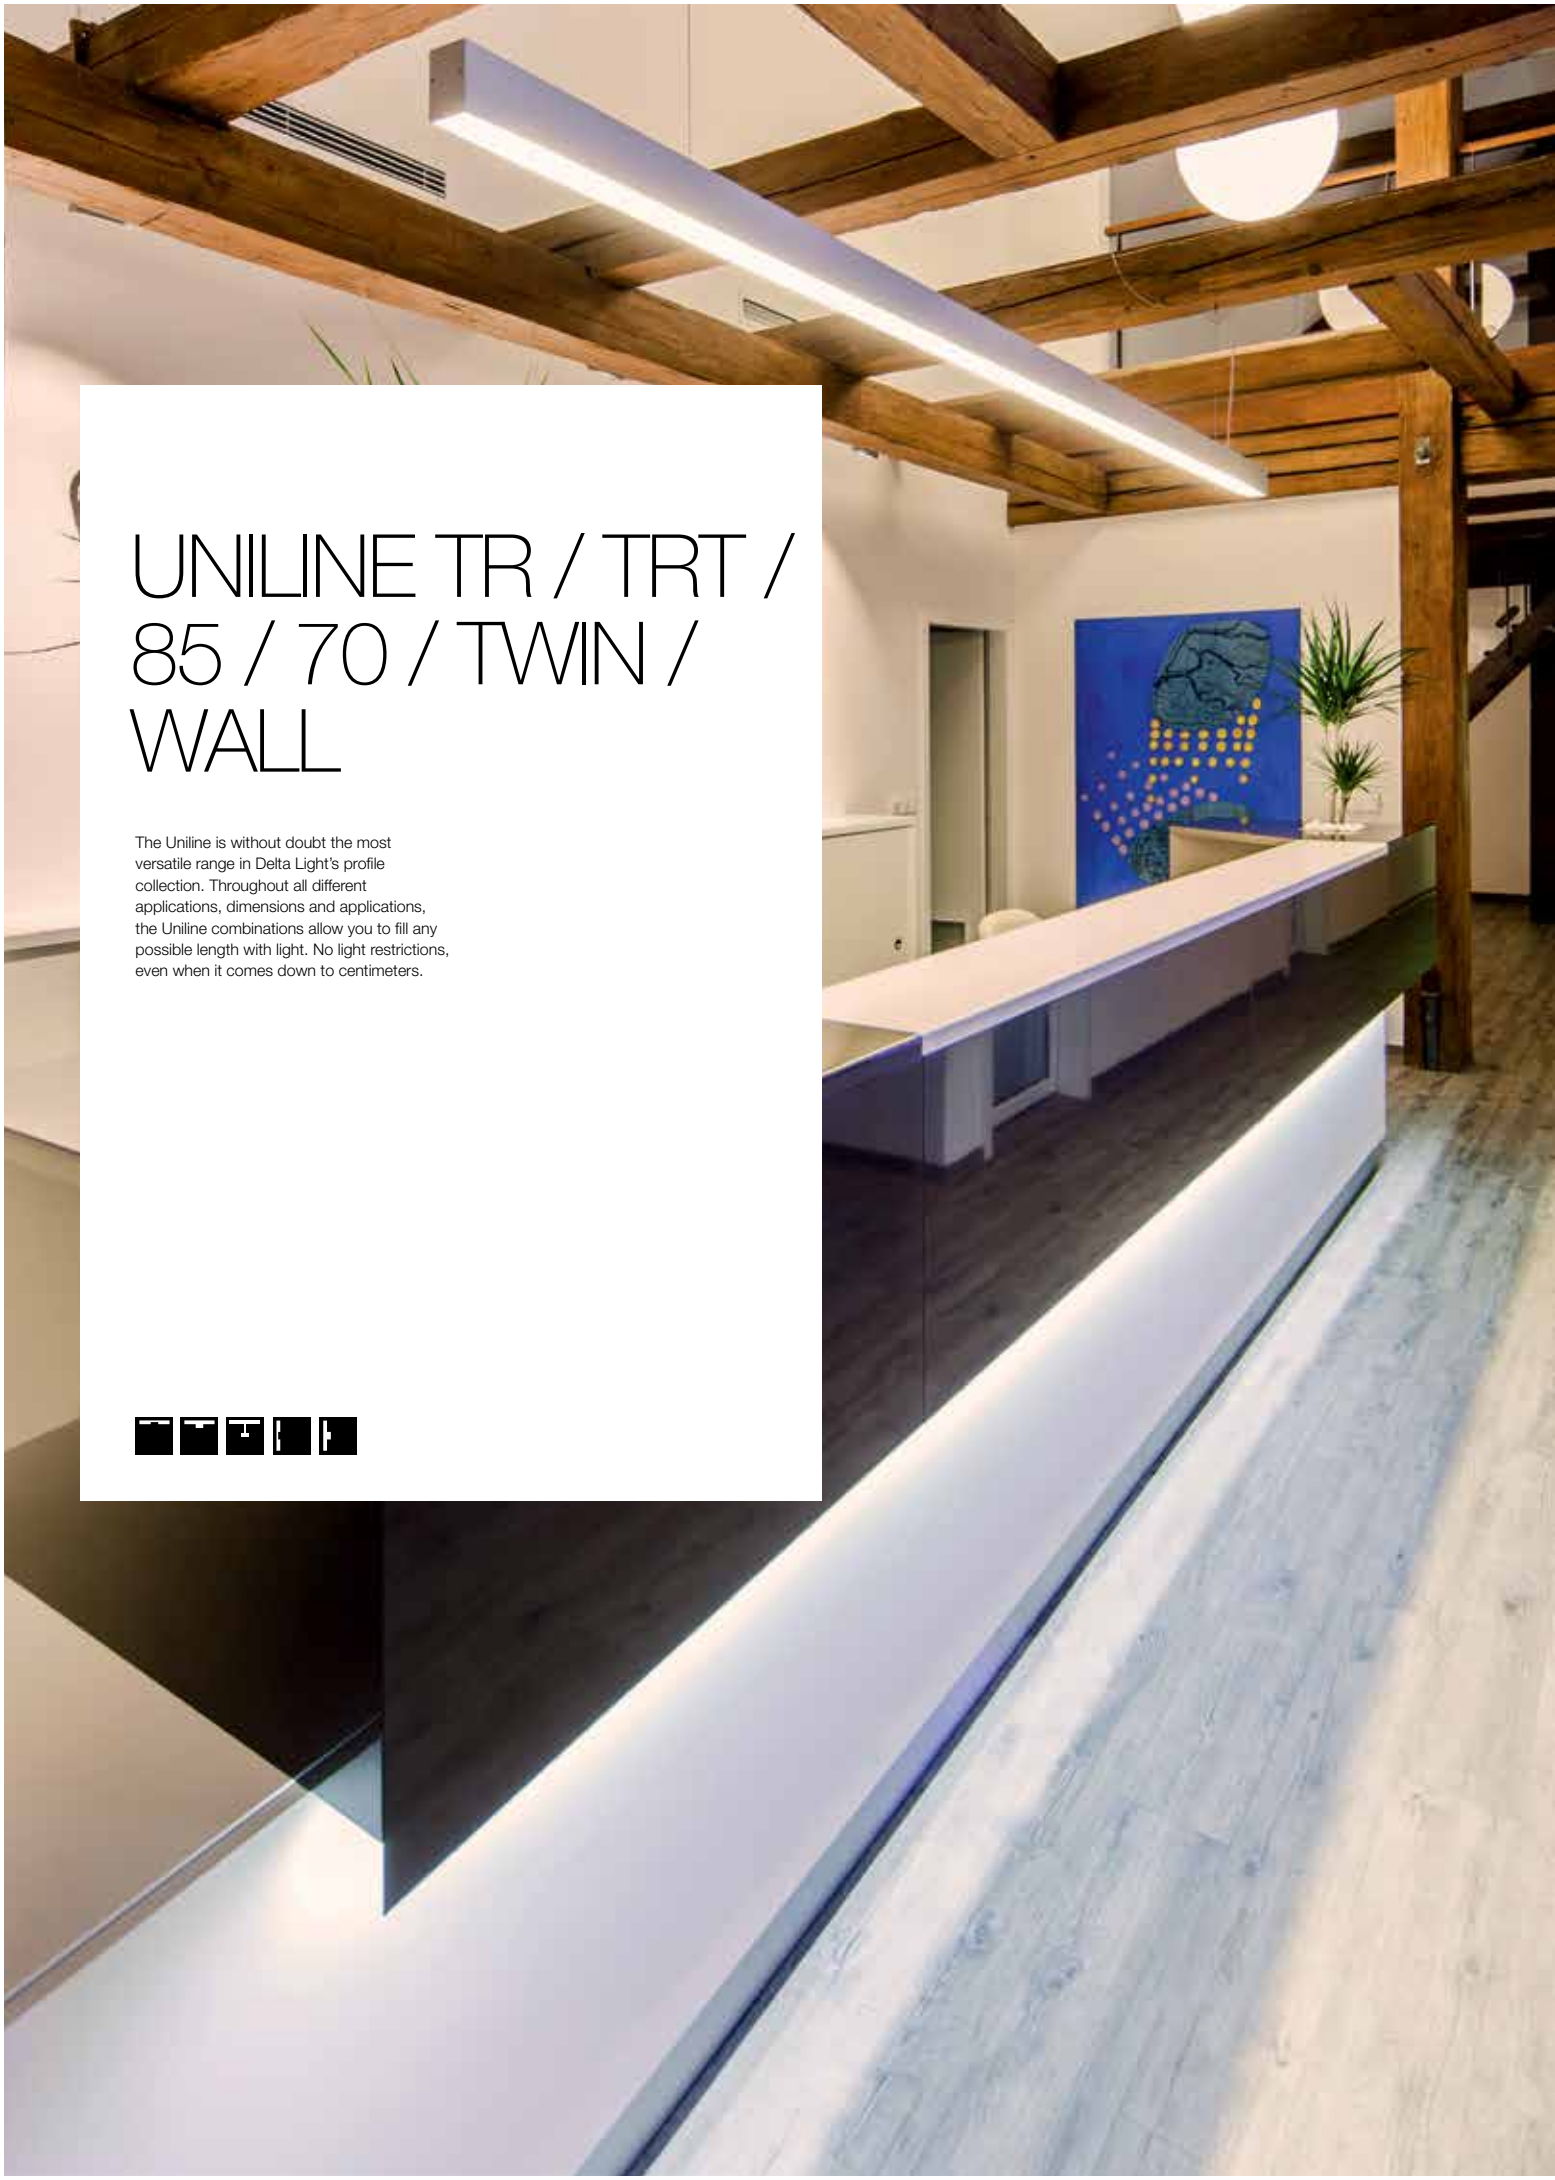


UNILINE TR / TRT / 85 / 70 / TWIN / WALL


The Uniline is without doubt the most versatile range in Delta Light's profile collection. Throughout all different applications, dimensions and applications, the Uniline combinations allow you to fill any possible length with light. No light restrictions, even when it comes down to centimeters.



























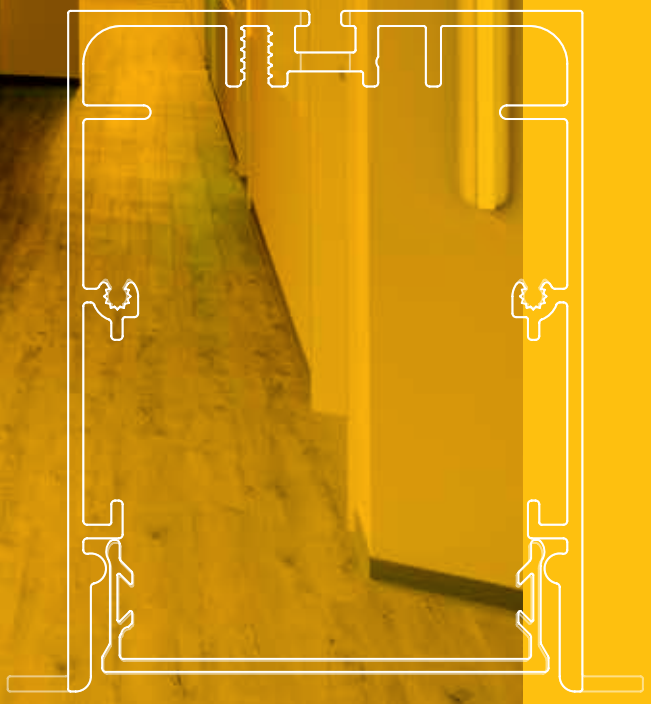

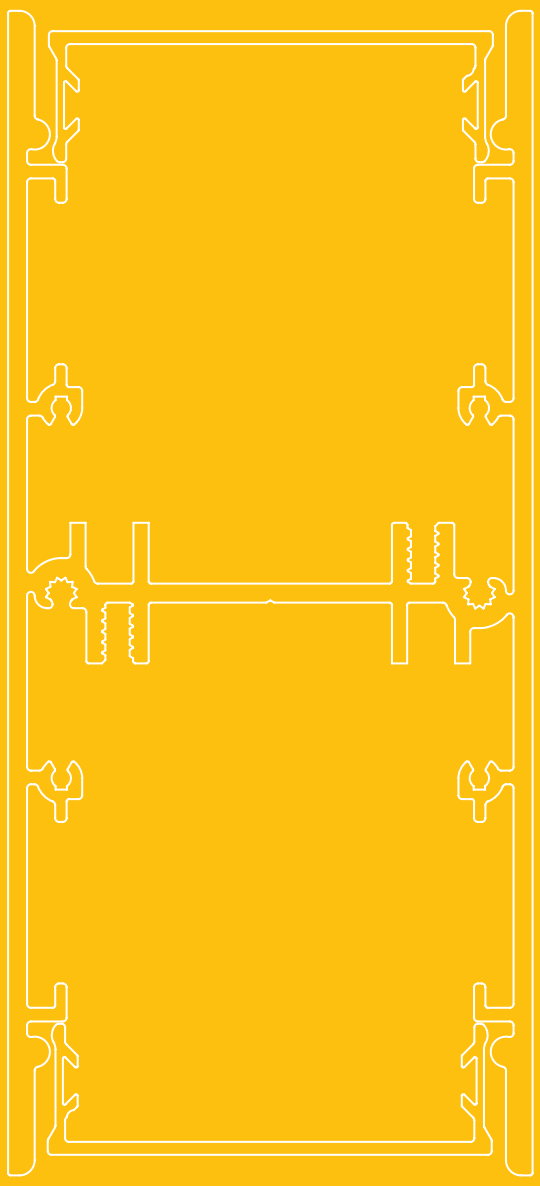


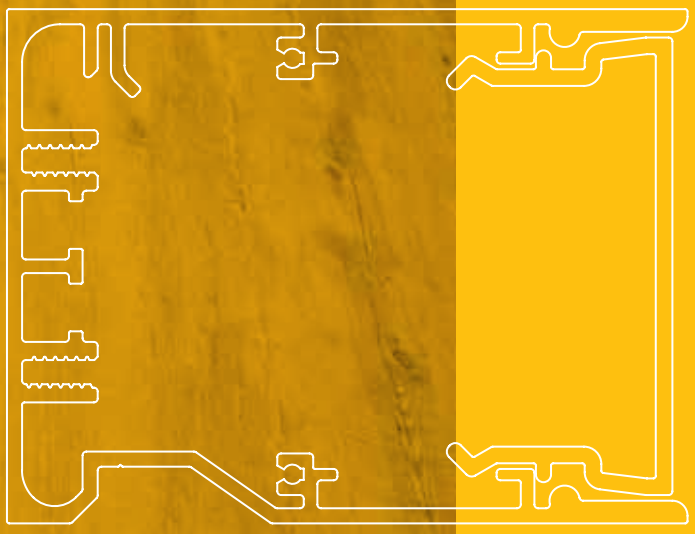


p

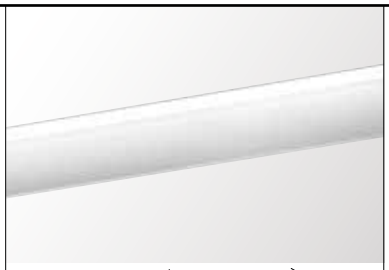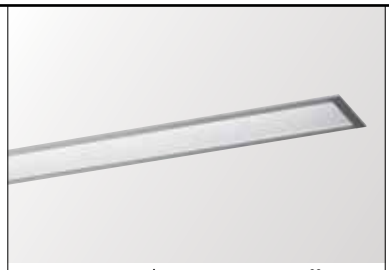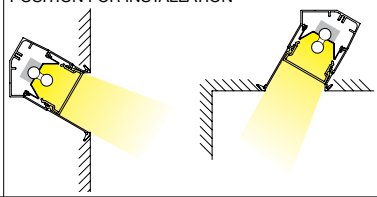	Uniline TR	Uniline TRT	Uniline 85
PROFILE	 **UNI TR - PROFILE ◇** **355 00 00 ◇** ◇ = ANO MAX.L / PROFILE : 6m Kg / m 2,1  TOL EN12020-2	 **UNI TRT - PROFILE ◇** **368 00 00 ◇** ◇ = ANO MAX.L / PROFILE : 6m Kg / m 2,5  TOL EN12020-2	 **UNI85 - PROFILE ◇** **352 00 00 ◇** ◇ = ANO / W MAX.L / PROFILE : 6m Kg / m 2,6  TOL EN12020-2
END CAP	  **UNI TR - END CAP ◇** **355 03 01 ◇** ◇ = ANO 0,1 **NO MODULE IN THIS AREA** 	  **UNI TRT - END CAP ◇** **368 03 01 ◇** ◇ = ANO 0,1 **NO MODULE IN THIS AREA** 	  **UNI85 - END CAP ◇** **352 03 01 ◇** ◇ = ANO / W 0,1
CORNER	**MIDL / UNI - CORNER 180°** **352 06 01** 0,3 	**MIDL / UNI - CORNER 180°** **352 06 01** 0,3 	**MIDL / UNI - CORNER 180°** **352 06 01** 0,2  **MIDL / UNI - CORNER 135°** **352 06 05** 0,2  **MIDL / UNI - CORNER 90°** **352 06 06** 0,2 
FIXATION	85 x (L + 5) x 125 min.6 / max.25 **UNI TR - CLIP** **355 14 01** 0,1 	102 x (L + 5) x 130 min.9 / max.15 **UNI TRT - CLIP** **368 14 01** 0,1  POSITION FOR INSTALLATION 	75 x (L + 5) x 135 max.35 **UNI85 - INSIDE CLIP** **352 14 01** 0,1 
CURRENT SUPPLY			

Uniline 70

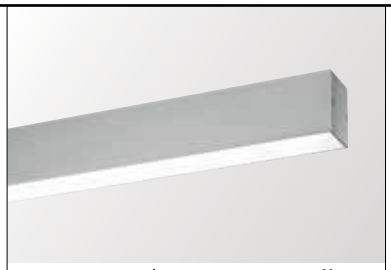


UNI70 - PROFILE ◇
351 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m
2,5



TOL EN12020-2




UNI70 - END CAP ◇
351 03 01 ◇
◇ = ALU / W
0,1




NO MODULE IN THIS AREA


MIDL / UNI - CORNER 180°
352 06 01
0,2




MIDL / UNI - CORNER 135°
352 06 05
0,2



MIDL / UNI - CORNER 90°
352 06 06
0,2



72 x (L + 5) x 90
UNI70 - WALL FIXATION 90°
351 06 10
0,3




NO MODULE IN THIS AREA 30 mm



SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m

SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m
0,1



CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **351 98 51**
L 6,0m / 3 x 0,75mm² **351 98 56**
L 1,6m / 5 x 0,75mm² **351 99 51**
L 6,0m / 5 x 0,75mm² **351 99 56** 0,3


OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-90




ANO **203 99 55 ANO**
W **203 99 55 W**
ANO **203 99 56 ANO**
W **203 99 56 W**
0,1



Uniline Twin

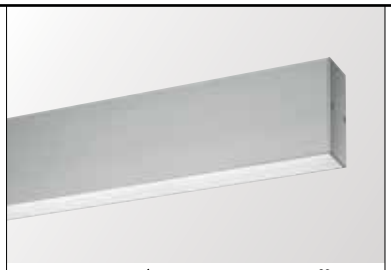


UNI T - PROFILE ◇
353 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m
4,5



TOL EN12020-2




UNI T - END CAP ◇
353 03 01 ◇
◇ = ALU / W
0,1




NO MODULE IN THIS AREA


UNI T - CORNER 180°
353 06 01
0,2




UNI T - CORNER 135°
353 06 05
0,2



UNI T - CORNER 90°
353 06 06
0,2



UNI T - WALL FIXATION 90°
353 06 10
0,3




NO MODULE IN THIS AREA 30 mm



SUSPENSION 5 SINGLE 1,6
328 16 01
L 1,6m

SUSPENSION 5 SINGLE 6,0
328 16 06
L 6,0m
0,2



CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **353 98 51**
L 6,0m / 3 x 0,75mm² **353 98 56**
L 1,6m / 5 x 0,75mm² **353 99 51**
L 6,0m / 5 x 0,75mm² **353 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-90




ANO **203 99 55 ANO**
W **203 99 55 W**
ANO **203 99 56 ANO**
W **203 99 56 W**
0,1



Uniline Wall




UNI W - PROFILE ◇
354 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m
2,2



TOL EN12020-2



UNI70 - END CAP ◇
351 03 01 ◇
◇ = ALU
0,1




NO MODULE IN THIS AREA


MIDL / UNI - CORNER 180°
352 06 01
0,2




UNI W - FIXATION
354 06 10
0,3



UP



DOWN



NO MODULE IN THIS AREA 135 mm

Uniline Single Jack

UNI - SINGLE JACK
352 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

L 180



0,3 IP20



Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339

Uniline Twin Jack

UNI - TWIN JACK
352 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

L 200



0,3 IP20




Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339


new led

Uniline Led Array Down

UNI LED ARRAY DOWN
110-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY 280mm - 3000K - 7,5W/array - 2678lm/m - 100lm/W
EXCL.UNI - PC SBL PROFILE



1,6 IP20 0,1



Requirements	Watt	L (mm)	EVG DIM 1 10V	EVG DIM DALI
UNI - PC SBL PROFILE **352 02 05 SBL** **or** **UNI - PC SBL PROFILE CL** **352 02 06 SBL** MAX.L / PROFILE : 5.8m - 0,2 / m	2 x 7,5	560	**352 610 22 ED1**	**352 610 22 ED1 + 385 610 ED5***
	4 x 7,5	1120	**352 610 42 ED1**	**352 610 42 ED1 + 385 610 ED5***


*max. 10x ED1/385 610 ED5




Uniline T16 Down

UNI - T16 PARALLEL BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

1,2 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1205	**352 61 154 EB**	**352 61 154 ED1B**	**352 61 154 ED2B**



Requirement

UNI - PC profile



UNI - PC SBL PROFILE

UNI - PC SBL PROFILE
352 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m



UNI - PC SBL PROFILE CL




UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

Uniline Modules T16 Non Stop


UNI NS - T16 SERIE DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.UNI - PC SBL PROFILE

1,6 IP20 0,1



Requirements
UNI - PC SBL PROFILE
352 02 05 SBL
or
UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

CONTINUOUS LIGHTLINE

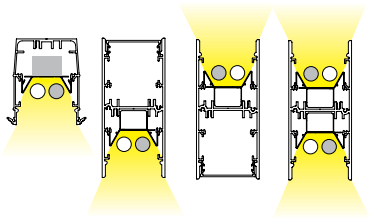



COMPOSITION	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH	MODULES
1	1190	352 79 001 E	352 79 001 ED1	352 79 001 ED2	1x(1x28/54W)
2	1490	352 79 002 E	352 79 002 ED1	352 79 002 ED2	1x(1x35/80W)
3	2150-2277	352 79 003 E	352 79 003 ED1	352 79 003 ED2	1x(2x28/54W)
4	2597-2877	352 79 004 E	352 79 004 ED1	352 79 004 ED2	1x(2x35/80W)
5	2932-3079	352 79 005 E	352 79 005 ED1	352 79 005 ED2	1x(1x21/39W) + 1x(2x28/54W)
6	3079-3115	352 79 006 E	352 79 006 ED1	352 79 006 ED2	1x(1x14/24W) + 1x(2x35/80W)
7	3115-3379	352 79 007 E	352 79 007 ED1	352 79 007 ED2	1x(1x28/54W) + 1x(2x28/54W)
8	3379-3410	352 79 008 E	352 79 008 ED1	352 79 008 ED2	1x(1x21/39W) + 1x(2x35/80W)
9	3410-3562	352 79 009 E	352 79 009 ED1	352 79 009 ED2	1x(1x35/80W) + 1x(2x28/54W)
10	3562-3709	352 79 010 E	352 79 010 ED1	352 79 010 ED2	1x(2x35/80W) + 1x(1x28/54W)
11	3709-4269	352 79 011 E	352 79 011 ED1	352 79 011 ED2	1x(1x35/80W) + 1x(2x35/80W)
12	4269-4456	352 79 012 E	352 79 012 ED1	352 79 012 ED2	2x(2x28/54W)
13	4456-4552	352 79 013 E	352 79 013 ED1	352 79 013 ED2	1x(2x35/80W) + 1x(1x35/80W) + 1x(1x14/24W)
14	4552-4816	352 79 014 E	352 79 014 ED1	352 79 014 ED2	2x(2x28/54W) + 1x(1x14/24W)
15	4816-5656	352 79 015 E	352 79 015 ED1	352 79 015 ED2	2x(2x35/80W)
16	5656-6000	352 79 016 E	352 79 016 ED1	352 79 016 ED2	1x(2x21/39W) + 2x(2x28/54W)
17	6000-7030	352 79 017 E	352 79 017 ED1	352 79 017 ED2	2x(2x35/80W) + 1x(1x35/80W))
18	7030-8200	352 79 018 E	352 79 018 ED1	352 79 018 ED2	3x(2x35/80W)
19	8200-9500	352 79 019 E	352 79 019 ED1	352 79 019 ED2	3x(2x35/80W) + 1x(1x35/80W)
20	9500-11000	352 79 020 E	352 79 020 ED1	352 79 020 ED2	4x(2x35/80W)
21	11000-12000	352 79 021 E	352 79 021 ED1	352 79 021 ED2	4x(2x35/80W) + 1x(1x35/80W)
COMBINATION OF COMPOSITIONS	>12000				

ED1 / ED2 - 80W NOT ADVISED

Uniline Modules T16 Seamless


UNI SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.UNI - PC SBL PROFILE

1,0 IP20 0,1



Requirements
UNI - PC SBL PROFILE
352 02 05 SBL
or
UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

CONTINUOUS LIGHTLINE

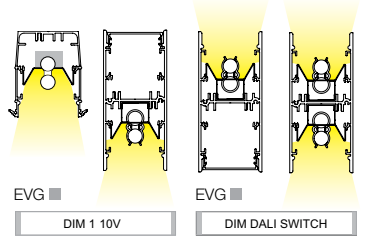




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	352 75 239 E	352 75 239 ED1	352 75 239 ED2
2 x 28/54	2370	352 75 254 E	352 75 254 ED1	352 75 254 ED2

UNI SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.UNI - PC SBL PROFILE

1,0 IP20 0,1



Requirements
UNI - PC SBL PROFILE
352 02 05 SBL
or
UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 24	585	352 75 124 E		
1 x 21/39	885	352 75 139 E	352 75 139 ED1	352 75 139 ED2
1 x 28/54	1185	352 75 154 E	352 75 154 ED1	352 75 154 ED2

T16 SEAMLESS - PAG TEC


CYBEX












cbc









MIDILINE 100L / 80L

A profile for suspended or surface mounted use, featuring modules which can be equipped with T16 fluorescent lamps, seamless or halogen lamps.

United Clothing of Belgium



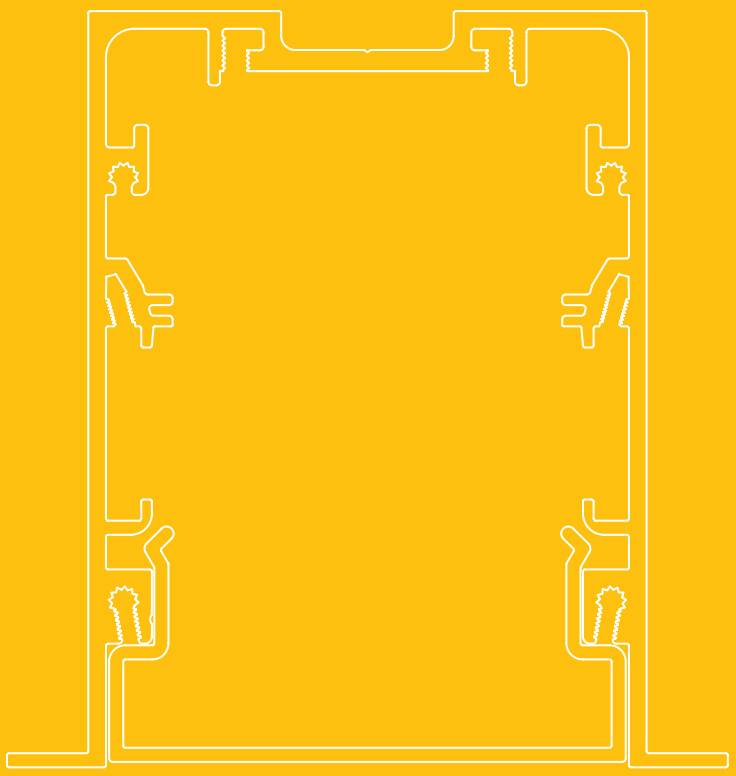


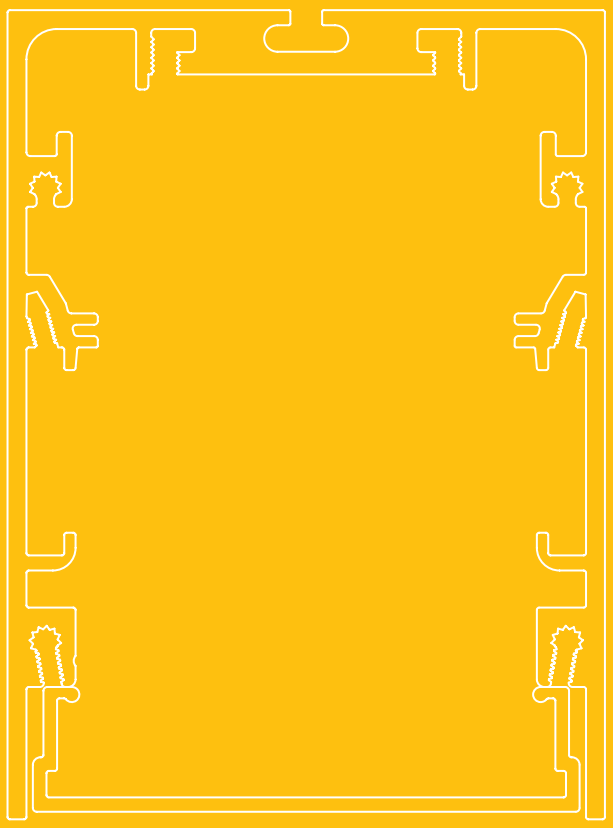

Midiline 100L


Midiline 80L

PROFILE

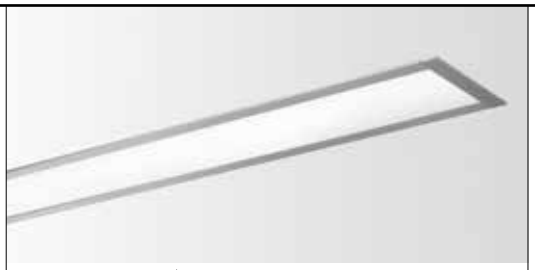

MID 100L - PROFILE ◇
361 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

3,5




TOL EN12020-2



MID 80L - PROFILE ◇
360 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

3,5




TOL EN12020-2

END CAP



MID 100L - END CAP ◇
361 03 01 ◇
◇ = ANO / W


0,1





MID 80L - END CAP ◇
360 03 01 ◇
◇ = ANO / W


0,1



CORNER


MIDL / UNI - CORNER 180°
352 06 01

0,3




MIDL / UNI - CORNER 135°
352 06 05

0,3



MIDL / UNI - CORNER 90°
352 06 06

0,3




MIDL / UNI - CORNER 180°
352 06 01

0,3




MIDL / UNI - CORNER 135°
352 06 05

0,3



MIDL / UNI - CORNER 90°
352 06 06


0,3



FIXATION


90 x (L + 5) x 110 max.35
MID 100L - INSIDE CLIP
361 14 01

0,1



83 x (L + 5) x 107
MID 80L - WALL FIXATION 90°
360 06 10

0,3



SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m

SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **298 98 51**
L 6,0m / 3 x 0,75mm² **298 98 56**
L 1,6m / 5 x 0,75mm² **298 99 51**
L 6,0m / 5 x 0,75mm² **298 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1



Midiline L RB150

MIDL - RB150 ◇
361 61 150 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W

0,3 IP20 0,5

L 220






Midiline L RB250

MIDL - RB250 ◇
361 61 250 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-C51 max.50W

0,5 IP20 0,5

L 300





Midiline L Single Jack

MIDL - SINGLE JACK
361 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

L 150



0,3 IP20

Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339



Midiline L Twin Jack

MIDL - TWIN JACK
361 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

L 225



0,3 IP20

Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339







Midiline L Modules T16 Down

MIDL - T16 PARALLEL PC SBL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.1 x MIDL - PC SBL PROFILE

CE 1,2 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	605	**361 71 224 E**	**361 71 224 ED1**	**361 71 224 ED2**
2 x 28/54	1205	**361 71 254 E**	**361 71 254 ED1**	**361 71 254 ED2**
2 x 35	1505	**361 71 235 E**	**361 71 235 ED1**	**361 71 235 ED2**

Requirements
MID - PC SBL PROFILE
298 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m





Midiline L Modules T16 Seamless Down

MIDL SL - T16 DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.1 x MIDL - PC SBL PROFILE

CE 1,0 IP20 0,1

CONTINUOUS LIGHTLINE





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 24	585	**361 75 224 E**		
2 x 21/39	885	**361 75 239 E**	**361 75 239 ED1**	**361 75 239 ED2**
2 x 28/54	1185	**361 75 254 E**	**361 75 254 ED1**	**361 75 254 ED2**

Requirements
MID - PC SBL PROFILE
298 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m



T16 SEAMLESS - PAG TEC


Requirement

MID - PC SBL profile




MID - PC SBL PROFILE

MID - PC SBL PROFILE
298 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

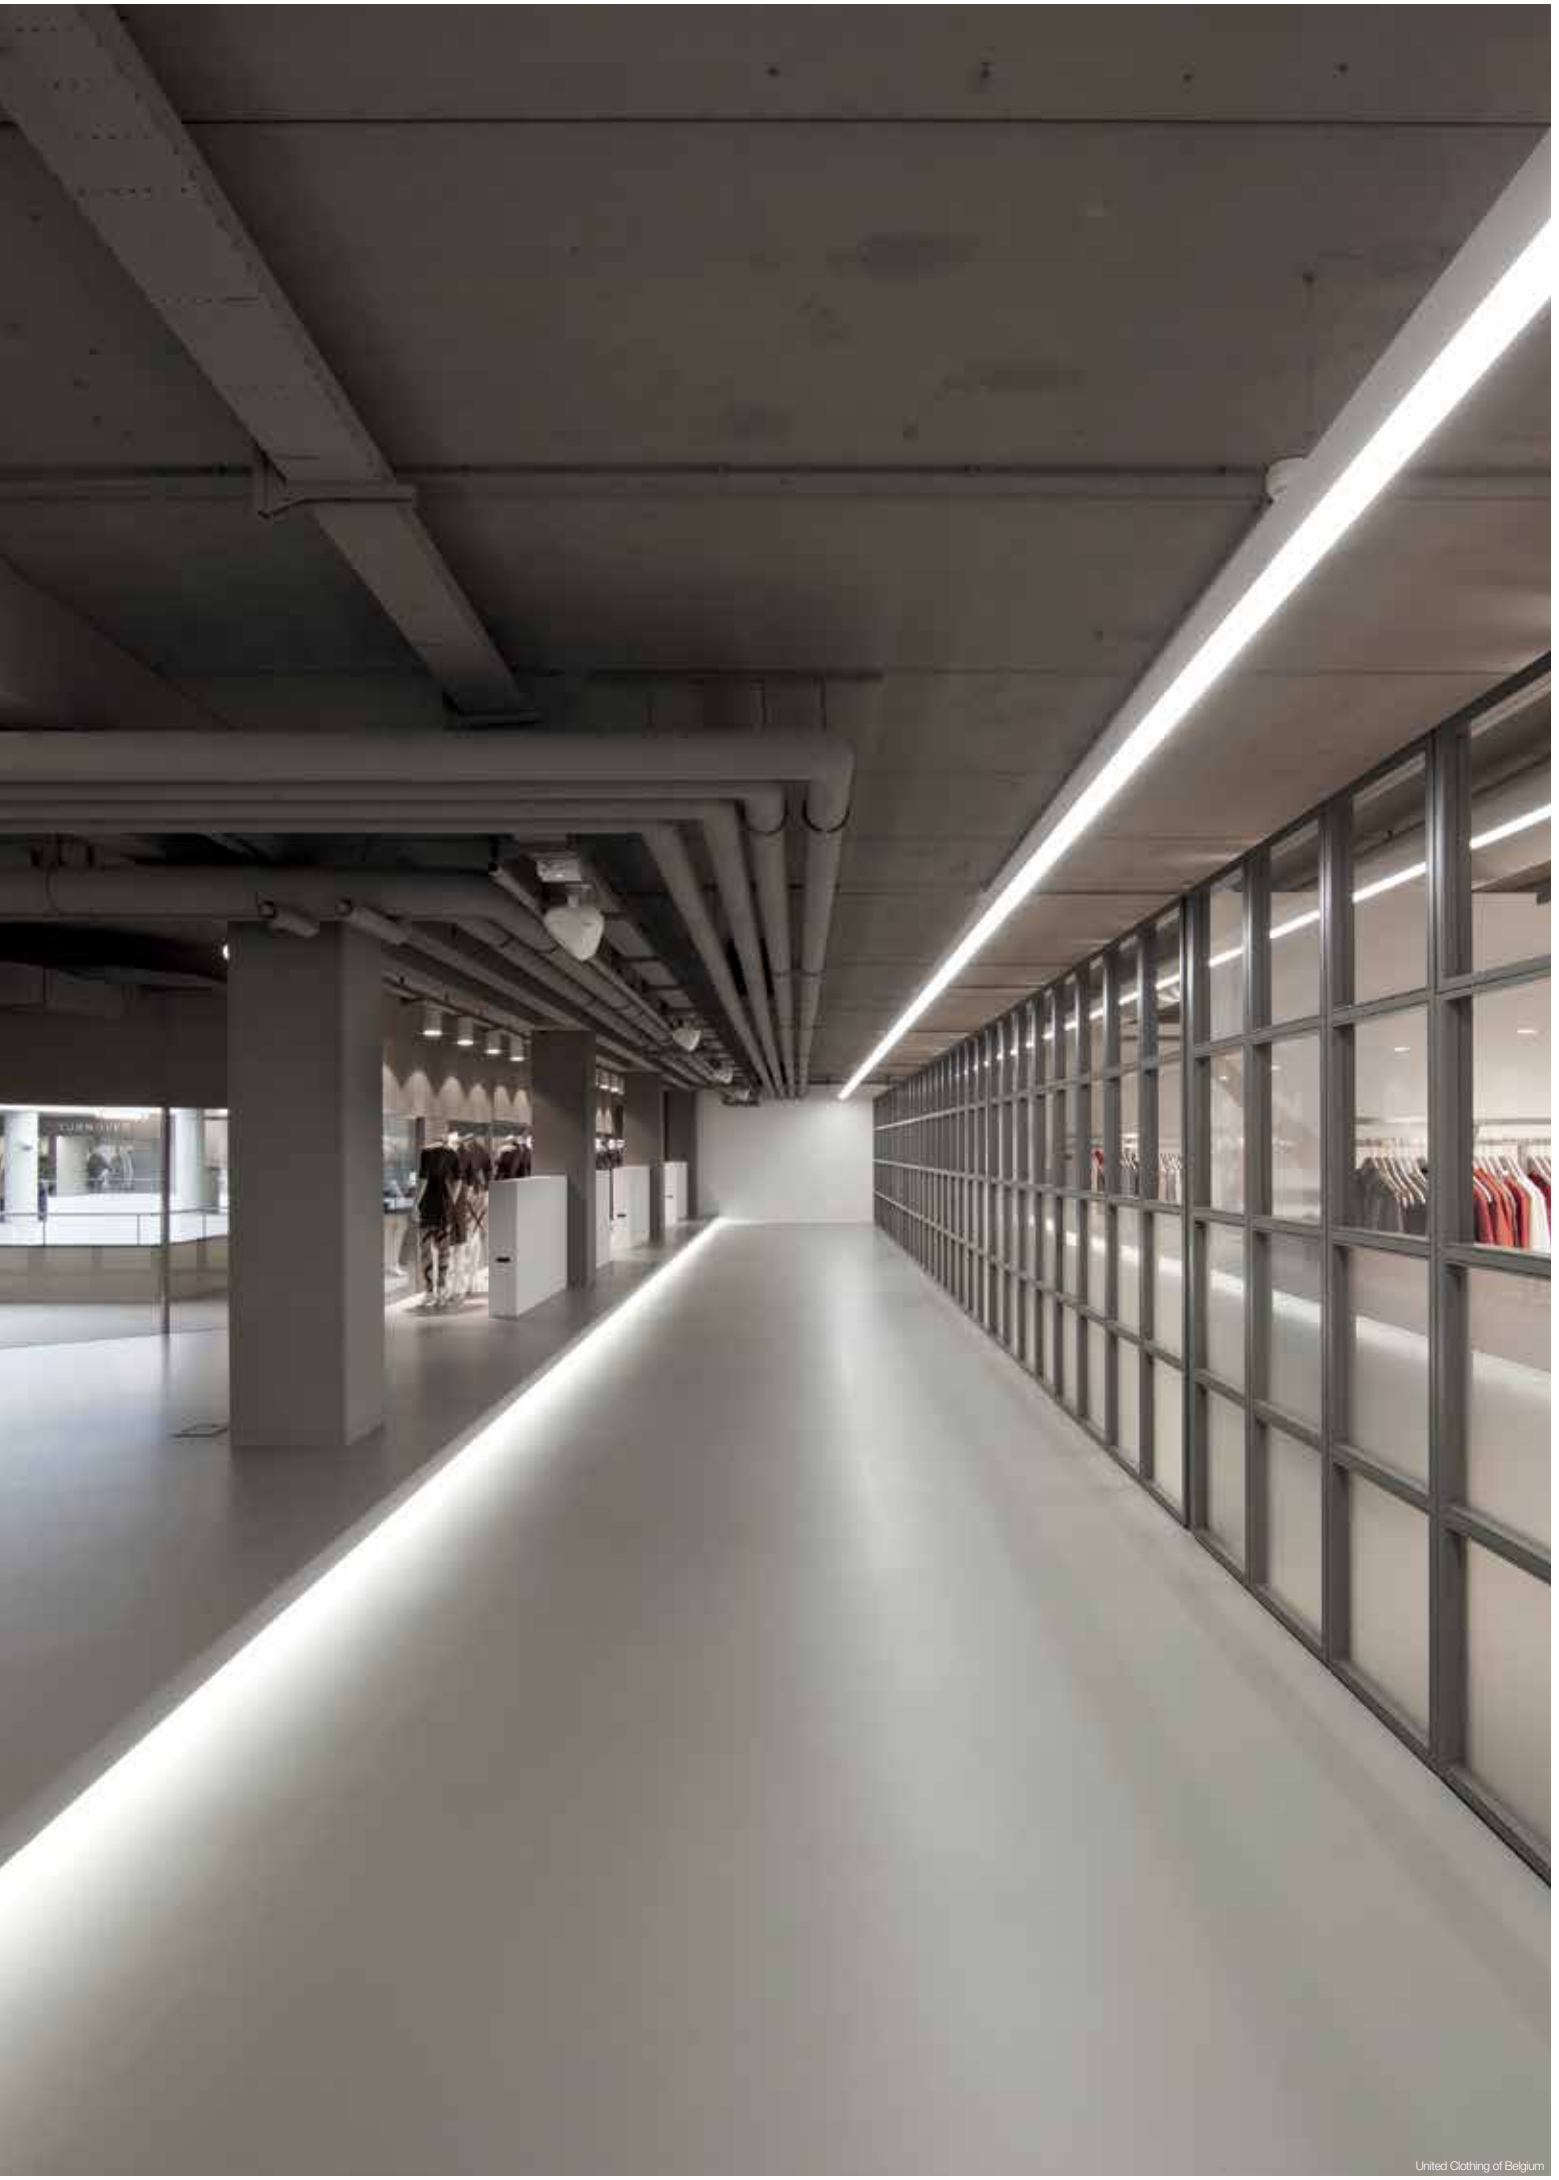

United Clothing of Belgium

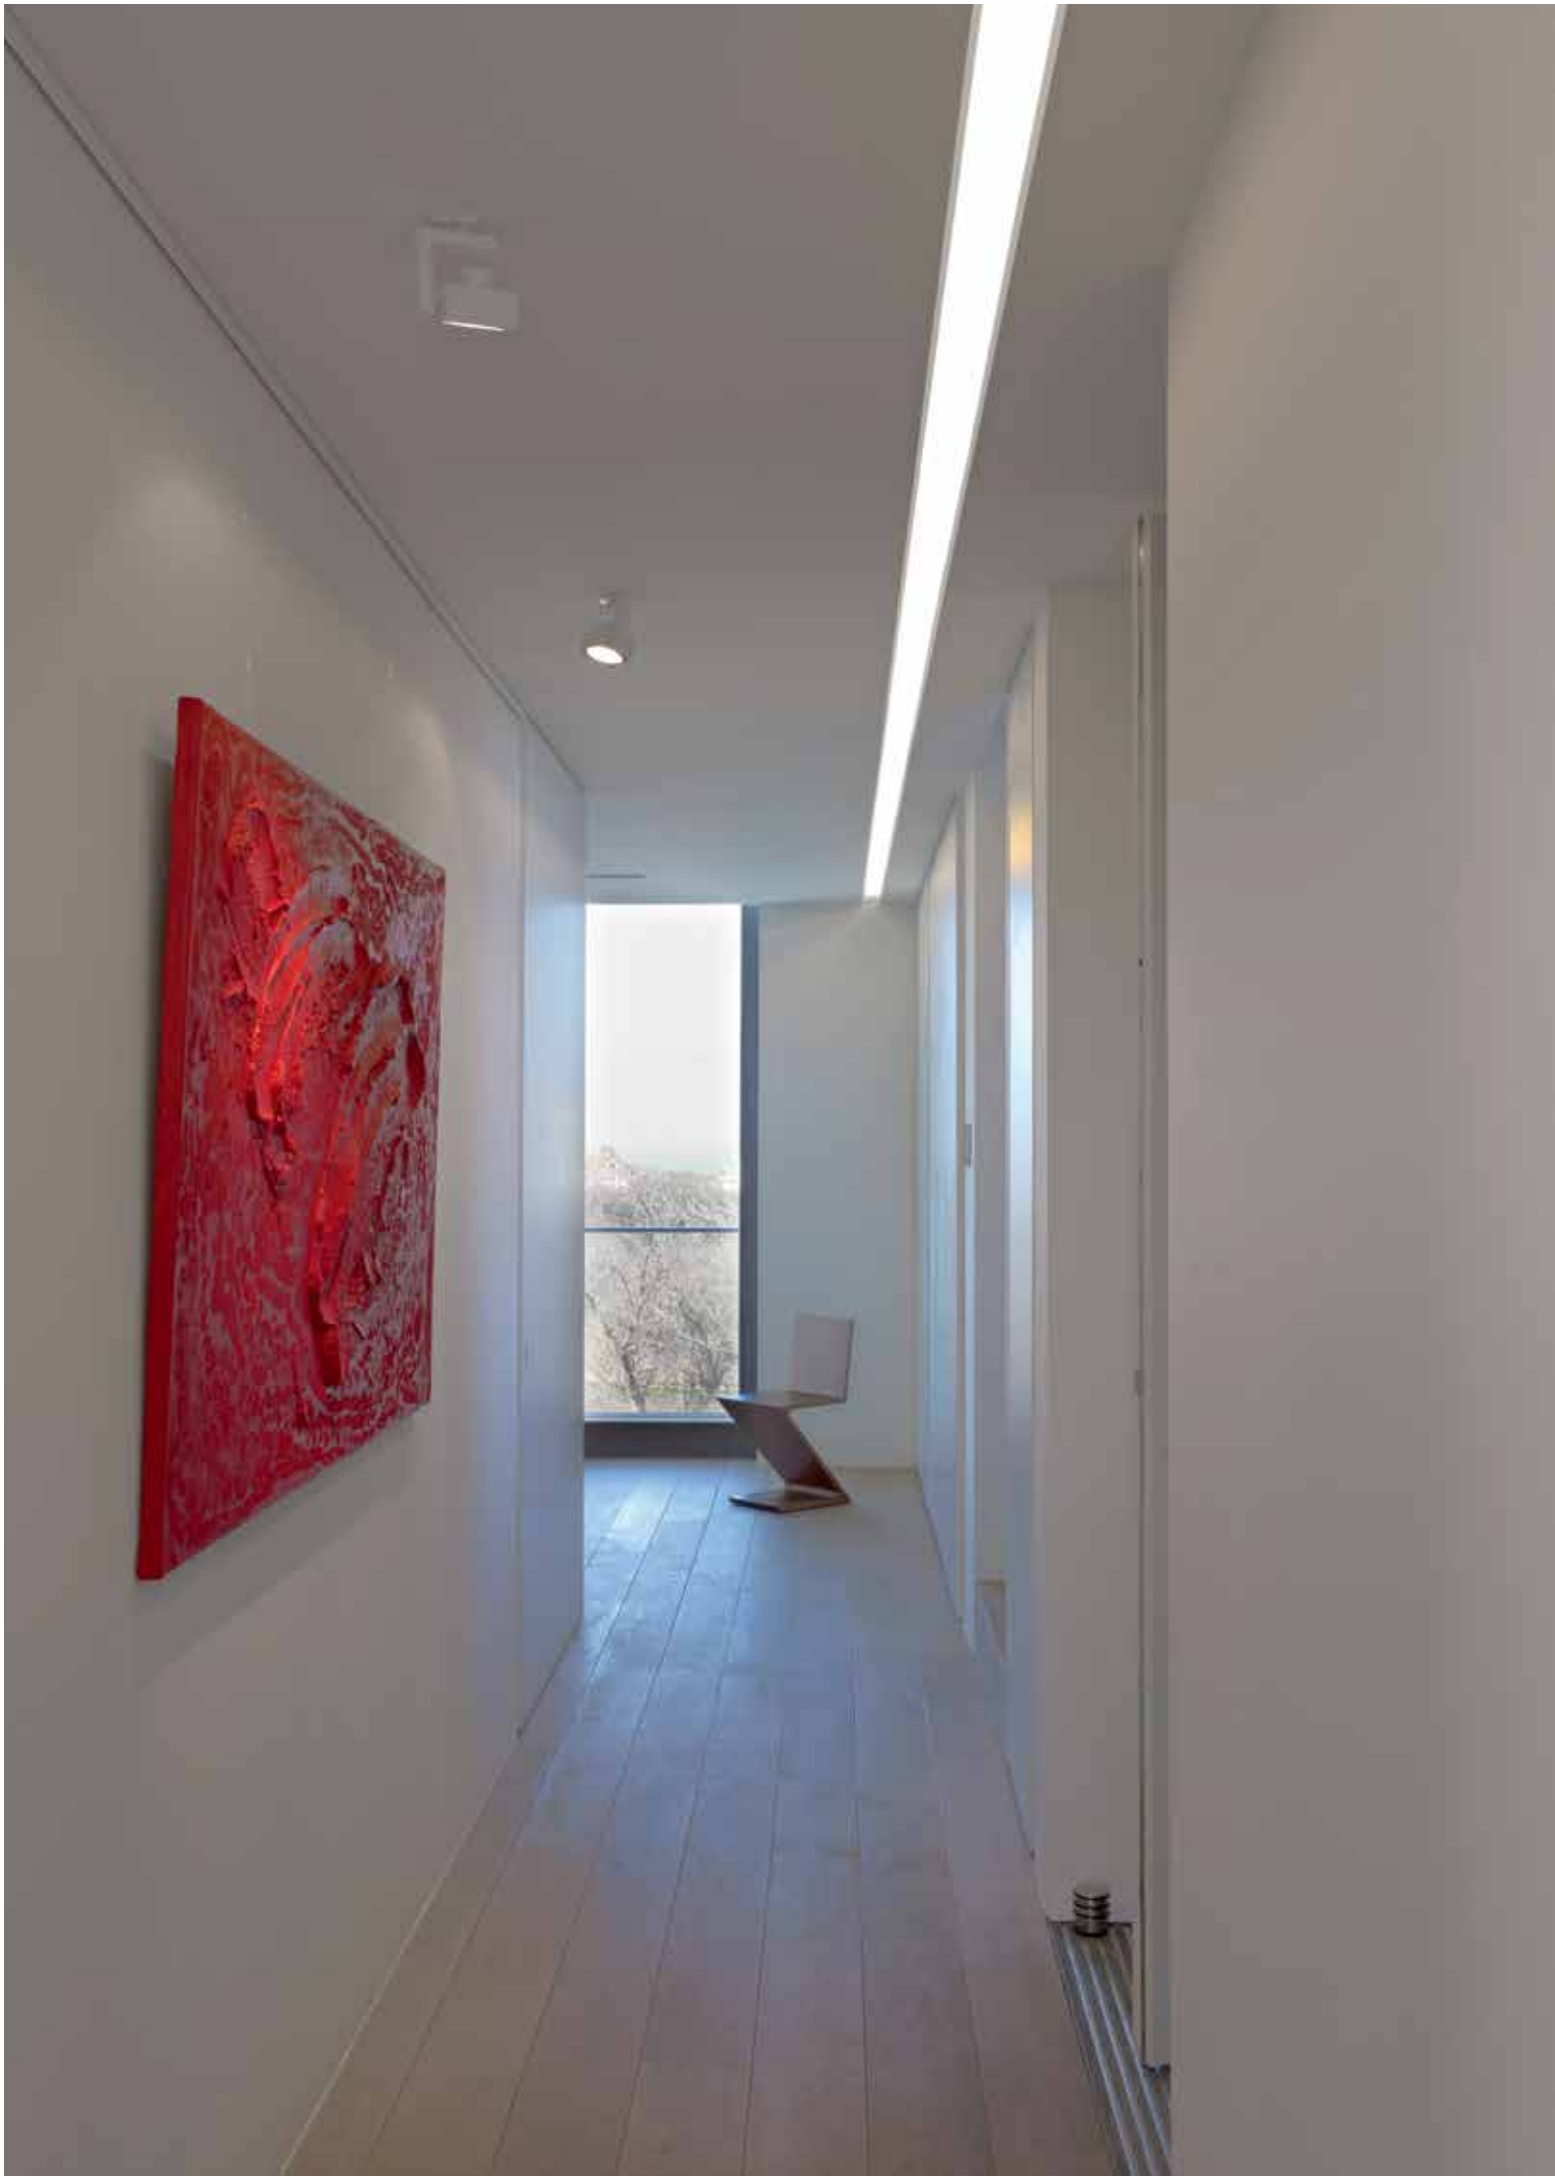





MACROLINE 180 / 160

The Macroline is a robust profile solution that allows you to use T16 fluorescent lamps, halogen or discharge lamps. Either ceiling recessed, surface mounted or suspended, Macroline is a solid solution for your commercial projects.

Macroline 180


Macroline 160

PROFILE



MAC180 - PROFILE ◇
295 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m

6,0




TOL EN12020-2



MAC160 - PROFILE ◇
294 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m

6,0




TOL EN12020-2


END CAP



MAC180 - END CAP ◇
295 03 01 ◇
◇ = ANO


0,1





MAC160 - END CAP ◇
294 03 01 ◇
◇ = ANO

0,1



CORNER

MAC - CORNER 180°
295 06 01


0,3


MAC - CORNER 135°
295 06 05

0,3

MAC - CORNER 90°
295 06 06

0,3




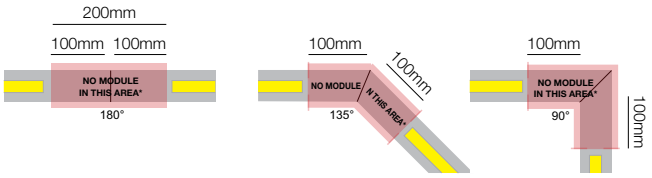



FIXATION

164 x (L + 5) x 155 max.35
MAC180 - INSIDE CLIP
295 14 01

0,3









164 x (L + 5) x 124
MAC160 - WALL FIXATION 90°
294 06 10

0,3




DIRECT FIXATION



SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m


SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m

0,1




SUSPENSION 2 TWIN 1,6
328 22 01
L 1,6m

0,1




RECESSED FIXATION



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **294 98 51**
L 6,0m / 3 x 0,75mm² **294 98 56**
L 1,6m / 5 x 0,75mm² **294 99 51**
L 6,0m / 5 x 0,75mm² **294 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1



Macroline RB111

MAC - RB111 ◇
295 61 231 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
CE 0,5 IP20 1,0
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

L 390
TE



Macroline RB211

MAC - RB211 ◇
295 61 232 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 0,7 IP20 1,0
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111

L 530
TE
140



Macroline HIC-35

MAC - HIC-35 EVG ◇
295 61 48 E ◇
◇ = B
INCL.1 x REFLECTOR 27°

MAC - HIC-35 EVG SP10 ◇
295 61 48 E SP10 ◇
◇ = B
INCL.1 x REFLECTOR SP-10°

ADJUSTABLE 0°-30°
INCL.1 x CLIP 111 + GLASS UV-STOP
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-CRI 35W
CE 1,6 IP20 0,5

L 350
EVG



Macroline HIC-70

MAC - HIC-70 EVG ◇
295 61 49 E ◇
◇ = B
INCL.1 x REFLECTOR 27°

MAC - HIC-70 EVG SP10 ◇
295 61 49 E SP10 ◇
◇ = B
INCL.1 x REFLECTOR SP-10°

ADJUSTABLE 0°-30°
INCL.1 x CLIP 111 + GLASS UV-STOP
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT-CRI 70W
CE 1,6 IP20 0,5

L 350
EVG



Macroline Twin jack

MAC - TWIN JACK
295 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W
CE 0,3 IP20

L 225
TE
150



Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339

FULL INFO / PAG TEC Accessories

CONE 111 ◇ Ø117 / Ø80 / H26
201 28 00 ◇
◇ = ALU / B / C / W
QR-LP111 max. 24°



CLIP 111 ◇ Ø110 / H22
201 27 99 A ◇
◇ = A / B / W



FRONTGLASS 111 Ø100
201 17 00



COLOUR FILTER 111 Ø100
201 27 11 🔵
201 27 12 🟢
201 27 13 🔴
201 27 14 🟡




LENS 111 Ø100
201 47 11




Macroline Modules T16 Down

MAC - T16 PARALLEL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.MAC - PC SBL PROFILE

CE 1,2 IP20 0,1



Requirements
MAC - PC SBL PROFILE
294 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,5 / m





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	605	**295 71 224 E**	**295 71 224 ED1**	**295 71 224 ED2**
2 x 28/54	1205	**295 71 254 E**	**295 71 254 ED1**	**295 71 254 ED2**
2 x 35	1505	**295 71 235 E**	**295 71 235 ED1**	**295 71 235 ED2**
2 x 80	1505	**295 71 280 E**	**295 71 280 ED1**	**295 71 280 ED2**



MAC - T16 PARALLEL BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 X BAP DOWN

CE 1,7 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1205	**295 61 254 EB**	**295 61 254 ED1B**	**295 61 254 ED2B**



Requirement

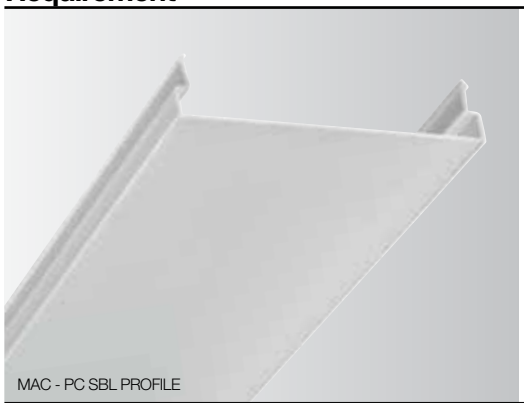

MAC - PC SBL profile


MAC - PC SBL PROFILE
294 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

Emergency Units

	W / % (BLF)	MACROLINE
1	W 14/24 % (24/13)	294 91 1401 (L=0)
1	W 21 % (16)	294 91 2101 (L=0)
1	W 28/35/39/54/80 % (14/12/8/6/5)	294 91 2801 (L=0)
1	W 14/21/28/35 % (16/15/11/10)	-
1	W 24/39/54 % (10/8/5)	-
3	W 14/24 % (24/13)	294 91 1403 (L=0)
3	W 21 % (16)	294 91 2103 (L=0)
3	W 28/35/39/54/80 % (14/12/8/6/5)	294 91 2803 (L=0)
3	W 14/21/28/35 % (16/15/11/10)	-
3	W 24/39/54 % (10/8/5)	-


BLF (%): BALLAST LUMEN FACTOR


THE MET HOTEL

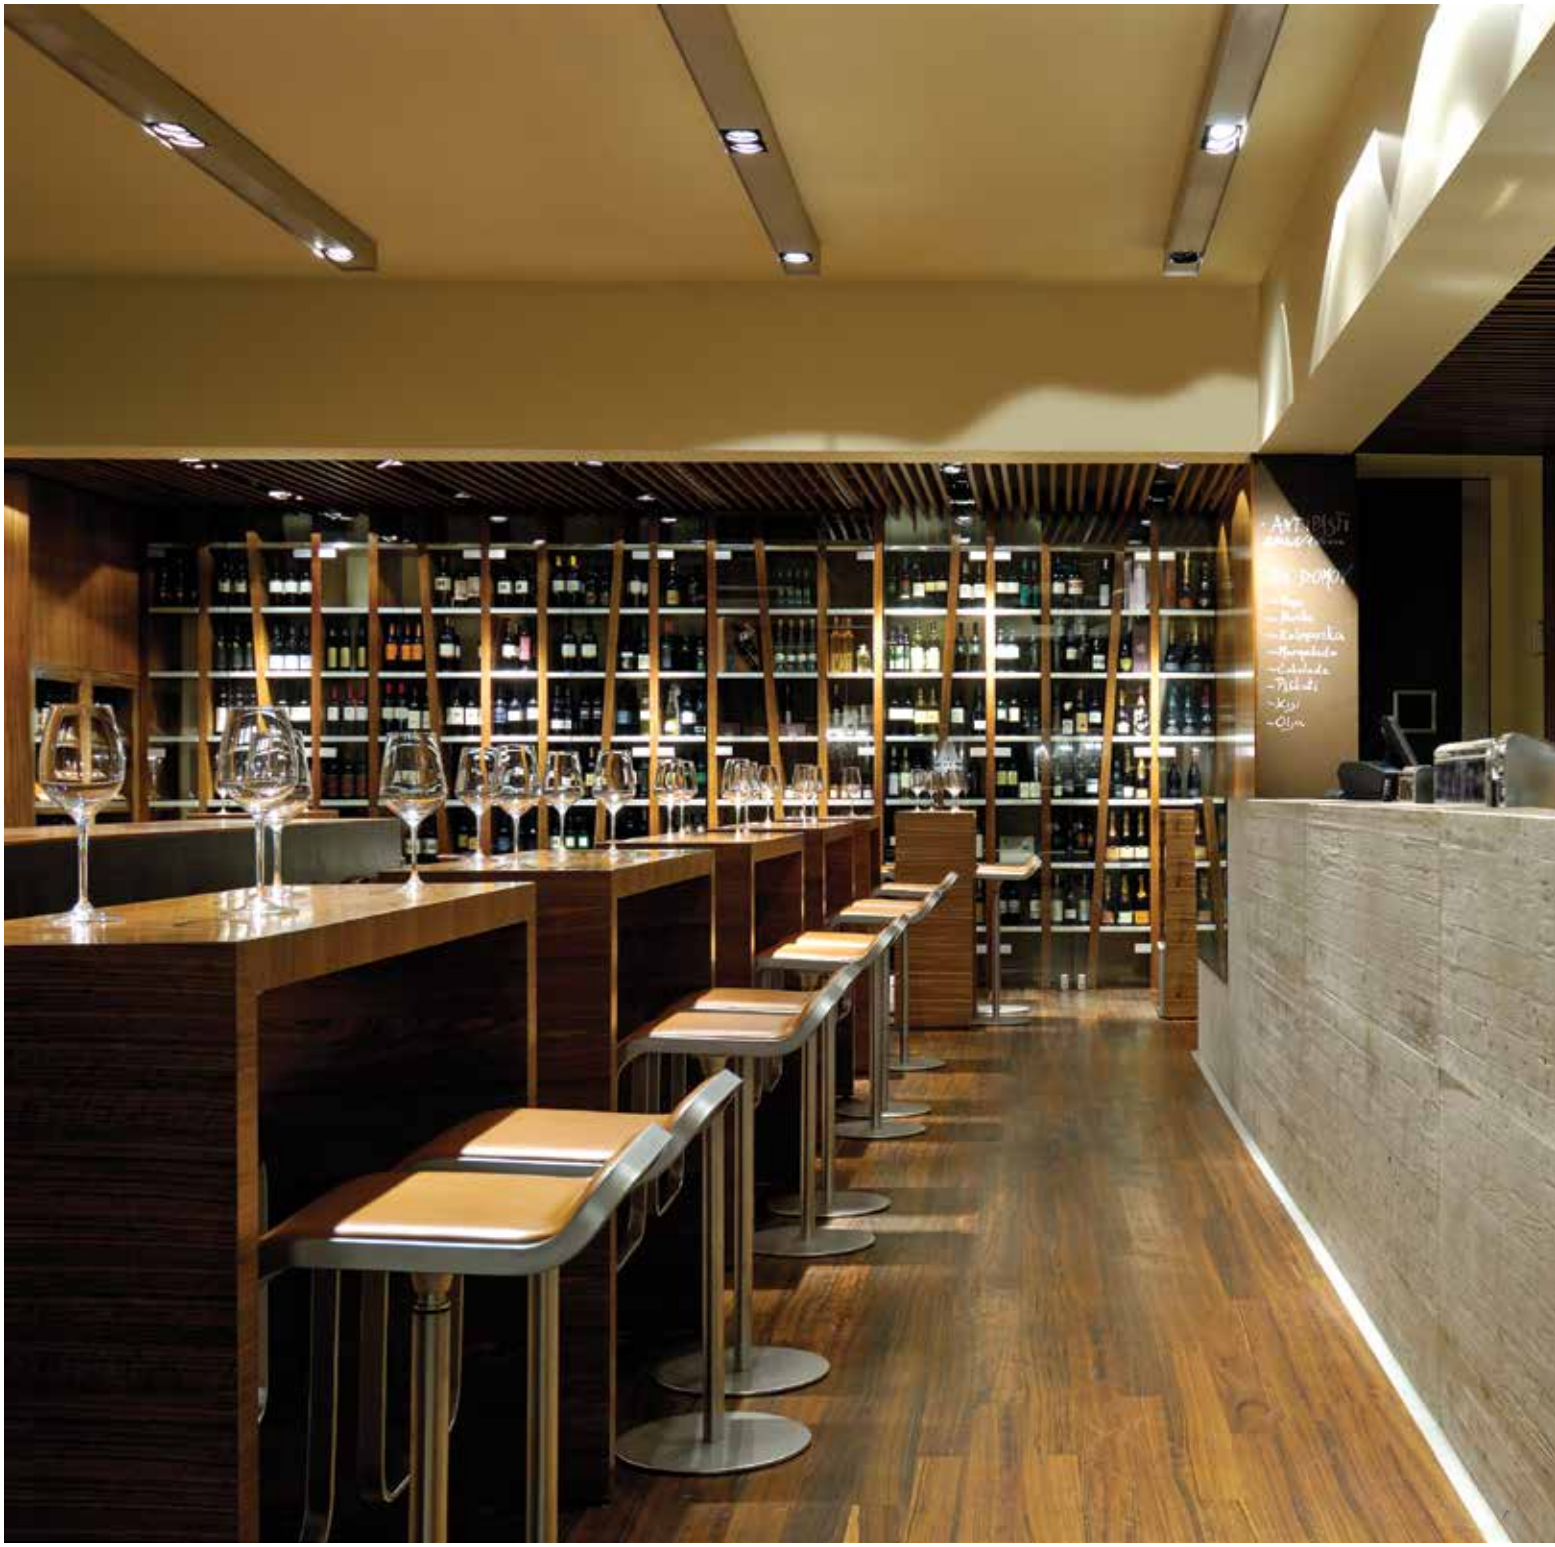




Incolmotos / AIA

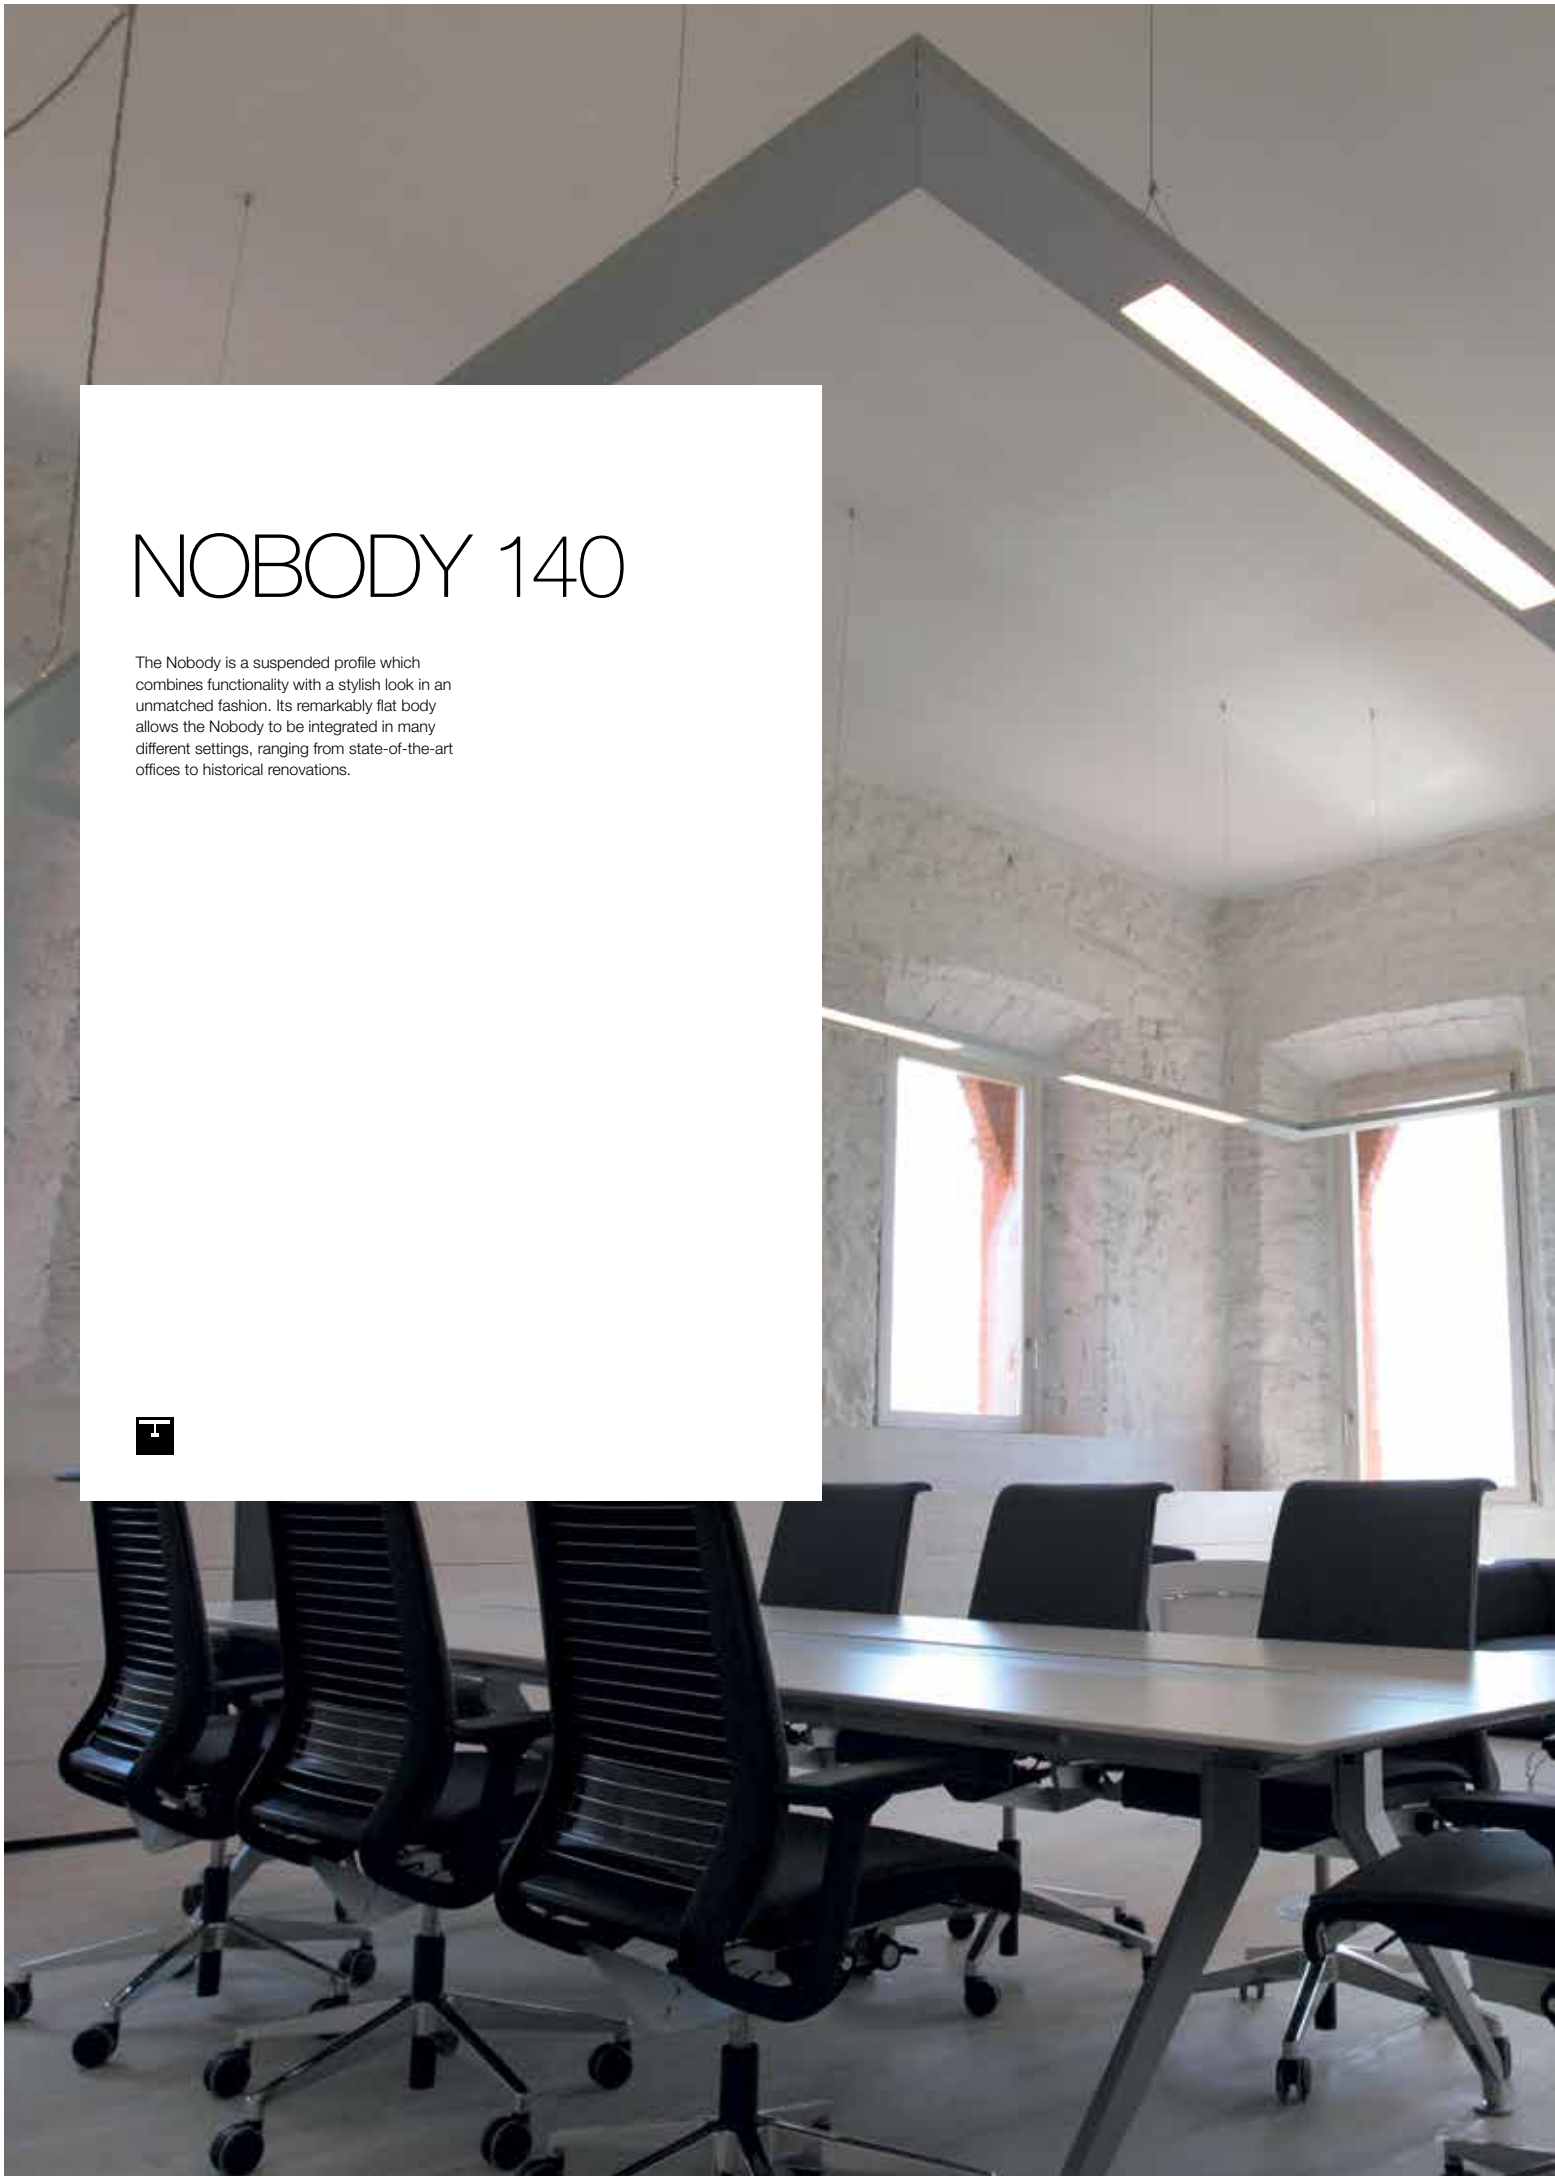

NOBODY 140


The Nobody is a suspended profile which combines functionality with a stylish look in an unmatched fashion. Its remarkably flat body allows the Nobody to be integrated in many different settings, ranging from state-of-the-art offices to historical renovations.



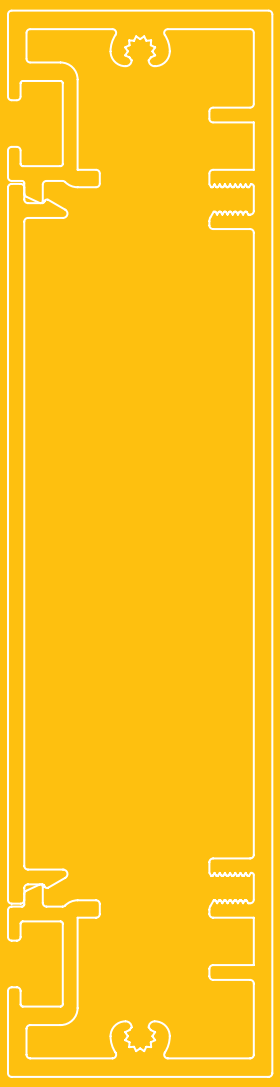


NoBody 140

PROFILE

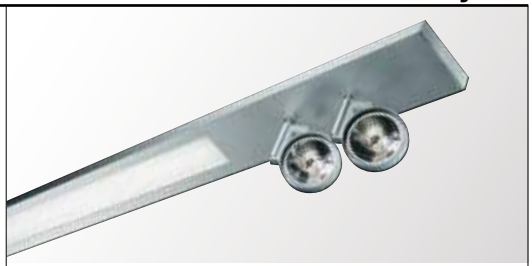

NB140 - PROFILE ◇
330 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

2,6




TOL EN12020-2

END CAP



NB140 - END CAP ◇
330 03 01 ◇
◇ = ALU / W

0,2




NO MODULE IN THIS AREA 15 mm



CORNER


NB140 - CORNER 180°
330 06 01

0,3




NB140 - CORNER 135°
330 06 05


0,3



NB140 - CORNER 90°
330 06 06

0,3




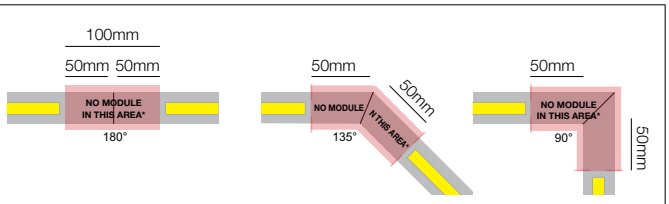

FIXATION

NB140 - WALL FIXATION 90°
330 06 10

0,3




NO MODULE IN THIS AREA 70 mm



SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m


SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m

0,1



SUSPENSION 2 TWIN 1,6
328 22 01
L 1,6m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **330 98 51**
L 6,0m / 3 x 0,75mm² **330 98 56**
L 1,6m / 5 x 0,75mm² **330 99 51**
L 6,0m / 5 x 0,75mm² **330 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1



NoBody 140 RB150

NB140 - RB150 ◇
330 61 201 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CB51 max.50W
0,3 IP20 0,5

L 210






NoBody 140 RB250

NB140 - RB250 ◇
330 61 202 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CB51 max.50W
0,4 IP20 0,5

L 310





NoBody 140 Single Jack

NB140 - SINGLE JACK
330 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W
0,3 IP20

L 110





NoBody 140 Twin Jack

NB140 - TWIN JACK
330 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W
0,3 IP20

L 200





Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339


p

NoBody 140 Modules T16 Down

NB140 - T16 PARALLEL PC OPAL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC OPAL DOWN

CE 1,2 IP20 0,1







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	1070	**330 61 224 E**	**330 61 224 ED1**	**330 61 224 ED2**
2 x 21/39	1370	**330 61 239 E**	**330 61 239 ED1**	**330 61 239 ED2**
2 x 28/54	1670	**330 61 254 E**	**330 61 254 ED1**	**330 61 254 ED2**
2 x 35	1970	**330 61 235 E**	**330 61 235 ED1**	**330 61 235 ED2**
2 x 80	1970	**330 61 280 E**	**330 61 280 ED1**	**330 61 280 ED2**




NB140 - T16 PARALLEL BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 1,4 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1690	**330 61 254 EB**	**330 61 254 ED1B**	**330 61 254 ED2B**

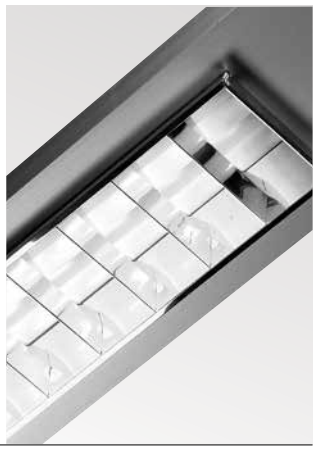


NoBody 140 Modules T16 Up

NB140 - T16 PARALLEL UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz


CE 1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	1070	**330 62 224 E**	**330 62 224 ED1**	**330 62 224 ED2**
2 x 21/39	1370	**330 62 239 E**	**330 62 239 ED1**	**330 62 239 ED2**
2 x 28/54	1670	**330 62 254 E**	**330 62 254 ED1**	**330 62 254 ED2**
2 x 35	1970	**330 62 235 E**	**330 62 235 ED1**	**330 62 235 ED2**
2 x 80	1970	**330 62 280 E**	**330 62 280 ED1**	**330 62 280 ED2**

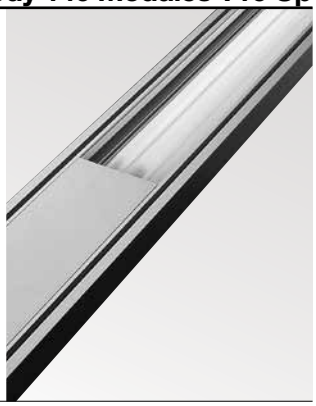

NoBody 140 PC Clear Up

NB140 - PC CLEAR UP T16 24W
330 52 24

0,1

NB140 - PC CLEAR UP T16 39W
330 52 39


0,2

NB140 - PC CLEAR UP T16 54W
330 52 54

0,3

NB140 - PC CLEAR UP T16 80W
330 52 80

0,4

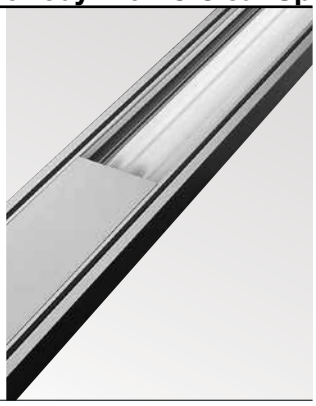


NoBody 140 Modules T16 Down-Up


NB140 - T16 PARALLEL PC OPAL DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC OPAL DOWN


1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP










Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	1070	**330 63 224 E**	**330 63 224 ED1**	**330 63 224 ED2**
2 x 21/39	1370	**330 63 239 E**	**330 63 239 ED1**	**330 63 239 ED2**
2 x 28/54	1670	**330 63 254 E**	**330 63 254 ED1**	**330 63 254 ED2**
2 x 35	1970	**330 63 235 E**	**330 63 235 ED1**	**330 63 235 ED2**
2 x 80	1970	**330 63 280 E**	**330 63 280 ED1**	**330 63 280 ED2**


NB140 - T16 PARALLEL BAP DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN


1,4 IP20 0,1

ACCESSORIES
PC CLEAR UP










Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1690	**330 63 254 EB**	**330 63 254 ED1B**	**330 63 254 ED2B**

p


Emergency Units

	W / % (BLF)	NoBody
1	W 14/24 % (24/13)	-
1	W 21 % (16)	-
1	W 28/35/39/54/80 % (14/12/8/6/5)	-
1	W 14/21/28/35 % (16/15/11/10)	330 91 1401 (L=300)
1	W 24/39/54 % (10/8/5)	330 91 2401 (L=300)
3	W 14/24 % (24/13)	-
3	W 21 % (16)	-
3	W 28/35/39/54/80 % (14/12/8/6/5)	-
3	W 14/21/28/35 % (16/15/11/10)	330 91 1403 (L=300)
3	W 24/39/54 % (10/8/5)	330 91 2403 (L=300)

BLF (%): BALLAST LUMEN FACTOR

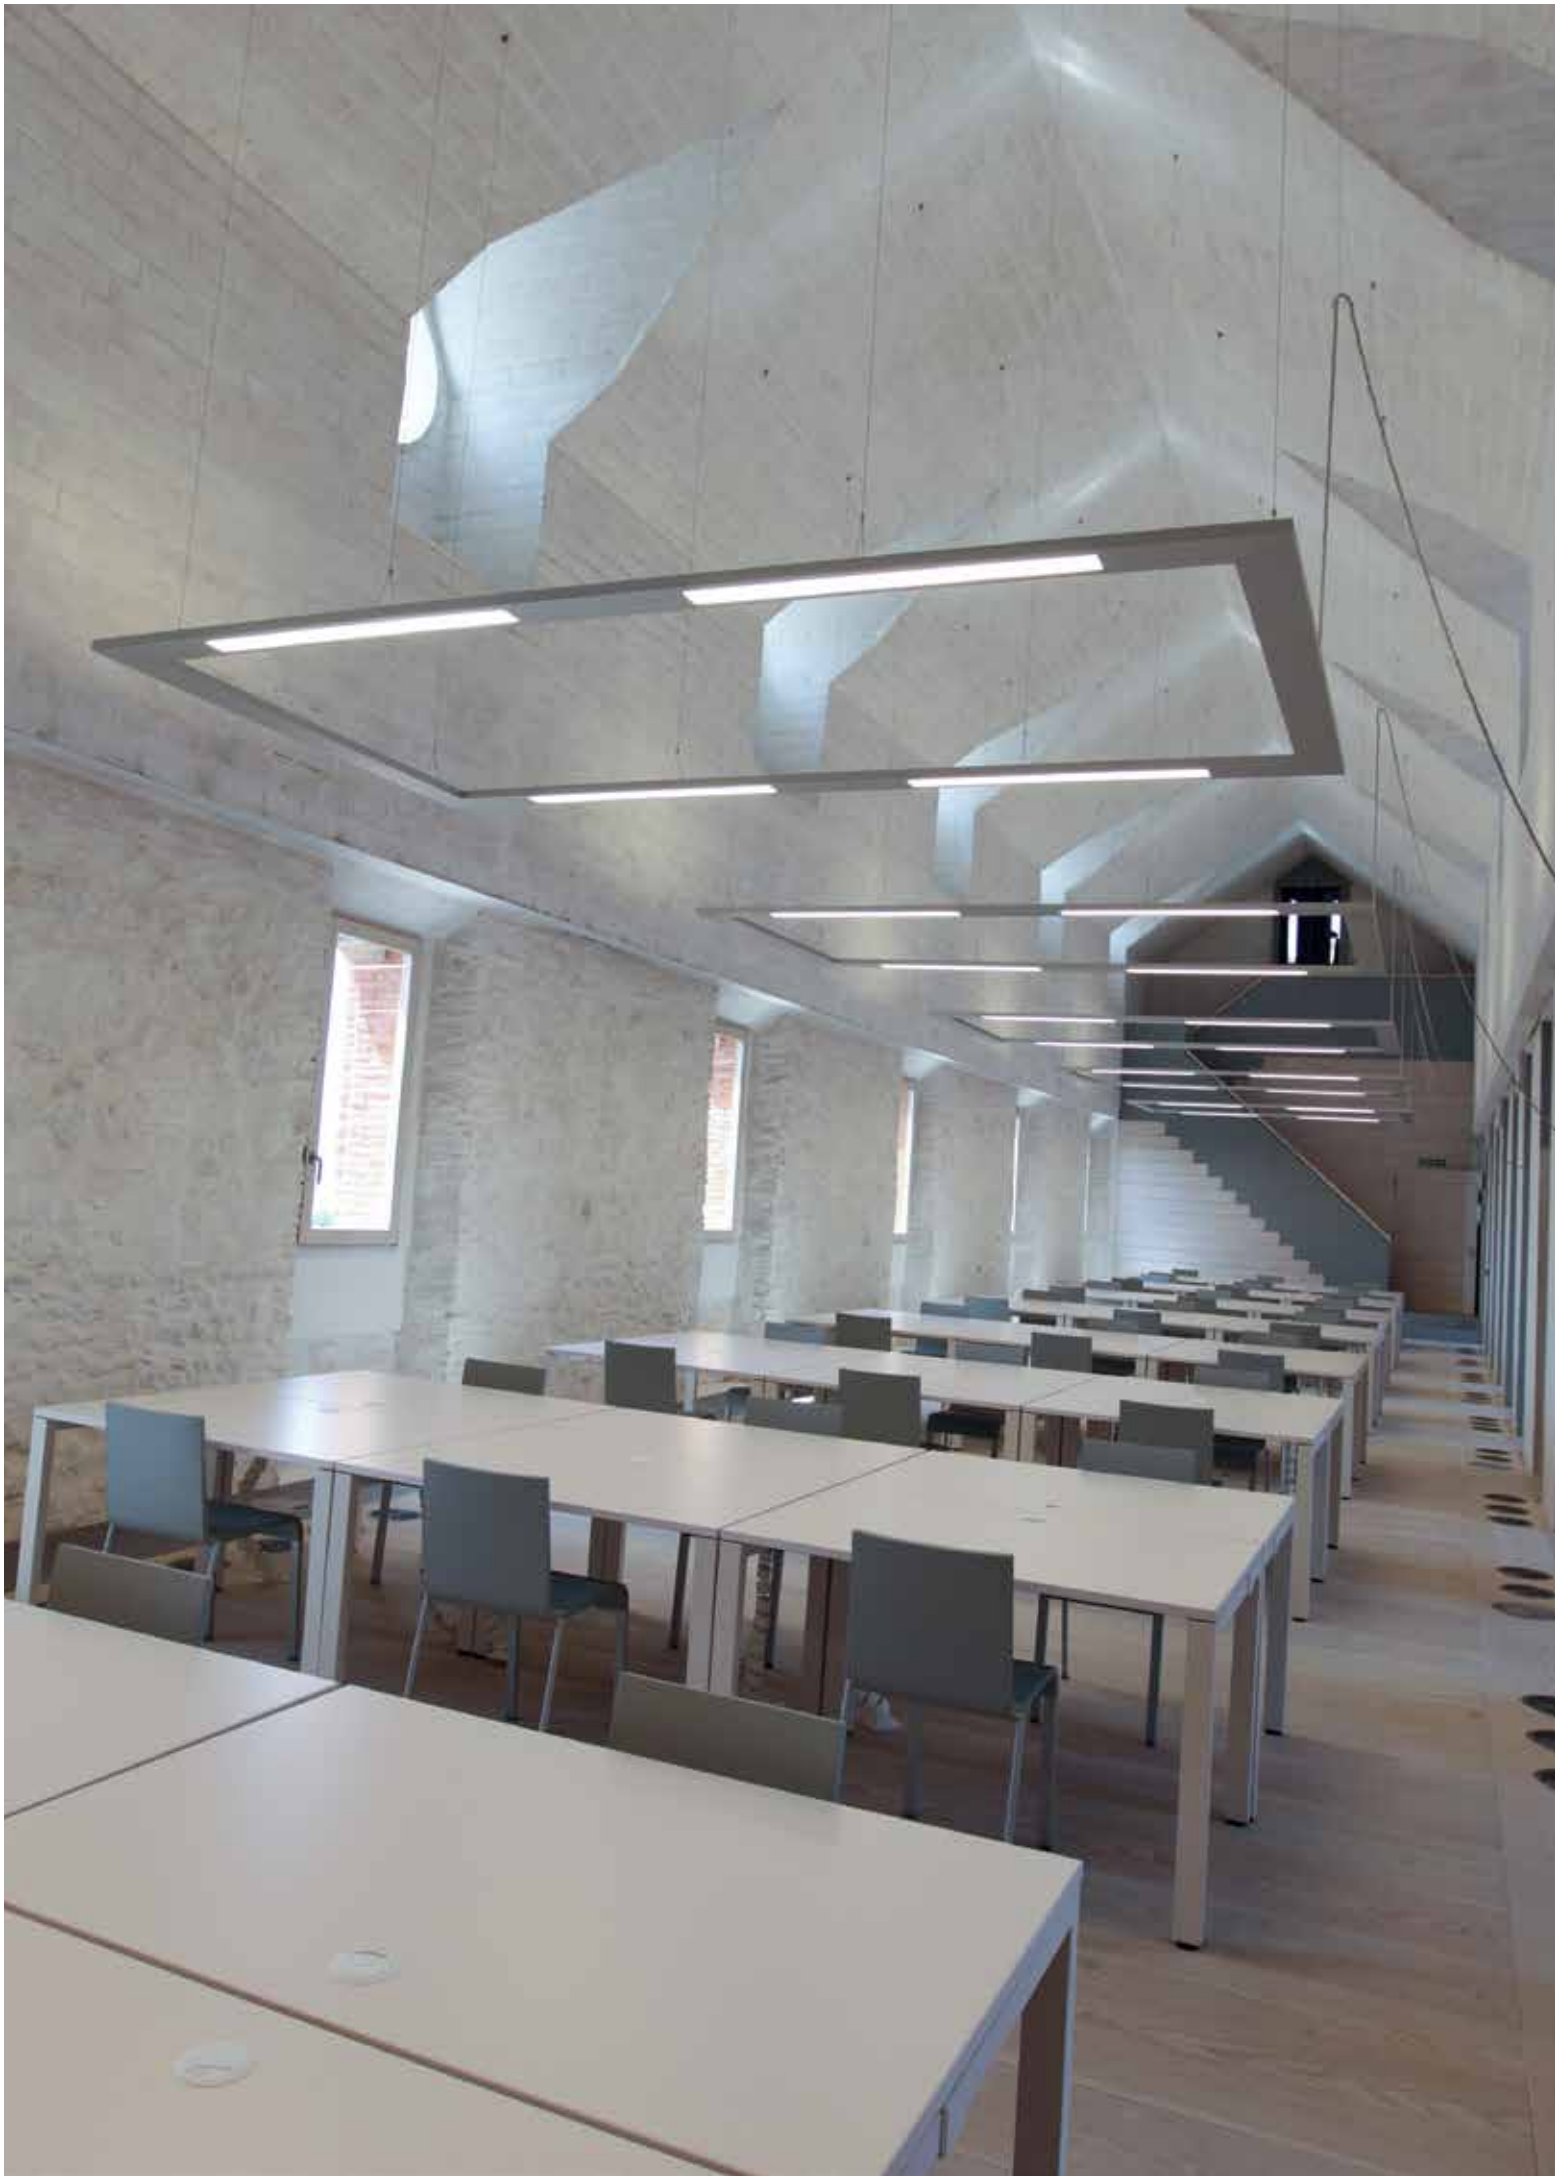




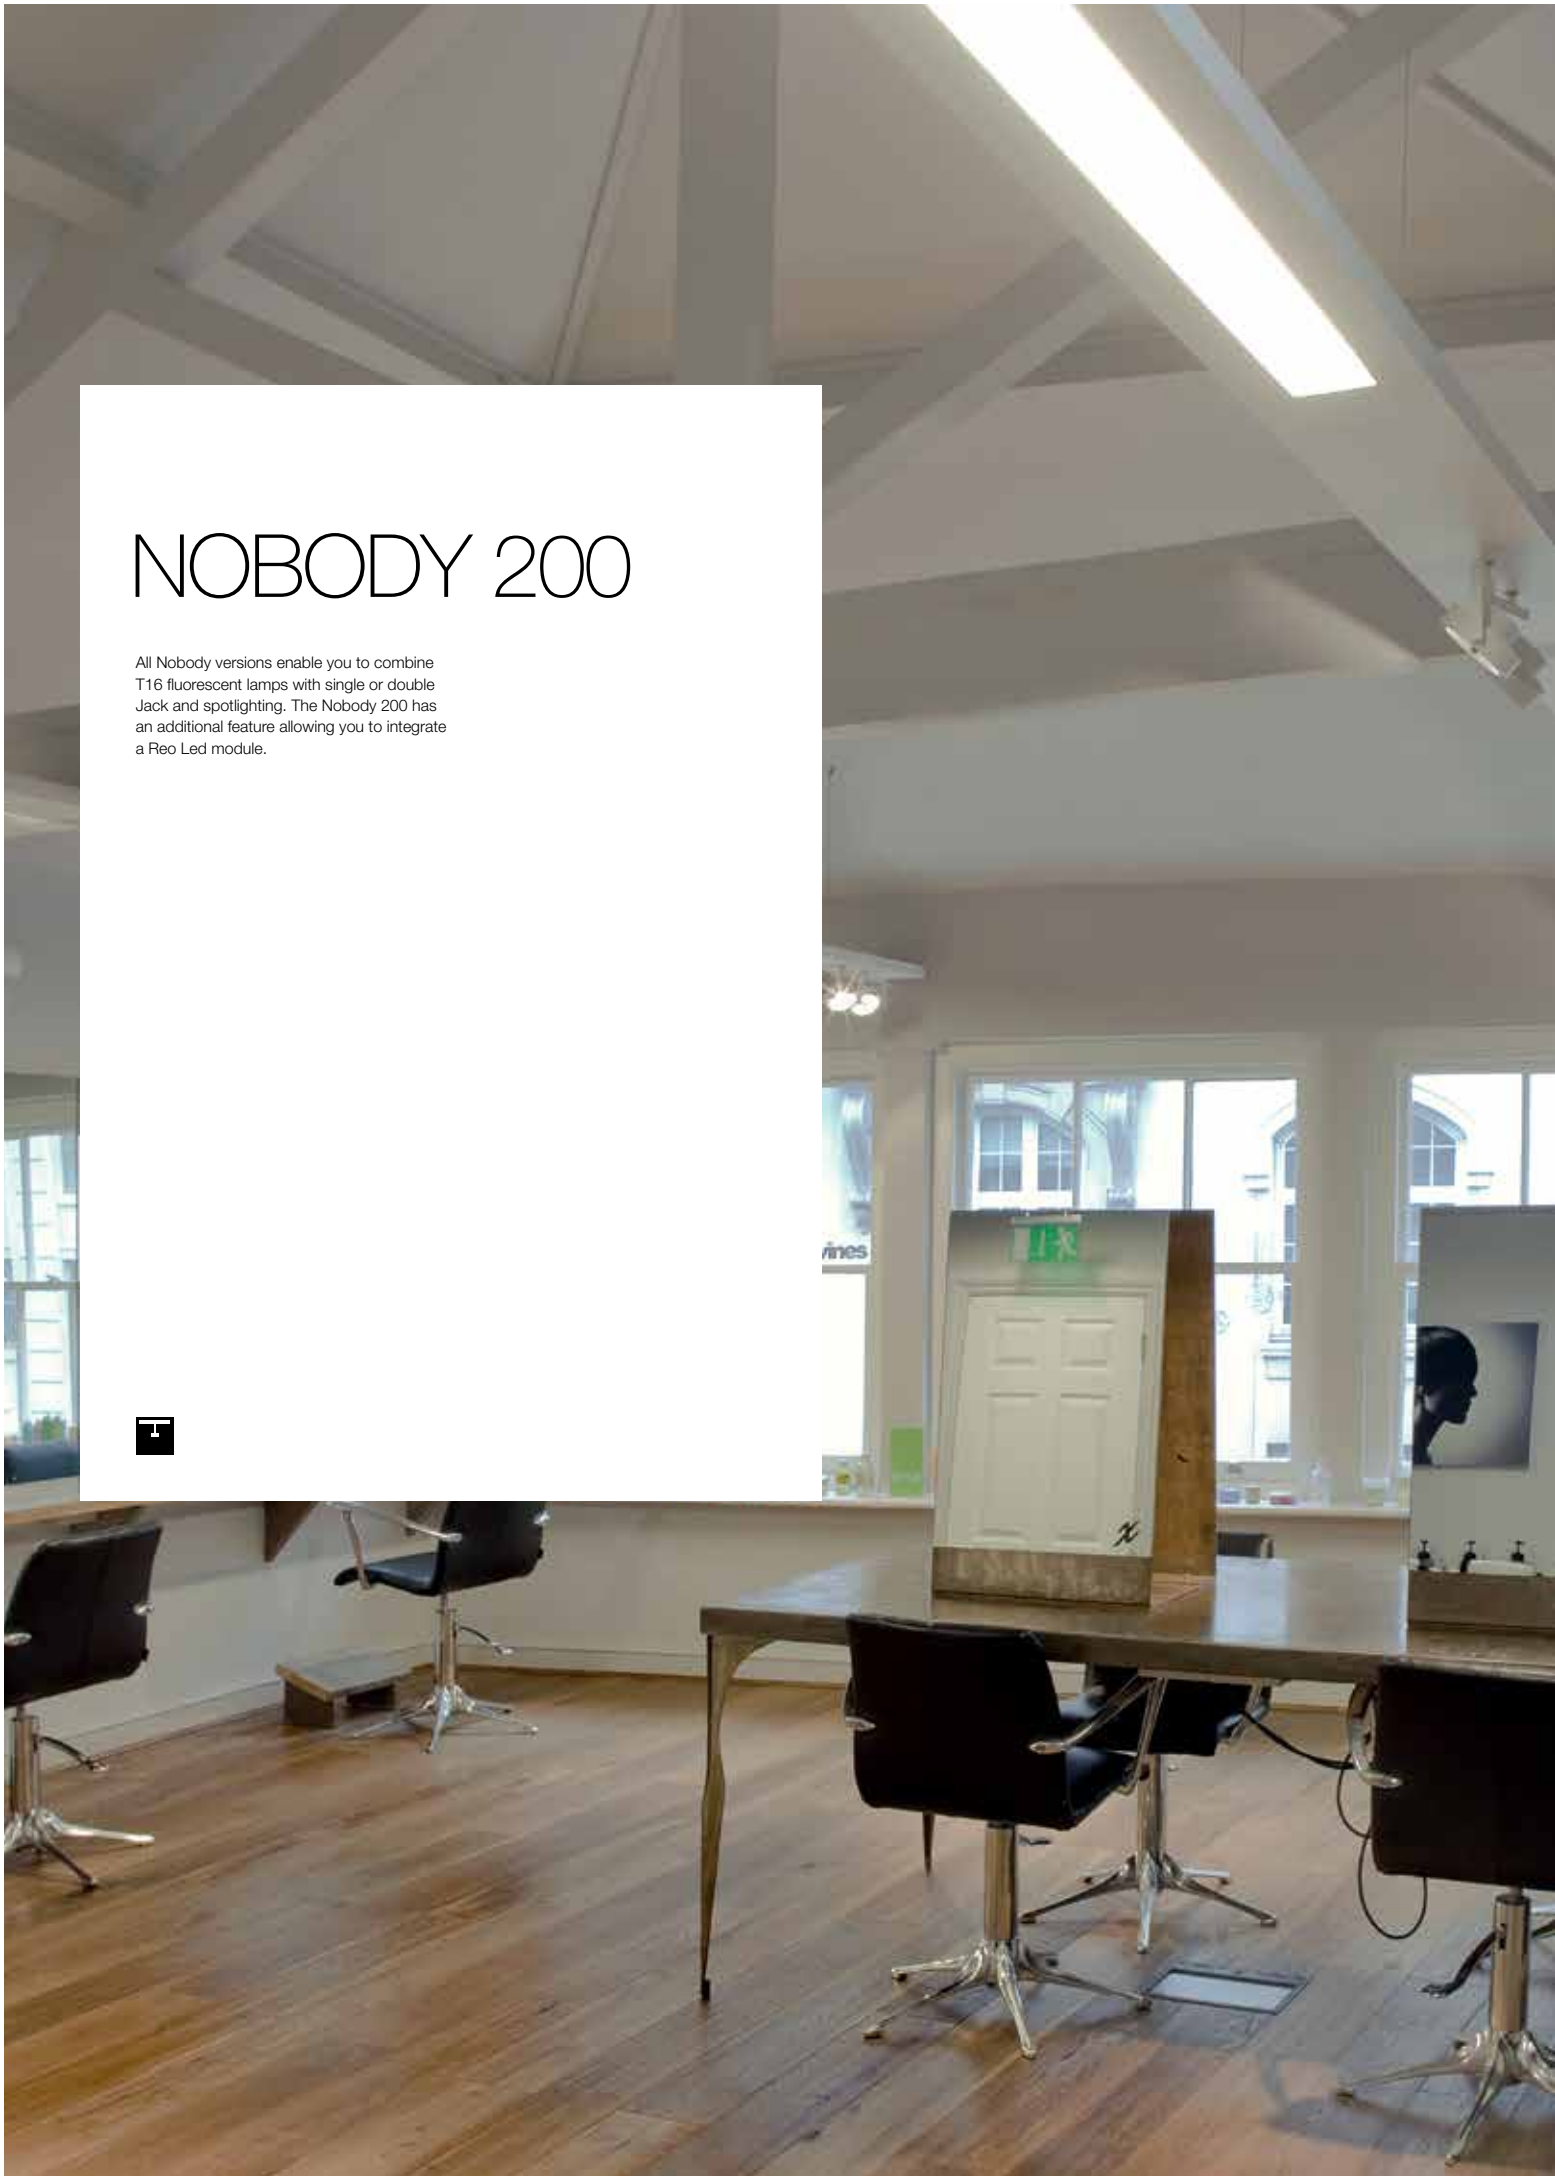

NOBODY 200


All Nobody versions enable you to combine T16 fluorescent lamps with single or double Jack and spotlighting. The Nobody 200 has an additional feature allowing you to integrate a Reo Led module.



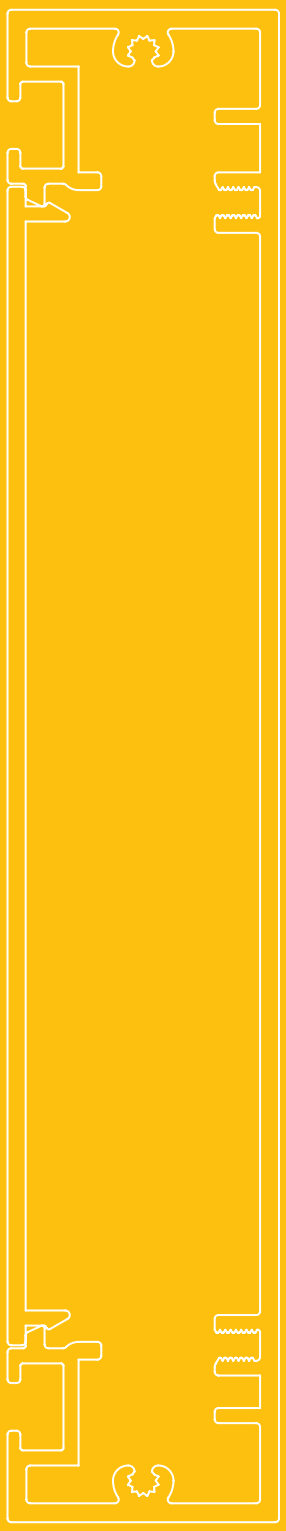


NoBody 200

PROFILE

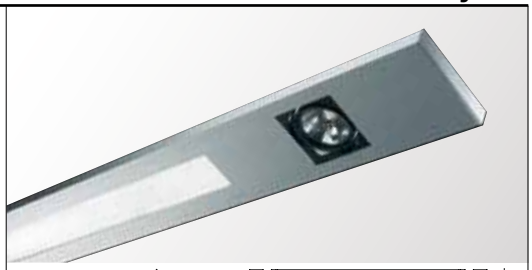

NB200 - PROFILE ◇
331 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

2,9




TOL EN12020-2

END CAP



NB200 - END CAP ◇
331 03 01◇
◇ = ALU / W

0,2




NO MODULE IN THIS AREA 15 mm



CORNER


NB200 - CORNER 180°
331 06 01

0,3




NB200 - CORNER 135°
331 06 05


0,3



NB200 - CORNER 90°
331 06 06

0,3




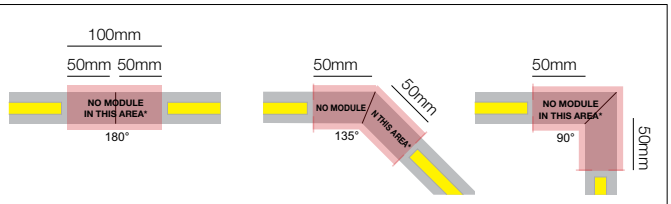

FIXATION

NB200 - WALL FIXATION 90°
331 06 10

0,3




NO MODULE IN THIS AREA 70 mm



SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m


SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m

0,1



SUSPENSION 2 TWIN 1,6
328 22 01
L 1,6m

0,1




CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **330 98 51**
L 6,0m / 3 x 0,75mm² **330 98 56**
L 1,6m / 5 x 0,75mm² **330 99 51**
L 6,0m / 5 x 0,75mm² **330 99 56** 0,3



OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1

NO MODULE IN THIS AREA 40 mm



NoBody 200 M10

NB200 - M10
331 61 01
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

CE 0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 525lm
EXCL.LED POWER SUPPLY 350mA-DC

CE 0,3 IP20

L 160

PS



FULL INFO / PAG TEC Accessories

CONE 111◇ Ø117 / Ø80 / H26
201 28 00◇
◇ = ALU / B / C / W
QR-LP111 max. 24°



CLIP 111◇ Ø110 / H22
201 27 99 A ◇
◇ = A / B / W



FRONTGLASS 111 Ø100
201 17 00



COLOUR FILTER 111 Ø100
201 27 11 🔵
201 27 12 🟢
201 27 13 🔴
201 27 14 🟡



LENS 111 Ø100
201 47 11



led

NoBody 200 1 Reo OK



L 200

PS

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**NB200 - 1 REO 3033 OK ◇** **331 61 8122 ◇** ◇ = A / W	**NB200 - 1 REO 3033-9 OK ◇** **331 61 89122 ◇** ◇ = A / W
REFLECTOR WFL-50°	**NB200 - 1 REO 3050 OK ◇** **331 61 8132 ◇** ◇ = A / W	**NB200 - 1 REO 3050-9 OK ◇** **331 61 89132 ◇** ◇ = A / W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**NB200 - 1 REO 2733 OK ◇** **331 61 8123 ◇** ◇ = A / W	**NB200 - 1 REO 2733-9 OK ◇** **331 61 89123 ◇** ◇ = A / W
REFLECTOR WFL-50°	**NB200 - 1 REO 2750 OK ◇** **331 61 8133 ◇** ◇ = A / W	**NB200 - 1 REO 2750-9 OK ◇** **331 61 89133 ◇** ◇ = A / W
	ADJUSTABLE 0°-30° / 350° INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz CE 0,3 IP20	

led

NoBody 200 2 Reo OK



L 320

120

PS

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	2x 660 lm	2x 580 lm
REFLECTOR FL-33°	**NB200 - 2 REO 3033 OK ◇** **331 61 8222 ◇** ◇ = A / W	**NB200 - 2 REO 3033-9 OK ◇** **331 61 89222 ◇** ◇ = A / W
REFLECTOR WFL-50°	**NB200 - 2 REO 3050 OK ◇** **331 61 8232 ◇** ◇ = A / W	**NB200 - 2 REO 3050-9 OK ◇** **331 61 89232 ◇** ◇ = A / W
2700K	2x 620 lm	2x 525 lm
REFLECTOR FL-33°	**NB200 - 2 REO 2733 OK ◇** **331 61 8223 ◇** ◇ = A / W	**NB200 - 2 REO 2733-9 OK ◇** **331 61 89223 ◇** ◇ = A / W
REFLECTOR WFL-50°	**NB200 - 2 REO 2750 OK ◇** **331 61 8233 ◇** ◇ = A / W	**NB200 - 2 REO 2750-9 OK ◇** **331 61 89233 ◇** ◇ = A / W
	ADJUSTABLE 0°-30° / 350° INCL.2 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz CE 0,4 IP20	

p

NoBody 200 RB150

NB200 - RB150 ◇
331 61 201 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE

1 x QR-CB51 max.50W

CE 0,3 IP20 0,5



L 210

TE

NoBody 200 RB250

NB200 - RB250 ◇
331 61 202 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE

2 x QR-CB51 max.50W

CE 0,4 IP20 0,5



L 310

TE

100

NoBody 200 RB111

NB200 - RB111 ◇
331 61 231 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE

1 x QR-LP111 max.50W

CE 0,5 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



L 230

TE

NoBody 200 RB211

NB200 - RB211 ◇
331 61 232 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE

2 x QR-LP111 max.50W

CE 0,7 IP20 1,0

ACCESSORIES
CONE111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



L 370

TE

140

NoBody 200 Single Jack

NB200 - SINGLE JACK
331 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

CE 0,3 IP20



L 110



NoBody 200 Twin Jack

NB200 - TWIN JACK
331 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

CE 0,3 IP20




L 200



NoBody 200 Modules T16 Down


NB200 - T16 PARALLEL PC OPAL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC OPAL DOWN

CE 1,2 IP20 0,1







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	650	**331 61 224 E**	**331 61 224 ED1**	**331 61 224 ED2**
2 x 21/39	950	**331 61 239 E**	**331 61 239 ED1**	**331 61 239 ED2**
2 x 28/54	1250	**331 61 254 E**	**331 61 254 ED1**	**331 61 254 ED2**
2 x 35	1550	**331 61 235 E**	**331 61 235 ED1**	**331 61 235 ED2**
2 x 80	1550	**331 61 280 E**	**331 61 280 ED1**	**331 61 280 ED2**

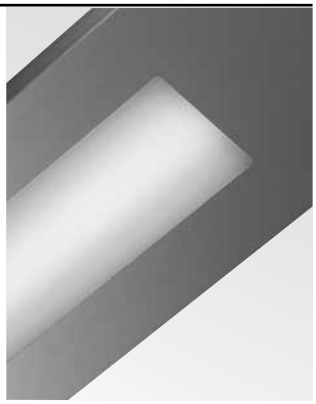

NB200 - T16 PARALLEL BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 1,4 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1250	**331 61 254 EB**	**331 61 254 ED1B**	**331 61 254 ED2B**





NoBody 200 Modules T16 Up

NB200 - T16 PARALLEL UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz

CE 1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	650	**331 62 224 E**	**331 62 224 ED1**	**331 62 224 ED2**
2 x 21/39	950	**331 62 239 E**	**331 62 239 ED1**	**331 62 239 ED2**
2 x 28/54	1250	**331 62 254 E**	**331 62 254 ED1**	**331 62 254 ED2**
2 x 35	1550	**331 62 235 E**	**331 62 235 ED1**	**331 62 235 ED2**
2 x 80	1550	**331 62 280 E**	**331 62 280 ED1**	**331 62 280 ED2**





NoBody 200 Modules T16 Down-Up

NB200 - T16 PARALLEL PC OPAL DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC OPAL DOWN


1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP











Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	650	**331 63 224 E**	**331 63 224 ED1**	**331 63 224 ED2**
2 x 21/39	950	**331 63 239 E**	**331 63 239 ED1**	**331 63 239 ED2**
2 x 28/54	1250	**331 63 254 E**	**331 63 254 ED1**	**331 63 254 ED2**
2 x 35	1550	**331 63 235 E**	**331 63 235 ED1**	**331 63 235 ED2**
2 x 80	1550	**331 63 280 E**	**331 63 280 ED1**	**331 63 280 ED2**

NB200 - T16 PARALLEL BAP DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN


1,4 IP20 0,1

ACCESSORIES
PC CLEAR UP









Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1250	**331 63 254 EB**	**331 63 254 ED1B**	**331 63 254 ED2B**

p

Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339

Emergency Units

	W / % (BLF)	NoBody
1	W 14/24 % (24/13)	-
1	W 21 % (16)	-
1	W 28/35/39/54/80 % (14/12/8/6/5)	-
1	W 14/21/28/35 % (16/15/11/10)	330 91 1401 (L=300)
1	W 24/39/54 % (10/8/5)	330 91 2401 (L=300)
3	W 14/24 % (24/13)	-
3	W 21 % (16)	-
3	W 28/35/39/54/80 % (14/12/8/6/5)	-
3	W 14/21/28/35 % (16/15/11/10)	330 91 1403 (L=300)
3	W 24/39/54 % (10/8/5)	330 91 2403 (L=300)

BLF (%): BALLAST LUMEN FACTOR

NoBody 200 PC Clear UP

NB200 - PC CLEAR UP T16 24W
331 52 24

0,2

NB200 - PC CLEAR UP T16 39W
331 52 39

0,3

NB200 - PC CLEAR UP T16 54W
331 52 54

0,4

NB200 - PC CLEAR UP T16 80W
331 52 80

0,5







CBC / Alfredo Saravia T




VALLÁS, FILOZÓFIA
VALLÁS, FILOZÓFIA
TÖRTÉNELEM
TÖRTÉNELEM
SZÓTÁRAK, NYELVKÖNYVEK



NOBODY 300


The Nobody 300 caters for high demanding environments, enabling a forceful down and/or uplight solution. Respecting the same flat dimensions as its two brothers, the Nobody 300 easily combines style and functionality.






NoBody 300

PROFILE

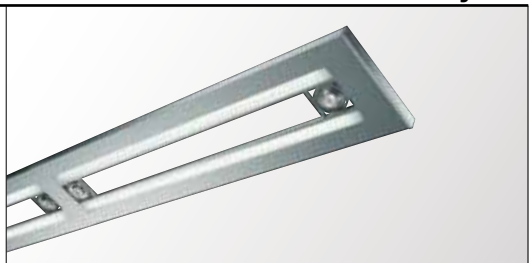

NB300 - PROFILE ◇
268 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m




5,9

TOL EN12020-2

END CAP






NB300 - END CAP ◇
268 03 01◇
◇ = ALU

0,2

CORNER


NB300 - CORNER 180°
268 06 01

0,3




NB300 - CORNER 135°
268 06 05

0,3



NB300 - CORNER 90°
268 06 06


0,3



FIXATION

NB300 - WALL FIXATION 90°
268 06 10

0,3




NO MODULE IN
THIS AREA 50 mm



SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m

SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m




0,1

CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **268 98 51**
L 6,0m / 3 x 0,75mm² **268 98 56**
L 1,6m / 5 x 0,75mm² **268 99 51**
L 6,0m / 5 x 0,75mm² **268 99 56** 0,3



OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1

FULL INFO / PAG TEC Accessories

CONE 111◇ Ø117 / Ø80 / H26
201 28 00◇
◇ = ALU / B / C / W
QR-LP111 max. 24°



CLIP 111◇ Ø110 / H22
201 27 99 A ◇
◇ = A / B / W



FRONTGLASS 111 Ø100
201 17 00



COLOUR FILTER 111 Ø100
201 27 11
201 27 12
201 27 13
201 27 14



LENS 111 Ø100
201 47 11



NoBody 300 RB150

NB300 - RB150 ◇
268 61 201 ◇
◇ = A
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CB51 max.50W
0,3 IP20 0,5



L 210



NoBody 300 RB250

NB300 - RB250 ◇
268 61 202 ◇
◇ = A
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CB51 max.50W
0,4 IP20 0,5



L 210



NoBody 300 RB111

NB300 - RB111 ◇
268 61 231 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
0,5 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



L 230




NoBody 300 RB211

NB300 - RB211 ◇
268 61 232 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
0,7 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



L 370




NoBody 300 RB311

NB300 - RB311 ◇
268 61 233 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W
1,0 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + COLOUR FILTER 111
CONE / CLIP 111 + LENS 111



L 580



Spot JAC

SPOTNIC JAC	PAG INT 303
RATIO JAC	PAG INT 311
SPATIO JAC	PAG INT 313
QUAD JAC	PAG INT 321
CREDO JAC	PAG INT 323
PHANTOM JAC	PAG INT 327
HALOSUN JAC	PAG INT 327
CLUB JAC	PAG INT 329
XILO JAC	PAG INT 333
RAND JAC	PAG INT 339

NoBody 300 Single Jack

NB300 - SINGLE JACK
268 61 10
EXCL.1 x SPOT SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W
0,3 IP20



L 100



NoBody 300 Double Jack

NB300 - DOUBLE JACK
268 61 15
EXCL.2 x SPOT SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W
0,3 IP20



L 100




p

NoBody 300 Modules T16 Down

NB300 - T16 PARALLEL PC SBL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x PC SBL DOWN

CE 1,2 IP20 0,1







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	670	**268 61 224 E**	**268 61 224 ED1**	**268 61 224 ED2**
2 x 21/39	970	**268 61 239 E**	**268 61 239 ED1**	**268 61 239 ED2**
2 x 28/54	1270	**268 61 254 E**	**268 61 254 ED1**	**268 61 254 ED2**
2 x 35	1570	**268 61 235 E**	**268 61 235 ED1**	**268 61 235 ED2**
2 x 80	1570	**268 61 280 E**	**268 61 280 ED1**	**268 61 280 ED2**



NB300 - T16 PARALLEL BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 1,4 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1270	**268 61 254 EB**	**268 61 254 ED1B**	**268 61 254 ED2B**



p



NoBody 300 Modules T16 Up

NB300 - T16 PARALLEL UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz

1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	630	**268 62 224 E**	**268 62 224 ED1**	**268 62 224 ED2**
2 x 21/39	930	**268 62 239 E**	**268 62 239 ED1**	**268 62 239 ED2**
2 x 28/54	1230	**268 62 254 E**	**268 62 254 ED1**	**268 62 254 ED2**
2 x 35	1530	**268 62 235 E**	**268 62 235 ED1**	**268 62 235 ED2**
2 x 80	1530	**268 62 280 E**	**268 62 280 ED1**	**268 62 280 ED2**




NB300 - T16 PARALLEL UP
4 x T16 / G5 / 220-240V / 0 I 50-60Hz

1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
4 x 14/24	630	**268 62 424 E**	**268 62 424 ED1**	**268 62 424 ED2**
4 x 21/39	930	**268 62 439 E**	**268 62 439 ED1**	**268 62 439 ED2**
4 x 28/54	1230	**268 62 454 E**	**268 62 454 ED1**	**268 62 454 ED2**
4 x 35	1530	**268 62 435 E**	**268 62 435 ED1**	**268 62 435 ED2**
4 x 80	1530	**268 62 480 E**	**268 62 480 ED1**	**268 62 480 ED2**



p

NoBody 300 PC Clear Up

NB300 - PC CLEAR UP T16 24W
268 52 24

0,3

NB300 - PC CLEAR UP T16 39W
268 52 39

0,4

NB300 - PC CLEAR UP T16 54W
268 52 54

0,5

NB300 - PC CLEAR UP T16 80W
268 52 80


0,8



NoBody 300 Modules T16 Down-Up

NB300 - T16 PARALLEL PC SBL DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x PC SBL DOWN

1,2 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	670	**268 63 224 E**	**268 63 224 ED1**	**268 63 224 ED2**
2 x 21/39	970	**268 63 239 E**	**268 63 239 ED1**	**268 63 239 ED2**
2 x 28/54	1270	**268 63 254 E**	**268 63 254 ED1**	**268 63 254 ED2**
2 x 35	1570	**268 63 235 E**	**268 63 235 ED1**	**268 63 235 ED2**
2 x 80	1570	**268 63 280 E**	**268 63 280 ED1**	**268 63 280 ED2**




NB300 - T16 PARALLEL BAP DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

1,4 IP20 0,1

ACCESSORIES
PC CLEAR UP







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1270	**268 63 254 EB**	**268 63 254 ED1B**	**268 63 254 ED2B**



NB300 - T16 PARALLEL PC SBL DOWN-UP L50
2 x T16 / G5
2 x QR-CB51 max.50W / GX5.3 / TE
220-240V / 50-60Hz
INCL.CABLING 2 CIRCUITS
INCL.2 x PC SBL DOWN

1,5 IP20 0,5





Watt	Lmm	EVG	EVG DIM 1 10	EVG DIM DALI SWITCH
2 x 14/24	670	**268 63 224 EL**	**268 63 224 ED1L**	**268 63 224 ED2L**
2 x 21/39	970	**268 63 239 EL**	**268 63 239 ED1L**	**268 63 239 ED2L**
2 x 28/54	1270	**268 63 254 EL**	**268 63 254 ED1L**	**268 63 254 ED2L**
2 x 35	1570	**268 63 235 EL**	**268 63 235 ED1L**	**268 63 235 ED2L**
2 x 80	1570	**268 63 280 EL**	**268 63 280 ED1L**	**268 63 280 ED2L**



Emergency Units

	W / % (BLF)	NoBody
1	W 14/24 % (24/13)	-
1	W 21 % (16)	-
1	W 28/35/39/54/80 % (14/12/8/6/5)	-
1	W 14/21/28/35 % (16/15/11/10)	330 91 1401 (L=300)
1	W 24/39/54 % (10/8/5)	330 91 2401 (L=300)
3	W 14/24 % (24/13)	-
3	W 21 % (16)	-
3	W 28/35/39/54/80 % (14/12/8/6/5)	-
3	W 14/21/28/35 % (16/15/11/10)	330 91 1403 (L=300)
3	W 24/39/54 % (10/8/5)	330 91 2403 (L=300)

BLF (%): BALLAST LUMEN FACTOR







INTERIOR CEILING RECESSED INT 4

INTERIOR CEILING SURFACE INT 220

INTERIOR WALL RECESSED INT 426

INTERIOR WALL SURFACE INT 446

INTERIOR STAND ALONE INT 510

INTERIOR TRACK LIGHTING t INT 528

PROFILES p PRO 4

EXTERIOR CEILING RECESSED EXT 4

EXTERIOR CEILING SURFACE EXT 18

EXTERIOR WALL RECESSED EXT 30

EXTERIOR WALL SURFACE EXT 42

EXTERIOR FLOOR RECESSED EXT 96

EXTERIOR FLOOR SURFACE EXT 118


TECHNICAL INFO tech TEC 2

INDEX index IND 2

EXTERIOR
CEILING RECESSED

These ceiling recessed luminaires for outdoor application enable you to continue the indoor lighting concept outside. Either for cantilever roofs, atriums, entrances or other ceiling structures, this collection offers a selection of luminaires to meet your project demands. In addition to outdoor use they can also be used in bathroom and wellness areas.



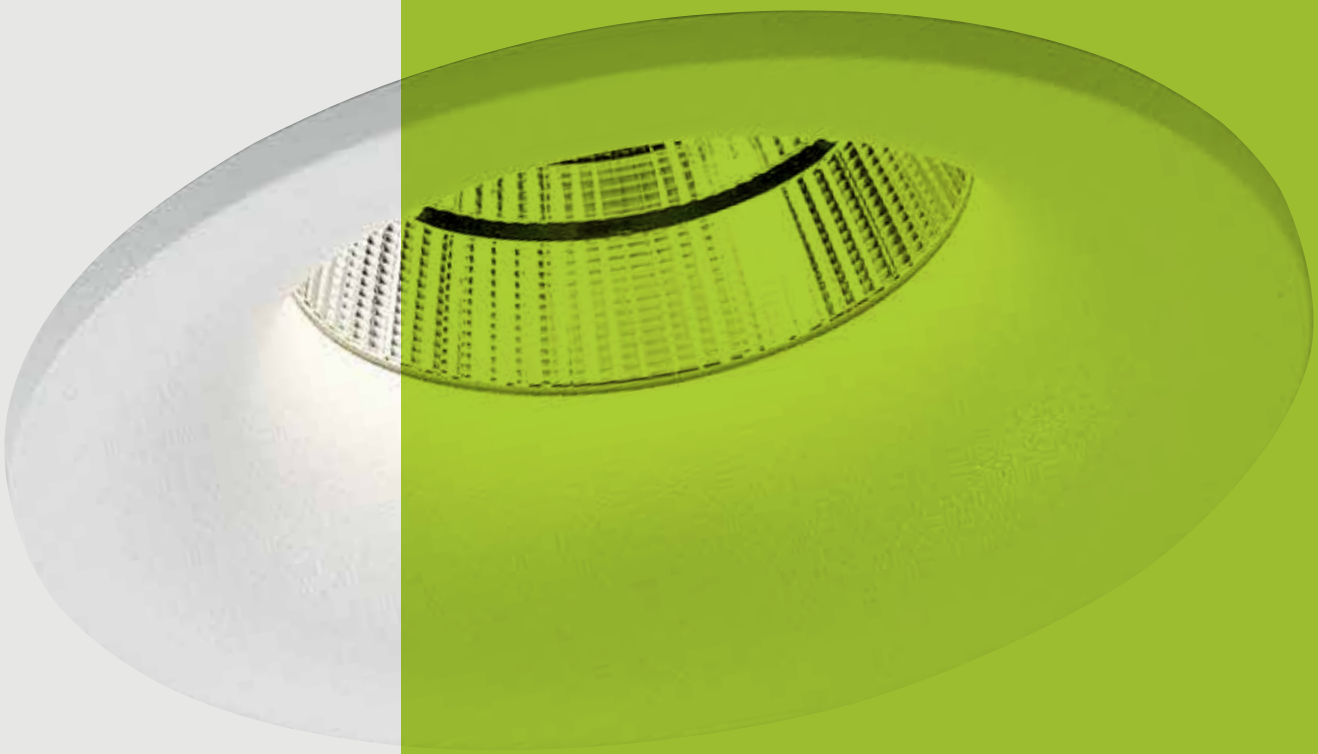


exterior
ceiling
recessed
www.deltalight.com/ECR

CARREE X	EXT 15
DIRO GT	EXT 12
DIRO OK X	EXT 9
LUX X	EXT 9
LUXOR X	EXT 9
REO X	EXT 8



REO X
EXT 8



DIRO OK X
EXT 9



LUX X
EXT 9



LUXOR X
EXT 9



DIRO GT
EXT 12



CARREE X
EXT 15

FULL INFO / PAG TEC

Options


CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 100W IP67 **200 47 10**	80 x 32 x 27

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

led

Reo X






76 x 55 max.22

REO X 3033 S1 ◇
202 25 28122 ◇
◇ = A / W
FIXED
INCL.1 x PC
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350mA-DC

IP20
IP43

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM



new

76 x 55

REO X 3033 S2 ◇
202 252 28122 ◇
◇ = A / W
FIXED
INCL.1 x PC
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350mA-DC


IP20
IP43

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

CRI >80 660lm (7W)
ON REQUEST 2700K/4000K

Diro OK X





76 x 100 max.22


DIRO OK X S1 ◇
202 14 13 ◇
◇ = A
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP23 0,5

OPTIONS
TRANSFO

Lux X





74 x 70 max.20


LUX X S1 ◇
202 13 15 ◇
◇ = INOX
INOX 316
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,2 IP20 IP23 0,5

OPTIONS
TRANSFO

Luxor X





79 x 70 max.20

LUXOR X S1 ◇
202 13 14 ◇
◇ = INOX
INOX 316
ADJUSTABLE 0°- 35° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP23 0,5

OPTIONS
TRANSFO





FULL INFO / PAG TEC


Options

CONTROL GEAR	C A B
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 100W IP67 **200 47 10**	80 x 32 x 27

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Diro GT LED





76 x 90 min.5


	CRI > 80
4000K	
	ON REQUEST
3000K	660 lm
REFLECTOR FL-33°	**DIRO GT LED 3033 ◇** **202 342 28122 ◇** ◇ = A / W
	FIXED INCL.1 x POWERLED WHITE 7W EXCL.LED POWER SUPPLY 350mA-DC 0,3 IP20 IP44 OPTIONS LED POWER SUPPLY 350mA-DC / DIM



new

Diro GT






76 x 125 min.5

DIRO GT ◇
202 34 12 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP44 0,5

OPTIONS
TRANSFO

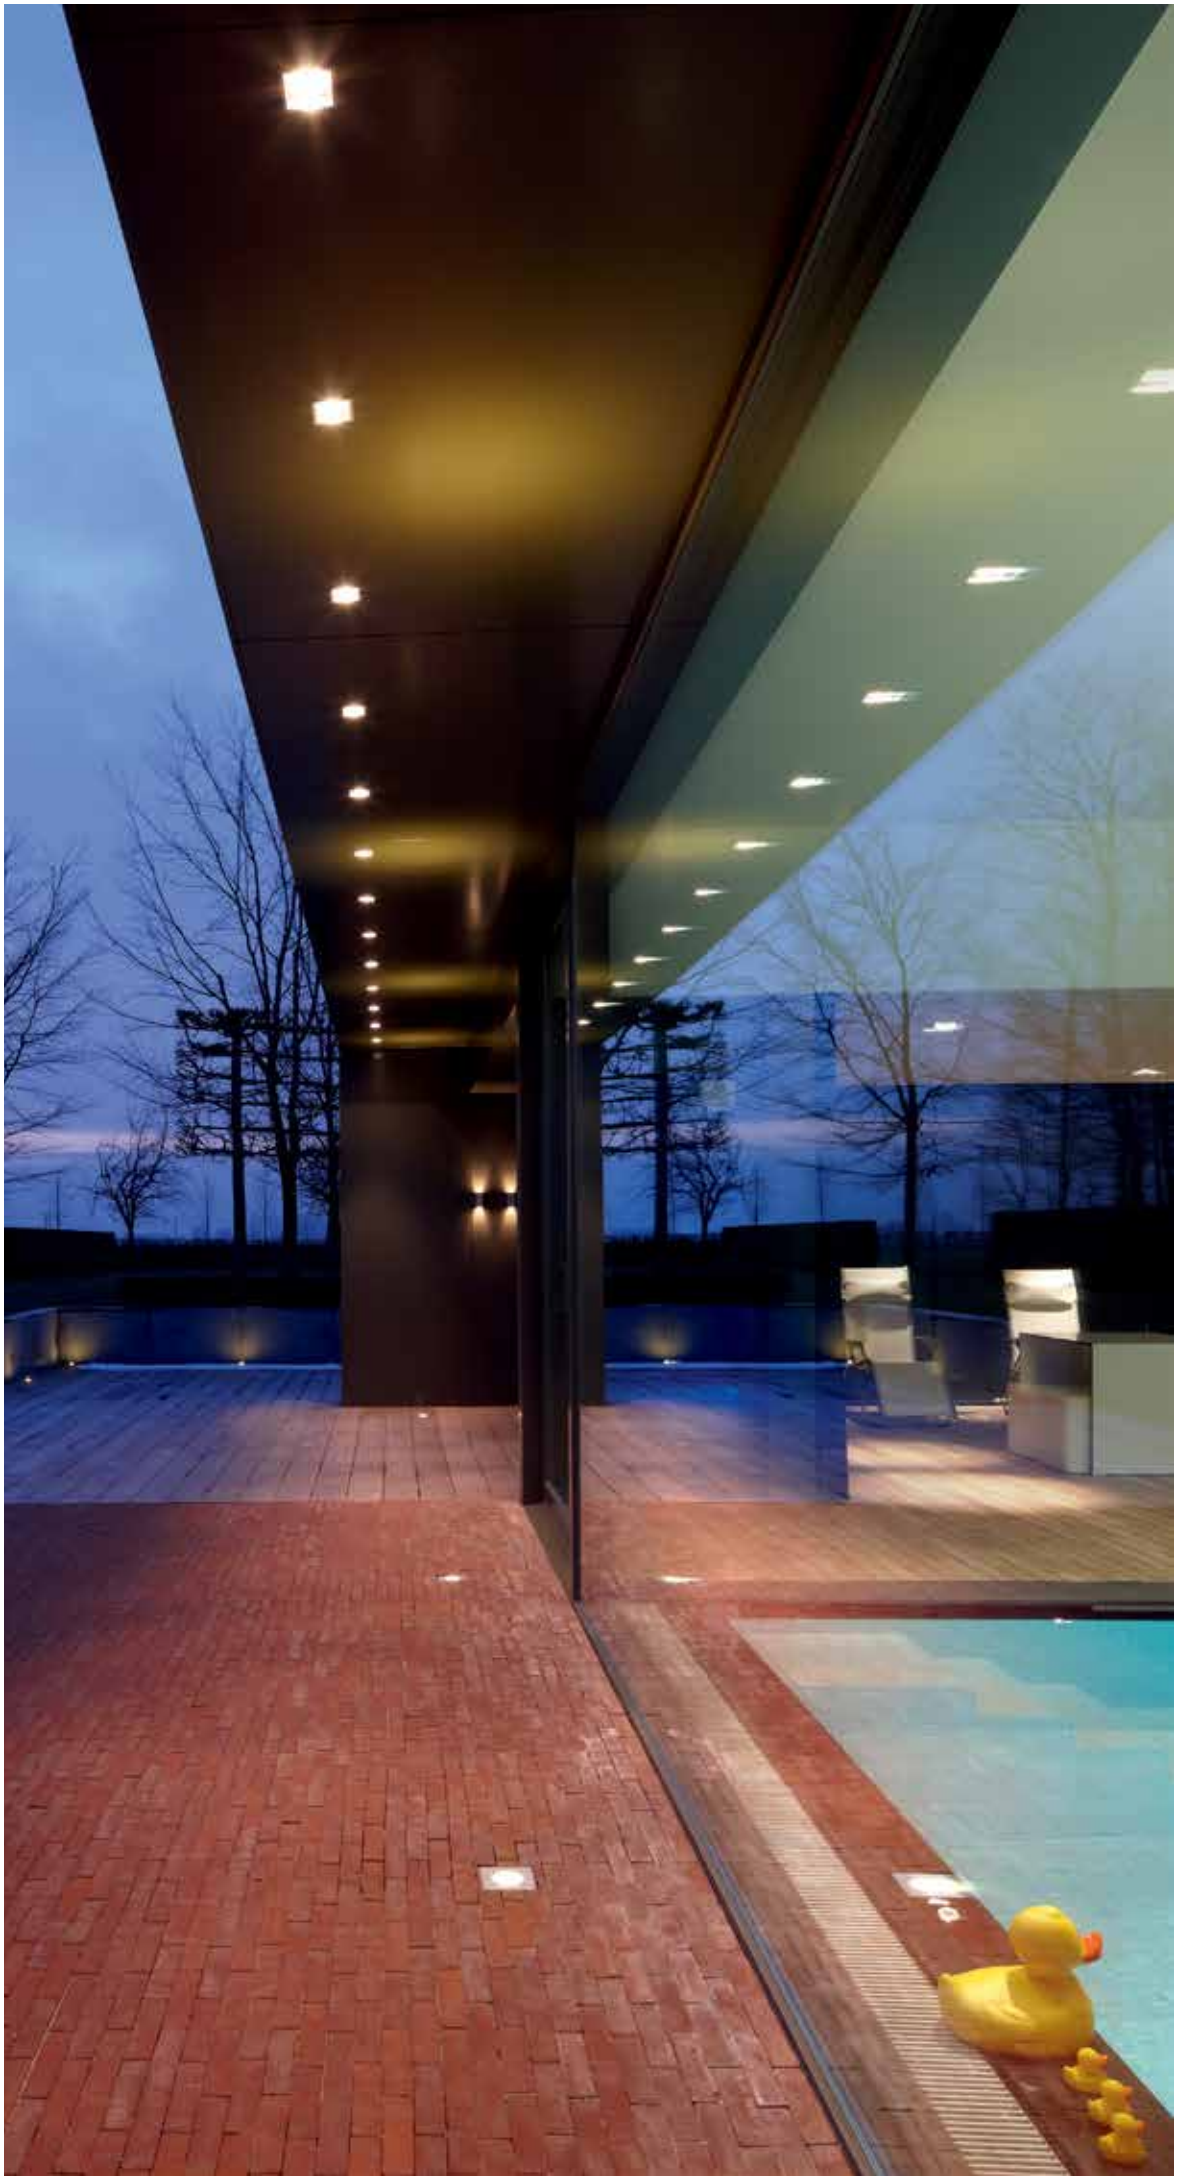


FULL INFO / PAG TEC

Options

CONTROL GEAR	C A B
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22
TRANSFO 100W IP67 **200 47 10**	80 x 32 x 27

Carree X LED





75 x 75 x 80 max.35

CARREE X LED 3033 S1 ◇
202 20 28122 ◇
◇ = A
FIXED
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.1 x PC
EXCL.LED POWER SUPPLY 350mA-DC


0,3 IP20 IP43

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

CRI >80 660lm (7W)

Carree II X






75 x 75 x 90 max.35

CARREE II X S1 ◇
202 20 41 ◇
◇ = A
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,2 IP20 IP23 0,5

OPTIONS
TRANSFO



75 x 75 x 90


CARREE II X S2 ◇
202 20 42 ◇
◇ = A
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


0,2 IP20 IP23 0,5

OPTIONS
TRANSFO



DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

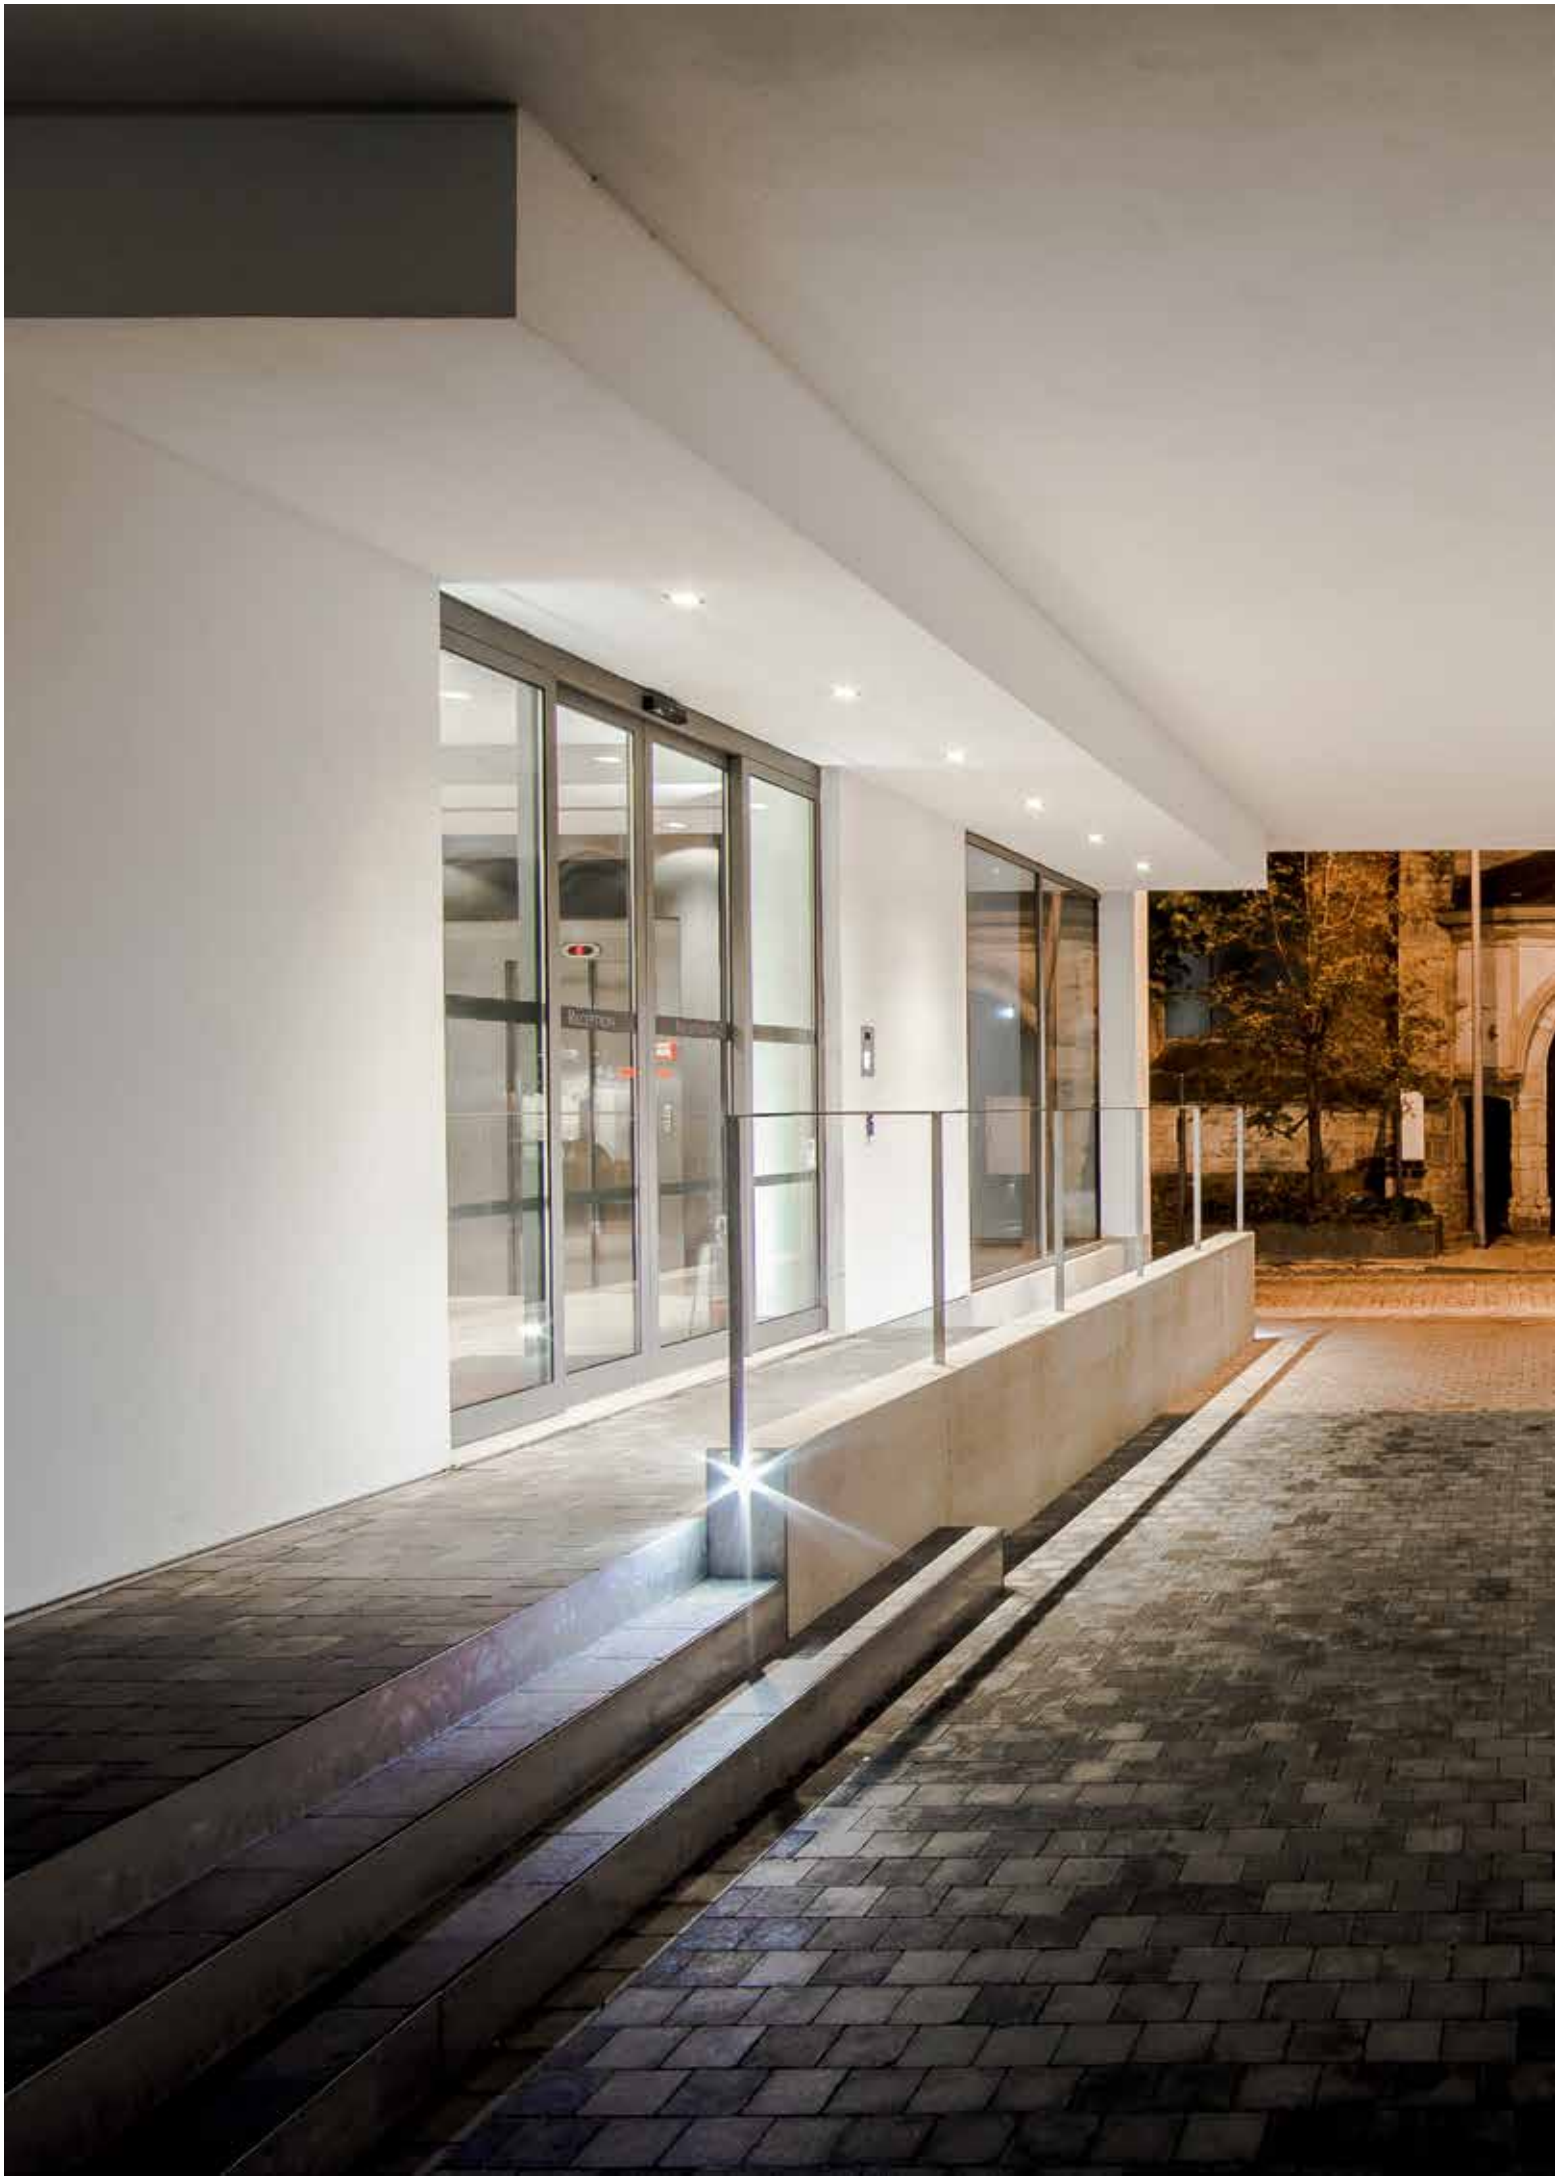

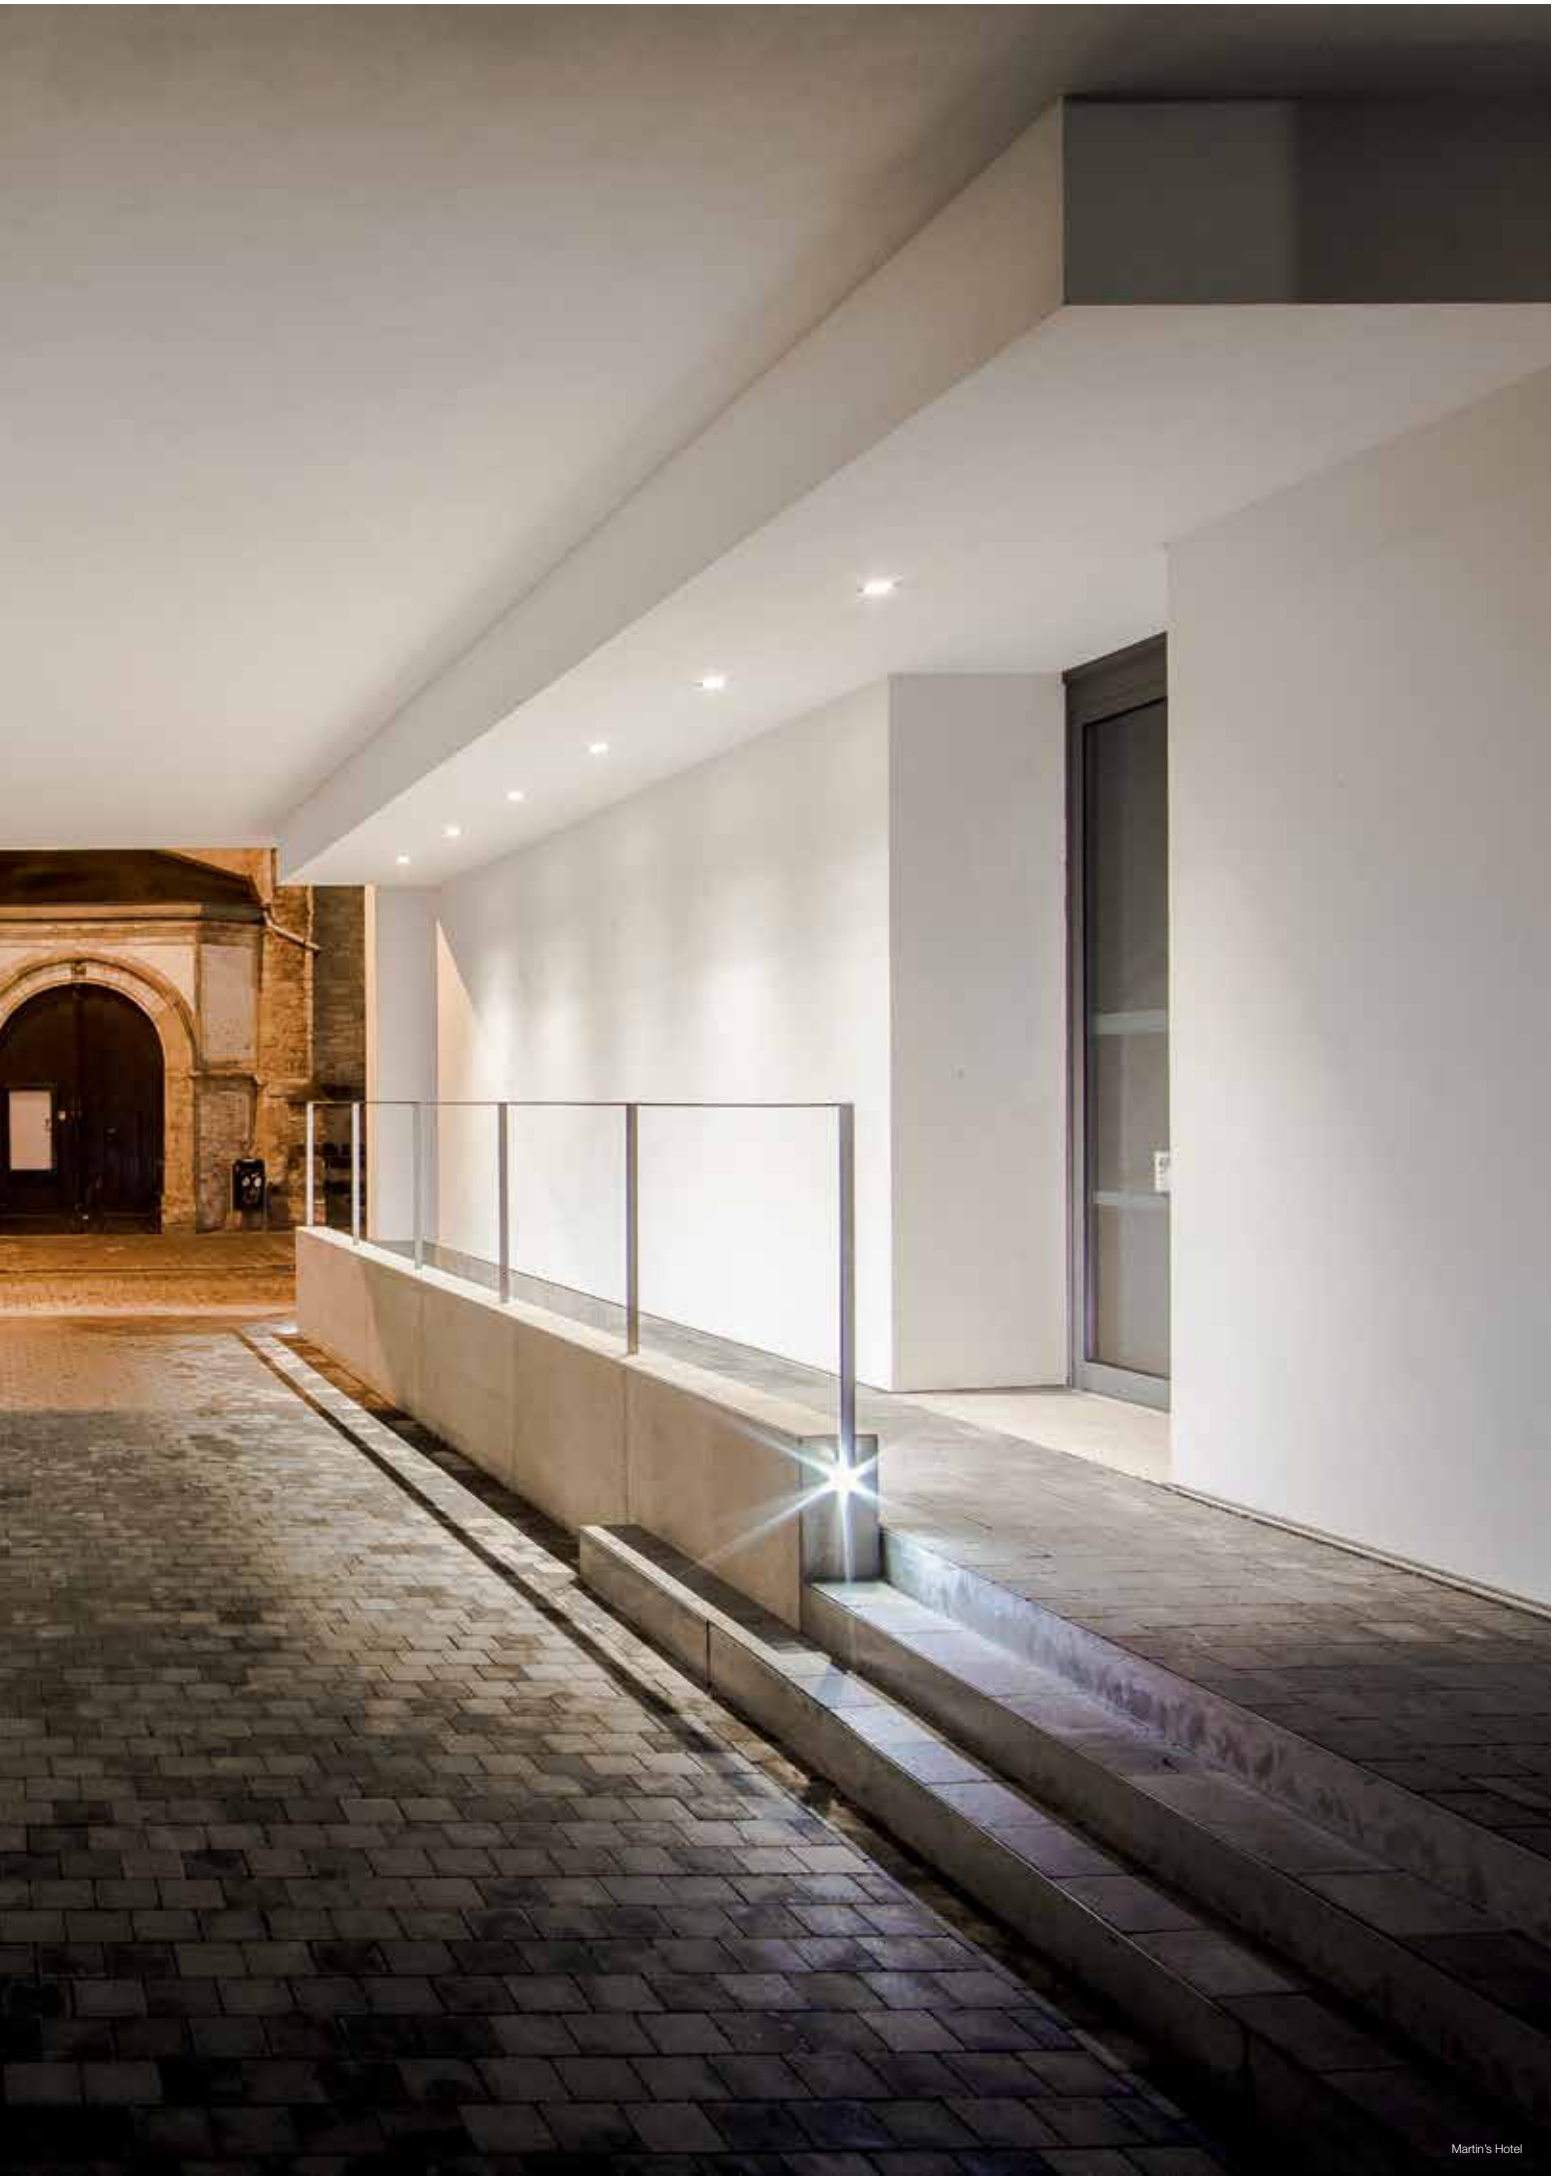



Martin's Hotel



EXTERIOR
CEILING SURFACE

The following range offers you easy-to-install ceiling luminaire solutions, be it for outdoor use or bathroom and wellness areas. Different light characteristics and colour finishes are available to match your project.

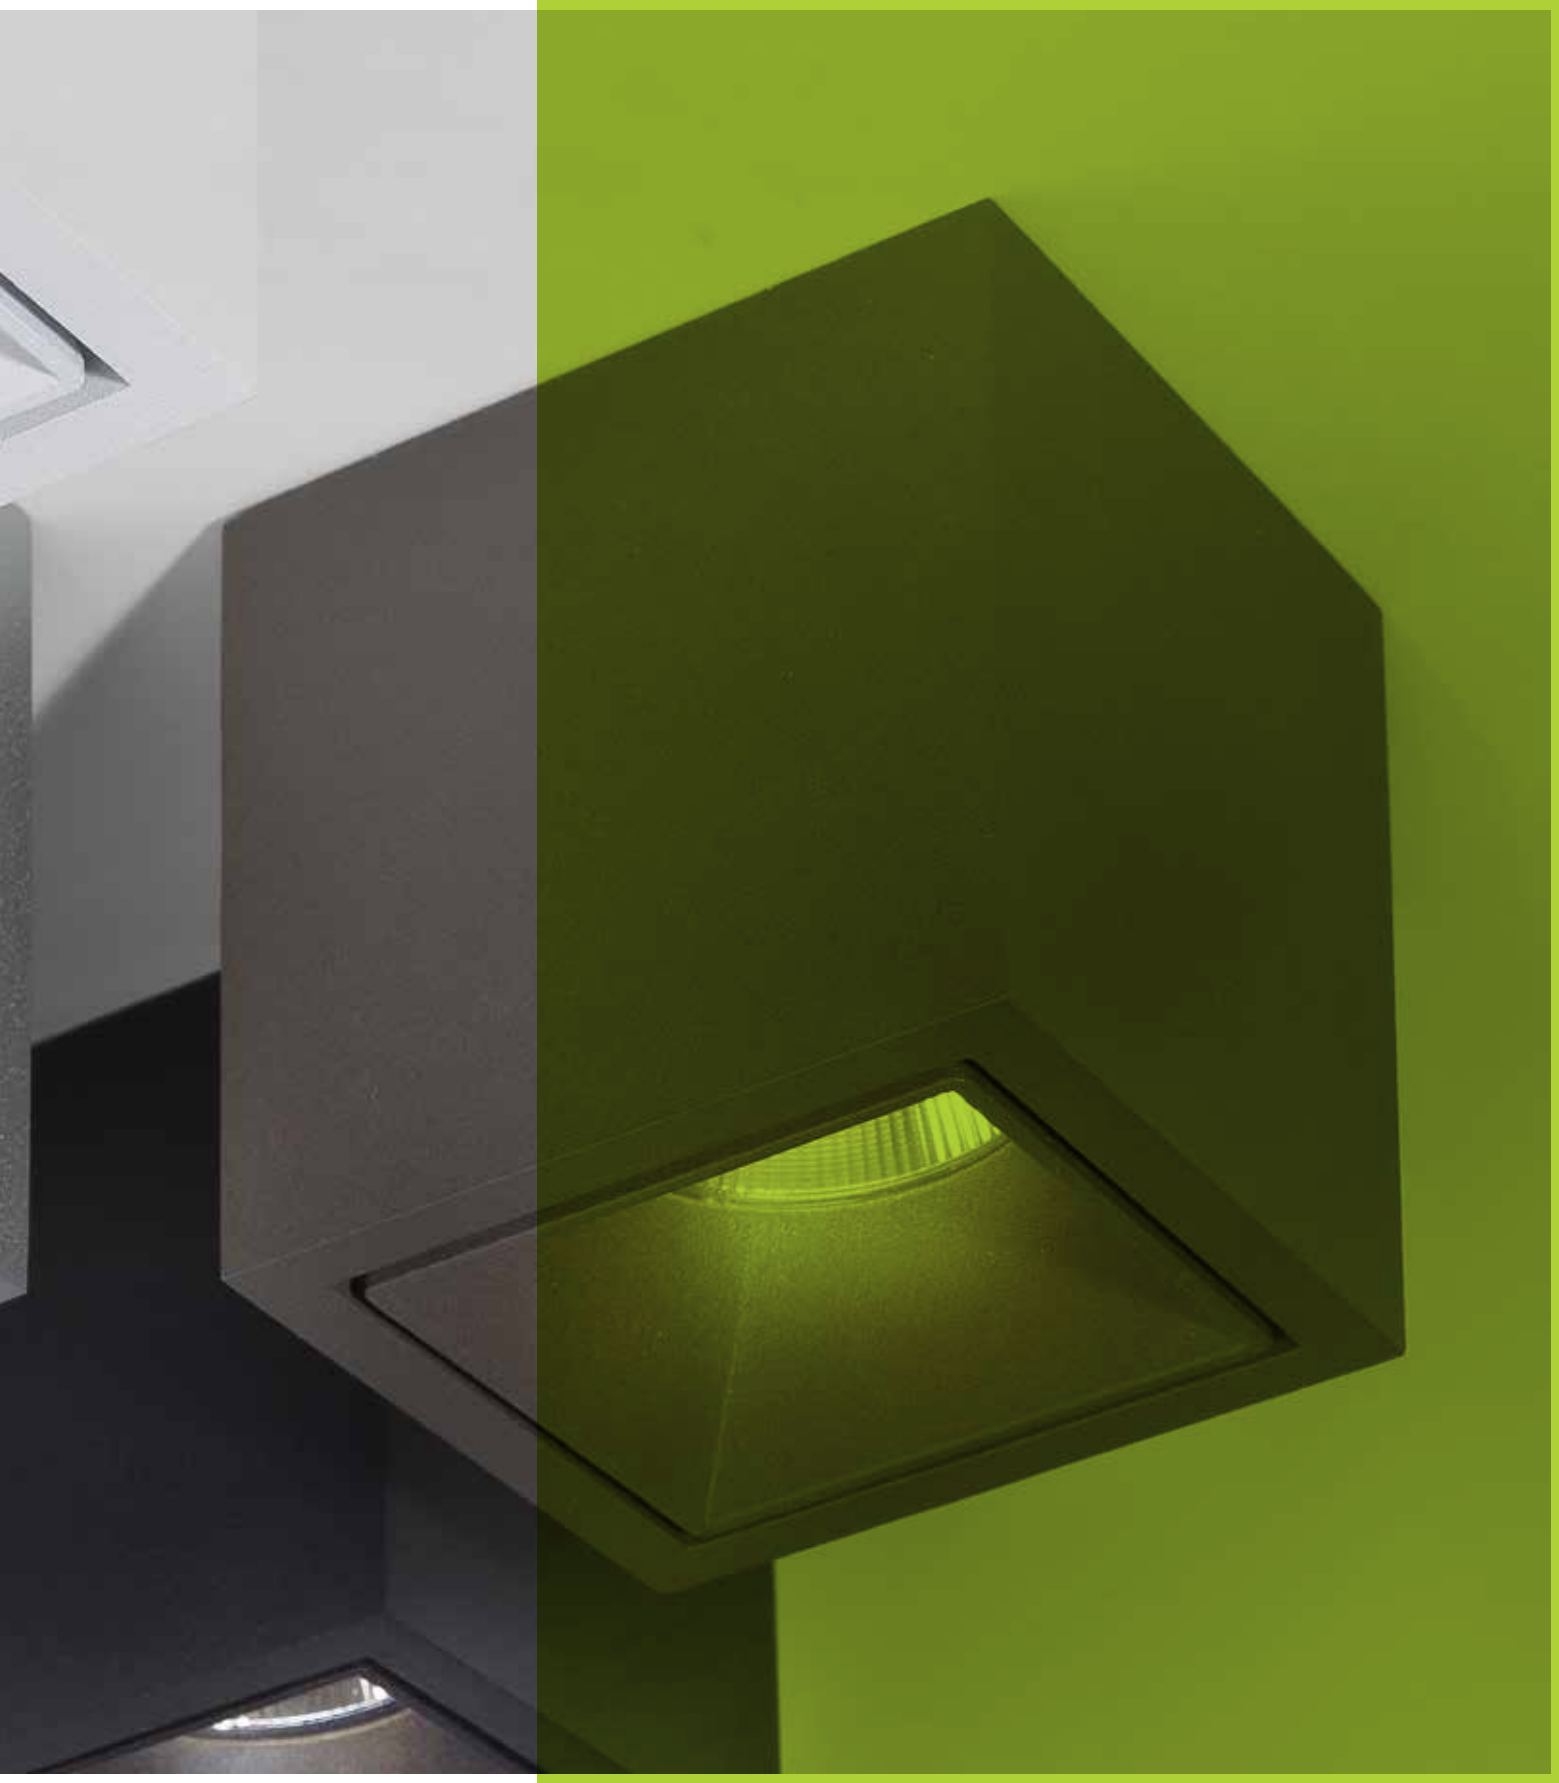

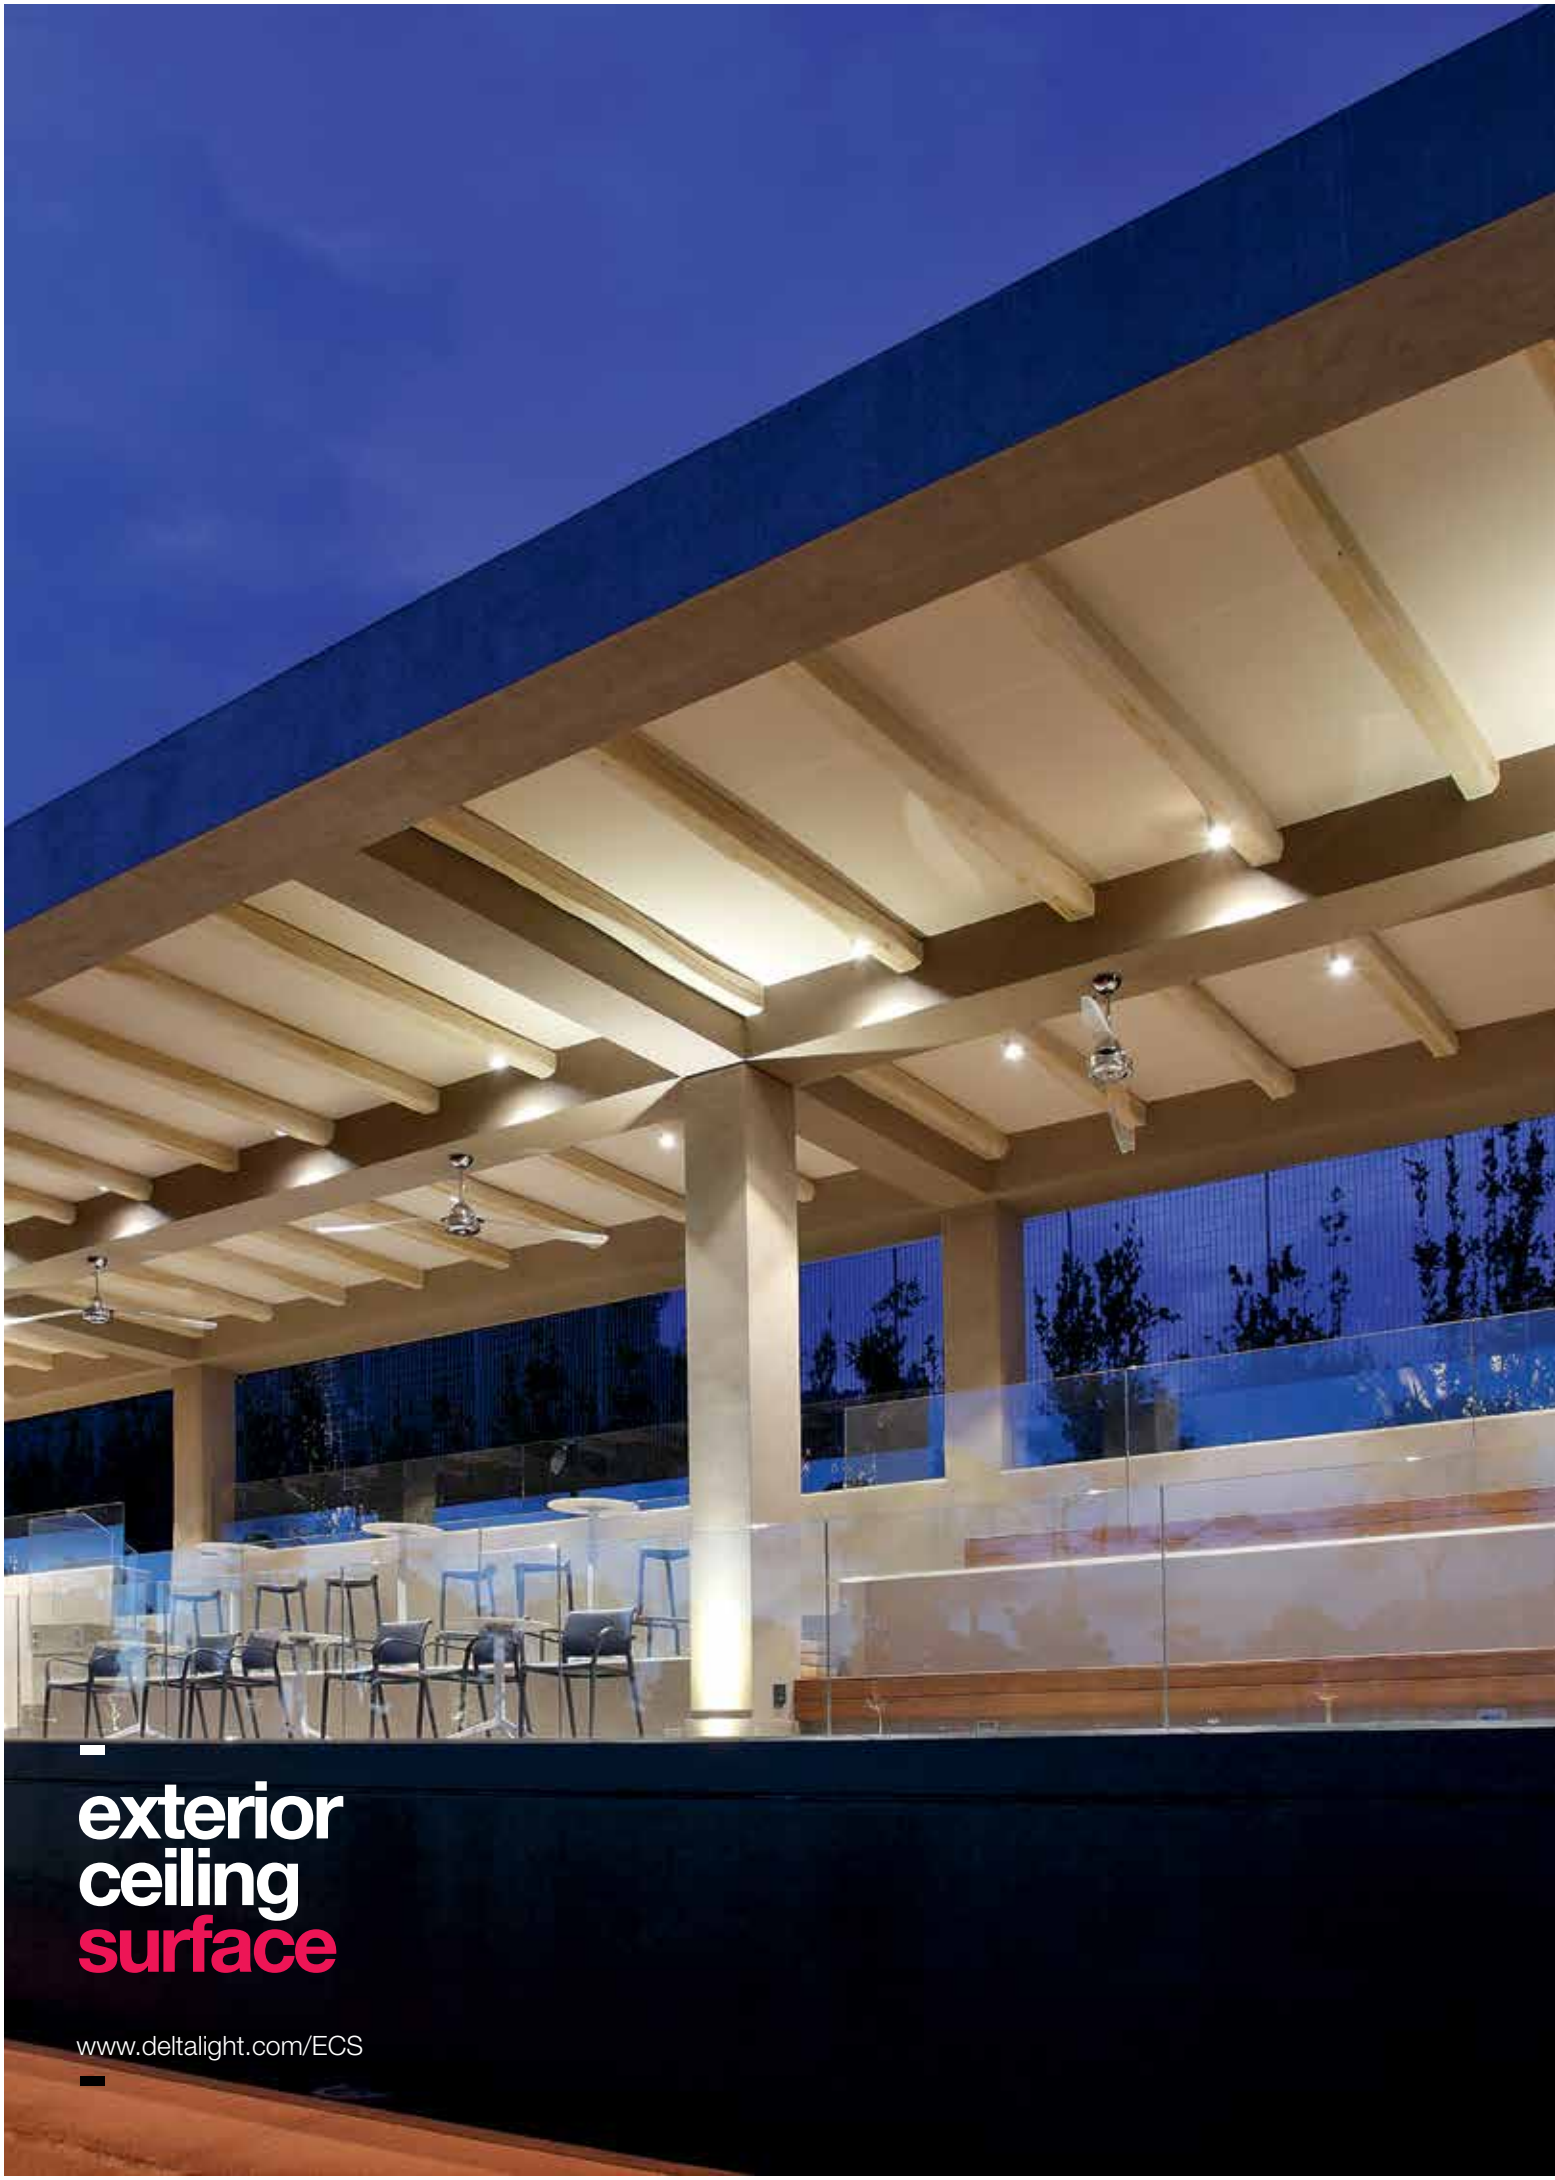

exterior ceiling surface

www.deltalight.com/ECS

BOXY +	EXT 27
BOXY L+ LED	EXT 25
DOX 100 S	EXT 23
INDUSTRIAL S	EXT 29



DOX 100 S
EXT 23



BOXY L+ LED
EXT 25



BOXY +
EXT 27




INDUSTRIAL S
EXT 29





Dox 100 S






DOX 100 S ◇
232 01 07 ◇
◇ = A
GX53 / 100-240V / 50-60Hz
1 x TC-FSE max.9W
IP55 0,6 0,1




Boxy L+ LED









BOXY L+ LED 3033 ◇
251 67 8122 ◇
◇ = A-A / B-B / G-G / W-W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE)
110-240V / 50-60Hz

0,6 IP53

BOXY 2L+ LED 3033 ◇
251 67 8222 ◇
◇ = A-A / B-B / W-W
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.2 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE)
110-240V / 50-60Hz

0,8 IP53

CRI>80 660lm (7W)





FULL INFO / PAG TEC

Options


CONTROL GEAR

TRANSFO 100W IP67 80 x 32 x 27
200 47 10

INDOOR MAX.35W

Boxy +





BOXY + ◇
251 67 44 ◇
◇ = A / G / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 35W

IP44 0,5

BOXY + 12V ◇
251 67 43 ◇
◇ = A / W
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.35W

IP44 0,5

OPTIONS
TRANSFO




FULL INFO / PAG TEC

Options

CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 6W **300 90 22 U**	45 x 45 x 25
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY 700mA-DC / 12W **300 90 43**	81 x 40 x 23
LED POWER SUPPLY 700mA-DC / 17W **300 90 93**	111 x 38 x 28
LED POWER SUPPLY 700mA-DC / 36W Dim8 **300 90 123**	133 x 40 x 30
LED POWER SUPPLY 700mA-DC / 40W Dim8 **300 90 7120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Industrial S





INDUSTRIAL S NW ◇
306 01 04 ◇
◇ = A
INCL.1 x POWERLED WHITE 1-3W / 4000K


INDUSTRIAL S WW ◇
306 01 02 ◇
◇ = A
INCL.1 x POWERLED WHITE 1-3W / 3000K

INCL.1 x LENS 10°
INCL.1 x CABLE HO5 RN-F 2 x 0,75mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

CE 0,2 IP67

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM

DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

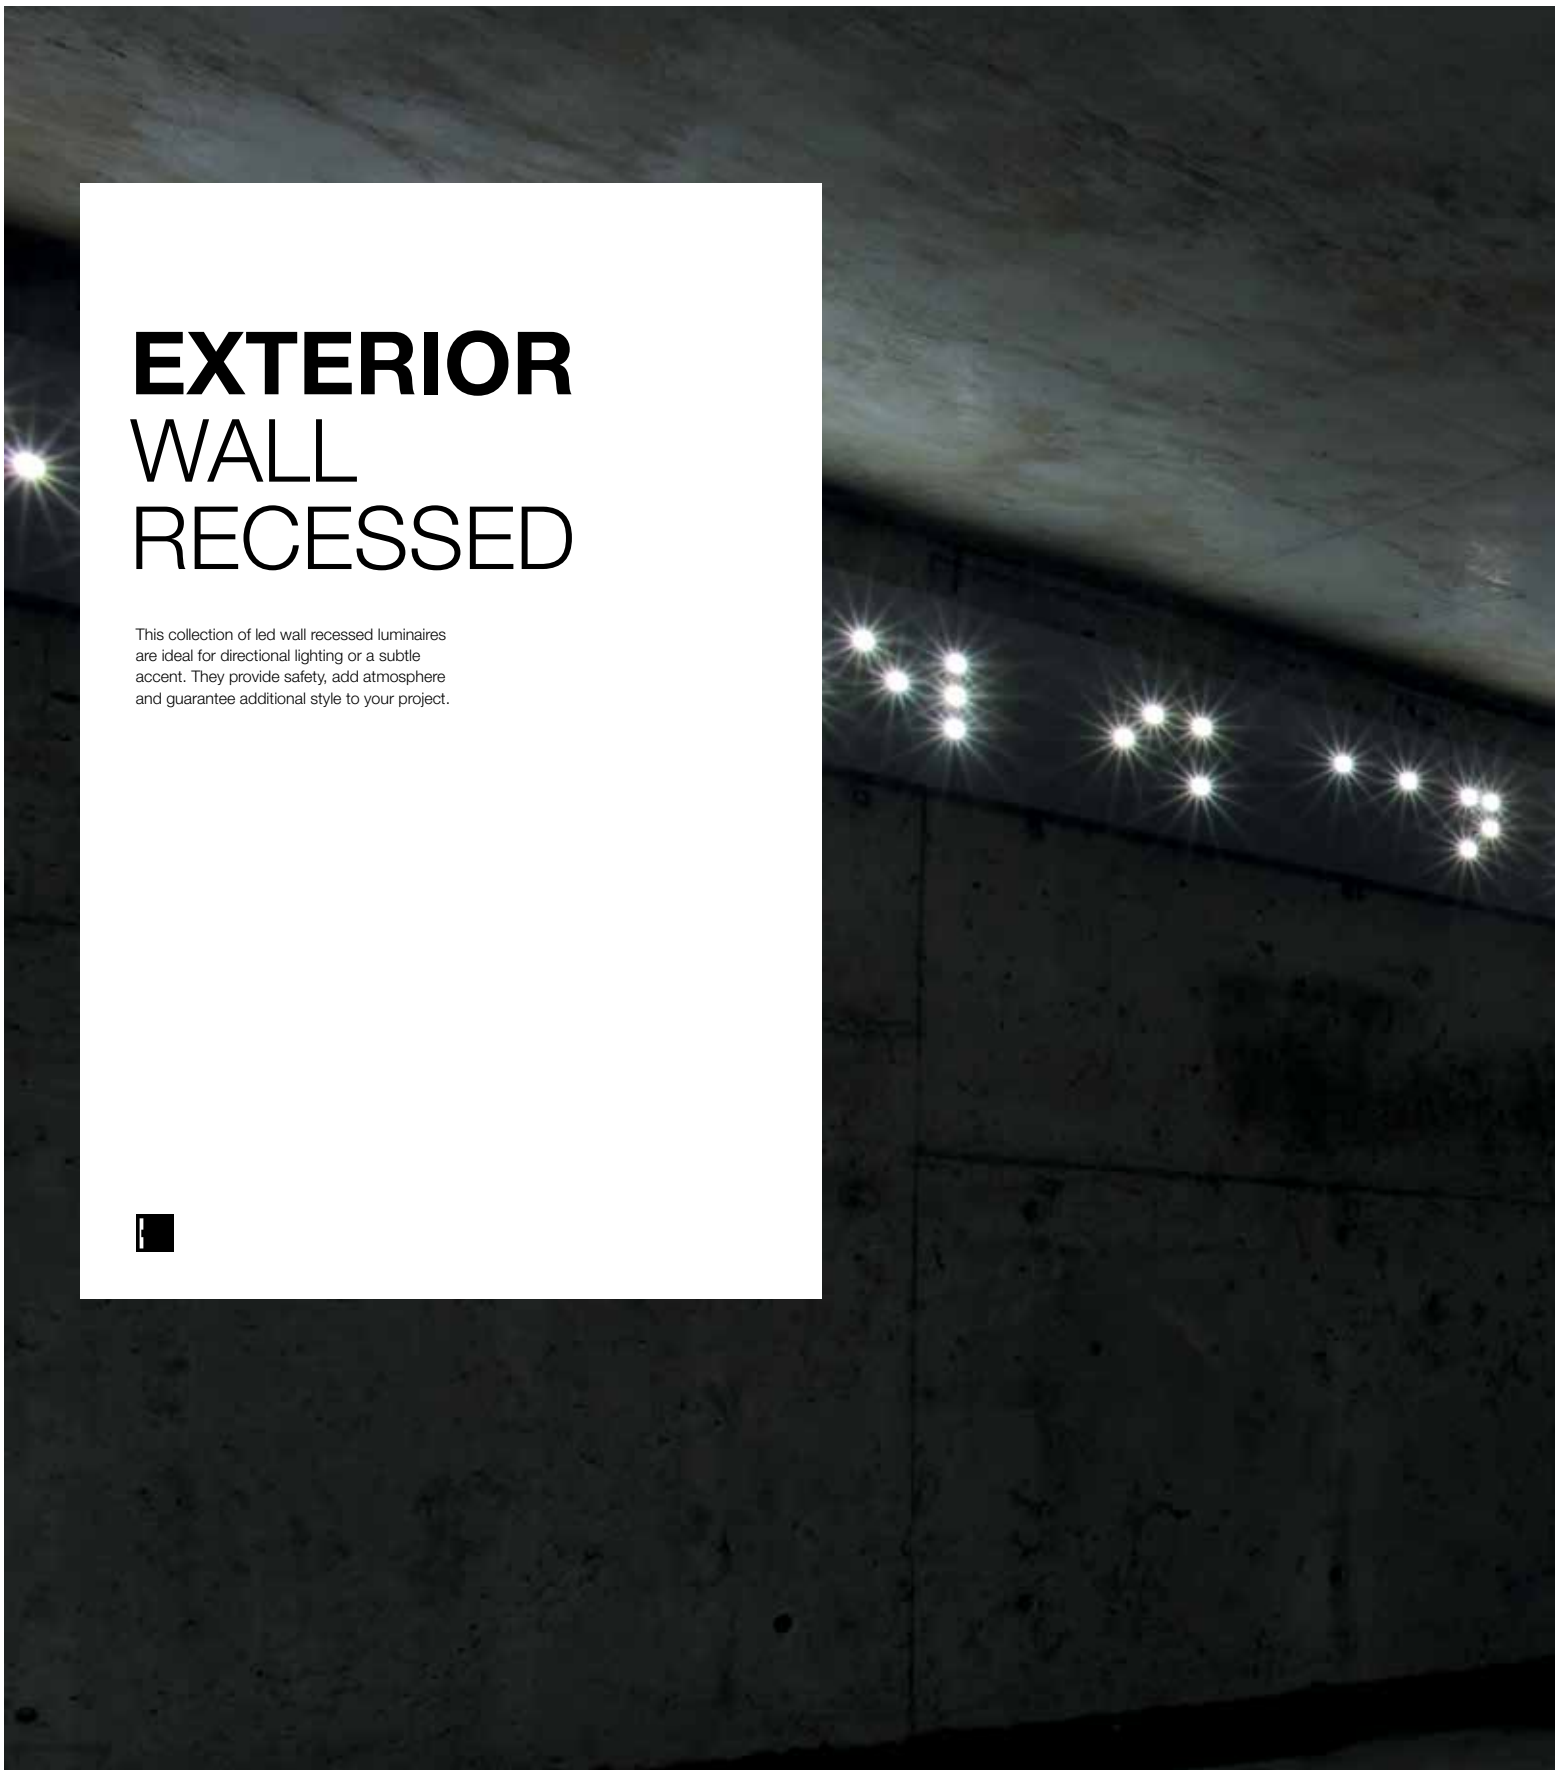

EXTERIOR
WALL
RECESSED

This collection of led wall recessed luminaires are ideal for directional lighting or a subtle accent. They provide safety, add atmosphere and guarantee additional style to your project.





exterior wall recessed

www.deltalight.com/EWR

Isagen / AIA



LEDS GO IN R
EXT 35



FEMTOLINE
EXT 41



LEDS GO IN
EXT 35



LEDS GO IN FORTE
EXT 35



LEDS C R
EXT 37



LEDS C S
EXT 37



HELI X SCREEN
EXT 39

FEMTOLINE	EXT 41
HELI X SCREEN	EXT 39
LEDS C R	EXT 37
LEDS C S	EXT 37
LEDS GO IN	EXT 35
LEDS GO IN FORTE	EXT 35
LEDS GO IN R	EXT 35



Martin's Hotel

FULL INFO / PAG TEC

Options


INSTALLATION	C A B	
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43
CONCRETE BOX 181 **270 11 181**	Ø50 x 68	Ø51
CONCRETE BOX TR 182 **270 11 182**	Ø50 x 68	Ø51

CONTROL GEAR	C A B
LED POWER SUPPLY 14V-DC / 12W **300 90 90**	100 x 48 x 28
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Leds Go® In





43 x 45

LEDS GO® IN R NW ◇
302 11 14 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 4000K


LEDS GO® IN R WW ◇
302 11 12 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 2800K

EXCL.LED POWER SUPPLY 14V-DC / 12W

IP67

OPTIONS
CONCRETE BOX 181
CONCRETE BOX TR 182
LED POWER SUPPLY 14V-DC / 12W





38 x 38 x 45

LEDS GO® IN NW ◇
302 10 14 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 4000K

LEDS GO® IN WW ◇
302 10 12 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 2800K


LEDS GO® IN BLUE ◇
302 10 11 BL ◇
◇ = ANO
INCL.4 x LED BLUE Ø5mm / 14V-DC / 0,5W


EXCL.LED POWER SUPPLY 14V-DC / 12W

IP67

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 14V-DC / 12W

Leds Go In Forte

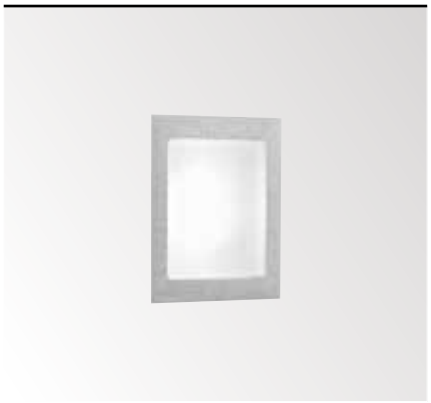



38 x 38 x 45

LEDS GO IN FORTE NW ◇
302 10 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K

LEDS GO IN FORTE WW ◇
302 10 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

IP67

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 350mA-DC / DIM



Martin's Hotel

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43


CONTROL GEAR	A B C
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

led

Leds C®





41 x 38
LEDS C® R ST NW ◇
302 20 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K


LEDS C® R ST WW ◇
302 20 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM





41 x 38
LEDS C® R NW ◇
302 20 10 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K

LEDS C® R WW ◇
302 20 12 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K


LEDS C® R BLUE ◇
302 20 11 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE 1W

EXCL.LED POWER SUPPLY - 350mA-DC

IP54

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY - 350mA-DC / DIM





38 x 38 x 38
LEDS C® S NW ◇
302 20 44 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K

LEDS C® S WW ◇
302 20 42 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K

LEDS C® S BLUE ◇
302 20 41 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE 1W

EXCL.LED POWER SUPPLY - 350mA-DC

IP54

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY - 350mA-DC / DIM





FULL INFO / PAG TEC

Options

INSTALLATION		
CONCRETE BOX 187 **270 11 187**	80 x 95 x 70	85 x 100

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

new

led

Heli X Screen LED





75 x 87 x 60

HELI X SCREEN LED NW ◇
202 04 24 ◇
◇ = A / N
INCL.1 x POWERLED WHITE 1W / 4000K
EXCL.LED POWER SUPPLY 350mA-DC

HELI X SCREEN LED WW ◇
202 04 22 ◇
◇ = A / N
INCL.1 x POWERLED WHITE 1W / 3000K
EXCL.LED POWER SUPPLY 350mA-DC

IP54

OPTIONS
CONCRETE BOX 187
LED POWER SUPPLY 350mA-DC / DIM






FULL INFO / PAG TEC

Options

INSTALLATION		
CONCRETE BOX 185 **270 11 185**	219 x 41 x 65	222 x 45
CONTROL GEAR		
LED POWER SUPPLY MULTI-POWER DIM6 **300 90 61**	165 x 47 x 35	
LED POWER SUPPLY MULTI-POWER DIM7 **300 90 60**	103 x 67 x 21	
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	146 x 55 x 19	
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	242 x 46 x 36	
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	211 x 43 x 28	
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	260 x 60 x 49	

Femtoline





219 x 38 x 65

FEMTOLINE 145 NW ◇
376 01 244 ◇
◇ = ANO
INCL.1 x LEDSTRIP WHITE 4000K / 1,5W

FEMTOLINE 145 WW ◇
376 01 242 ◇
◇ = ANO
INCL.1 x LEDSTRIP WHITE 3000K / 1,5W

INCL.1 x PC SBL
EXCL.LED POWER SUPPLY 24V-DC


0,4 IP22

OPTIONS
CONCRETE BOX 185
LED POWER SUPPLY 24V-DC

DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

EXTERIOR
WALL SURFACE

Upgrade your façade with soft lighting elements or by using a parabolic and far-reaching lighting pattern. A remarkable feature in the wall surface range is the combination of LED with a lens, fusing architectural light effects and energy efficiency, offering new possibilities in exterior lighting.

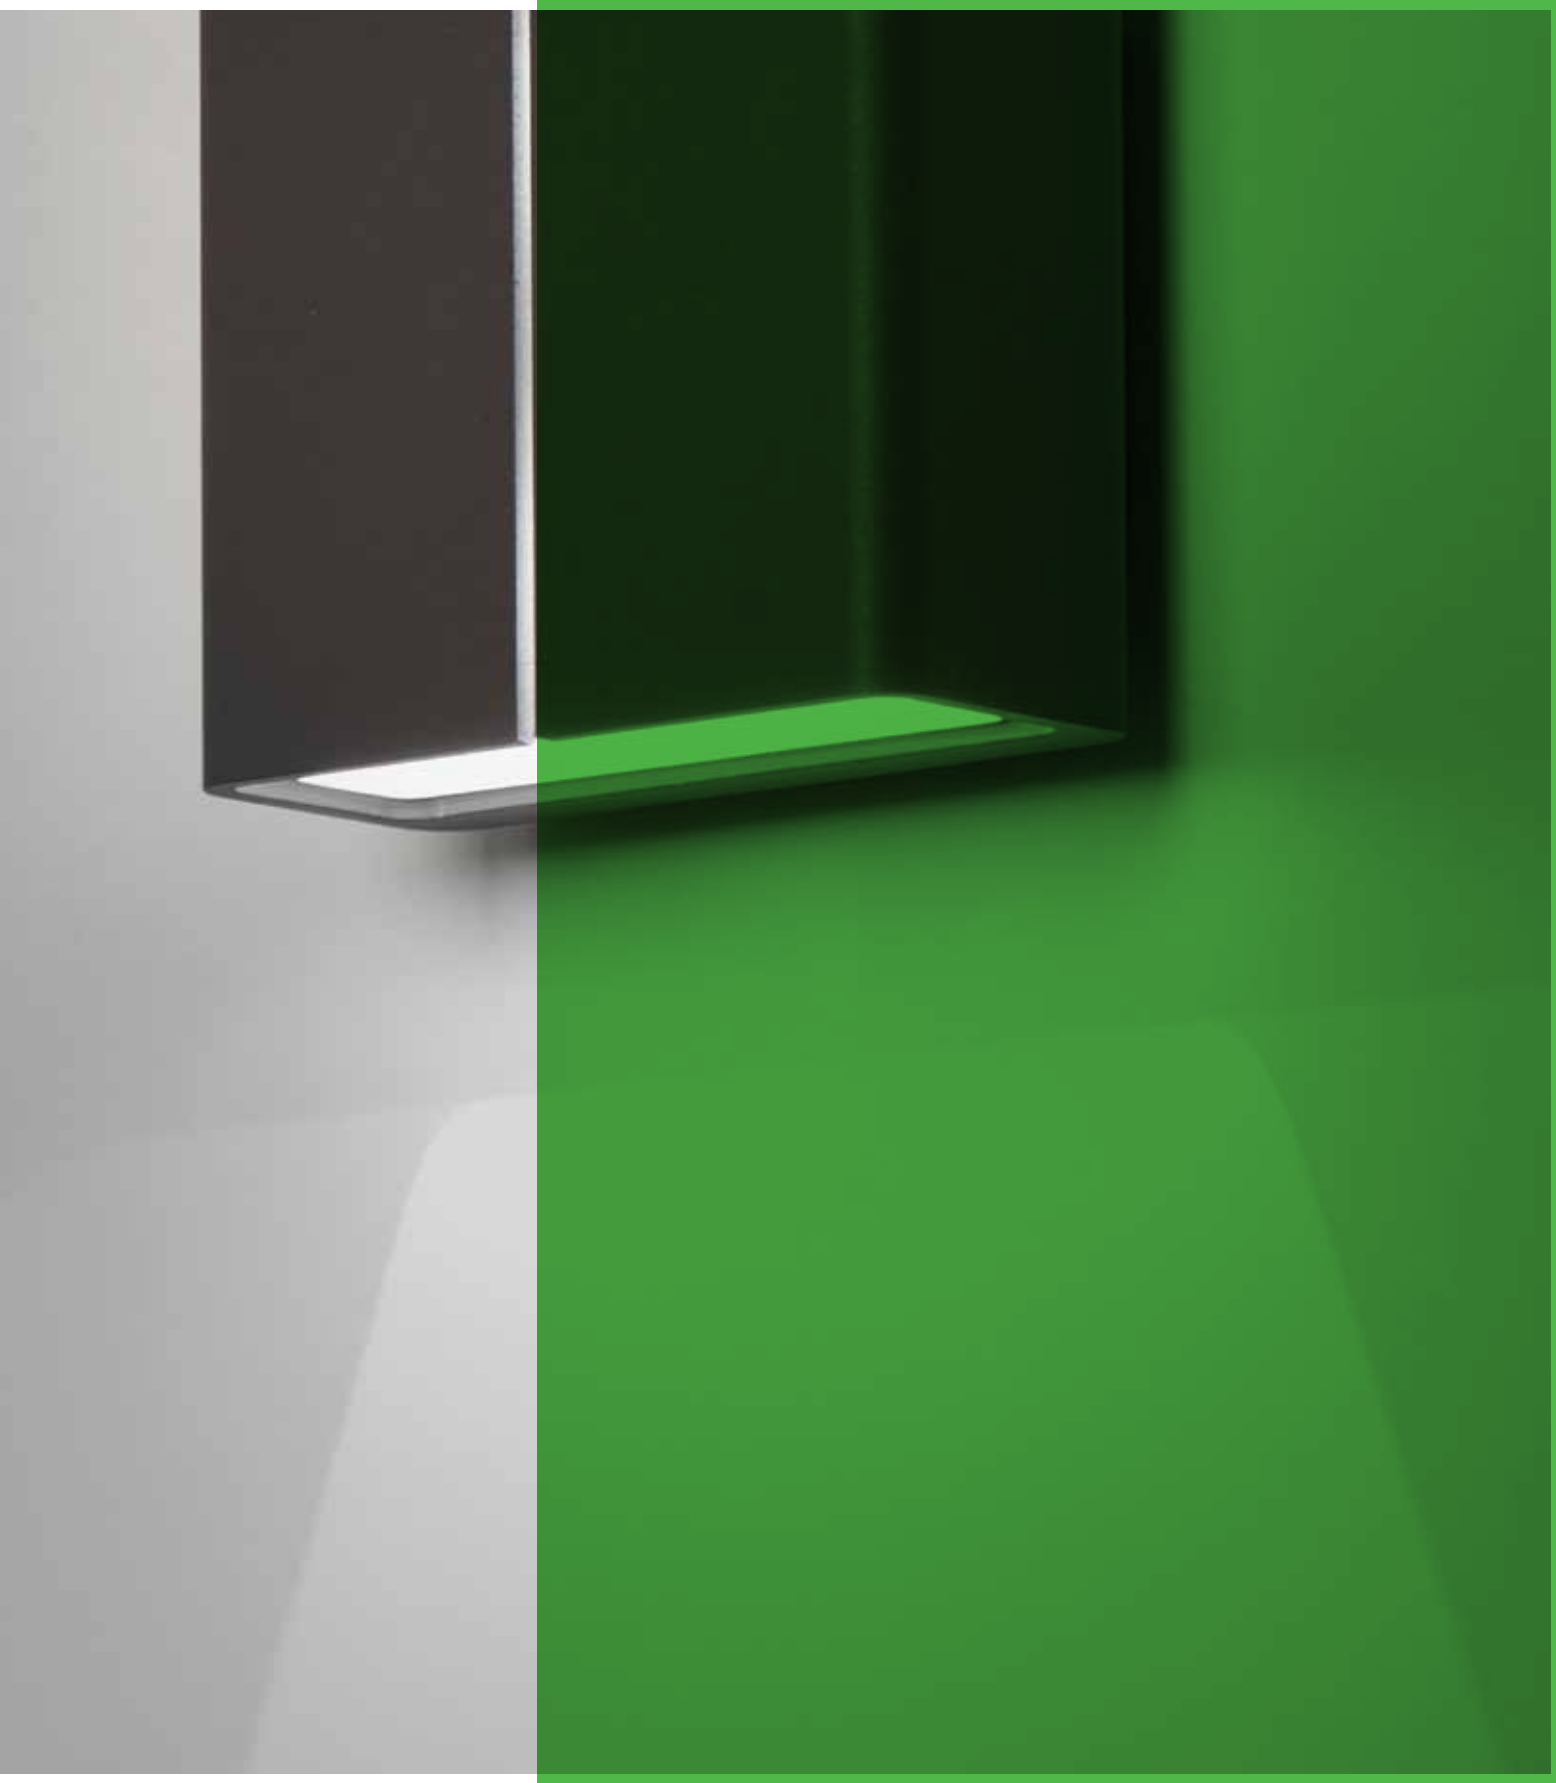



exterior wall surface

www.deltalight.com/EWS



VIKTOR
EXT 47



YUPI X
EXT 57



VISION OUT
EXT 71



TWEETER X W
EXT 49



MOMBA LED
EXT 59



CASTAR
EXT 75



NOX
EXT 51



MONO
EXT 61



SONAR 101
EXT 75



PUK XL
EXT 53



GALA L
EXT 67



ULTRA X
EXT 77



LOOK OUT
EXT 53



VISA X LED
EXT 69



AYA
EXT 79



TOPIX L X
EXT 55



TIGA LED
EXT 69



INDUSTRIAL S
EXT 81



KIX
EXT 83



GRAFITI
EXT 95



DOX 2
EXT 85



DOX 100
EXT 87



WALLSCAN 45 LED
EXT 89



BAZIL W 60
EXT 91



BE COOL X
EXT 93

AYA	EXT 79
BAZIL W 60	EXT 91
BE COOL X	EXT 93
CASTAR	EXT 75
DOX 100	EXT 87
DOX 2	EXT 85
GALA L	EXT 67
GRAFITI	EXT 95
INDUSTRIAL S	EXT 81
KIX	EXT 83
LOOK OUT	EXT 53
MOMBA LED	EXT 59
MONO	EXT 61
NOX	EXT 51
PUK XL	EXT 53
SONAR 101	EXT 75
TIGA LED	EXT 69
TOPIX L X	EXT 55
TWEETER X W	EXT 49
ULTRA X	EXT 77
VIKTOR	EXT 47
VISA X LED	EXT 69
VISION OUT	EXT 71
WALLSCAN 45 LED	EXT 89
YUPI X	EXT 57




new

led

Viktor



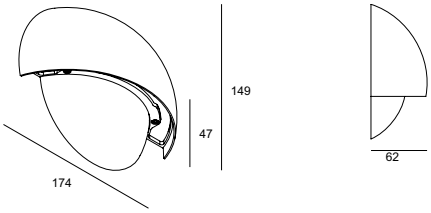

VIKTOR ◇
223 80 12 ◇
◇ = A / N
INCL.LED CLUSTER 8,4W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,5 IP65

CRI>80 580lm (8,4W)







new

led

Tweeter X W







TWEETER X W ◇
206 40 12 ◇
◇ = N
ADJUSTABLE 0-45° / 350°
INCL.PC SBL
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

IP54

CRI>80 525lm (7W)












Nox





NOX Hi ◇
225 11 15 ◇
◇ = G
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W

CE 1,0 IP55 0,5

led

NOX LED WW ◇
225 11 4102 ◇
◇ = G
FIXED
INCL.1 x POWERLED WHITE 6W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
100-240V / 50-60Hz

CE 1,0 IP55

CRI >80 - 420lm (6W)



FULL INFO / PAG TEC

Options


INSTALLATION		
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Puk XL







PUK XL ◇
301 01 41 ◇
◇ = A
INCL.4 x POWERLED WHITE 1W / 5000K ○
INCL.4 x LENS 15°
EXCL.LED POWER SUPPLY 350mA-DC

IP65

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

Look Out

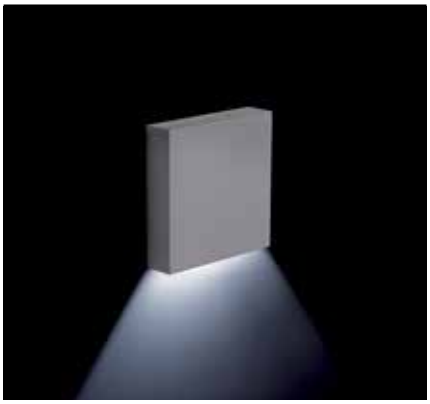



41 x 38

LOOK OUT NW ◇
304 13 14 ◇
◇ = A
INCL.1 x POWERLED WHITE 1W / 4000K

LOOK OUT WW ◇
304 13 12 ◇
◇ = A
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

IP54

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM








led

Topix L X





TOPIX L X ◇
304 17 51 ◇
◇ = A / G
INCL.2 x POWERLED WHITE 3,5W / 5000K ○

TOPIX L X WW ◇
304 17 52 ◇
◇ = A / G
INCL.2 x POWERLED WHITE 3,5W / 3000K ●

INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,0 IP55





FULL INFO / PAG TEC


Options


CONTROL GEAR	C A B
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
500mA-DC / 20W **300 90 92**	111 x 38 x 28
500mA-DC / 32W Dim8 **5120**	86 x 56 x 24
MULTI-POWER **9 4**	124,5 x 9 x 22
LED POWER SUPPLY **1** **300 90 64**	103 x 67 x 21
6 **1**	65 47 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Yupi X

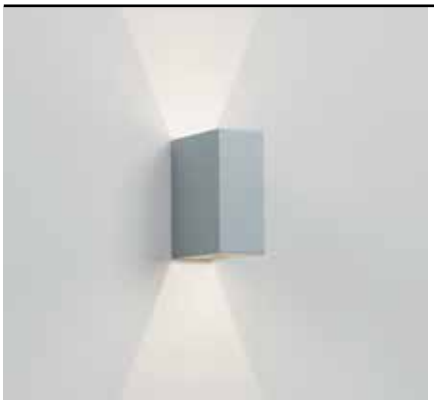

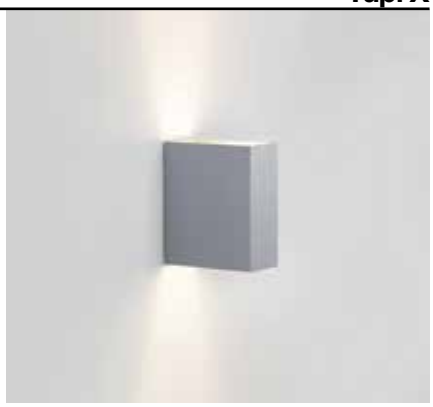





led

YUPI X LED WW ◇
279 91 22 ◇
◇ = A
INCL.2 x POWERLED WHITE 1-2W / 3000K
EXCL.LED POWER SUPPLY 350-500mA-DC

0,5 IP65

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

INDOOR MAX.35W

YUPI X ◇
279 91 40 ◇
◇ = A
G9 / 100-240V / 50-60Hz
1 x QT14 max.40W

0,5 IP64 0,1

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali




new


led

Momba LED









MOMBA LED WW ◇
225 20 18102 ◇
◇ = A / N
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

◇ CE 0,9 IP65

MOMBA DOWN-UP LED WW ◇
225 20 18202 ◇
◇ = A / N
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

◇ CE 1,3 IP65

CRI >80 525lm (7W)











led

Mono LED

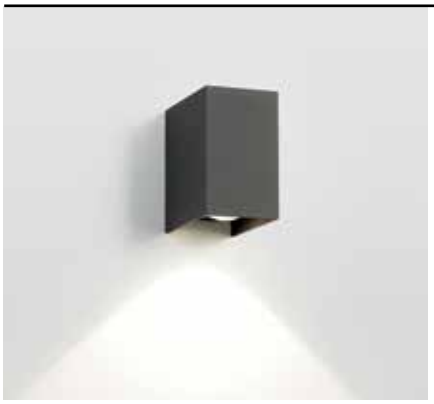

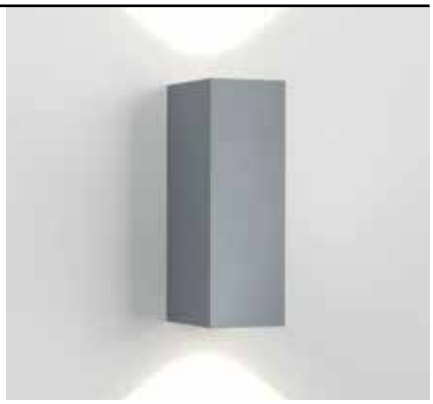





MONO LED WW ◇
223 11 4102 ◇
◇ = A / G
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

□ CE 0,6 IP55

MONO DOWN-UP LED WW ◇
223 51 4102 ◇
◇ = A / G
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz


◇ CE 0,9 IP55

CRI >80 525lm (7W)




INDOOR
MAX.35W





MONO ◇
223 11 01 ◇
◇ = A / G
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-CBC51 max.50W
0,4 IP54 0,5
OPTIONS
TRANSFO




MONO ◇
223 11 01 ◇
◇ = INOX
INOX 316 L
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-CBC51 max.50W
0,6 IP44 0,5
OPTIONS
TRANSFO


FULL INFO / PAG TEC

Options

CONTROL GEAR	A-B-C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21


Mono

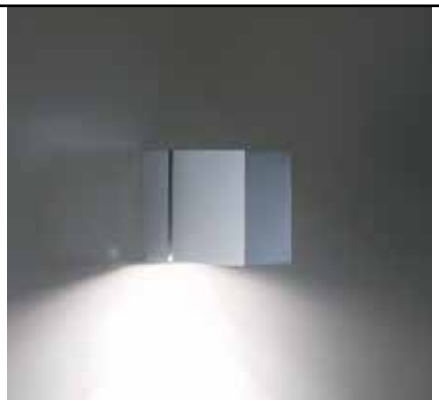




MONO X T50 ◇
223 12 51 ◇
◇ = A / G
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
0,6 IP54 0,5







MONO DOWN-UP ◇
223 51 01 ◇
◇ = A / G
GX5.3 / 12V / EXCL. TRANSFO
2 x QR-CBC51 max.35W
0,8 IP54 0,5

OPTIONS
TRANSFO

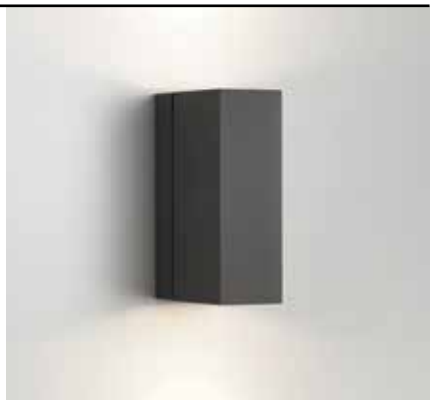




MONO X DOWN-UP T50 ◇
223 52 51 ◇
◇ = A / G
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CBC51 max.35W
1,0 IP54 0,5




MONO X T50 ◇
223 12 51 ◇
◇ = INOX
INOX 316 L
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
1,0 IP44 0,5



MONO DOWN-UP ◇
223 51 01 ◇
◇ = INOX
INOX 316 L
GX5.3 / 12V / EXCL. TRANSFO
2 x QR-CBC51 max.35W
1,2 IP44 0,5

OPTIONS
TRANSFO



MONO X DOWN-UP T50 ◇
223 52 51 ◇
◇ = INOX
INOX 316 L
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CBC51 max.35W
1,6 IP44 0,5








new


led

Gala L LED









GALA L LED WW ◇
275 04 52 ◇
◇ = A / N
FIXED
INCL.LED CLUSTER 6,7W / 3000K
INCL.LED POWER SUPPLY 350 mA-DC
100-240V / 50-60Hz

0,8 IP65

CRI>80 500lm (6,7W)

GALA L OK LED WW ◇
275 04 18202 ◇
◇ = A / N
ADJUSTABLE 20°
INCL.2 x POWERLED WHITE 5W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 240 mA-DC
100-240V / 50-60Hz


1,0 IP55

CRI>80 380lm (5W)



Visa X LED







VISA X LED WW ◇
275 06 24 ◇
◇ = G
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,2 IP55

Tiga LED

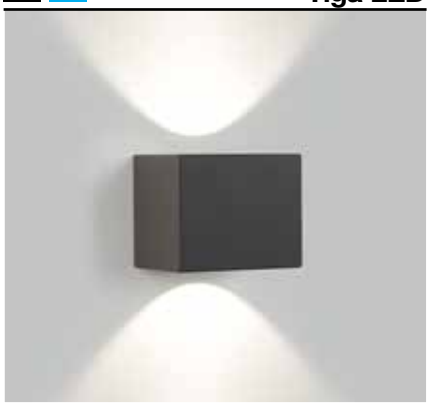



TIGA LED 3024 ◇
223 751 8102 ◇
◇ = A / G
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,4 IP65

TIGA LED BS 3024 ◇
223 752 8102 ◇
◇ = A / G
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,4 IP65

CRI >80 660lm (7W)






led

Vision Out






VISION OUT LED NW ◇
278 27 24 ◇
INCL.2 x POWERLED WHITE 2W / 4000K

VISION OUT LED WW ◇
278 27 22 ◇
INCL.2 x POWERLED WHITE 2W / 3000K

◇ = A / N
INCL.2 x LENS
INCL.LED POWER SUPPLY 500mA-DC
120-240V / 50-60Hz

□ CE 1,2 IP55



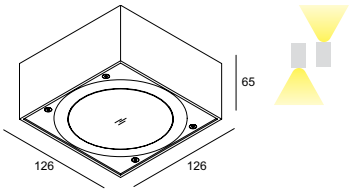



VISION S OUT LED NW ◇
278 26 24 ◇
INCL.2 x POWERLED WHITE 2W / 4000K

VISION S OUT LED WW ◇
278 26 22 ◇
INCL.2 x POWERLED WHITE 2W / 3000K

◇ = A / N
INCL.1 x LENS
INCL.LED POWER SUPPLY 500mA-DC
120-240V / 50-60Hz

□ CE 1,1 IP55

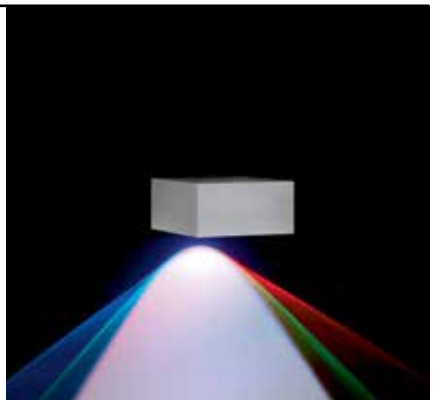

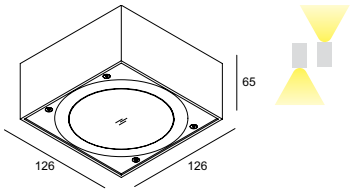

VISION S OUT RGB ◇
278 26 33 ◇
◇ = A
INCL.1 x LENS
INCL.3 x POWERLED 2W / R - G - B
INCL.LED POWER SUPPLY 500mA-DC
120-240V / 50-60Hz

□ CE 1,1 IP55







Martin's Hotel


RESTAURANT

INDOOR MAX.35W

Castar






CASTAR HP ◇
223 70 40 ◇
◇ = A
INCL.1 x CORIAN® SHIELD
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,9 IP54 0,1

INDOOR MAX.35W

Sonar 101






SONAR 101 HP ◇
223 65 40 ◇
◇ = A-ANO
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

CE 0,9 IP54 0,1



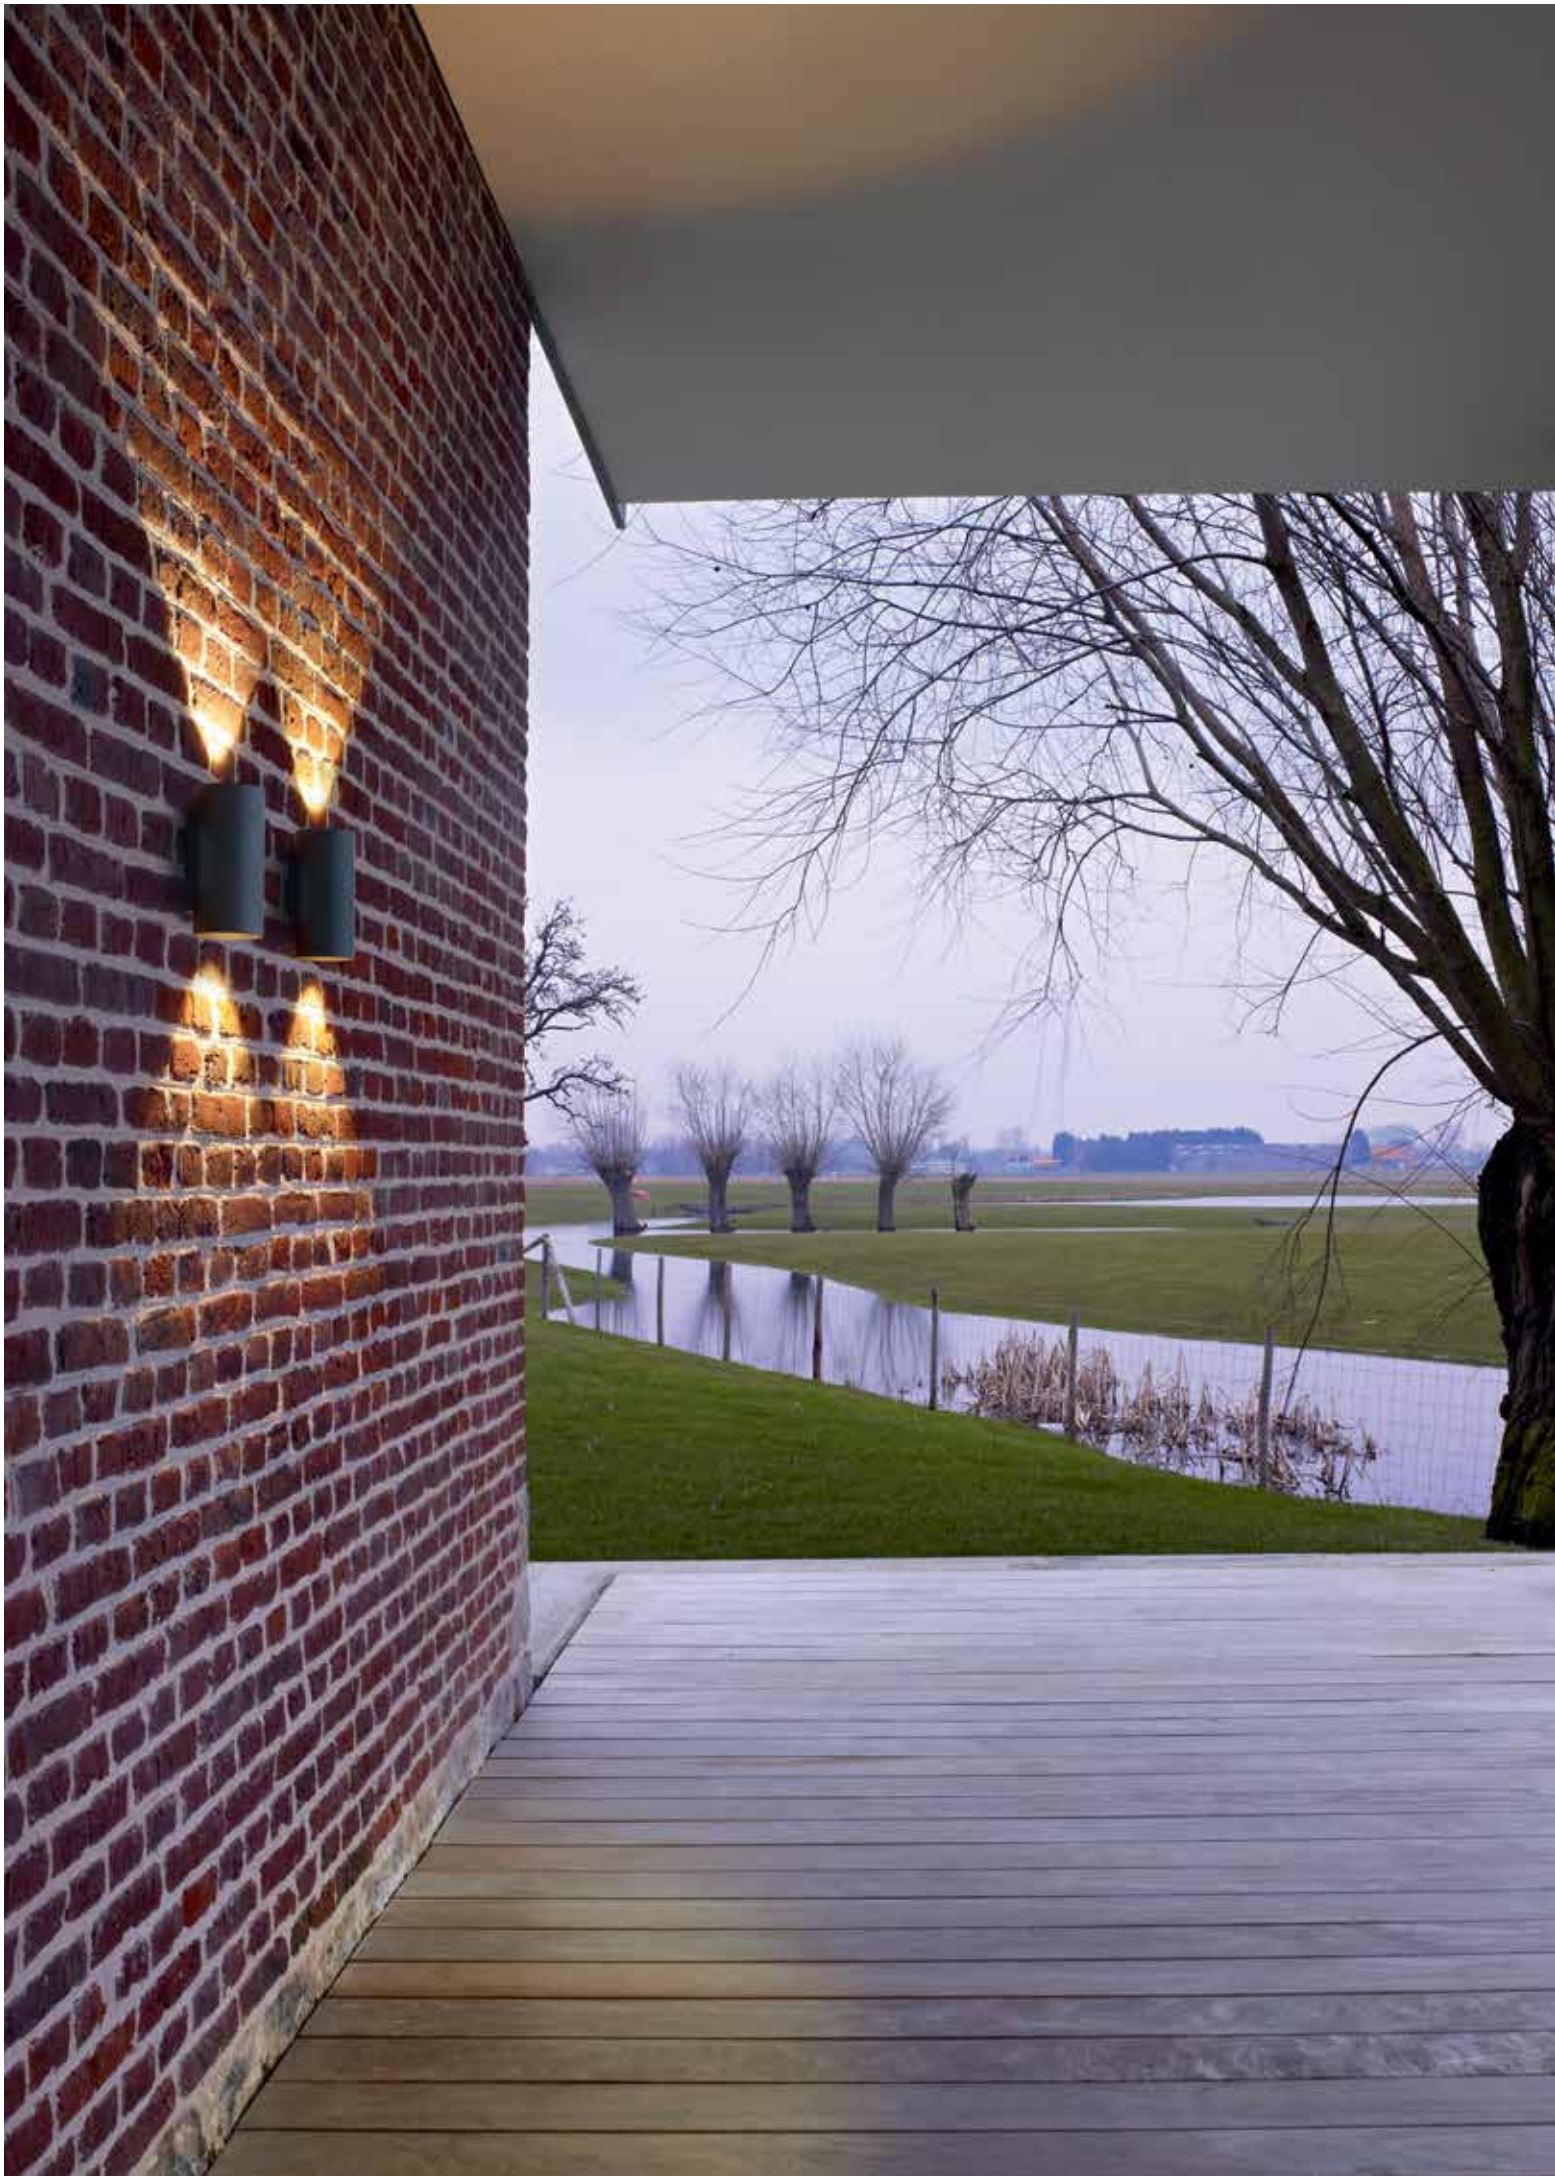


new

led

Ultra X LED






ULTRA X LED WW ◇
279 61 18102 ◇
◇ = A / N
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

□ CE 0,6 IP55

CRI >80 525lm (7W)







ULTRA X DOWN-UP LED WW ◇
279 61 18202 ◇
◇ = A / N
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

◇ CE 0,9 IP55

INDOOR MAX.35W

Ultra X

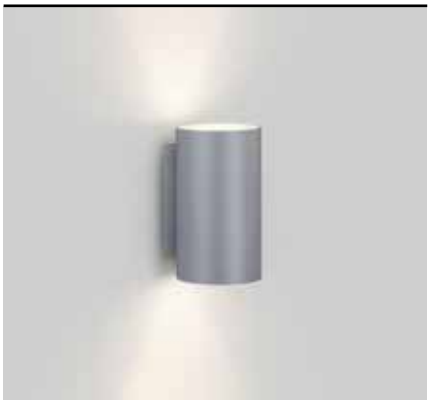




ULTRA X ◇
279 61 40 ◇
◇ = A
G9 / 100-240V / 50-60Hz
1 x QT14 max.40W


◇ CE 0,4 IP55







Aya

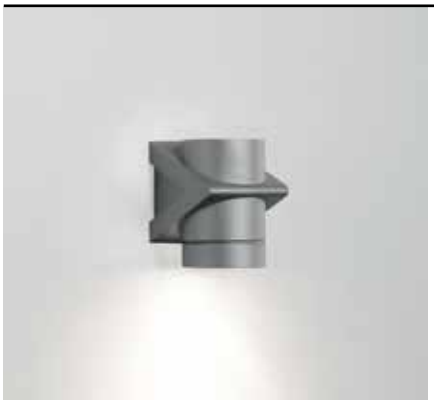

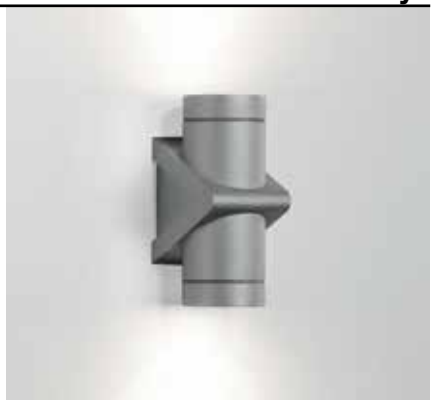






AYA Hi ◇
225 31 15 ◇
◇ = A
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W

CE 0,7 IP55 0,5

AYA DOWN-UP Hi ◇
225 51 15 ◇
◇ = A
FIXED
GU10 / 100-240V / 50-60Hz
2 x QPAR 51 max.35W

CE 0,9 IP55 0,5

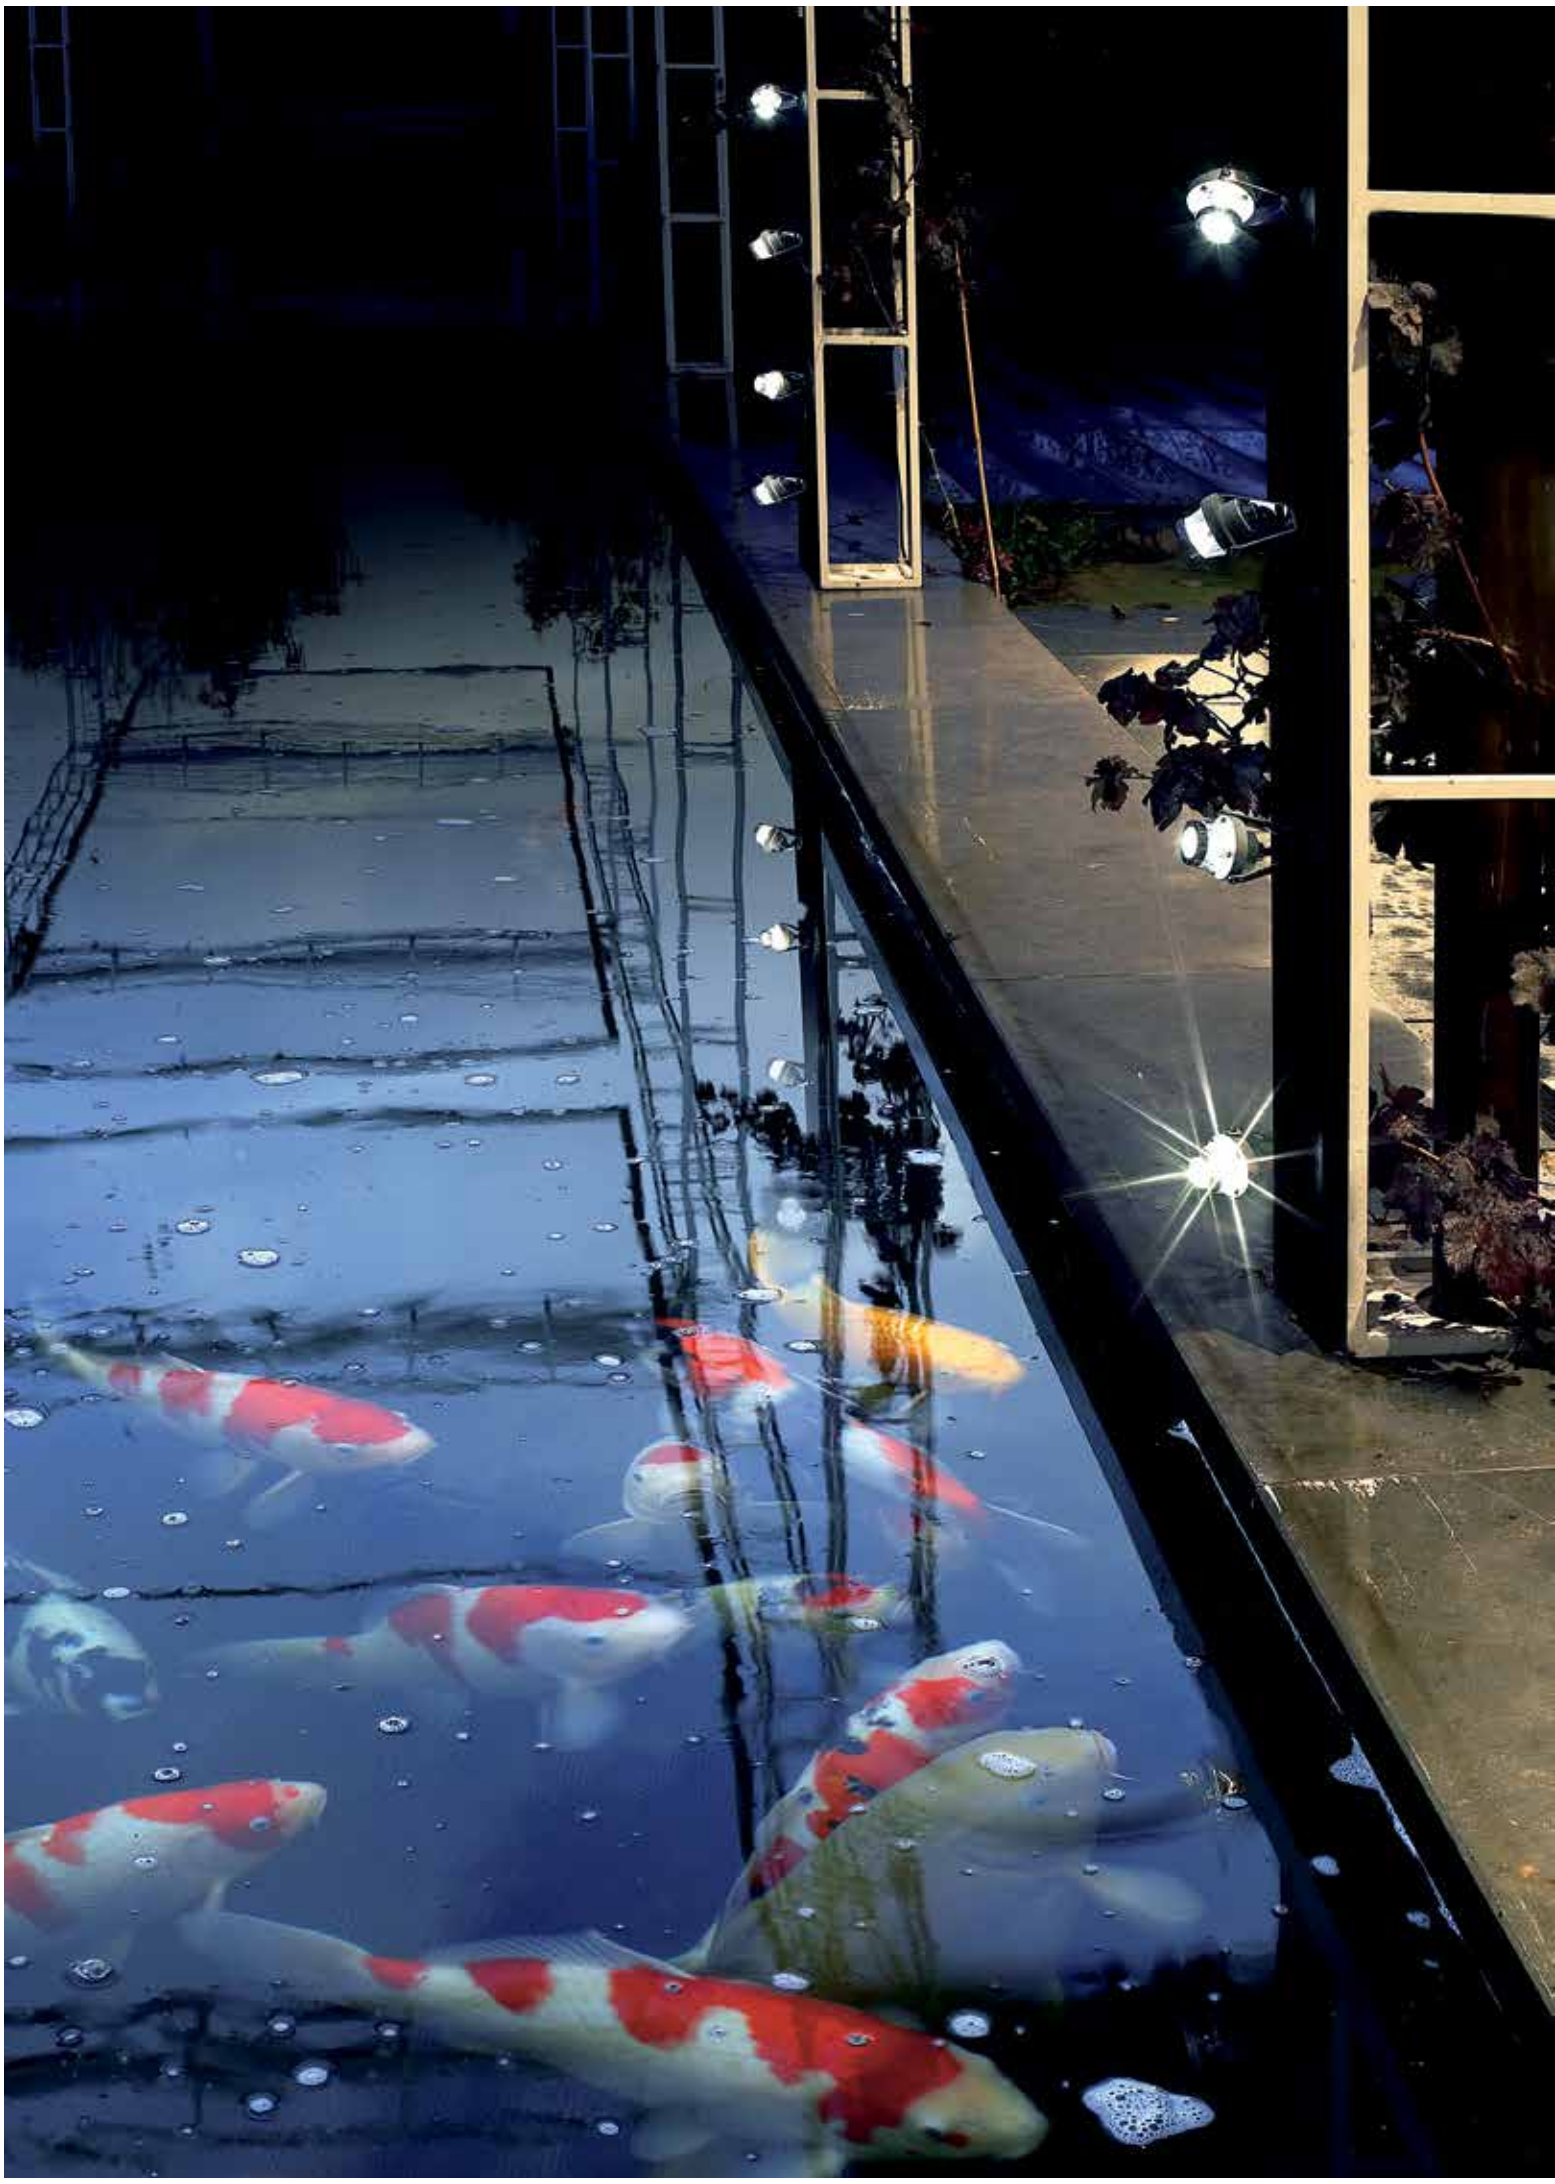

FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 6W **300 90 22 U**	45 x 45 x 25
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY 700mA-DC / 12W **300 90 43**	81 x 40 x 23
LED POWER SUPPLY 700mA-DC / 17W **300 90 93**	111 x 38 x 28
LED POWER SUPPLY 700mA-DC / 36W Dim8 **300 90 123**	133 x 40 x 30
LED POWER SUPPLY 700mA-DC / 40W Dim8 **300 90 7120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

led

Industrial S





INDUSTRIAL S NW ◇
306 01 04 ◇
◇ = A
INCL.1 x POWERLED WHITE 1-3W / 4000K

INDUSTRIAL S WW ◇
306 01 02 ◇
◇ = A
INCL.1 x POWERLED WHITE 1-3W / 3000K

INCL.1 x LENS 10°
INCL.1 x CABLE HO5 RN-F 2 x 0,75mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

III CE 0,2 IP67

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX

DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali




new

led

Kix





KIX 3011 ◇
232 10 18112 ◇
INCL.1 x REFLECTOR SP-11°

KIX 3030 ◇
232 10 18122 ◇
INCL.1 x REFLECTOR FL-30°

KIX 3055 ◇
232 10 18132 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

□ CE 0,9 IP65


CRI >80 525lm (7W)





DE STRIKP
Academie


INDOOR MAX.35W


Dox 2

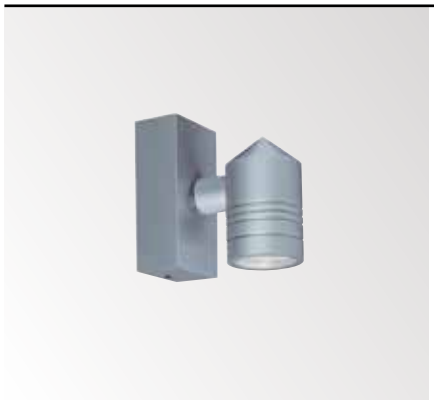





DOX 2 T50 ◇
219 31 51 ◇
◇ = A
FIXED
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CB51 max.50W
CE 0,7 IP54 0,5

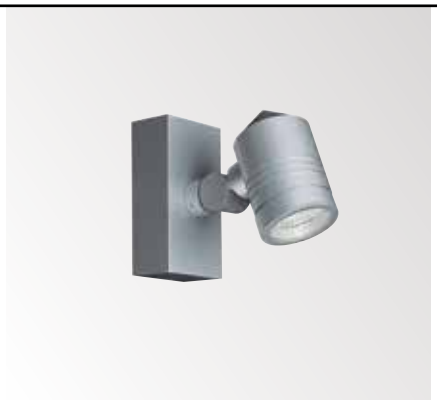




DOX 2 ORIENTABLE T50 ◇
219 31 55 ◇
◇ = A
ADJUSTABLE
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CB51 max.50W
CE 0,9 IP54 0,5

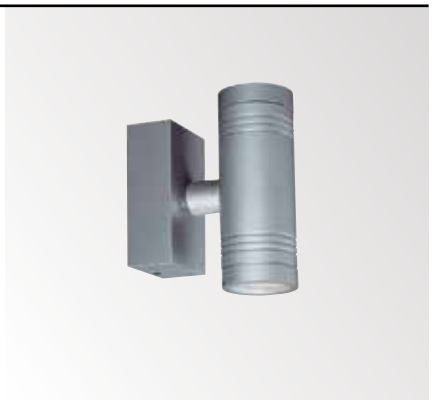



DOX 2 DOWN-UP T50 ◇
219 51 51 ◇
◇ = A
FIXED
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CB51 max.35W
CE 1,0 IP54 0,5

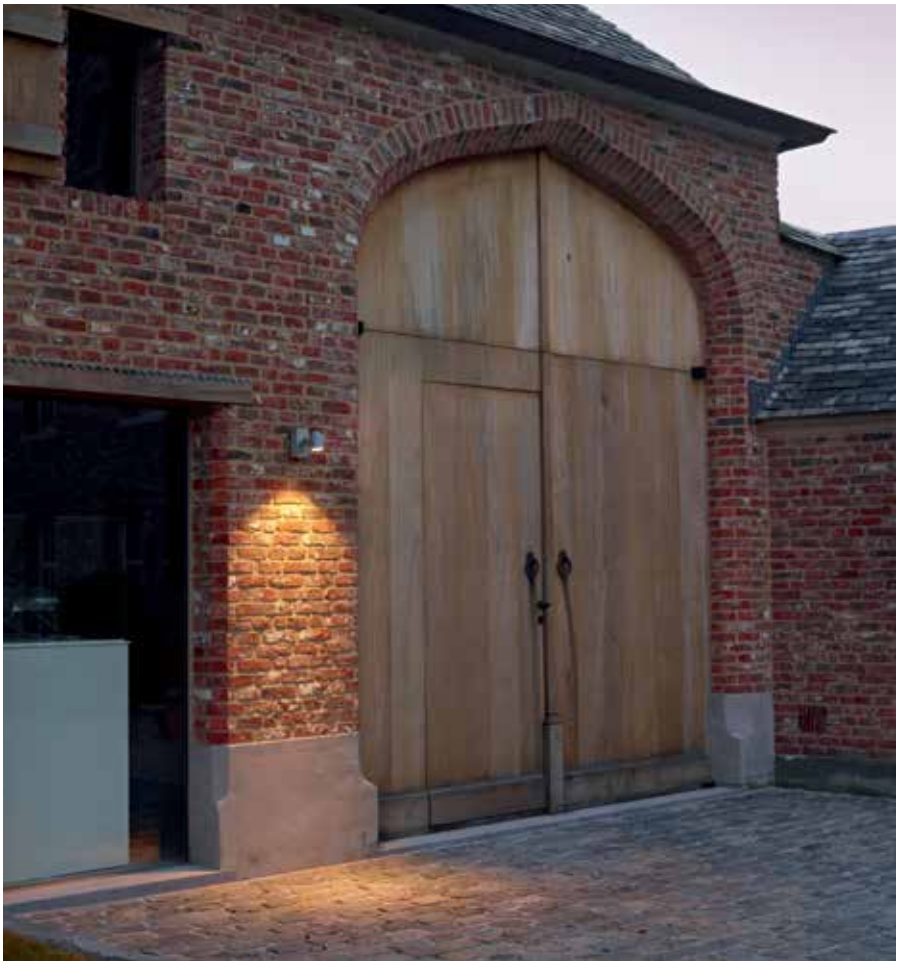







Dox 100









DOX 100 ◇
232 02 07 ◇
◇ = A
GX53 / 100-240V / 50-60Hz
1 x TC-FSE max.9W
0,7 IP55 0,1

DOX 100 DOWN-UP ◇
232 03 07 ◇
◇ = A
GX53 / 100-240V / 50-60Hz
2 x TC-FSE max.9W
0,9 IP55 0,1





new

led

Wallscan 45 LED







WALLSCAN 45 LED ◇
222 40 12 ◇
◇ = A / N
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA
100-240V / 50-60Hz

□ CE 0,9 IP55

CRI>80 525lm (7W)




new

led

Bazil W 60





BAZIL W 60 ◇
222 600 62 ◇
◇ = A-ANO / N-ANO / N-GOLD
INCL.LED CLUSTER 3W / 3000K
INCL.LED POWER SUPPLY 350mA
220-240V / 50-60Hz

CE 1,2 IP54

CRI>80 250lm (3W)







Be Cool® X










BE COOL® X 114 ◇
274 24 114 ◇
◇ = A
G5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16 14W
CE 2,0 IP54 0,1


BE COOL® X 128 ◇
274 24 128 ◇
◇ = A
G5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16 28W
CE 3,2 IP54 0,1



INDOOR MAX.35W


Grafiti

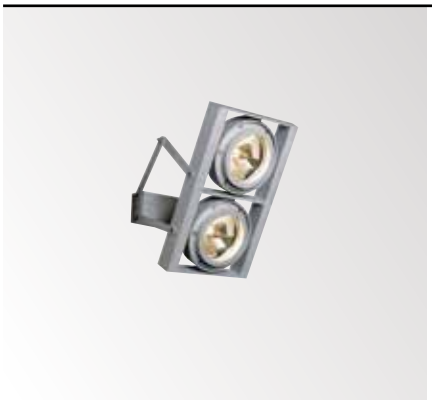



GRAFITI 211 T50 ◇
215 02 11 ◇
◇ = A
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 2,8 IP65 1,0






GRAFITI 411 T50 ◇
215 04 11 ◇
◇ = A
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
CE 5,1 IP65 1,0



EXTERIOR
FLOOR RECESSED

Floor recessed luminaires guarantee a subtle, discrete and powerful light effect. Embedded in a well-planned lighting study, in-ground luminaires are perfect to highlight both buildings, art or natural elements such as trees, hedges or ponds. The new collection offers a variety of lighting options, angles and effects.

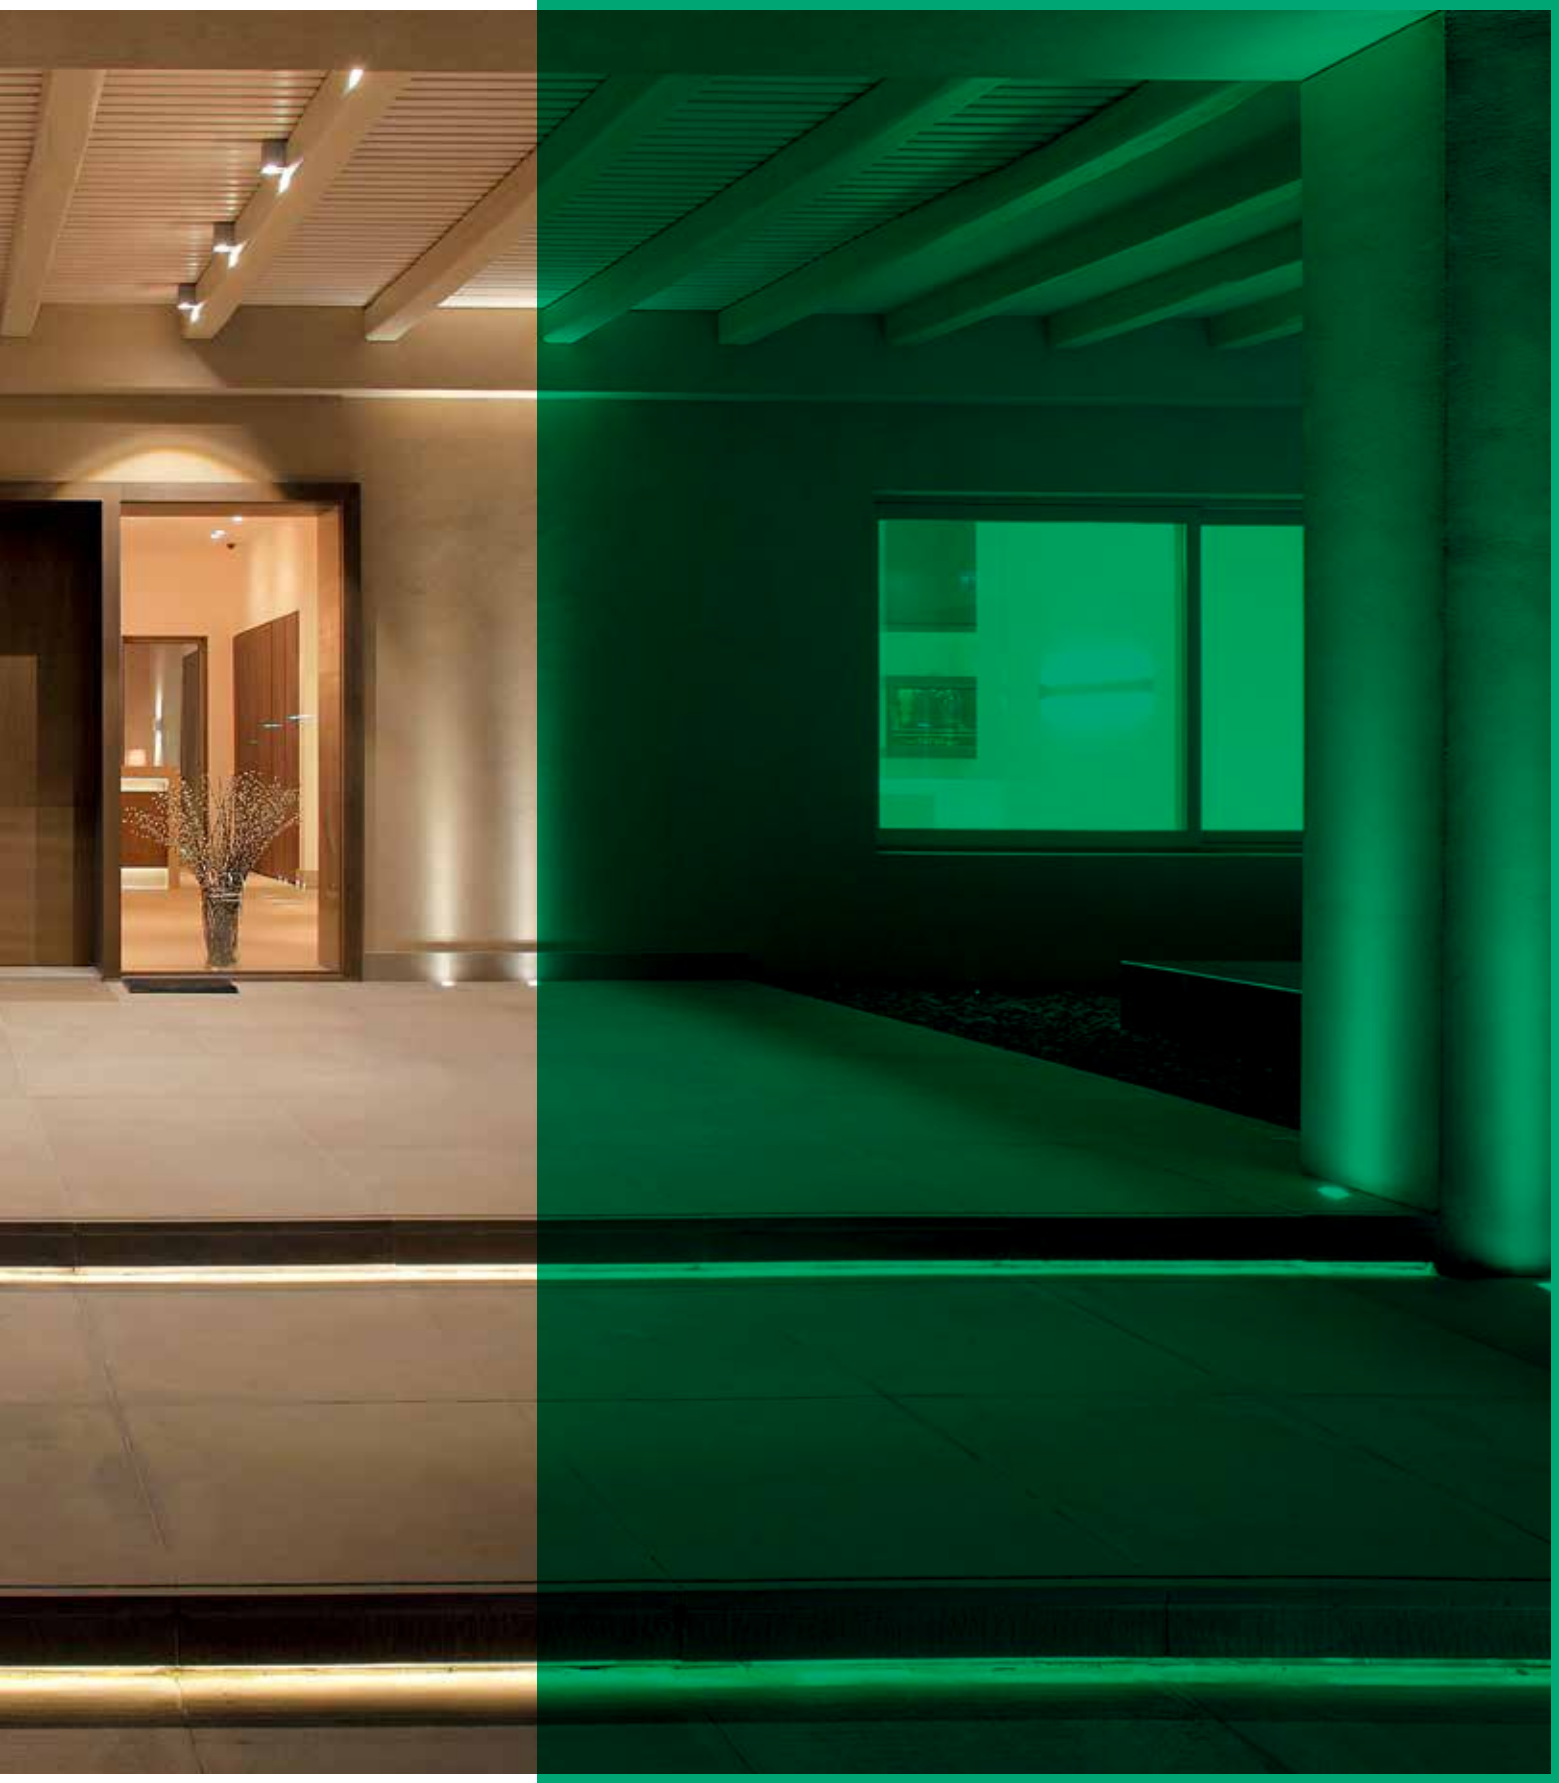



exterior floor recessed


www.deltalight.com/EFR



LEDS C
EXT 100



LOGIC S
EXT 103



BASIC
EXT 115



LEDS GO IN R
EXT 101



TACTIC 2
EXT 107



FLIP SET
EXT 117



LEDS GO IN
EXT 101



GENIE 90 R
EXT 109



LEDS GO IN FORTE
EXT 101



GENIE 90 S
EXT 109



TACTIC
EXT 102



BASIC LR
EXT 113



LOGIC R
EXT 103



BASIC LSR
EXT 113

BASIC	EXT 115
BASIC LR	EXT 113
BASIC LSR	EXT 113
FLIP SET	EXT 117
GENIE 90 R	EXT 109
GENIE 90 S	EXT 109
LEDS C	EXT 100
LEDS GO IN	EXT 101
LEDS GO IN FORTE	EXT 101
LEDS GO IN R	EXT 101
LOGIC R	EXT 103
LOGIC S	EXT 103
TACTIC	EXT 102
TACTIC 2	EXT 107



FULL INFO / PAG TEC


Options

INSTALLATION	A B C	
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43
CONCRETE BOX 181 **270 11 181**	Ø50 x 68	Ø51
CONCRETE BOX TR 182 **270 11 182**	Ø50 x 68	Ø51
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300

CONTROL GEAR	A B C
LED POWER SUPPLY 14V-DC / 12W **300 90 90**	100 x 48 x 28
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

Leds C®





41 x 38

LEDS C R ST NW ◇
302 20 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K

LEDS C R ST WW ◇
302 20 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC


0,1 IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Leds Go® In





43 x 45


LEDS GO® IN R NW ◇
302 11 14 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 4000K


LEDS GO® IN R WW ◇
302 11 12 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 2800K

EXCL.LED POWER SUPPLY 14V-DC / 0,8A

IP67

OPTIONS
CONCRETE BOX 181
CONCRETE BOX TR 182
LED POWER SUPPLY 14V-DC / 12W
CBOX

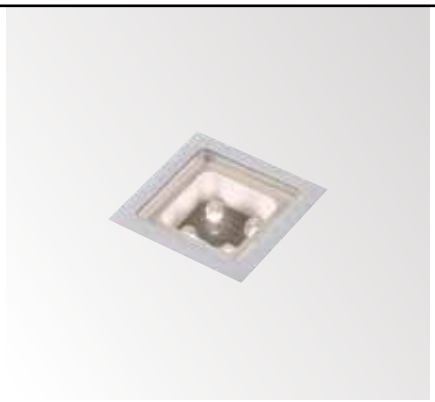



38 x 38 x 45

LEDS GO® IN NW ◇
302 10 14 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 4000K


LEDS GO® IN WW ◇
302 10 12 ◇
◇ = ANO
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 2800K


LEDS GO® IN BLUE ◇
302 10 11 BL ◇
◇ = ANO
INCL.4 x LED BLUE Ø5mm / 14V-DC / 0,5W

EXCL.LED POWER SUPPLY 14V-DC / 0,8A

IP67

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 14V-DC / 12W
CBOX

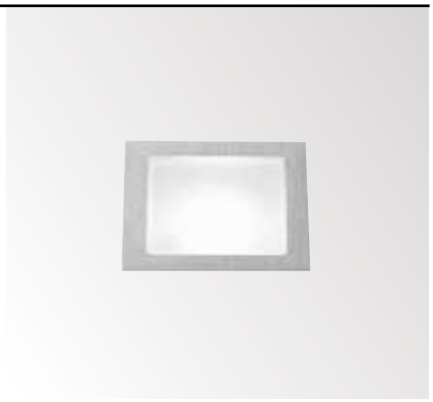



38 x 38 x 45

LEDS GO® IN FORTE NW ◇
302 10 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 4000K

LEDS GO® IN FORTE WW ◇
302 10 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

IP67

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 350mA-DC / DIM
CBOX / CBOX 350mA



FULL INFO / PAG TEC

Options


INSTALLATION		
TACTIC BOX 60 R **213 19 10**	170 x 120 x 100	175 x125 x105
GENIE BOX 80 S / 90 S **213 19 08**	220 x 155 x 150	224 x 159 x 155
GENIE BOX 90 R **213 19 09**	220 x 155 x 146	224 x 159 x 150
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

new

led

TacTic





61 x 100

TACTIC 3020 ◇
213 45 18122 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-20°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350mA-DC
CURRENT CONTROLLED
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 6mm

0,6 IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
TACTIC BOX 60 R


CRI >80 525lm (7W)




TACTIC BOX 60R



Logic R

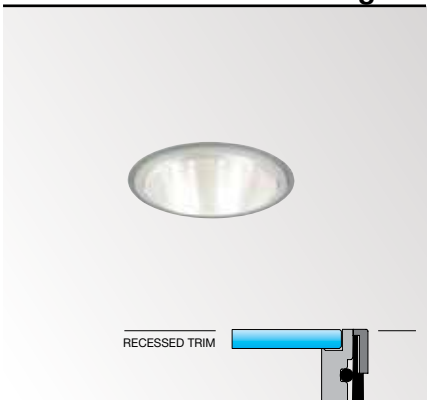



93 x 125

LOGIC R 3011 ◇
213 47 18112 ◇
INCL.1 x REFLECTOR SP-11°

LOGIC R 3030 ◇
213 47 18122 ◇
INCL.1 x REFLECTOR FL-30°

LOGIC R 3055 ◇
213 47 18132 ◇
INCL.1 x REFLECTOR WFL-55°


◇ = ANO
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm


CE 1,0 IP67

OPTIONS
CBOX
GENIE BOX 90 R

CRI>80 525lm (7W)

Logic R A

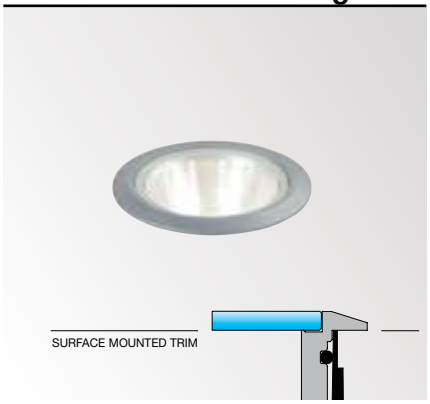



93 x 125

LOGIC R A 3011 ◇
213 48 18112 ◇
INCL.1 x REFLECTOR SP-11°

LOGIC R A 3030 ◇
213 48 18122 ◇
INCL.1 x REFLECTOR FL-30°

LOGIC R A 3055 ◇
213 48 18132 ◇
INCL.1 x REFLECTOR WFL-55°


◇ = ANO
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm


CE 1,0 IP67

OPTIONS
CBOX
GENIE BOX 90 R

CRI>80 525lm (7W)

Logic S

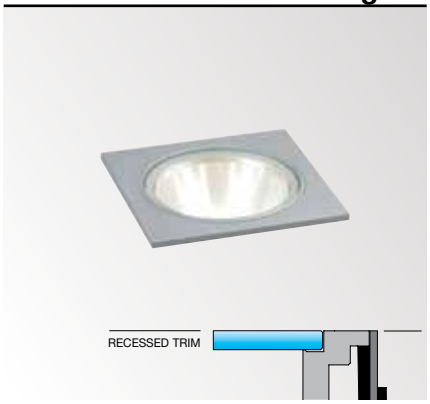



112 x 112 x 125

LOGIC S 3011 ◇
213 49 18112 ◇
INCL.1 x REFLECTOR SP-11°

LOGIC S 3030 ◇
213 49 18122 ◇
INCL.1 x REFLECTOR FL-30°

LOGIC S 3055 ◇
213 49 18132 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = ANO
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

CE 1,1 IP67

OPTIONS
CBOX
GENIE BOX 80 S /90 S

CRI>80 525lm (7W)












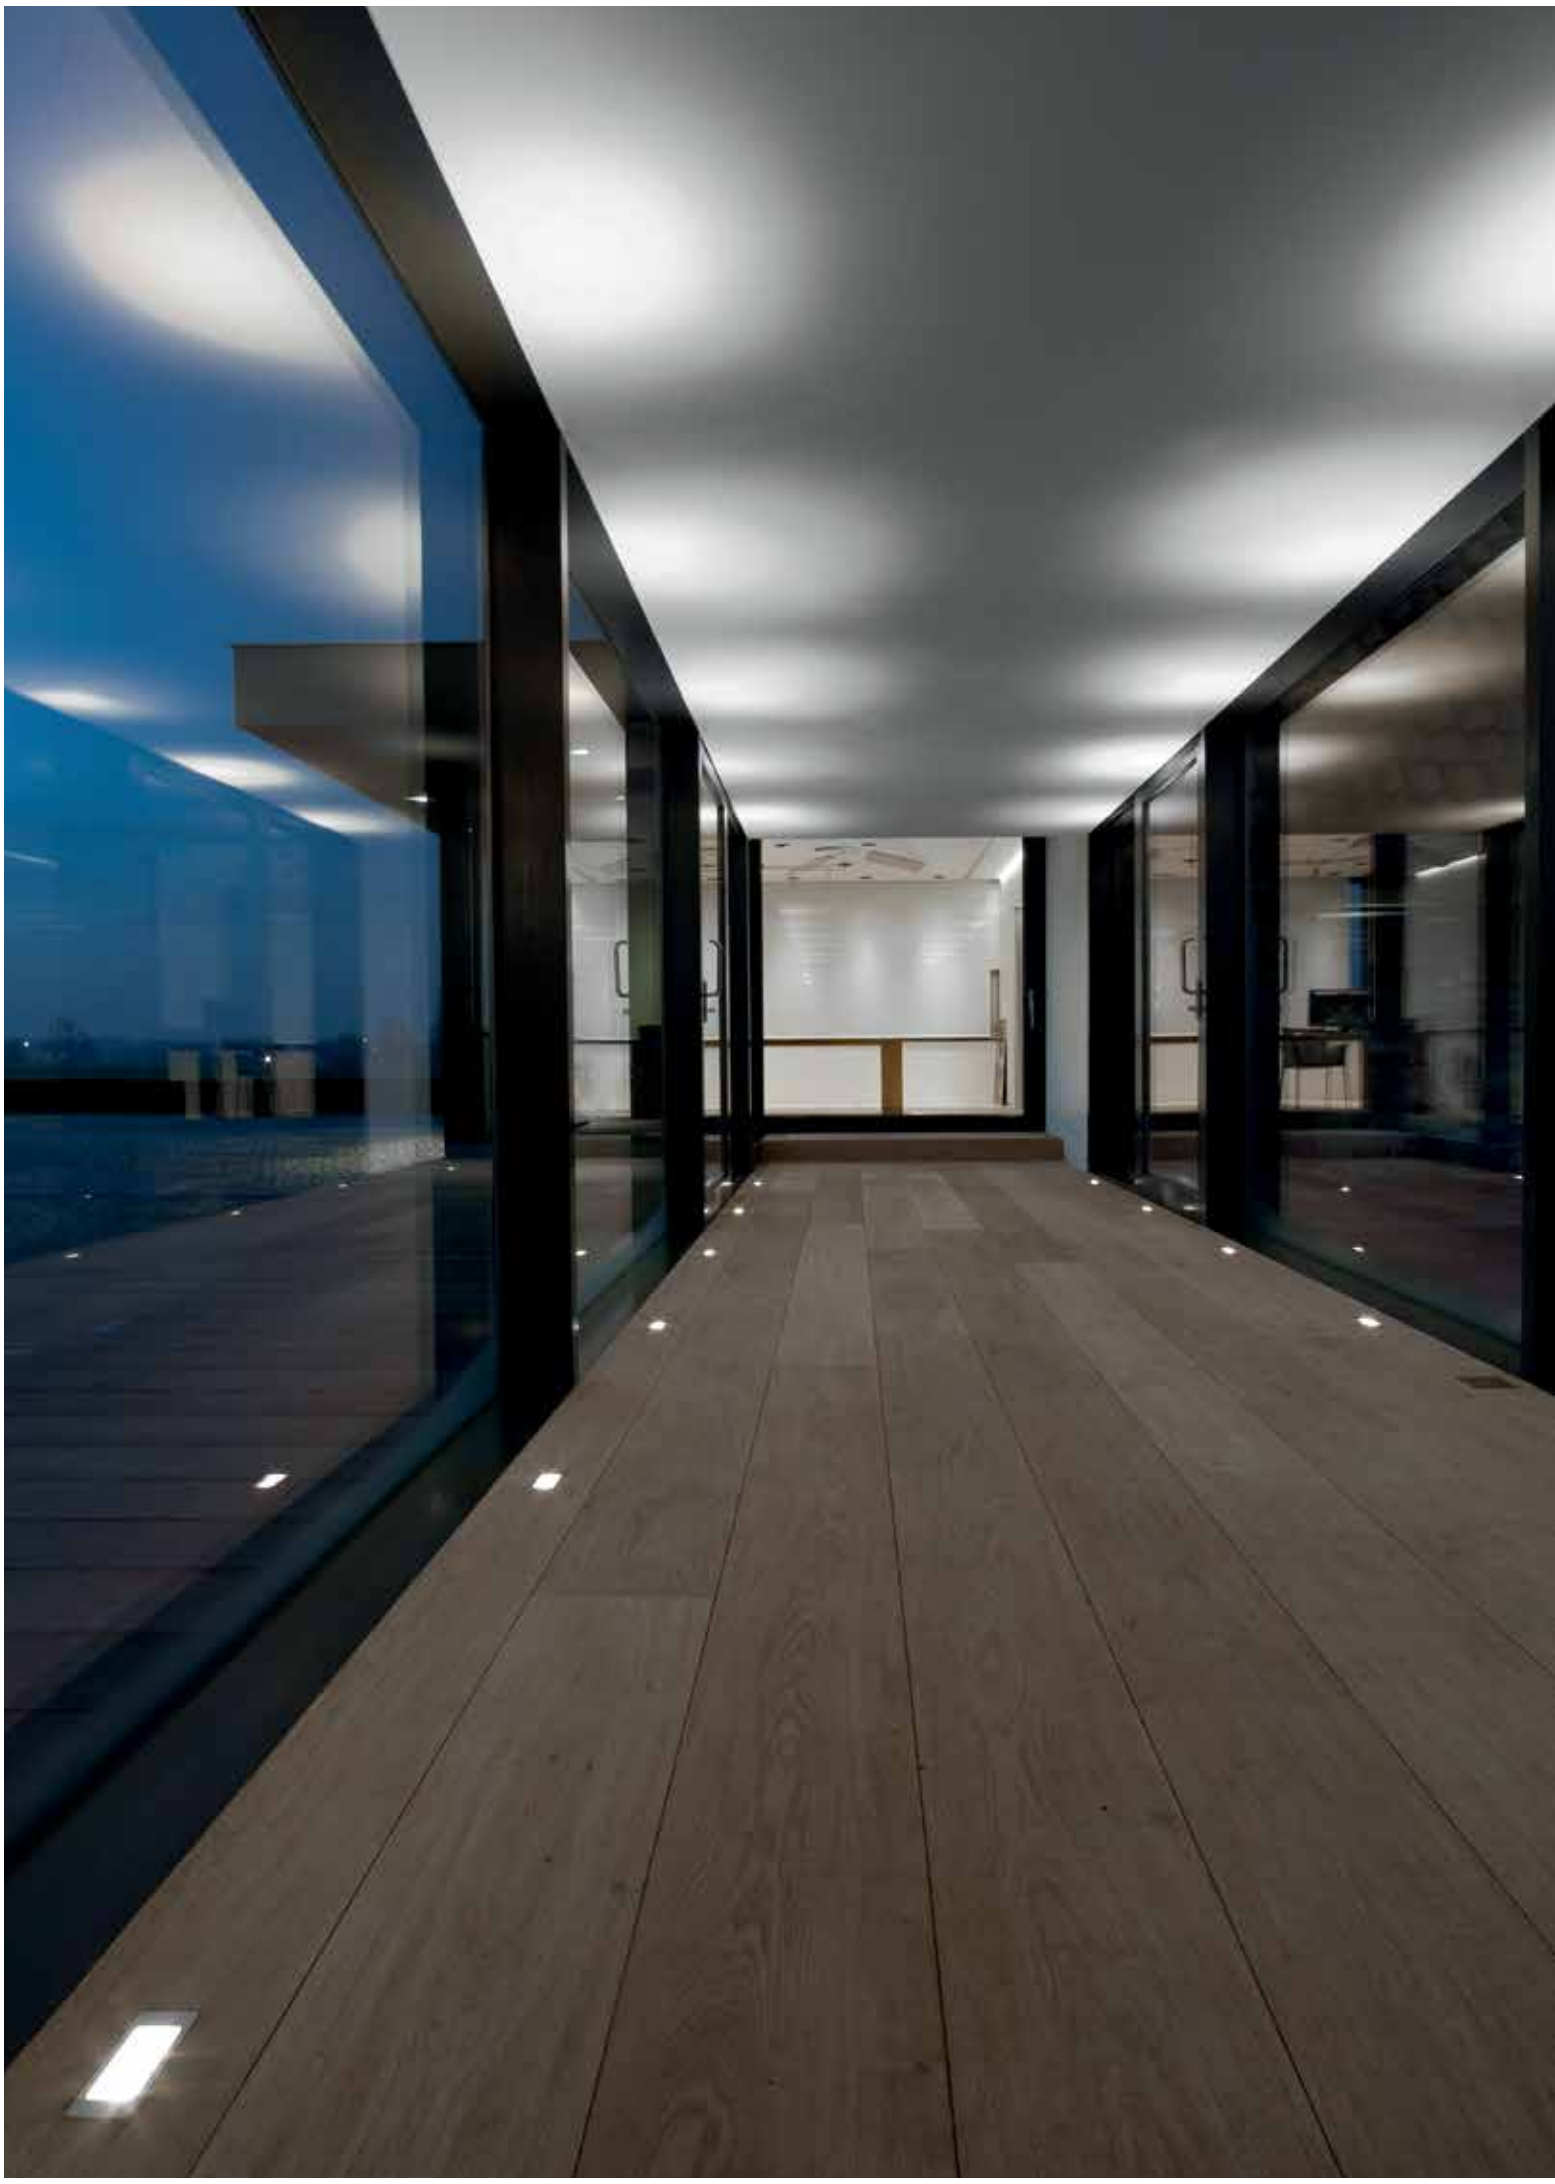

FULL INFO / PAG TEC

Options

INSTALLATION	A-B-C	i
CONCRETE BOX 183 **270 11 183**	96 x 45 x 41	98 x 48
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


CONTROL GEAR	A-B-C
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

led

TacTic 2





i 97 x 47 x 80

TACTIC 2 NW ◇
213 42 42 ◇
◇ = ANO
INCL.2 x POWERLED WHITE 1W / 4000K

TACTIC 2 WW ◇
213 42 22 ◇
◇ = ANO
INCL.2 x POWERLED WHITE 1W / 3000K


TACTIC 2 HW ◇
213 42 32 ◇
◇ = ANO
INCL.2 x POWERLED WHITE 1W / 2700K

INCL.2 x LENS 25°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 6mm

CE 0,4 IP67

OPTIONS
CONCRETE BOX 183
LED POWER SUPPLY 350mA-DC / DIM
CBOX / CBOX 350mA
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



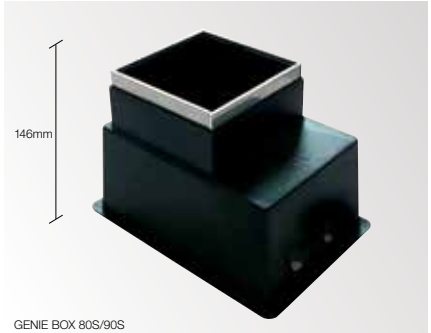

GENIE BOX 80S/90S



GENIE BOX 90R

FULL INFO / PAG TEC

Options

INSTALLATION		
GENIE BOX 80 S / 90 S **213 19 08**	220 x 155 x 150	224 x 159 x 155
GENIE BOX 90 R **213 19 09**	220 x 155 x 146	224 x 159 x 150
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX T50 **216 12 50**	140 x 140 x 173	142 x 142 x 300
CBOX T100 **216 12 100**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

FULL INFO / PAG TEC

Accessories

GENIE RASTER **213 19 01**	Ø72 / H4	



GENIE 90 S O

Genie 90








90 x 125

GENIE 90 R P ◇
213 11 21 ◇
◇ = ANO
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,6 IP65 0,5

OPTIONS
GENIE BOX 90 R
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
GENIE RASTER






112 x 112 x 100

GENIE 90 S ◇
213 11 05 ◇
◇ = ANO
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,7 IP65 0,5

OPTIONS
GENIE BOX 80 S / 90 S
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
GENIE RASTER




90 x 125

GENIE 90 R P SBL ◇
213 12 21 ◇
◇ = ANO
ESG SBL 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,6 IP65 0,5

OPTIONS
GENIE BOX 90 R
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
GENIE RASTER




112 x 112 x 100

GENIE 90 S SBL ◇
213 12 05 ◇
◇ = ANO
ESG SBL 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,7 IP65 0,5

OPTIONS
GENIE BOX 80 S / 90 S
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
GENIE RASTER




90 x 125

GENIE 90 R O P ◇
213 15 21 ◇
◇ = ANO
ADJUSTABLE 0°-35°
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,6 IP65 0,5

OPTIONS
GENIE BOX 90 R
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



112 x 112 x 100

GENIE 90 S O ◇
213 15 05 ◇
◇ = ANO
ADJUSTABLE 0°-35°
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,7 IP65 0,5

OPTIONS
GENIE BOX 80 S / 90 S
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P





FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX T50 **216 12 50**	140 x 140 x 173	142 x 142 x 300
CBOX T100 **216 12 100**	140 x 140 x 173	142 x 142 x 300



CONTROL GEAR	A B C	
TRANSFO 50W IP67 **200 47 60**	64 x 54 x 48	
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

FULL INFO / PAG TEC

Accessories

	A B C	
BASIC R GLASS SBL **228 91 20**	Ø94	


Temperature

LAMP	W	°C	
QR-CBC51	20	90	
	35	125	
	50	140	
QPAR16	50	155	
	35	135	
QR-CBC51	20	90	
	35	125	
	50	140	



BASIC LRA 50 ANO + BASIC R GLASS SBL

INDOOR MAX.35W



ADJUSTABLE 0°-30°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 max.50W
1,6 IP67 0,5

ESG 10mm
max.2000kg 120N/mm²
INCL.1 x WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm² 1m

OPTIONS
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
TRANSFO

ACCESSORIES
BASIC R GLASS SBL






ADJUSTABLE 0°-30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 50W
1,6 IP67 0,5

ESG 10mm
max.2000kg 120N/mm²
INCL.1 x WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm² 1m

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
BASIC R GLASS SBL







ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
2,4 IP67 0,5

ESG 10mm
max.2000kg 120N/mm²
INCL.1 x TRANSFO IP67
+ WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm² 0,5m

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
BASIC R GLASS SBL







Basic





148 x 185
BASIC LRI 50 ◇
228 111 01 10 ◇
◇ = ANO

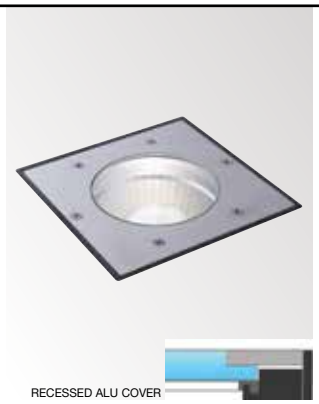




149 x 149 x 185
BASIC LSRI 50 ◇
228 151 01 10 ◇
◇ = ANO





148 x 185
BASIC LRA 50 ◇
228 112 01 10 ◇
◇ = ANO






149 x 149 x 185
BASIC LSRA 50 ◇
228 152 01 10 ◇
◇ = ANO




148 x 185
BASIC LRI 50 Hi ◇
228 111 11 11 ◇
◇ = ANO




149 x 149 x 185
BASIC LSRI 50 Hi ◇
228 151 11 11 ◇
◇ = ANO




148 x 185
BASIC LRA 50 Hi ◇
228 112 11 11 ◇
◇ = ANO




149 x 149 x 185
BASIC LSRA 50 Hi ◇
228 152 11 11 ◇
◇ = ANO




290 x 230 x 205
BASIC BRI 50 T50 ◇
228 311 01 15 ◇
◇ = ANO



290 x 230 x 215
BASIC BSRI 50 T50 ◇
228 351 01 15 ◇
◇ = ANO



290 x 230 x 215
BASIC BRA 50 T50 ◇
228 312 01 15 ◇
◇ = ANO



290 x 230 x 215
BASIC BSRA 50 T50 ◇
228 352 01 15 ◇
◇ = ANO



FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX T50 **216 12 50**	140 x 140 x 173	142 x 142 x 300
CBOX T100 **216 12 100**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
CONTROL GEAR		
TRANSFO 50W IP67 **200 47 60**	64 x 54 x 48	


FULL INFO / PAG TEC


Accessories

BASIC S DECORATIVE GLASS **228 90 10**	12 x 140 x 140	
BASIC S GLASS SBL **228 90 20**	100 x 100	
BASIC S RASTER◇ **228 90 59 ◇** ◇ = INOX	20 x 140 x 140	


INDOOR MAX.35W

Basic

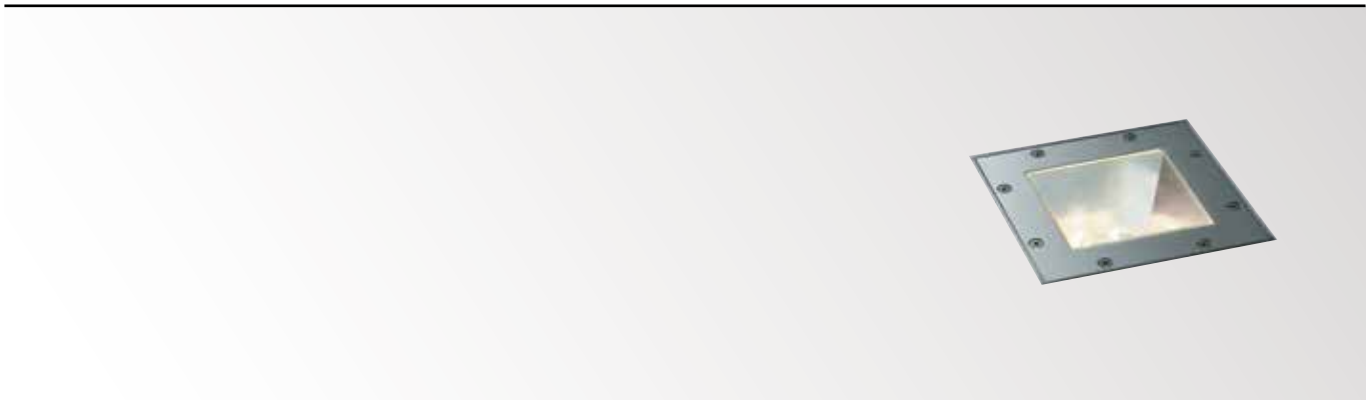














149 x 149 x 203

BASIC LSI 50 ◇
228 171 01 10 ◇
◇ = INOX
INOX 316L
ADJUSTABLE 0°-15°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 max.50W

2,0 IP67 0,5

ESG 10mm
max.1000kg 120N/mm^2
INCL.1 x WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm^2 1m

OPTIONS
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
TRANSFO

ACCESSORIES
BASIC S RASTER INOX
BASIC S DECORATIVE GLASS
BASIC S GLASS SBL

149 x 149 x 203

BASIC LSI 50 Hi ◇
228 171 11 11 ◇
◇ = INOX
INOX 316L
ADJUSTABLE 0°-15°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

2,0 IP67 0,5

ESG 10mm
max.1000kg 120N/mm^2
INCL.1 x WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm^2 1m

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
BASIC S RASTER INOX
BASIC S DECORATIVE GLASS
BASIC S GLASS SBL

290 x 230 x 235

BASIC BSI 50 T50 ◇
228 371 01 15 ◇
◇ = INOX
INOX 316L
ADJUSTABLE 0°-15°
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W

2,7 IP67 0,5


ESG 10mm
max.1000kg 120N/mm^2
INCL.1 x TRANSFO IP67
+ WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm^2 0,5m

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
BASIC S RASTER INOX
BASIC S DECORATIVE GLASS
BASIC S GLASS SBL

Temperature

LAMP	W	°C
QR-CBC51	20	90
	35	125
	50	140
QPAR16	50	155
	35	135
QR-CBC51	20	90
	35	125
	50	140





FULL INFO / PAG TEC

Options

INSTALLATION

IP68 CONNECTION KIT 95 x 45 x 25
216 12 01



IP68 CONNECTOR 3P Ø 23 x 68
216 12 02





led

Flip Set





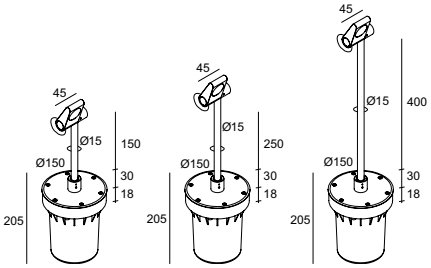



148 x 225

150 mm **FLIP SET 15** ◇ 1,3
217 61 15 4102 ◇

250 mm **FLIP SET 25** ◇ 1,3
217 61 25 4102 ◇

400 mm **FLIP SET 40** ◇ 1,4
217 61 40 4102 ◇

◇ = A / G
ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP54 IP67

OPTIONS
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

148 x 225

250 mm **FLIP TWIN SET 25** ◇ 1,5
217 61 25 4202 ◇

400 mm **FLIP TWIN SET 40** ◇ 1,7
217 61 40 4202 ◇

◇ = A / G
ADJUSTABLE
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

IP54 IP67

OPTIONS
IP68 CONNECTION KIT
IP68 CONNECTOR 3P


CRI >80 525lm (7W)





EXTERIOR
FLOOR SURFACE

The range of exterior floor fixtures constitutes the ideal directional or mood lighting. Position the fixtures at regular intervals to light garden paths, or use them throughout your landscape design for additional style and atmosphere. As in the wall surface range several bollards combine led with a lens. The light effect is reinforced, resulting in maximum beam spread and powerful play of light. Outdoor fixtures using a lens provide a unique effect when used on their own, but can also add an attractive and artistic touch when used in a composition or well thought-out set-up. The striking light silhouettes enable you to play with light on wall, floor or ceiling.

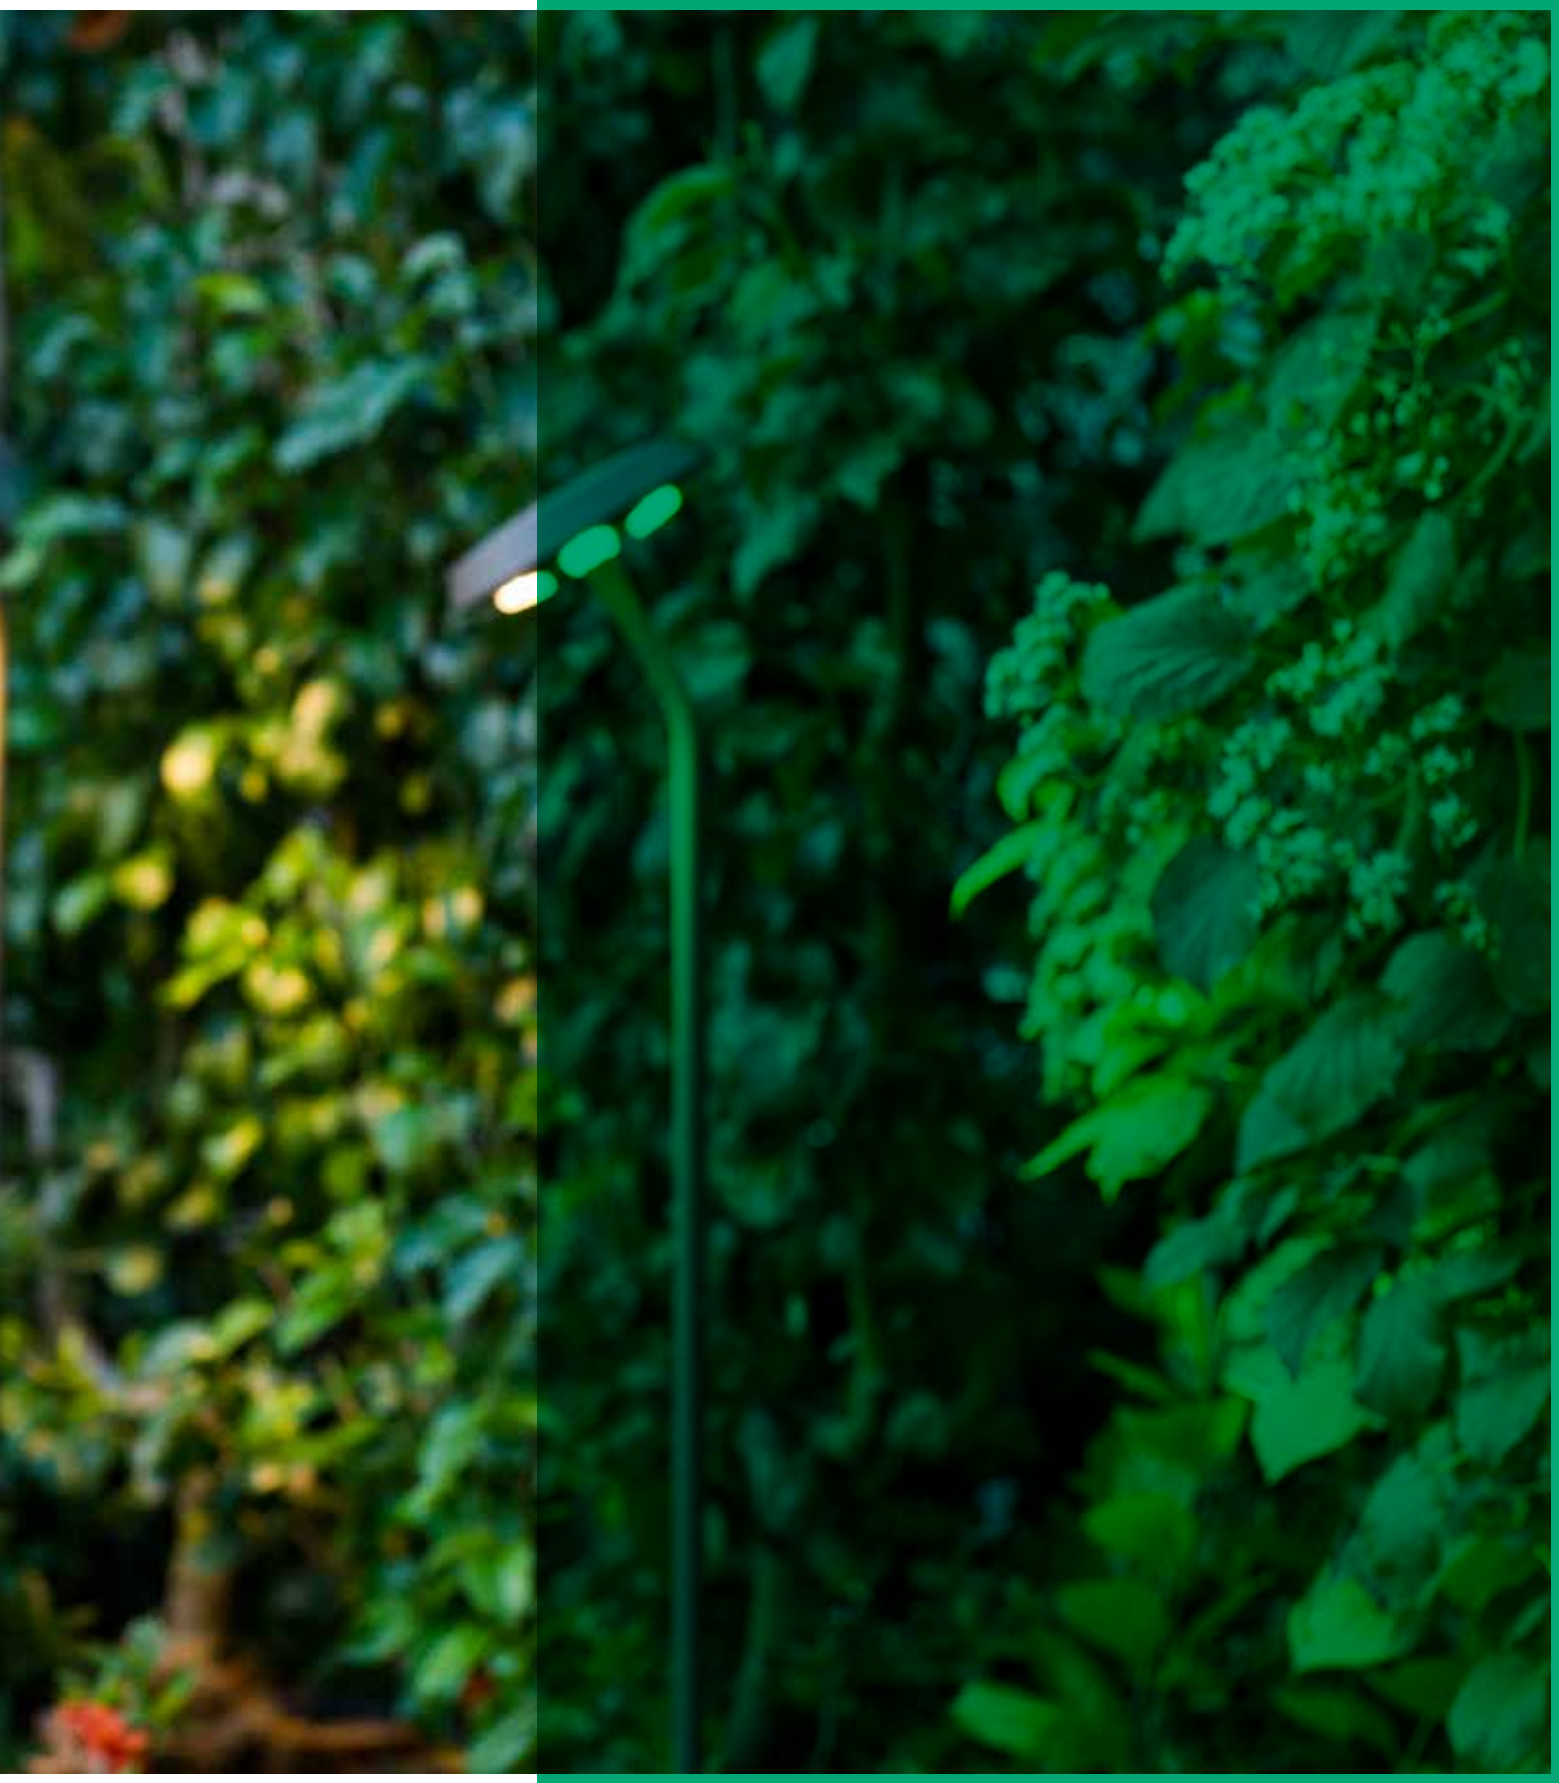



exterior floor surface

www.deltalight.com/EFS



TWEETER X P
EXT 123



FOX P
EXT 137



OBLIX
EXT 149



TAFI
EXT 125



KIX
EXT 137



SKELP X P
EXT 151



BAZIL
EXT 127



INDUSTRIAL S
EXT 141



WALKER
EXT 153



SPYKER
EXT 129



DOX 2 PIN
EXT 143



STRIPER
EXT 155



CITYSCAN
EXT 131



TOURNESOL
EXT 145



MONOPOL
EXT 157



FLIP
EXT 133



AULA
EXT 147



MONOSTEP
EXT 159



BOTANIC
EXT 161



KING TEAK
EXT 171



REAKTOR
EXT 163



VISIONAIR
EXT 173



LABYRINTH
EXT 165



MR. JUNIOR X
EXT 169



MR. SENIOR
EXT 169



QUEEN TEAK
EXT 171

AULA	EXT 147
BAZIL	EXT 127
BOTANIC	EXT 161
CITYSCAN	EXT 131
DOX 2 PIN	EXT 143
FLIP	EXT 133
FOX P	EXT 137
INDUSTRIAL S	EXT 141
KING TEAK	EXT 171
KIX	EXT 137
LABYRINTH	EXT 165
MONOPOL	EXT 157
MONOSTEP	EXT 159
MR. JUNIOR X	EXT 169
MR. SENIOR	EXT 169
OBLIX	EXT 149
QUEEN TEAK	EXT 171
REAKTOR	EXT 163
SKELP X P	EXT 151
SPYKER	EXT 129
STRIPER	EXT 155
TAFI	EXT 125
TOURNESOL	EXT 145
TWEETER X P	EXT 123
VISIONAIR	EXT 173
WALKER	EXT 153




FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 11 **229 01 11**	41 x 79 x 403

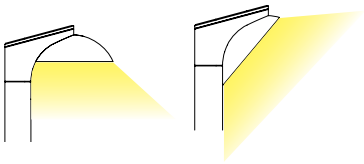


new

led

Tweeter X P



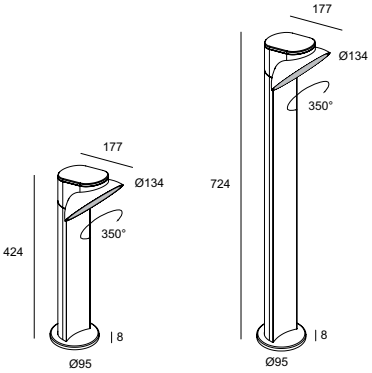

424 mm **TWEETER X P 30 ◇** 1,4
206 43 12 ◇

724 mm **TWEETER X P 60 ◇** 2,6
206 46 12 ◇

◇ = N
ADJUSTABLE
INCL.1 x POWERLED 7W / 3000K
INCL.1 x PC SBL
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

IP65

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 525lm (7W)





FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PIN 11 **229 01 11**	41 x 79 x 403	

new

led

Tafi





503 mm

TAFI 30 ◇ 1,7
222 623 12 ◇

803 mm

TAFI 60 ◇ 2,0
222 626 12 ◇

◇ = A / N
INCL.1 x POWERLED 7W / 3000K
INCL.2 x GLASS SBL
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

IP65

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 525lm (7W)




FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


INSTALLATION	
PIN 3 **229 01 03**	Ø108 x 404
PIN 11 **229 01 11**	41 x 79 x 403

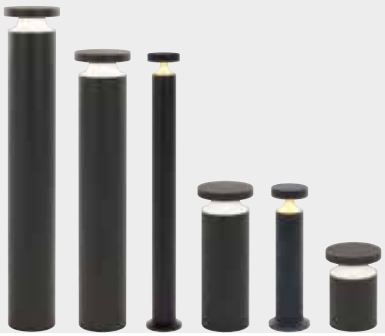

new led

Bazil 60





384 mm

BAZIL 63 ◇ 1,3
222 603 62 ◇
◇ = A-ANO / N-ANO / N-GOLD

684 mm

BAZIL 66 ◇ 1,6
222 606 62 ◇
◇ = A-ANO / N-ANO / N-GOLD

INCL.LED CLUSTER 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55


OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 505lm (7W)

new led

Bazil 120



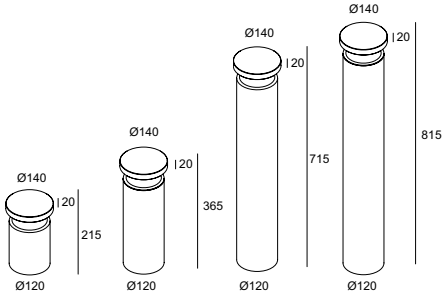

215 mm

BAZIL 121 ◇ 3,2
222 121 12 ◇
◇ = A-ANO / N-ANO / N-GOLD

365 mm

BAZIL 123 ◇ 3,7
222 123 12 ◇
◇ = A-ANO / N-ANO / N-GOLD

715 mm

BAZIL 126 ◇ 4,7
222 126 12 ◇
◇ = A-ANO / N-ANO / N-GOLD

815 mm

BAZIL 127 ◇ 4,9
222 127 12 ◇
◇ = A-ANO / N-ANO / N-GOLD

INCL.LED CLUSTER 15W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 50-60Hz

IP55

OPTIONS
PIN 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 1020lm (15W)



N-GOLD N-ANO A-ANO



FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 11 **229 01 11**	41 x 79 x 403

Spyker 80



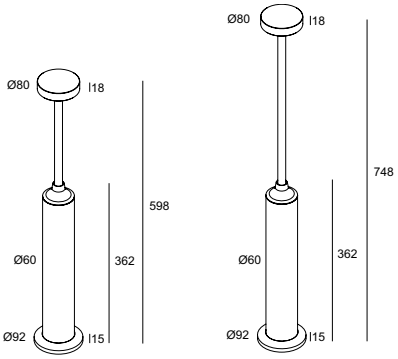

598 mm — **SPYKER 85** ◇ 1,6
217 64 25 12 ◇

748 mm — **SPYKER 87** ◇ 1,7
217 64 40 12 ◇

◇ = G
INCL.LEDCLUSTER 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


IP55

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 505lm (7W)

Spyker 140



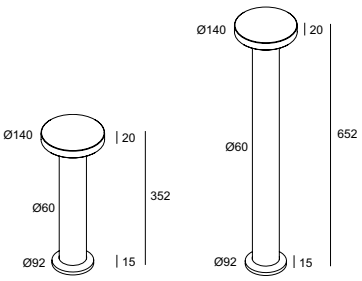

352 mm — **SPYKER 143** ◇ 1,7
222 613 12 ◇

652 mm — **SPYKER 146** ◇ 2,0
222 616 12 ◇

◇ = A / N
INCL.LED CLUSTER 15W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 50-60Hz

IP55

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 1020lm (15W)






FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
PIN 3 **229 01 03**	Ø108 x 404	

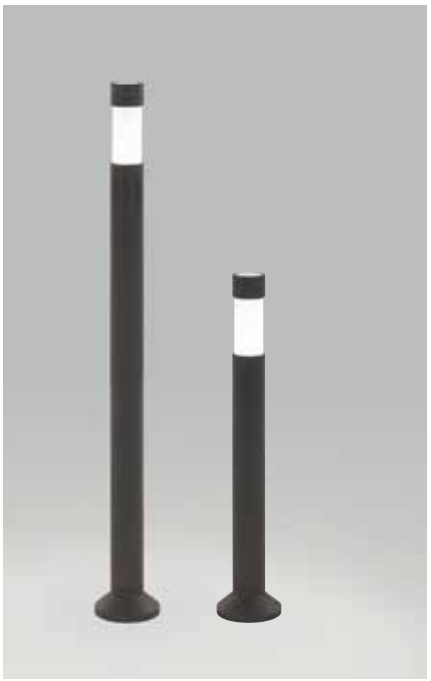


new

led

Cityscan 45 LED



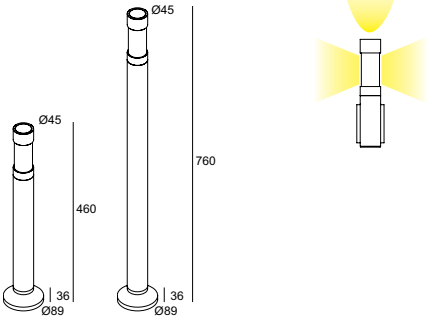

460 mm **CITYSCAN 453 LED ◇** 0,7
222 43 12 ◇

760 mm **CITYSCAN 456 LED ◇** 1,1
222 46 12 ◇

◇ = A / N
INCL.POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz


CE IP65

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 525lm (7W)

Cityscan 64





400 mm **CITYSCAN 643 T18 ◇** 1,4
214 52 83 E ◇

700 mm **CITYSCAN 646 T18 ◇** 2,6
214 52 86 E ◇
◇ = A
GX24q-2 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 18W
CE IP65 0,1

OPTIONS
PIN 3
CBOX

400 mm **CITYSCAN 643 QT ◇** 1,3
214 52 73 ◇

700 mm **CITYSCAN 646 QT ◇** 2,4
214 52 76 ◇
◇ = A
E27 / 220-240V / 50-60Hz
1 x QT32 70W
CE IP65 0,1

OPTIONS
PIN 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
PIN 11 **229 01 11**	41 x 79 x 403	

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

new

led

Flip Pin 80





FLIP PIN 80 ◇
217 63 80 18102 ◇

◇ = A / G
ADJUSTABLE
INCL.POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.1 x CABLE HO5 RN-F 2 x 0,75mm² 2m
EXCL.LED POWER SUPPLY 350mA-DC

0,7 IP65


OPTIONS
LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 525lm (7W)

led

Flip



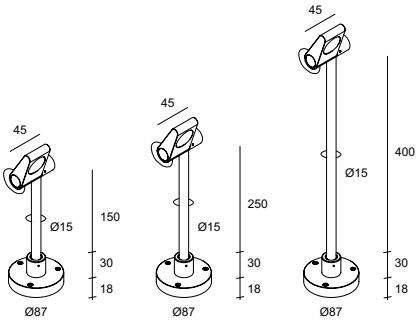

150 mm **FLIP 15** ◇ 0,8
217 60 15 18102 ◇

250 mm **FLIP 25** ◇ 0,8
217 60 25 18102 ◇

400 mm **FLIP 40** ◇ 1,0
217 60 40 18102 ◇

◇ = A / G
ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS
EXCL.LED POWER SUPPLY 350mA-DC

IP54

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM


CRI >80 525lm (7W)

new

led

Flip P



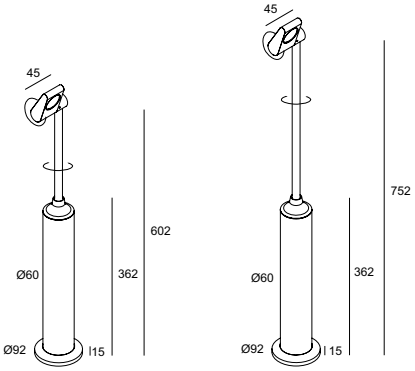

602 mm **FLIP P 25** ◇ 1,7
217 62 25 4102 ◇

752 mm **FLIP P 40** ◇ 1,8
217 62 40 4102 ◇

◇ = G
ADJUSTABLE
INCL.POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP54

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 525lm (7W)









FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim1 **300 90 64**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Kix





KIX 3011 ◇
232 10 18112 ◇
INCL.1 x REFLECTOR SP-11°

KIX 3030 ◇
232 10 18122 ◇
INCL.1 x REFLECTOR FL-30°

KIX 3055 ◇
232 10 18132 ◇
INCL.1 x REFLECTOR WFL-55°


◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K / 525 lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

0,9 IP65

CRI >80 525lm (7W)

Kix Pin



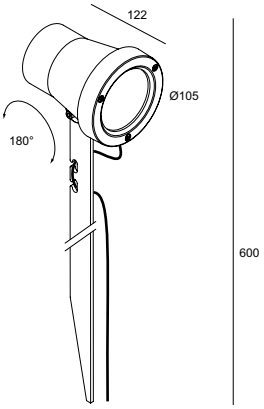

KIX PIN 3011 ◇
232 11 18112 ◇
INCL.1 x REFLECTOR SP-11°

KIX PIN 3030 ◇
232 11 18122 ◇
INCL.1 x REFLECTOR FL-30°

KIX PIN 3055 ◇
232 11 18132 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x CABLE H05 RN-F 2 x 0,75mm² 2m
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


1,2 IP65

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 525lm (7W)

Fox P



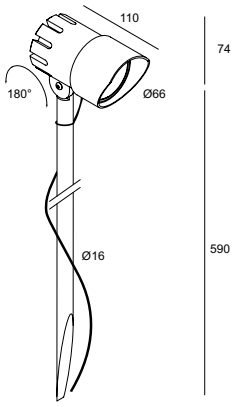

FOX P 73020 ◇
306 34 7122 ◇
◇ = G


ADJUSTABLE
INCL.1 x POWERLED WHITE 10W / 3000K
INCL.1 x REFLECTOR FL-20°
INCL.1 x CABLE H05 RN-F 2 x 0,75mm² 2m
EXCL. LED POWER SUPPLY 350mA-DC

1,0 IP54

OPTIONS
LED POWER SUPPLY 350mA-DC
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 770lm (10W)



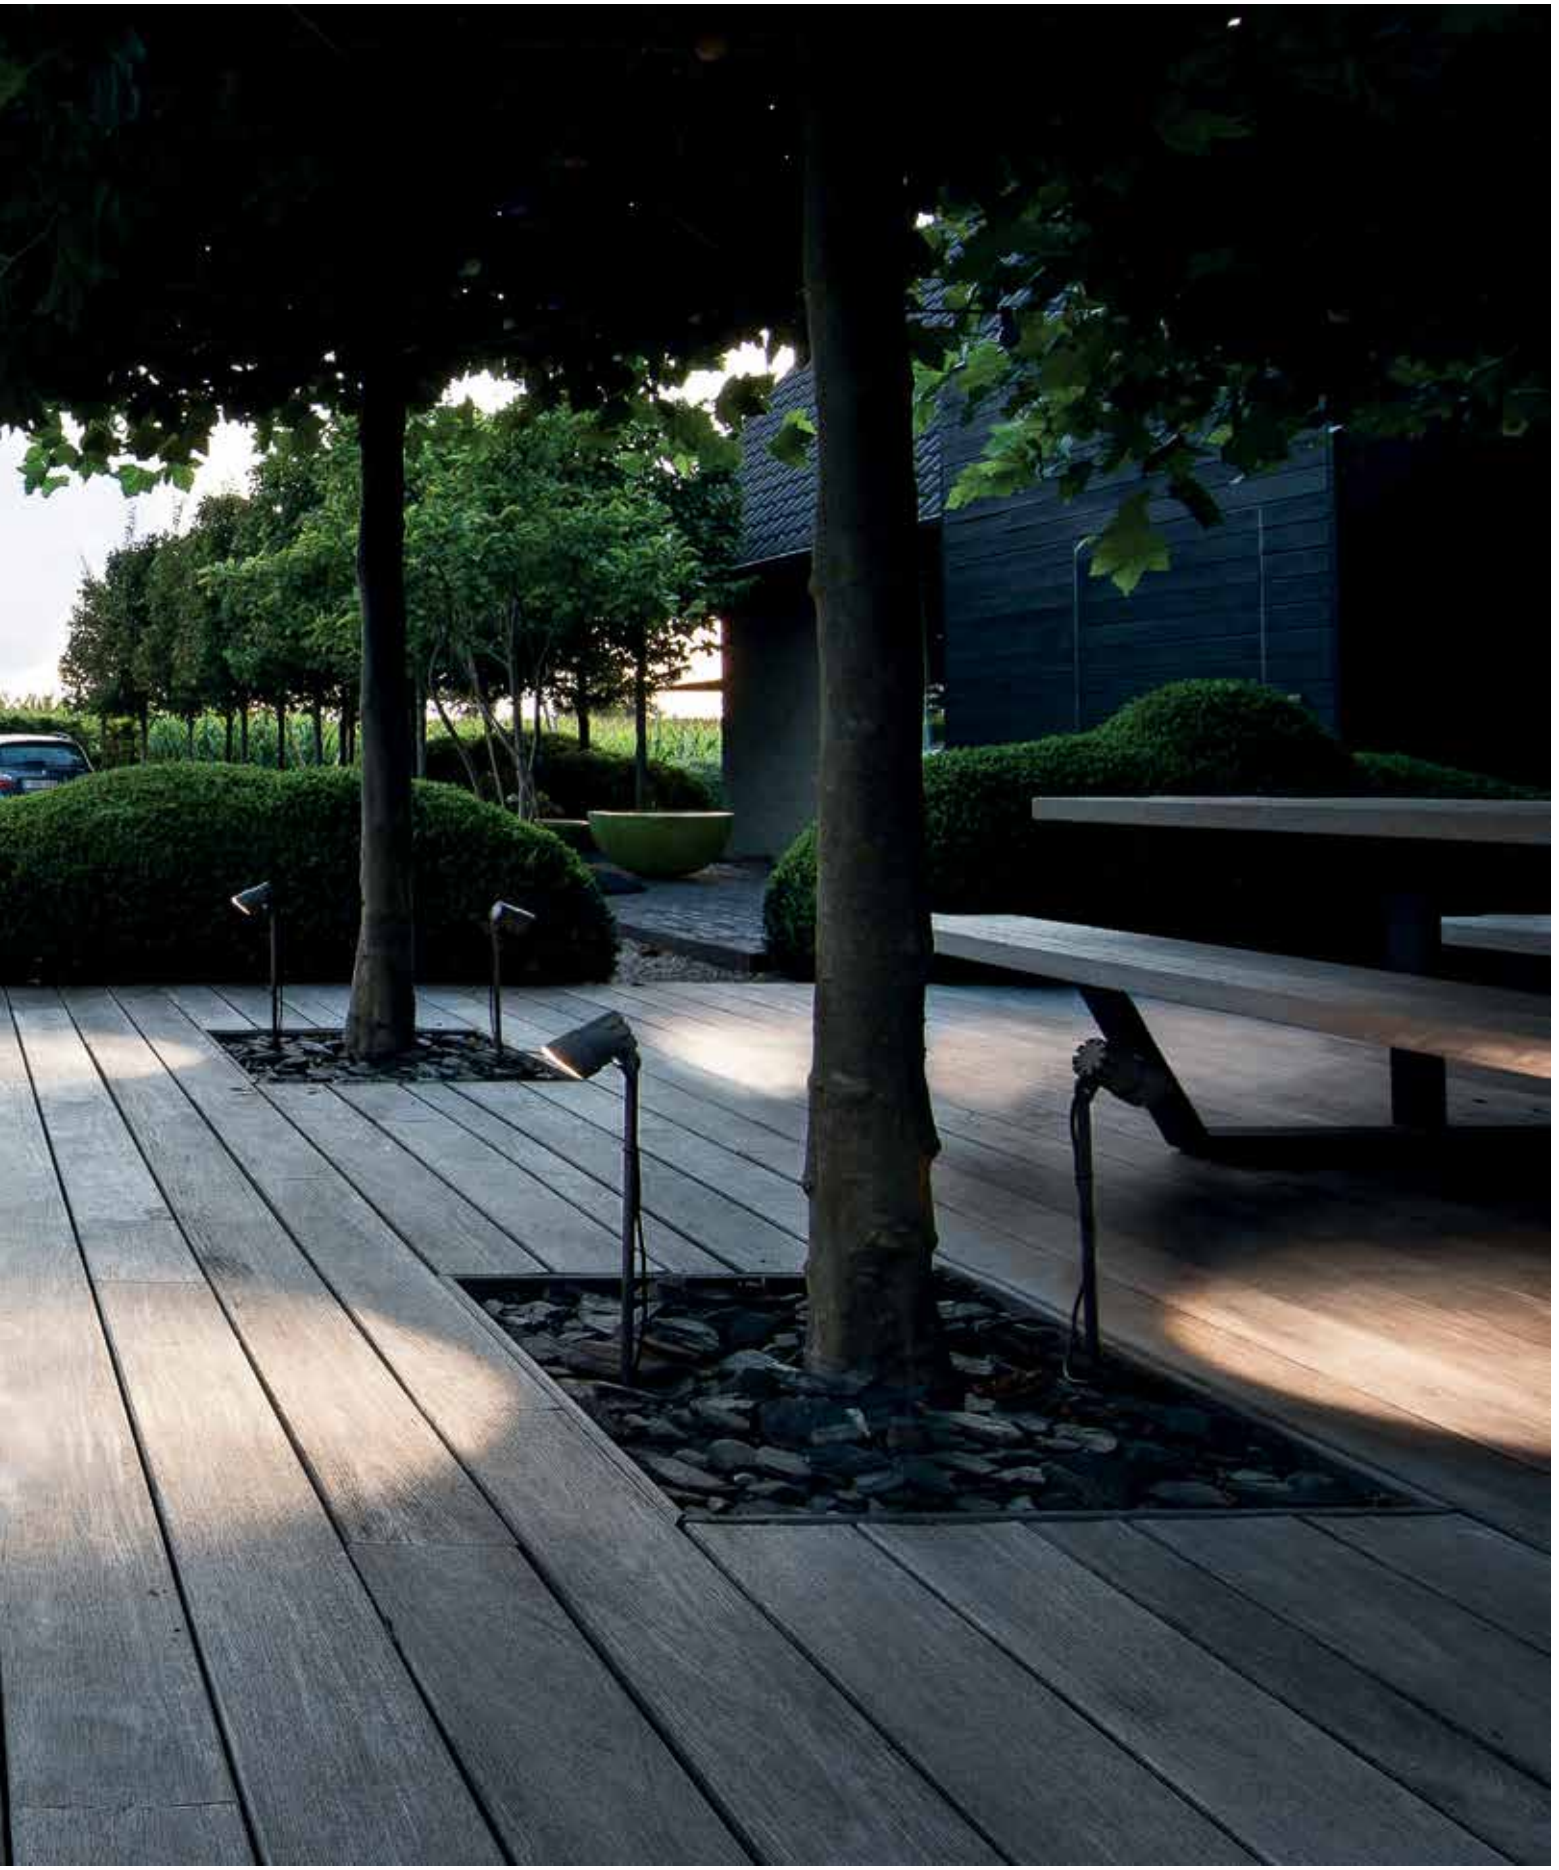





FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 7 **229 01 07**	Ø4,5 x 315


CONTROL GEAR	
LED POWER SUPPLY 350mA-DC / 6W **300 90 104**	64 x 35 x 20
LED POWER SUPPLY 350mA-DC / 15W **300 90 91**	115 x 34 x 19
LED POWER SUPPLY 350mA-DC / 16W Dim8 **300 90 3112**	76 x 34 x 24
LED POWER SUPPLY 350mA-DC / 17W **300 90 913**	111 x 38 x 28
LED POWER SUPPLY 350mA-DC / 18W **300 90 112**	81 x 35 x 23
LED POWER SUPPLY 500mA-DC / 6W **300 90 22 U**	45 x 45 x 25
LED POWER SUPPLY 500mA-DC / 20W **300 90 92**	111 x 38 x 28
LED POWER SUPPLY 500mA-DC / 32W Dim8 **300 90 5120**	86 x 56 x 24
LED POWER SUPPLY 700mA-DC / 12W **300 90 43**	81 x 40 x 23
LED POWER SUPPLY 700mA-DC / 17W **300 90 93**	111 x 38 x 28
LED POWER SUPPLY 700mA-DC / 36W Dim8 **300 90 123**	133 x 40 x 30
LED POWER SUPPLY 700mA-DC / 40W Dim8 **300 90 7120**	86 x 56 x 24
LED POWER SUPPLY MULTI-POWER **300 90 914**	124,5 x 79 x 22
LED POWER SUPPLY MULTI-POWER Dim6 **300 90 61**	165 x 47 x 35
LED POWER SUPPLY MULTI-POWER Dim7 **300 90 60**	103 x 67 x 21
LED POWER SUPPLY MULTI-POWER Dim9 **300 90 63**	111 x 79 x 22

DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

led

Industrial S





INDUSTRIAL S NW ◇
306 01 04 ◇
◇ = A
INCL.1 x POWERLED WHITE 1-3W / 4000K

INDUSTRIAL S WW ◇
306 01 02 ◇
◇ = A
INCL.1 x POWERLED WHITE 1-3W / 3000K

INCL.1 x LENS 10°
INCL.1 x CABLE HO5 RN-F 2 x 0,75mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

IP67

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX / CBOX 350mA
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
PIN 7



FULL INFO / PAG TEC

Options


INSTALLATION	A B C	
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX T50 **216 12 50**	140 x 140 x 173	142 x 142 x 300
CBOX T100 **216 12 100**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

Dox 2 Pin










DOX 2 PIN ◇
219 16 01 ◇
◇ = A

ADJUSTABLE
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CB51 max.50W
0,7 IP64 0,5


OPTIONS
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

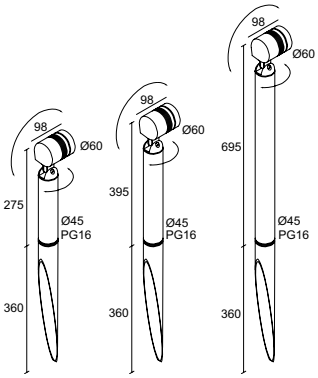

275 mm **DOX 2 PIN T 20** ◇ 1,0
219 16 52 ◇
395 mm **DOX 2 PIN T 30** ◇ 1,1
219 16 53 ◇
695 mm **DOX 2 PIN T 60** ◇ 1,3
219 16 56 ◇
◇ = A

ADJUSTABLE
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CB51 max.50W
IP64 0,5

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



DOX 2 PIN T 30 READY ◇
219 26 53 ◇
◇ = A

ADJUSTABLE
INCL.1 x CABLE H05 RN-F 3 x 1mm² 1,5m
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CB51 max.50W
1,4 IP64 0,5



FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	



led

Tournesol





TOURNESOL NW ◇
314 16 46 ◇
◇ = G
INCL.6 x POWERLED WHITE 1W / 4000K

TOURNESOL WW ◇
314 16 26 ◇
◇ = G
INCL.6 x POWERLED WHITE 1W / 3000K

INCL.6 x LENS 40°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz
INCL.PIN

CE 2,3 IP54

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P





FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 15 **229 01 15**	93 x 130 x 403

led

Aula





260 mm **AULA 26** ◇ 1,0
318 14 4102 ◇

600 mm **AULA 60** ◇ 1,8
318 17 4102 ◇

◇ = G-W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

IP55

OPTIONS
PIN 15
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 525lm (7W)







FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PIN 12 **229 01 12**	42 x 142 x 403	
PLATE 7 **229 02 07**	150 x 200 x 3	

new

led

Oblix



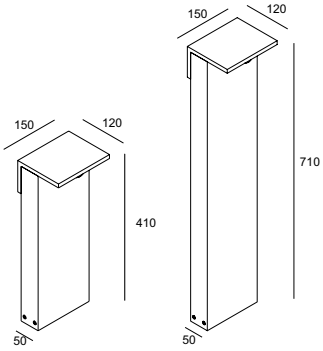

410 mm **OBLIX 40** ◇ 2,2
220 74 12 ◇

710 mm **OBLIX 70** ◇ 3,5
220 77 12 ◇

◇ = A / N
INCL.POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55

OPTIONS
PIN 12
PLATE 7
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 525lm (7W)







FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PIN 12 **229 01 12**	42 x 142 x 403	
PLATE 7 **229 02 07**	150 x 200 x 3	

new

led

Skelp X P





410 mm	**SKELP X P 40** ◇ **320 23 12** ◇	2,6
710 mm	**SKELP X P 70** ◇ **320 26 12** ◇	5,2

◇ = A / N
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

IP54

OPTIONS
PIN 12
PLATE 7
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 525lm (7W)



Martin's Hotel

FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


INSTALLATION		
PIN 12 **229 01 12**	42 x 142 x 403	
PIN 13 **229 01 13**	57 x 192 x 403	
PLATE 7 **229 02 07**	150 x 200 x 3	
PLATE 8 **229 02 08**	195 x 267 x 3	


Walker










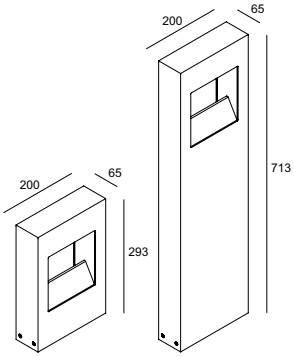

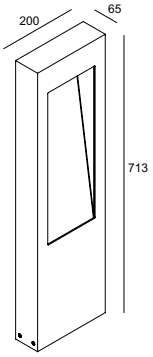

led

263 mm **WALKER 53 LED WW** ◇ 1,5
220 53 4102 ◇
533 mm **WALKER 55 LED WW** ◇ 2,9
220 55 4102 ◇
◇ = A / G
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55

OPTIONS
PLATE 7
PIN 12
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

293 mm **WALKER 63 TC** ◇ 2,1
220 63 18 ◇
713 mm **WALKER 67 TC** ◇ 5,2
220 67 18 ◇
◇ = A / G
G24q-2 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x TC-DEL 18W

IP55 0,1

OPTIONS
PIN 13
PLATE 8
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

WALKER 67L TC ◇
220 68 18 ◇
◇ = A / G
G24q-2 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x TC-DEL 18W

4,3 IP55 0,1

OPTIONS
PIN 13
PLATE 8
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 525lm (7W)




FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PIN 1 **229 01 01**	58 x 58 x 280	
PLATE 1 **229 02 01**	200 x 200 x 3	

led

Striper

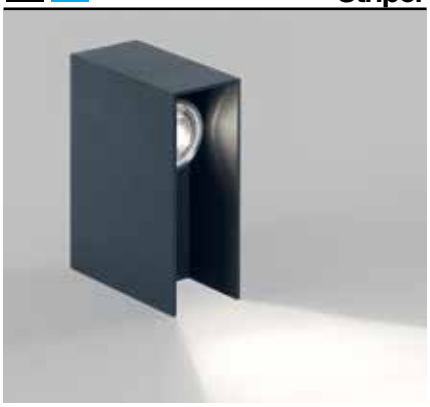



STRIPER ◇
223 00 12 ◇

◇ = A / N
INCL.POWERLED WHITE 3W / 3000K
INCL.LENS 4°
INCL.LED POWER SUPPLY 700mA-DC
120-240V / 50-60Hz

CE 1,0 IP55

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



Incolmotos / AIA

FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 1 **229 01 01**	58 x 58 x 280
PLATE 1 **229 02 01**	200 x 200 x 3

led

Monopol LED





260 mm **MONOPOL 26 LED WW** ◇ 1,2
223 16 4102 ◇

700 mm **MONOPOL 70 LED WW** ◇ 2,7
223 17 4102 ◇

◇ = A / G
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55


OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 525lm (7W)

INDOOR MAX.35W

Monopol






MONOPOL 70 T50 ◇
223 10 57 ◇
◇ = A / G
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W

2,8 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

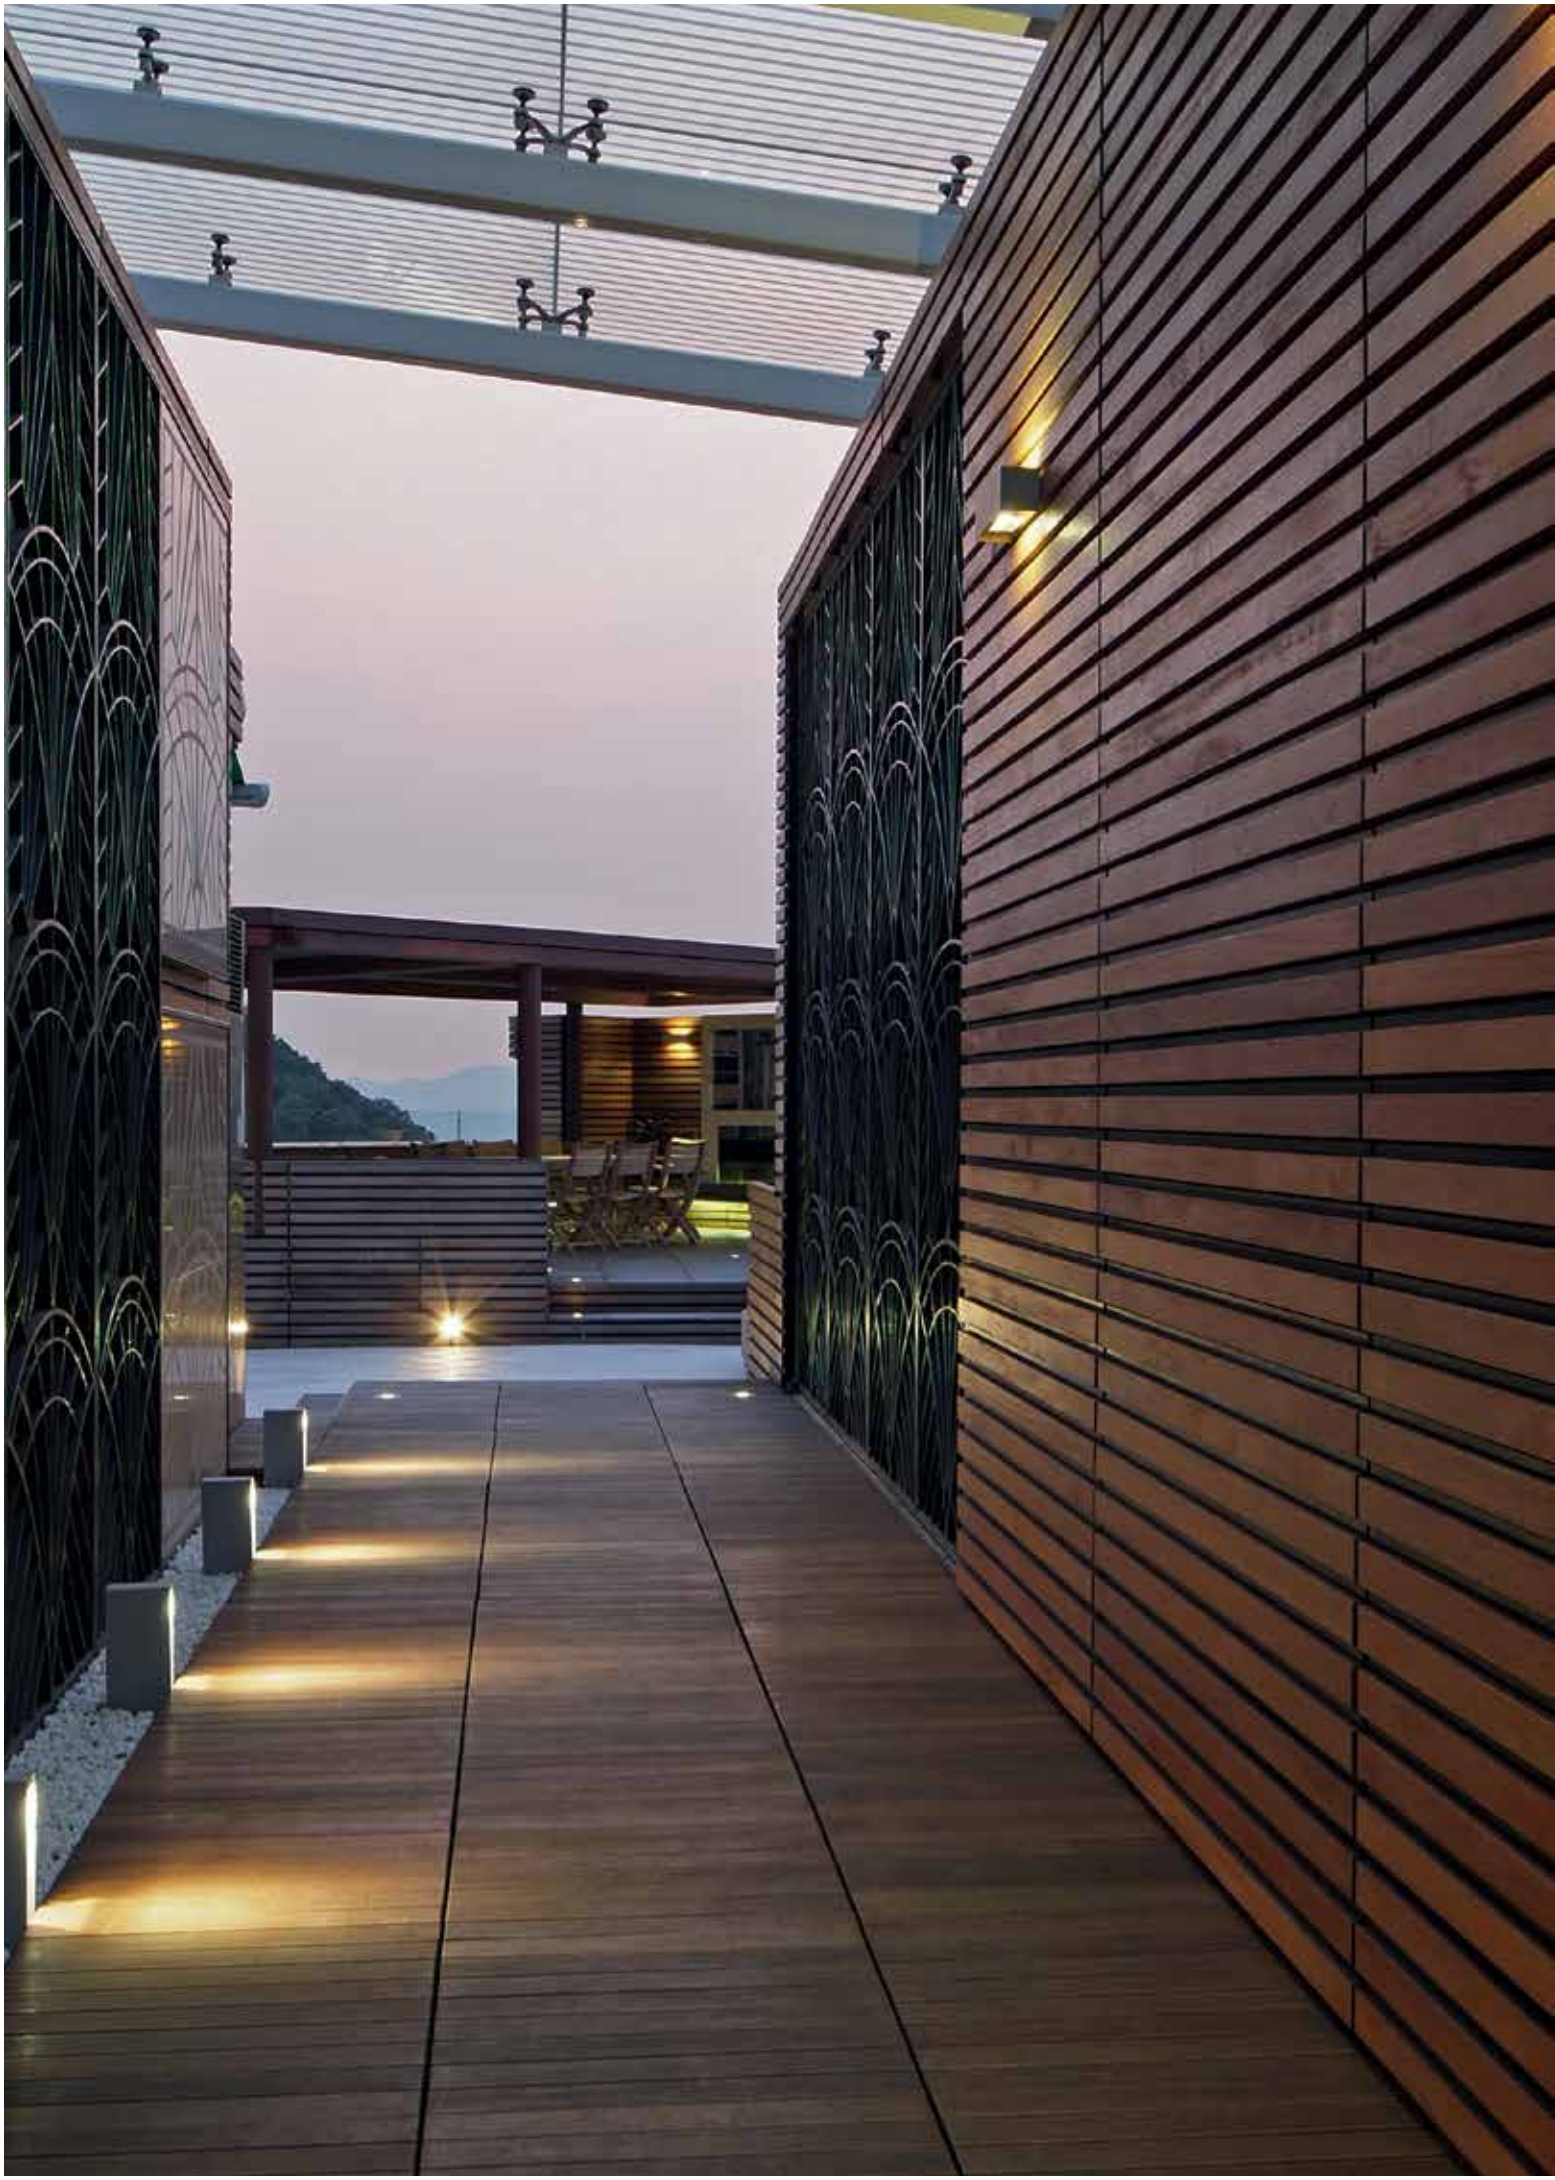

FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX T50 **216 12 50**	140 x 140 x 173	142 x 142 x 300
CBOX T100 **216 12 100**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


INSTALLATION	
PIN 1 **229 01 01**	58 x 58 x 280
PLATE 1 **229 02 01**	200 x 200 x 3

Monostep









MONOSTEP 26 T50 ◇
223 00 52 ◇
◇ = A / G
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
1,2 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

MONOSTEP 26 ◇
223 00 02 ◇
◇ = INOX
INOX 316 L
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 max.50W
2,0 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

MONOSTEP 70 T50 ◇
223 00 57 ◇
◇ = A / G
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
2,6 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

MONOSTEP 70 T50 ◇
223 00 57 ◇
◇ = INOX
INOX 316 L
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
4,8 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P


onasida

FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PIN 14 **229 01 14**	120 x 120 x 403	

led

Botanic





240 mm **BOTANIC 24** ◇ 1,9
317 12 22 ◇
INCL.2 x LEDSTRIP WHITE 1,25W / 3000K

540 mm **BOTANIC 54** ◇ 3,6
317 15 22 ◇
INCL.2 x LEDSTRIP WHITE 3W / 3000K

◇ = A / G
INCL.2 x PC SBL
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

IP55

OPTIONS
PIN 14
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P





FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PLATE 9 **229 02 09**	Ø126 x 440	

led

Reaktor



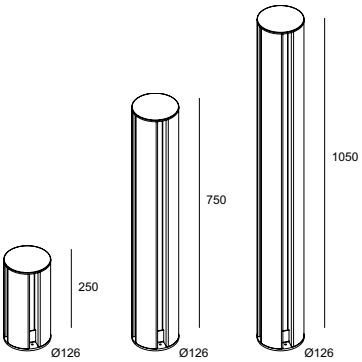

250 mm	**REAKTOR 25** ◇ **317 22 42** ◇ INCL.4 x LEDSTRIP WHITE 1,25W / 3000K	1,3
750 mm	**REAKTOR 75** ◇ **317 27 42** ◇ INCL.4 x LEDSTRIP WHITE 4,2W / 3000K	4,5
1050 mm	**REAKTOR 105** ◇ **317 210 42** ◇ INCL.4 x LEDSTRIP WHITE 6W / 3000K	5,8

◇ = A / G
INCL.4 x PC SBL
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

IP55

OPTIONS
PLATE 9
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P




FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PLATE 5 **229 02 05**	250 x 250 x 475	

Labyrinth





LABYRINTH ◇
220 10 36 ◇
◇ = A / G
2G11 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-L 36W

IP55 0,1

OPTIONS
PLATE 5
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

GREEN GOOD DESIGN award










FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PLATE 3 **229 02 03**	85 x 85 x 500

Mr. Junior X

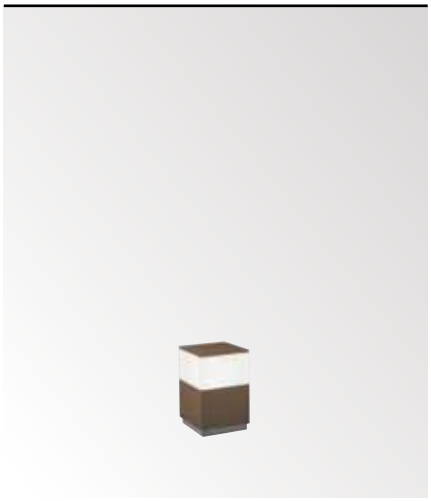




Mr. JUNIOR X ◇
226 21 17 ◇
◇ = A / G
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.15W
1 x TC-SB max.16W
CE 3,5 IP54 0,1

OPTIONS
PLATE 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

Mr. Senior





615 mm **Mr. SENIOR 155** ◇ 6,3
226 23 57 ◇
◇ = A / G

1000 mm **Mr. SENIOR 159** ◇ 9,7
226 23 97 ◇
◇ = A
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.20W
1 x TC-SB max.16W
CE IP54 0,1

OPTIONS
PLATE 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P




FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

Queen Teak






QUEEN TEAK
226 11 37
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.20W
1 x TC-SB max.16W
3,4 IP54 0,1

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

King Teak





KING TEAK
226 12 37
E27Ls / 100-240V / 50-60Hz
2 x TCA-SE max.20W
2 x TC-SB max.16W
11,6 IP54 0,1

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P





FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


Visionair

VISIONAIR ◇
278 28 00 ◇
◇ = A
INCL.CABLING
EXCL.1 x VISION S OUT LED **278 26 24**
EXCL.1 x VISION S OUT LED RGB **278 26 33**

□ 8,6

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



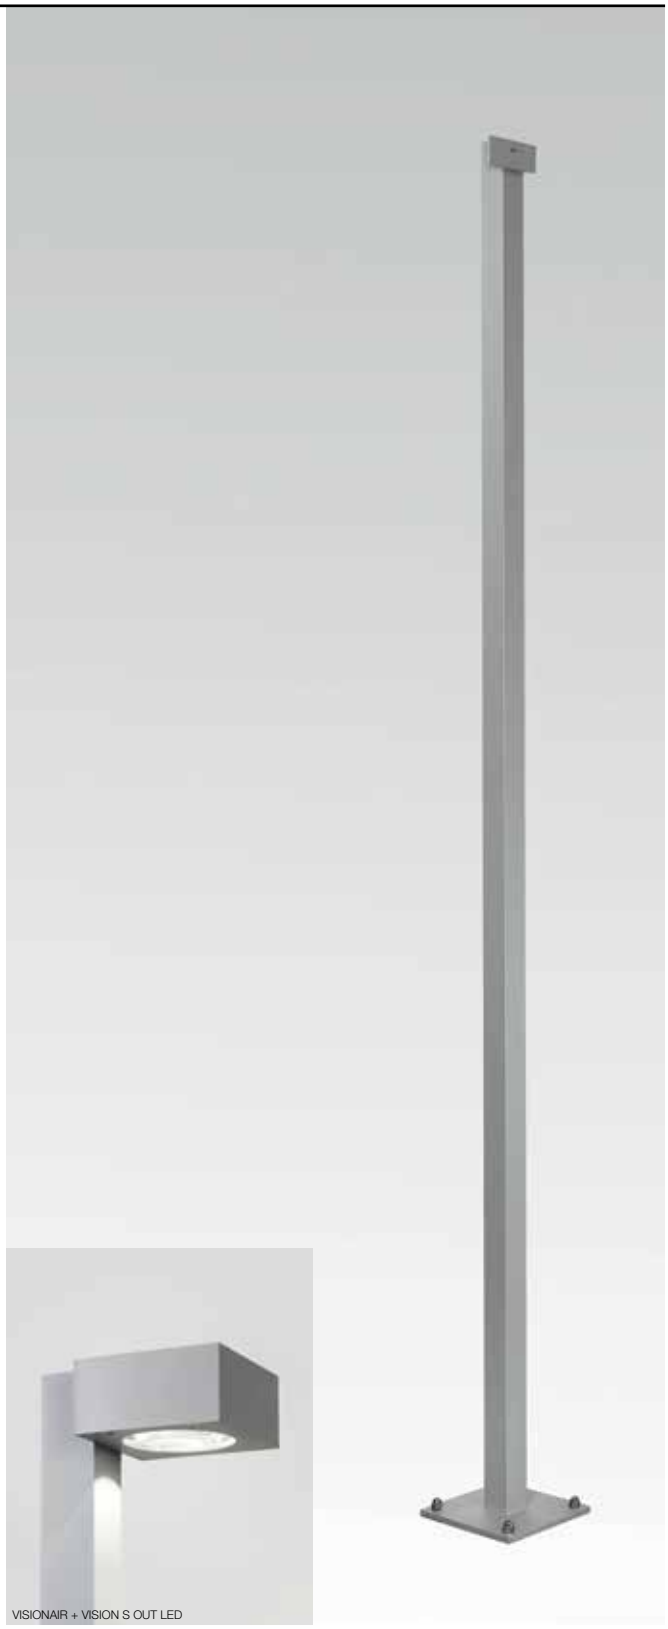

VISIONAIR + VISION S OUT LED




INTERIOR CEILING RECESSED INT 4


INTERIOR CEILING SURFACE INT 220


INTERIOR WALL RECESSED INT 426


INTERIOR WALL SURFACE INT 446


INTERIOR STAND ALONE INT 510



INTERIOR TRACK LIGHTING INT 528



PROFILES PRO 4


EXTERIOR CEILING RECESSED EXT 4


EXTERIOR CEILING SURFACE EXT 18


EXTERIOR WALL RECESSED EXT 30


EXTERIOR WALL SURFACE EXT 42


EXTERIOR FLOOR RECESSED EXT 96


EXTERIOR FLOOR SURFACE EXT 118



TECHNICAL INFO TEC 2



INDEX IND 2



technical


ANTI-GLARE TUBE	TEC 43
APPLICATION OF MOUNTING OPTIONS	TEC 31
BALLASTSET	TEC 30
BASIC GLASS / RASTER	TEC 45
CABLE BASE R/S	TEC 40
CBOX	TEC 41
CLIP 50/111	TEC 42
COLOUR FILTER 66/109/111	TEC 43
CONCRETE BOX	TEC 33
CONCRETE PACK	TEC 35
CONE 50/66/111	TEC 42
CONNECTION TRIMLESS	TEC 40
COVERSET R/S	TEC 40
CUT-OUT OVERVIEW	TEC 46
DALI CONVERTOR	TEC 30
DICROIC FILTER 50/100	TEC 42
FRONTGLASS 109/111	TEC 43
GENIE BOX 80/90	TEC 41
GENIE RASTER	TEC 45
GLASS SBL	TEC 43
HALOLED 111 (LED SOLUTION)	TEC 4
HALOLED 51 (LED SOLUTION)	TEC 4
HALOLED E27 (LED SOLUTION)	TEC 4
HALOLED HI (LED SOLUTION)	TEC 4
INSTALLATION SCHEME - DIMMABLE LED POWER SUPPLY	TEC 25
INSTALLATION SCHEME - LED POWER SUPPLY 24V-DC	TEC 27
IP68 CONNECTION	TEC 41
JACK SYSTEM	TEC 38
LAMP INDEX	TEC 48
LED POWER SUPPLIES : DO'S & DONT'S	TEC 16
LED POWER SUPPLY 14V-DC	TEC 28
LED POWER SUPPLY 24V-DC	TEC 26
LED POWER SUPPLY 350MA-DC	TEC 17
LED POWER SUPPLY 500MA-DC	TEC 18
LED POWER SUPPLY 700MA-DC	TEC 19
LED POWER SUPPLY MULTI-POWER	TEC 20
LED RGB KIT	TEC 29
LED SPECS	TEC 10
LED TRANSFO	TEC 30
LEDFLEX	TEC 8
LEDFLEX SET	TEC 9
LEDSTRIP	TEC 6
LEDSTRIP SET	TEC 7
LEGENDA	TEC 49
LENS 109/111	TEC 42
M10 SYSTEM	TEC 39
MOUNTING KIT	TEC 36
PHOTOMETRICS	TEC 12
PLASTERKIT	TEC 32
RASTER 66/109	TEC 45
REO 111 (LED SOLUTION)	TEC 4
RGB OPTIONS	TEC 28
RING 66/109	TEC 42
SPOTNIC M10 SYSTEM	TEC 39
SUSPENSION TRIMLESS	TEC 40
T16 SEAMLESS LAMP	TEC 05
TRANSFO	TEC 30
TRIMLESS KIT	TEC 35
TUBE C/R	TEC 44
UV-FILTER	TEC 43
ZB BOX	TEC 35

LED SOLUTION

led

Haloled






HALOLED 51 - 36° (20W) WW
309 106 38 22
INCL.1 x POWERLED WHITE / 3000K
INCL.1 x LENS 36°
TOTAL POWER 5W/210lm
GX5.3 /12V

CE 0,1 IP20






HALOLED 51 - 36° (35W) WW
309 106 38 32
INCL.1 x POWERLED WHITE / 3000K
INCL.1 x LENS 36°
TOTAL POWER 7W/315lm
GX5.3 / 12V

CE 0,1 IP20






HALOLED Hi - 36° (35W) WW
309 107 38 32
INCL.3 x POWERLED WHITE / 2700K
INCL.3 x LENS 35°
TOTAL POWER 5,2W/190lm
GU10 / 220-240V / 50-60Hz

CE 0,1 IP20






HALOLED E27 - 360° (60W) WW
309 108 00 02
INCL.1 x POWERLED WHITE / 2700K
TOTAL POWER 12W
E27 / 220-240V / 50-60Hz

CE 0,1 IP20

led

Reo 111





	CRI > 80	CRI > 90
3000K	660 lm	580 lm
REFLECTOR FL-33°	**REO 111 3033** ◇ **309 111 28122** ◇ ◇ = A / B / W	**REO 111 3033-9** ◇ **309 111 29122** ◇ ◇ = A / B / W
REFLECTOR WFL-50°	**REO 111 3050** ◇ **309 111 28132** ◇ ◇ = A / B / W	**REO 111 3050-9** ◇ **309 111 29132** ◇ ◇ = A / B / W
2700K	620 lm	525 lm
REFLECTOR FL-33°	**REO 111 2733** ◇ **309 111 28123** ◇ ◇ = A / B / W	**REO 111 2733-9** ◇ **309 111 29123** ◇ ◇ = A / B / W
REFLECTOR WFL-50°	**REO 111 2750** ◇ **309 111 28133** ◇ ◇ = A / B / W	**REO 111 2750-9** ◇ **309 111 29133** ◇ ◇ = A / B / W


INCL.1 x POWERLED WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC
INCL.2 x WIRE 1 x 0.50mm² 0.5m
$T_{HEATSINK}$ MAX < 65°C*

CE 0,2 IP20

led

Haloled 111





HALOLED 111 - 24° HW
309 155 24 12

HALOLED 111 - 45° HW
309 155 45 12

INCL.2 x POWERLED WHITE / 2800K
TOTAL POWER 15W
G53 / 12V / NON DIMMABLE

CE 0,2




GRID IN 1QR + REO 111

* provide appropriate ventilation to limit $T_{HEATSINK}$ temperature

tech

Led Solution

PRODUCT	REFERENCE	HALOLED 111	REO 111
GRAND DIRO ST 111	202 15 62 01		•
GRAND DIRO ST D 111	202 15 62 00		
GRAND DIRO TRIMLESS 111	202 15 61 01		•
GRAND DIRO TRIMLESS D 111	202 15 61 00		
GRID IN 1 QR	202 62 00 01	•	•
GRID IN 2 QR	202 62 00 02	•	•
GRID IN 3 QR	202 62 00 03	•	•
GRID IN 4 QR	202 62 00 04	•	•
GRID IN 4LINE QR	202 62 00 04L	•	•
GRID IN TRIMLESS 1 QR	202 61 00 01	•	•
GRID IN TRIMLESS 2 QR	202 61 00 02	•	•
GRID IN TRIMLESS 3 QR	202 61 00 03	•	•
GRID IN TRIMLESS 4 QR	202 61 00 04	•	•
GRID IN TRIMLESS 4LINE QR	202 61 00 04L	•	•
GRID IN ZB 1 QR	202 60 00 01	•	•
GRID IN ZB 2 QR	202 60 00 02	•	•
GRID IN ZB 3 QR	202 60 00 03	•	•
GRID IN ZB 4 QR	202 60 00 04	•	•
PUT 111 CENTER	202 91 01 11	•	•
PUT 111 CLICK	202 91 02 11		•
RODI 111 S1	202 37 12	•	•
RODI S 111 S1	202 38 12	•	•
ULTRA IN TRIMLESS 111	202 57 61 00	•	•

LED POWER SUPPLY	REFERENCE	PAGE	HALOLED 111	REO 111
LED POWER SUPPLY 350mA-DC / 15W	300 90 91	TEC 17	-	1
LED POWER SUPPLY 350mA-DC / 16W DIM8	300 90 3112	TEC 17	-	2
LED POWER SUPPLY 350mA-DC / 17W	300 90 913	TEC 17	-	2
LED POWER SUPPLY 350mA-DC / 18W	300 90 112	TEC 17	-	2
LED TRANSFO 12V-70W	300 89 12 71	TEC 30	2	-


T16 Seamless


x 1 / pack	REFERENCE	
T16 SEAMLESS 14W 3000K	300 93 17 3014	0.125
T16 SEAMLESS 21W 3000K	300 93 17 3021	0.18
T16 SEAMLESS 24W 3000K	300 93 17 3024	0.125
T16 SEAMLESS 28W 3000K	300 93 17 3028	0.24
T16 SEAMLESS 39W 3000K	300 93 17 3039	0.18
T16 SEAMLESS 54W 3000K	300 93 17 3054	0.235

x 25 / pack		
T16 SEAMLESS 14W 3000K	300 93 17 3014-25	3,1
T16 SEAMLESS 21W 3000K	300 93 17 3021-25	4,5
T16 SEAMLESS 24W 3000K	300 93 17 3024-25	3,1
T16 SEAMLESS 28W 3000K	300 93 17 3028-25	6,0
T16 SEAMLESS 39W 3000K	300 93 17 3039-25	4,5
T16 SEAMLESS 54W 3000K	300 93 17 3054-25	5,8



Ledstrip 50 F

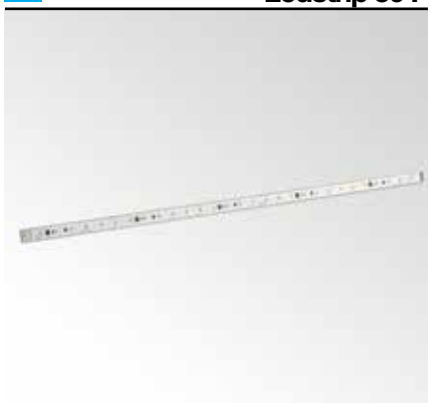



LEDSTRIP 50 F NW
300 92 00 14 F
L : 500mm
30 x SMD LED - 4000K - ±50K

LEDSTRIP 50 F WW
300 92 00 12 F
L : 500mm
30 x SMD LED - 3000K - ±50K

LEDSTRIP 50 F HW
300 92 00 13 F
L : 500mm
30 x SMD LED - 2700K - ±50K


3W / LEDSTRIP (6W/m)
220lm / LEDSTRIP (440lm/m)
DIVIDABLE PER 100mm
24V-DC
EXCL.LED POWER SUPPLY 24V-DC

CE 0,1 IP20

OPTIONS
LEDSTRIP CONNECTION SET 300 92 91 01
LEDSTRIP SUPPLY CABLE SET 300 92 91 02

Ledstrip 50 FP





LEDSTRIP 50 FP NW
300 92 00 14 FP
L : 500mm
30 x SMD LED - 4000K - ±50K

LEDSTRIP 50 FP WW
300 92 00 12 FP
L : 500mm
30 x SMD LED - 3000K - ±50K


LEDSTRIP 50 FP HW
300 92 00 13 FP
L : 500mm
30 x SMD LED - 2700K - ±50K


10W / LEDSTRIP (20W/m)
630lm / LEDSTRIP (1260lm/m)
DIVIDABLE PER 100mm
24V-DC
EXCL.LED POWER SUPPLY 24V-DC

CE 0,1 IP20

OPTIONS
LEDSTRIP FP CONNECTION SET 300 92 92 01
LEDSTRIP FP SUPPLY CABLE SET 300 92 92 02

Ledstrip 50 RGB

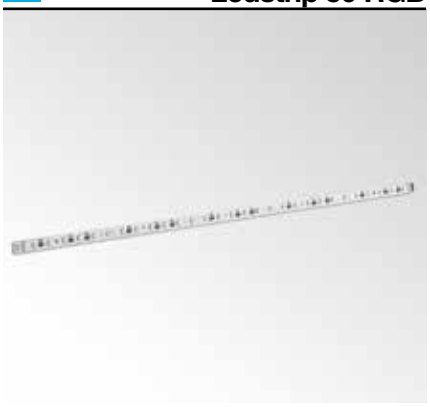




LEDSTRIP 50 RGB
300 92 00 33
L : 500mm
30 x SMD LED - RGB


7,5W / LEDSTRIP
DIVIDABLE PER 100mm
24V-DC
EXCL.LED POWER SUPPLY 24V-DC

CE 0,1 IP20

OPTIONS
LEDSTRIP CONNECTION SET 300 92 91 01
LEDSTRIP SUPPLY CABLE SET 300 92 91 02

option LEDSTRIP 50 F + 50 RGB

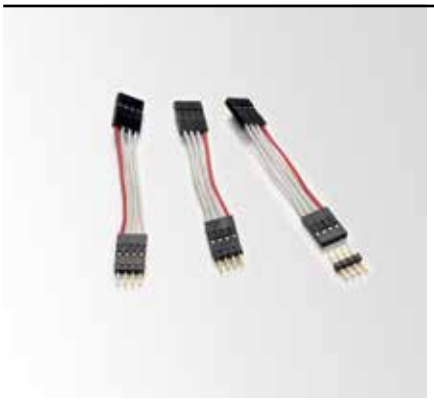

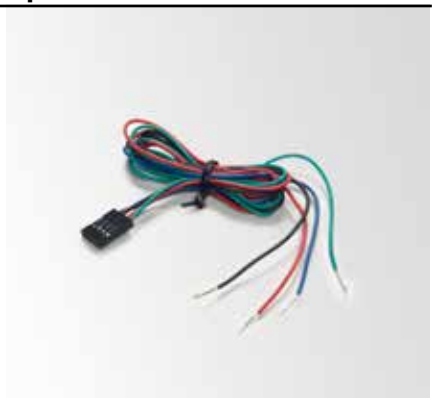





LEDSTRIP CONNECTION SET
300 92 91 01
4 x 0.35mm² / 48 mm
SET OF 10 pcs


CE 0,1

LEDSTRIP SUPPLY CABLE SET
300 92 91 02
4 x 0.35mm² / 500 mm
SET OF 10 pcs

CE 0,1

option LEDSTRIP 50 FP



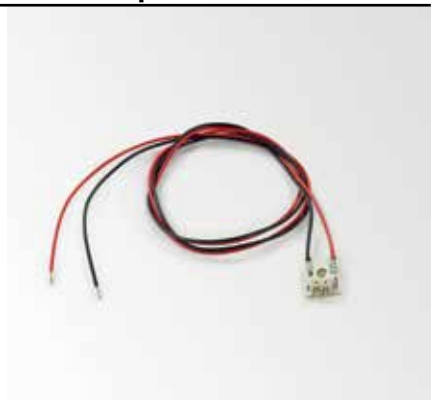





LEDSTRIP FP CONNECTION SET
300 92 92 01
2 x 0.35mm² / 48 mm
SET OF 5 pcs


CE 0,1

LEDSTRIP FP SUPPLY CABLE SET
300 92 92 02
2 x 0.35mm² / 500 mm
SET OF 5 pcs

CE 0,1

Ledflex 5m





LEDFLEX IN NW 5m
300 92 52 04
60 x SMD LED/m - 4000K

LEDFLEX IN WW 5m
300 92 52 02
60 x SMD LED/m - 3000K

LEDFLEX IN HW 5m
300 92 52 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
5W/m - 360lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

OPTIONS
LEDFLEX IN CONNECTION SET
LEDFLEX IN SUPPLY CABLE SET
LEDFLEX IN CONNECTION CLIP SET



LEDFLEX OUT NW 5m
300 92 62 04
60 x SMD LED/m - 4000K

LEDFLEX OUT WW 5m
300 92 62 02
60 x SMD LED/m - 3000K

LEDFLEX OUT HW 5m
300 92 62 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
5W/m - 360lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
INCL.8 ENDCAPS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,3 IP65

Ledflex FP 5m





LEDFLEX IN FP NW 5m
300 92 53 04
60 x SMD LED/m - 4000K

LEDFLEX IN FP WW 5m
300 92 53 02
60 x SMD LED/m - 3000K

LEDFLEX IN FP HW 5m
300 92 53 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
15W/m - 1000lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

OPTIONS
LEDFLEX IN FP CONNECTION SET
LEDFLEX IN FP SUPPLY CABLE SET
LEDFLEX IN FP CONNECTION CLIP SET



LEDFLEX OUT FP NW 5m
300 92 63 04
60 x SMD LED/m - 4000K

LEDFLEX OUT FP WW 5m
300 92 63 02
60 x SMD LED/m - 3000K

LEDFLEX OUT FP HW 5m
300 92 63 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
15W/m - 1000lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
INCL.8 ENDCAPS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,3 IP65

Ledflex HP 5m





LEDFLEX IN HP WW 5m
300 92 54 02
180 x SMD LED/m - 3000K

LEDFLEX IN HP HW 5m
300 92 54 03
180 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 33,3mm
21,6W/m - 1800lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

Ledflex RGB 5m





LEDFLEX IN RGB 5m
300 92 52 33
30 x SMD LED/m - RGB

L : 5m / DIVIDABLE PER 167mm
8W/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

OPTIONS
LEDFLEX IN RGB CONNECTION SET
LEDFLEX IN RGB SUPPLY CABLE SET
LEDFLEX IN RGB CONNECTION CLIP SET




LEDFLEX OUT RGB 5m
300 92 62 33
30 x SMD LED/m - RGB

L : 5m / DIVIDABLE PER 167mm
8W/m
24V-DC
INCL.20 MOUNTING BRACKETS
INCL.8 ENDCAPS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,3 IP65

tech


option LEDFLEX IN

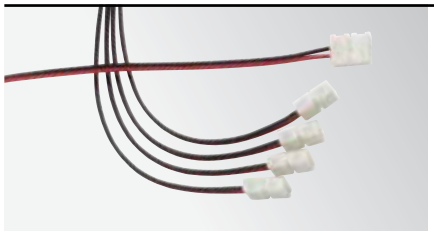



LEDFLEX IN SUPPLY CABLE SET
300 92 93 07
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1

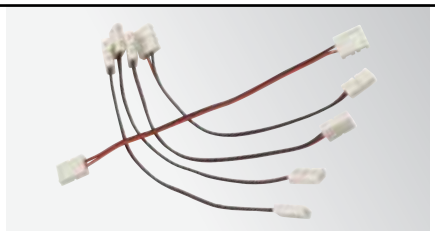



LEDFLEX IN CONNECTION SET
300 92 93 08
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1






LEDFLEX IN CONNECTION CLIP SET
300 92 93 09
SET OF 10 pcs

CE 0,1


option LEDFLEX IN FP

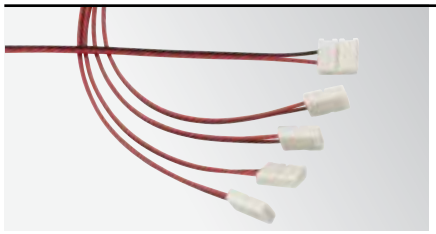



LEDFLEX IN FP SUPPLY CABLE SET
300 92 93 01
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1

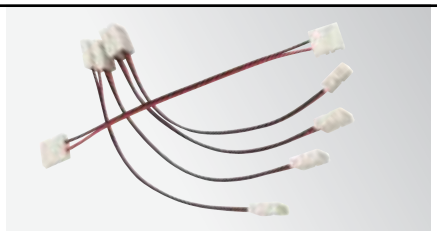



LEDFLEX IN FP CONNECTION SET
300 92 93 02
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1






LEDFLEX IN FP CONNECTION CLIP SET
300 92 93 03
SET OF 10 pcs

CE 0,1


option LEDFLEX IN RGB

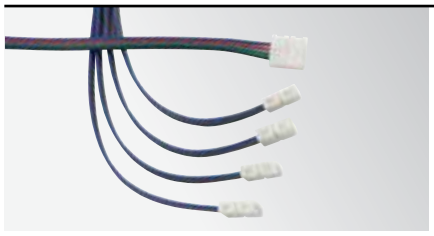



LEDFLEX IN RGB SUPPLY CABLE SET
300 92 93 04
4 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1

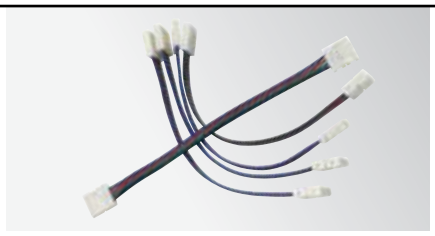



LEDFLEX IN RGB CONNECTION SET
300 92 93 05
4 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1





LEDFLEX IN RGB CONNECTION CLIP SET
300 92 93 06
SET OF 10 pcs

CE 0,1

tech

led

			2700K 3	3000K	4000K	Typical values	
CRI	**LED**	**1 Power**	**Luminous flux @ 70°**	**Luminous flux @ 70°**	**Luminous flux @ 70°**	**Forw.Cur.**	**Forw.Volt.**
CRI > 80 2							
		**7 W**	**500 lm - 76 lm/W**	**525 lm - 80 lm/W**	**560 lm - 85 lm/W**	**350 mA**	**18,8 V ***
		**10 W**	**725 lm - 74 lm/W**	**770 lm - 78 lm/W**	**860 lm - 87 lm/W**	**350 mA**	**28,1 V ***
		**7 W**	**620 lm - 88 lm/W 4**	**660 lm - 94 lm/W**	**750 lm - 107 lm/W**	**350 mA**	**20,1 V ***
		10 W	**865 lm - 84 lm/W**	**920 lm - 89 lm/W**	**1045 lm - 101 lm/W**	**500 mA**	**20,7 V ***
		**18 W**	**1475 lm - 83 lm/W**	**1570 lm - 88 lm/W**	**1790 lm - 101 lm/W**	**500 mA**	**35,5 V ***
		25 W	**1990 lm - 77 lm/W**	**2130 lm - 82 lm/W**	**2420 lm - 93 lm/W**	**700 mA**	**37,0 V ***
		**17 W**	**-**	**1500 lm - 88 lm/W**	**-**	**700 mA**	**SYSTEM**
		29 W	**-**	**3000 lm - 104 lm/W**	**-**	**700 mA**	**SYSTEM**
CRI > 90							
		**7 W**	430 lm - 65 lm/W ON REQUEST	465 lm - 71 lm/W ON REQUEST	-	**350 mA**	**18,8 V ***
		**10 W**	615 lm - 63 lm/W ON REQUEST	680 lm - 69 lm/W ON REQUEST	-	**350 mA**	**28,1 V ***
		**7 W**	**525 lm - 75 lm/W**	**580 lm - 82 lm/W**	-	**350 mA**	**20,1 V ***
		10 W	**735 lm - 71 lm/W**	**810 lm - 78 lm/W**	-	**500 mA**	**20,7 V ***
		**18 W**	**1284 lm - 72 lm/W**	**1295 lm - 73 lm/W**	-	**500 mA**	**35,5 V ***
		25 W	**1735 lm - 67 lm/W**	**1750 lm - 68 lm/W**	-	**700 mA**	**37,0 V ***
		**33 W**	-	**3000 lm - 91 lm/W**	-	**700 mA**	**SYSTEM**

*** +/- 8%**


tech

All the technical parameters for LED-apply to the entire module. In view of the complex manufacturing process for light emitting diodes (LED), the typical values given in this **Lighting Bible® 10** are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values. For most accurate info, please consult: **www.deltalight.com/ledspecs.pdf**

LED SPECS

Example





Example

76 x 55 max.22

	CRI > 80 2	CRI > 90
4000K	750 lm	
REFLECTOR FL-33°	**REO 4033 S1** ◇ **202 26 28124** ◇ ◇ = C / MMAT / W	
REFLECTOR WFL-50°	**REO 4050 S1** ◇ **202 26 28134** ◇ ◇ = C / MMAT / W	
3000K	660 lm	580 lm
REFLECTOR FL-33°	**REO 3033 S1** ◇ **202 26 28122** ◇ ◇ = C / MMAT / W	**REO 3033-9 S1** ◇ **202 26 29122** ◇ ◇ = C / MMAT / W
REFLECTOR WFL-50°	**REO 3050 S1** ◇ **202 26 28132** ◇ ◇ = C / MMAT / W	**REO 3050-9 S1** ◇ **202 26 29132** ◇ ◇ = C / MMAT / W
2700K 3	620 lm 4	525 lm
REFLECTOR FL-33°	**REO 2733 S1** ◇ **202 26 28123** ◇ ◇ = C / MMAT / W	**REO 2733-9 S1** ◇ **202 26 29123** ◇ ◇ = C / MMAT / W
REFLECTOR WFL-50°	**REO 2750 S1** ◇ **202 26 28133** ◇ ◇ = C / MMAT / W	**REO 2750-9 S1** ◇ **202 26 29133** ◇ ◇ = C / MMAT / W

FIXED
INCL.1 x POWERLED WHITE 7W 1
EXCL.LED POWER SUPPLY 350mA-DC

IP20 IP43 IP20 IP20

OPTIONS
PLASTERKIT 101
LED POWER SUPPLY 350mA-DC / DIM

tech

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33	4052	4313	3431	3791
	50	2745	2922	2325	2568
1.0m	33	1013	1079	858	948
	50	687	731	582	643
1.5m	33	451	479	381	421
	50	305	325	258	286
2.0m	33	253	270	214	237
	50	171	183	145	161

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 7W	Boxter x LED	33	2700 - 3000	80-90	350
LED 7W	BOXY WL+ LED	33	2700 - 3000	80	350
LED 7W	Boxy x L+ LED	33	2700 - 3000	80-90	350
LED 7W	Carree GT LED	33	2700 - 3000	80	350
LED 7W	Carree ST L LED	33	2700 - 3000	80-90	350
LED 7W	Carree ST LED	33	2700 - 3000	80-90	350
LED 7W	Carree Trimless LED	33	2700 - 3000	80-90	350
LED 7W	Carree X LED	33	3000	80	350
LED 7W	Credo REO Jac	33	2700 - 3000	80	350
LED 7W	DEEP RINGO LED	33	2700 - 3000	80-90	350
LED 7W	DEEP RINGO S LED	33	2700 - 3000	80-90	350
LED 7W	Diro ST OK LED	33	2700 - 3000	80	350
LED 7W	Diro Trimless LED	33	2700 - 3000	80-90	350
LED 7W	HDL - x REO	33-50	2700 - 3000	80-90	350
LED 7W	Link x Reo	33	2700 - 3000	80-90	350
LED 7W	McDelta	33	3000	80	350*
LED 7W	Minigrid In Trimless x REO	33	2700 - 3000	80-90	350
LED 7W	Minigrid In x REO	33	2700 - 3000	80-90	350
LED 7W	Minigrid In ZB x Reo	33	2700 - 3000	80-90	350
LED 7W	NB200 - x REO	33-50	2700 - 3000	80-90	350
LED 7W	Oreo	33	2700 - 3000	80	350
LED 7W	RAND x REO	33-50	2700 - 3000	80-90	350
LED 7W	Reo	33-50	2700-3000-4000	80-90	350
LED 7W	Reo 111	33-50	2700 - 3000	80-90	350
LED 7W	Reo 2 S	33-50	2700-3000-4000	80-90	350
LED 7W	Reo 2 S OK	33-50	2700-3000-4000	80-90	350
LED 7W	Reo D	33	2700-3000-4000	80-90	350
LED 7W	Reo HD	33	2700-3000-4000	80-90	350
LED 7W	Reo OK	33-50	2700-3000-4000	80-90	350
LED 7W	Reo S	33-50	2700-3000-4000	80-90	350
LED 7W	Reo S OK	33-50	2700-3000-4000	80-90	350
LED 7W	Reo X	33	3000	80	350
LED 7W	Spatio Reo (AD)	33-50	2700-3000	80-90	350
LED 7W	SPL51 - x LED	33-50	2700-3000	80-90	350
LED 7W	SPL52 - x LED	33-50	2700-3000	80-90	350
LED 7W	SPL52 - x RB LED	33-50	2700-3000	80-90	350
LED 7W	SPOTNIC LED M10	33	3000	80	350
LED 7W	SPOTNIC x LED	33	3000	80	350
LED 7W	TWEETER ST D REO	33-50	2700-3000	80-90	350
LED 7W	TWEETER Trimless REO	33-50	2700-3000	80-90	350
LED 7W	Ultra C D	33	2700-3000	80-90	350
LED 7W	Ultra S D	33	2700-3000	80-90	350
LED 7W	Ultra S Reo	33	2700-3000	80-90	350
LED 7W	Ultra Twin LED	33-50	2700-3000	80-90	350
LED 7W	You-Turn REO	33-50	2700-3000	80-90	350

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33	5384	5726	4575	5042
	50	3647	3879	3100	3416
1.0m	33	1346	1433	1144	1261
	50	912	970	776	855
1.5m	33	599	636	508	560
	50	405	431	344	380
2.0m	33	336	358	286	316
	50	227	243	193	214

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 10W	You-Turn ON REO (AD)	33-50	2700-3000	80-90	500
LED 10W	TWEETER ON x REO	33-50	2700-3000	80-90	500
LED 10W	TWEETER ST D REO	33-50	2700-3000	80-90	500
LED 10W	TWEETER Trimless REO	33-50	2700-3000	80-90	500

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15	52889	56252	44940	49526
	33	18689	19877	15880	17500
	45	8904	9470	7566	8338
1.0m	15	13222	14063	11235	12382
	33	4672	4969	3970	4375
	45	2226	2368	1892	2085
1.5m	15	5876	6250	4993	5503
	33	2077	2209	1765	1945
	45	989	1052	840	926
2.0m	15	3306	3516	2809	3096
	33	1168	1242	992	1094
	45	557	592	473	521


LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 10W	Mohow LED AD	15-33-45	2700 - 3000	80	500

tech

LUX		CRI 80
		3000K
0.5m	60	2196
1.0m	60	550
1.5m	60	244
2.0m	60	137


LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 10W	STREAMER M	---	3000	80	500
LED 10W	STREAMER TRIMLESS M	---	3000	80	500

PHOTOMETRICS




		CRI 80
		3000K
0.5m	90	3572
1.0m	90	893
1.5m	90	397
2.0m	90	223

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
SMD LED	STREAMER L	---	3000	80	1000
SMD LED	STREAMER TRIMLESS L	---	3000	80	1000




		CRI 80
		3000K
0.5m	11	19532
	30	4068
	55	1882
1.0m	11	4883
	30	1042
	55	470
1.5m	11	2170
	30	463
	55	209
2.0m	11	1221
	30	261
	55	118

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 7W	KIX (PIN)	11 - 30 - 55	3000	80	350
LED 7W	LOGIC R / R A / S	11 - 30 - 55	3000	80	350



		CRI 80
		3000K
0.5m	20°	2183
1.0m	20°	546
1.5m	20°	243
2.0m	20°	136


LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 7W	Tactic 3020	20	3000	80	350

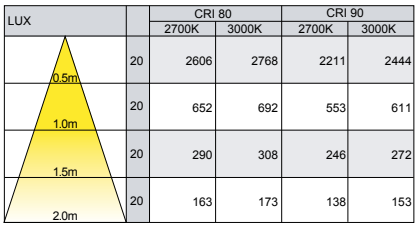

		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	20	2606	2768	2211	2444
1.0m	20	652	692	553	611
1.5m	20	290	308	246	272
2.0m	20	163	173	138	153


LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 10W	Fox P 7	20	3000	80	350

@500mA

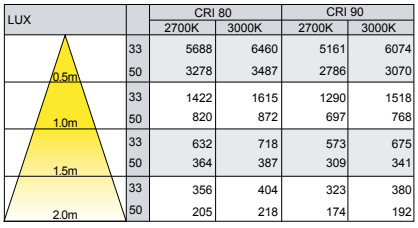

		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33	5688	6460	5161	6074
	50	3278	3487	2786	3070
1.0m	33	1422	1615	1290	1518
	50	820	872	697	768
1.5m	33	632	718	573	675
	50	364	387	309	341
2.0m	33	356	404	323	380
	50	205	218	174	192

@700mA

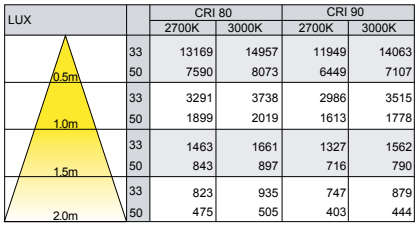

		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33	13169	14957	11949	14063
	50	7590	8073	6449	7107
1.0m	33	3291	3738	2986	3515
	50	1899	2019	1613	1778
1.5m	33	1463	1661	1327	1562
	50	843	897	716	790
2.0m	33	823	935	747	879
	50	475	505	403	444

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18W	Grid In Trimless x REO	33	2700-3000	80-90	500
LED 18W	Grid In x REO	33	2700-3000	80-90	500
LED 18W	Grid In ZB x REO	33	2700-3000	80-90	500
LED 25W	You-Turn ON REO 20 (AD)	33-50	2700-3000	80-90	700
LED 18-25W	You-Turn Reo 20	33-50	2700-3000	80-90	500-700

@500mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15	19021	20230	16162	17811
	33	6725	7153	5715	6298
	55	3075	3271	2613	2880
1.0m	15	4756	5058	4041	4453
	33	1681	1788	1428	1574
	55	769	818	654	720
1.5m	15	2114	2248	1796	1979
	33	747	795	635	700
	55	341	363	290	320
2.0m	15	1188	1264	1010	1113
	33	420	447	357	394
	55	192	204	163	180

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18W	Grid In Trimless x OPTO	15-33-55	2700-3000	80-90	500
LED 18W	Grid In x OPTO	15-33-55	2700-3000	80-90	500
LED 25W	You-Turn ON OPTO 20 (AD)	15-33-55	2700-3000	80-90	700
LED 18-25W	You-Turn OPTO 20	15-33-55	2700-3000	80-90	500-700
LED 25W	You-Turn SPL OPTO 20	15-33-55	2700-3000	80-90	700
LED 25W	You-Turn SPL REO 20	15-33-55	2700-3000	80-90	700

@700mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15	44037	46837	37419	41237
	33	15571	16561	13231	14581
	55	7120	7573	6050	6668
1.0m	15	11010	11710	9356	10310
	33	3892	4140	3307	3645
	55	1781	1894	1513	1667
1.5m	15	4893	5205	4158	4582
	33	1731	1841	1470	1621
	55	790	840	671	740
2.0m	15	2751	2926	2338	2577
	33	973	1035	827	911
	55	444	472	377	416

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	10	46296	49278	55995	40647
	20	20983	22334	25378	18422
	45	7085	7541	8569	6220
1.0m	10	11575	12320	13999	10162
	20	5245	5583	6344	4605
	45	1771	1885	2142	1555
1.5m	10	5144	5475	6221	4516
	20	2332	2482	2820	2047
	45	787	838	952	691
2.0m	10	2894	3080	3500	2541
	20	1312	1396	1586	1151
	45	443	471	535	389

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18W	Grand Diro ST OPTO	10-20-45	2700-3000	80-90	500
LED 18W	Grand Diro Trimless OPTO	10-20-45	2700-3000	80-90	500

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	17	26127	27810	22744	22939
	37	11314	12043	9849	9934
	60	5290	5631	4605	4645
1.0m	17	6532	6953	5686	5735
	37	2829	3011	2462	2484
	60	1323	1408	1152	1161
1.5m	17	2903	3090	2527	2549
	37	1257	1338	1094	1104
	60	588	626	512	516
2.0m	17	1633	1738	1421	1434
	37	707	753	616	621
	60	331	352	288	290

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18W	Minigrid In Trimless x HP	17-37-60	2700-3000	80-90	500
LED 18W	Minigrid In x HP	17-37-60	2700-3000	80-90	500

LUX		CRI 80	
		1500lm	3000lm
0.5m	20	30100	31643
	27		
	40	11752	
	50		12355
1.0m	20	7525	7911
	27		
	40	2938	
	50		3089
1.5m	20	3344	3516
	27		
	40	1306	
	50		1373
2.0m	20	1881	1978
	27		
	40	734	
	50		772

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 17W	BOOSTER HP (AD)	20-40	3000	80	700
LED 29W	BOOSTER HP (AD)	27-50	3000	80	700

LUX		CRI 80	CRI 90
		3000K	3000K
0.5m	27	31643	31643
	50	12355	12355
1.0m	27	7911	7911
	50	3089	3089
1.5m	27	3516	3516
	50	1373	1373
2.0m	27	1978	1978
	50	772	772

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 29-33W	Grid In Trimless x HP	27-50	3000	80-90	700
LED 29-33W	Grid In x HP	27-50	3000	80-90	700

PHOTOMETRICS

LUX		CRI 80	
		2700K	3000K
0.5m	20	11396	11966
	40	5557	5835
1.0m	20	2849	2991
	40	1390	1459
1.5m	20	1267	1330
	40	617	648
2.0m	20	712	748
	40	348	365

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18W	Ultra Twin LED	20-40	3000	80	700

LUX		35W	50W	70W
0.5m	18	65423	78750	127968
	28	41006	49359	80208
	52	15845	19073	30993
1.0m	18	16356	19687	31992
	28	10251	12340	20052
	52	3961	4768	7748
1.5m	18	7269	8750	14219
	28	4556	5484	8912
	52	1761	2119	3444
2.0m	18	4089	4922	7998
	28	2563	3085	5013
	52	990	1192	1937


LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	Watt
HIT-TC	BOOSTER HIC (AD)	18-28-52	---	---	35-50-70

LUX		35W	70W
0.5m	15	188914	383075
	24	45204	91665
	43	19682	39911
1.0m	15	47228	95769
	24	11301	22916
	43	4920	9987
1.5m	15	20990	42564
	24	5023	10185
	43	2187	4435
2.0m	15	11807	23942
	24	2825	5729
	43	1230	2494

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	Watt
HIT-TC	GRID IN TRIMLESS x HIC	15-24-43	---	---	35-70
HIT-TC	GRID IN x HIC	15-24-43	---	---	35-70
HIT-TC	RODI HIC	15-24-43	---	---	35-70
HIT	You-Turn ON HIT (AD)	15-24-43	---	---	35-70


Do's & Don'ts


CORRECT CONNECTION: serial connection

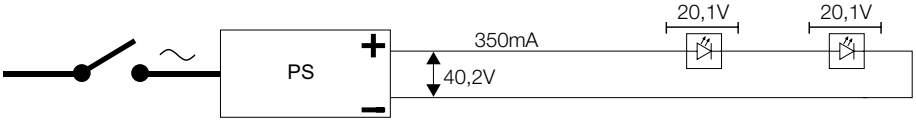

WRONG CONNECTION: parallel connection


Depending on the number of fixtures the LED modules will function at half (2 LED's), one third (3 LED's) the luminous intensity. Moreover, due to different forward voltages the current will not split in equal part.

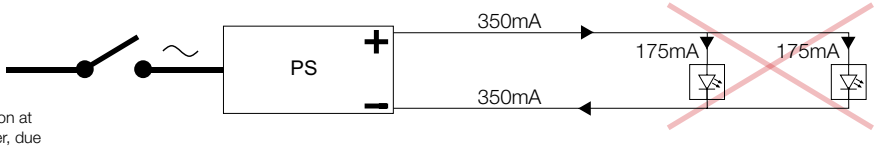


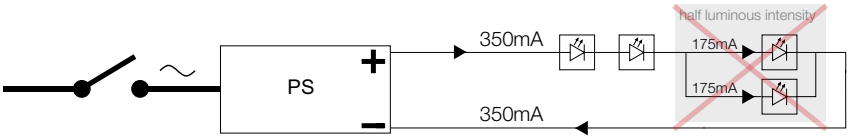

WRONG CONNECTION: testing of led modules on switched on power supply

Risk for an output voltage that exceeds the max for the LED.
A power supply that is switched on has max output on the secundary side (eg. 49V).
The LED in eg. a Reo 3030 is 7W works at 350mA and 20,1V.
49V is far too big for the Reo 3030 >> LED will be damaged.

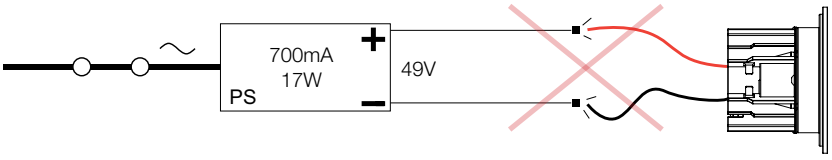

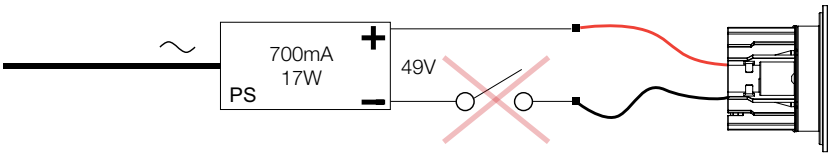


WRONG POWER SUPPLY:

Question:
How many Minigrid in 1 Reo (7W) luminaires can be connected to power supply 300 90 914?
7W x 4 = 28W >>> max **power** of 300 90 914 = 35W >>> **OK**
4 x 20,1V = 80,4V >>> max **voltage** of 300 90 914 = 72V >>> **NOT OK**

Answer:
3 x Minigrid in 1 Reo (7W) luminaires can be connected to power supply 300 90 914






Therefore: **always consult the matrix on PAGE TEC 17-24!**



300 90 914	
CE 0,1 IP20	
124,5 x 79 x 22	
110-240V / 50-60Hz	
500mA / 35W / 72V	
> 0,9	
-	
MINIGRID IN 1 REO	3

led




LED Power Supply 350mA-DC

Type					
LED POWER SUPPLY...	**350mA / 6W**	**350mA / 15W (110-120V: 10W)**	**350mA / 16W Dim8**	**350mA / 17W (110-127V: 12W)**	**350mA / 18W**
	300 90 104	**300 90 91**	**300 90 3112**	**300 90 913**	**300 90 112**
	□ CE 0,1 IP67	□ CE 0,1 IP20	□ FE CE 0,3 IP65	□ CE 0,1 IP20	□ CE 0,3 IP54
Dimensions (L x W x H)	64 x 35 x 20	115 x 34 x 19	76 x 34 x 24	111 x 38 x 28	133 x 40 x 30,5
Input	220-240V / 50-60Hz	100-240V / 50-60Hz	100-240V / 50-60Hz	110-240V / 50-60Hz	220-240V / 0/50/60Hz
Output	2-20V-DC	0-43V-DC	17-46V-DC	0-49V-DC	4-52V-DC
λ	0,5	0,54 (240V) - 0,64 (100V)	> 0,9	0,55	> 0,9
Dim	-	-	Dim8 (30-100%)	-	Dim8 (35-100%)





B-SIDE LED	4	12 (10)	min. 5 - max. 12	13 (12)	min. 2 - max. 14
CARREE GT LED	0	1	2	2 (1)	2
CARREE ST L LED	0	1	2	2 (1)	2
CARREE ST LED	0	1	2	2 (1)	2
CARREE TRIMLESS LED	0	1	2	2 (1)	2
CARREE X LED	0	1	2	2 (1)	2
CREDO REO JAC	0	1	2	2 (1)	2
DEEP IRIS	4	12 (10)	min. 5 - max. 12	13 (12)	min. 2 - max. 14
DEEP RINGO LED	0	1	2	2 (1)	2
DEEP RINGO S LED	0	1	2	2 (1)	2
DIRO GT LED	0	1	2	2 (1)	2
DIRO LED +	0	1	2	2 (1)	2
DIRO ST OK LED	0	1	2	2 (1)	2
DIRO TRIMLESS LED	0	1	2	2 (1)	2
FLIP	0	2	2	2 (1)	2
FLIP PIN	0	2	2	2 (1)	2
FOX P 7	0	1	1	1	1
GRAND DIRO ST OPTO	-	-	-	-	-
GRAND DIRO TRIMLESS OPTO	-	-	-	-	-
GRID IN 1 OPTO	-	-	-	-	-
GRID IN 1 REO	-	-	-	-	-
GRID IN 2 OPTO	-	-	-	-	-
GRID IN 2 REO	-	-	-	-	-
GRID IN TRIMLESS 1 OPTO	-	-	-	-	-
GRID IN TRIMLESS 1 REO	-	-	-	-	-
GRID IN TRIMLESS 2 OPTO	-	-	-	-	-
GRID IN TRIMLESS 2 REO	-	-	-	-	-
GRID IN ZB 1 REO	-	-	-	-	-
GRID IN ZB 2 REO	-	-	-	-	-
HELI 1 LED	5	12 (9)	min. 6 - max. 12	14 (10)	16
HELI 1 SCREEN LED	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
HELI X SCREEN LED	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
INDUSTRIAL S	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
INLET MS	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
INLET S	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
LEDS C R	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
LEDS C R ST	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
LEDS C S	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
LEDS GO IN FORTE	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
LEDS SWING	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
LOOK IN	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
LOOK OUT	4	12 (8)	min. 5 - max. 12	13 (9)	min. 2 - max. 14
MINIGRID IN 1 HP	-	-	-	-	-
MINIGRID IN 1 REO	0	1	2	2 (1)	2
MINIGRID IN 2 HP	-	-	-	-	-
MINIGRID IN 2 REO	0	0,5	1	1 (0)	1
MINIGRID IN TRIMLESS 1 HP	-	-	-	-	-
MINIGRID IN TRIMLESS 1 REO	0	1	2	2 (1)	2
MINIGRID IN TRIMLESS 2 HP	-	-	-	-	-
MINIGRID IN TRIMLESS 2 REO	0	0,5	1	1 (0)	1
MINIGRID IN ZB 1 REO	0	1	2	2 (1)	2
MINIGRID IN ZB 2 REO	0	0,5	1	1 (0)	1
OREO	0	1	2	2 (1)	2
PUK XL	1	3 (2)	min. 2 - max. 3	3 (2)	3
REO	0	1	2	2 (1)	2
REO 2 S	0	0	1	1 (0)	1
REO 2 S OK	0	0	1	1 (0)	1
REO D	0	1	2	2 (1)	2
REO HD	0	1	2	2 (1)	2
REO OK	0	1	2	2 (1)	2
REO S	0	1	2	2 (1)	2
REO S OK	0	1	2	2 (1)	2
REO X	0	1	2	2 (1)	2
SPOTNIC LED M10	0	1	2	2 (1)	2
TACTIC 2	2	6 (5)	min. 3 - max. 6	6 (4)	min. 1 - max. 7
TACTIC	0	1	2	2 (1)	2
TOPIX	2	6 (4)	min. 3 - max. 6	6 (4)	min. 1 - max. 7
TWEETER ST D REO	0	1	2	2 (1)	2
TWEETER TRIMLESS REO	0	1	2	2 (1)	2
YOU-TURN OPTO 20	-	-	-	-	-
YOU-TURN REO	0	1	2	2 (1)	2
YOU-TURN REO 20	-	-	-	-	-
YUPI X LED	2	6 (5)	min. 3 - max. 6	6 (4)	min. 1 - max. 7

tech


LED Power Supply 500mA-DC

Type			
LED POWER SUPPLY...	**500mA / 6W**	**500mA / 20W (110V: 12W)**	**500mA / 32W Dim8**
	300 90 22 U	**300 90 92**	**300 90 5120**
	☐ CE 0,1 IP67	☐ CE 0,1 IP20	☐ FE CE 0,3 IP65
Dimensions (L x W x H)	45 x 45 x 25	111 x 38 x 28	86 x 56 x 24
Input	120-240V / 50-60Hz	110-240V / 50-60Hz	110-240V / 0/50/60Hz
Output	2-14V-DC	3,5-45V-DC	24-45V-DC
λ	0,5	0,57	> 0,9
Dim	-	-	Dim8 (30-100%)
B-SIDE LED	3	11 (6)	min. 7 - max. 13
CARREE GT LED	-	-	-
CARREE ST L LED	-	-	-
CARREE ST LED	-	-	-
CARREE TRIMLESS LED	-	-	-
CARREE X LED	-	-	-
CREDO REO JAC	-	-	-
DEEP IRIS	3	11 (6)	min. 7 - max. 13
DEEP RINGO LED	-	-	-
DEEP RINGO S LED	-	-	-
DIRO GT LED	-	-	-
DIRO LED +	0	1	min. 2 - max. 2
DIRO ST OK LED	-	-	-
DIRO TRIMLESS LED	-	-	-
FLIP	-	-	-
FLIP PIN	-	-	-
FOX P 7	-	-	-
GRAND DIRO ST OPTO	0	1	1
GRAND DIRO TRIMLESS OPTO	0	1	1
GRID IN 1 OPTO	0	1	1
GRID IN 1 REO	0	1	1
GRID IN 2 OPTO	0	0,5	0,5
GRID IN 2 REO	0	0,5	0,5
GRID IN TRIMLESS 1 OPTO	0	1	1
GRID IN TRIMLESS 1 REO	0	1	1
GRID IN TRIMLESS 2 OPTO	0	0,5	0,5
GRID IN TRIMLESS 2 REO	0	0,5	0,5
GRID IN ZB 1 REO	0	1	1
GRID IN ZB 2 REO	0	0,5	0,5
HELI 1 LED	-	-	-
HELI 1 SCREEN LED	-	-	-
HELI X SCREEN LED	-	-	-
INDUSTRIAL S	3	11 (6)	min. 7 - max. 13
INLET MS	-	-	-
INLET S	-	-	-
LEDS C R	-	-	-
LEDS C R ST	-	-	-
LEDS C S	-	-	-
LEDS GO IN FORTE	-	-	-
LEDS SWING	3	11 (6)	min. 7 - max. 13
LOOK IN	-	-	-
LOOK OUT	-	-	-
MINIGRID IN 1 HP	0	1	1
MINIGRID IN 1 REO	-	-	-
MINIGRID IN 2 HP	0	0,5	0,5
MINIGRID IN 2 REO	-	-	-
MINIGRID IN TRIMLESS 1 HP	0	1	1
MINIGRID IN TRIMLESS 1 REO	-	-	-
MINIGRID IN TRIMLESS 2 HP	0	0,5	0,5
MINIGRID IN TRIMLESS 2 REO	-	-	-
MINIGRID IN ZB 1 REO	-	-	-
MINIGRID IN ZB 2 REO	-	-	-
OREO	-	-	-
PUK XL	-	-	-
REO	-	-	-
REO 2 S	-	-	-
REO 2 S OK	-	-	-
REO D	-	-	-
REO HD	-	-	-
REO OK	-	-	-
REO S	-	-	-
REO S OK	-	-	-
REO X	-	-	-
SPOTNIC LED M10	-	-	-
TACTIC 2	-	-	-
TACTIC	-	-	-
TOPIX	-	-	-
TWEETER ST D REO	0	1	min. 2 - max. 2
TWEETER TRIMLESS REO	0	1	min. 2 - max. 2
YOU-TURN OPTO 20	0	1	1
YOU-TURN REO	-	-	-
YOU-TURN REO 20	0	1	1
YUPI X LED	1	5 (3)	min. 4 - max. 6


LED Power Supply 700mA-DC

Type				
LED POWER SUPPLY...	**700mA / 12W**	**700mA / 17W**	**700mA / 36W Dim8**	**700mA / 32W Dim8**
	300 90 43	**300 90 93**	**300 90 123**	**300 90 7120**
	□ CE 0,2 IP67	□ CE 0,1 IP20	□ FE CE 0,3 IP54	□ FE CE 0,3 IP65
Dimensions (L x W x H)	81 x 40 x 23	111 x 38 x 28	133 x 40 x 30,5	86 x 56 x 24
Input	120-240V 50-60Hz	230-240V / 50-60Hz	220-240V / 50-60Hz	110-240V / 50-60Hz
Output	2-18V-DC	3,5-26V-DC	4-52V-DC	24-46V-DC
λ	0,5	0,6	0,97	> 0,9
Dim	-	-	Dim8 (30-100%)	Dim8 (30-100%)
B-SIDE LED	4	6	min. 7- max. 12	min. 9 - max. 14
CARREE GT LED	-	-	-	-
CARREE ST L LED	-	-	-	-
CARREE ST LED	-	-	-	-
CARREE TRIMLESS LED	-	-	-	-
CARREE X LED	-	-	-	-
CREDO REO JAC	-	-	-	-
DEEP IRIS	-	-	-	-
DEEP RINGO LED	-	-	-	-
DEEP RINGO S LED	-	-	-	-
DIRO GT LED	-	-	-	-
DIRO LED +	-	-	-	-
DIRO ST OK LED	-	-	-	-
DIRO TRIMLESS LED	-	-	-	-
FLIP	-	-	-	-
FLIP PIN	-	-	-	-
FOX P 7	-	-	-	-
GRAND DIRO ST OPTO	-	-	-	-
GRAND DIRO TRIMLESS OPTO	-	-	-	-
GRID IN 1 OPTO	-	-	-	-
GRID IN 1 REO	-	-	-	-
GRID IN 2 OPTO	-	-	-	-
GRID IN 2 REO	-	-	-	-
GRID IN TRIMLESS 1 OPTO	-	-	-	-
GRID IN TRIMLESS 1 REO	-	-	-	-
GRID IN TRIMLESS 2 OPTO	-	-	-	-
GRID IN TRIMLESS 2 REO	-	-	-	-
GRID IN ZB 1 REO	-	-	-	-
GRID IN ZB 2 REO	-	-	-	-
HELI 1 LED	-	-	-	-
HELI 1 SCREEN LED	-	-	-	-
HELI X SCREEN LED	-	-	-	-
INDUSTRIAL S	4	6	min. 7- max. 12	min. 9 - max. 14
INLET MS	-	-	-	-
INLET S	-	-	-	-
LEDS C R	-	-	-	-
LEDS C R ST	-	-	-	-
LEDS C S	-	-	-	-
LEDS GO IN FORTE	-	-	-	-
LEDS SWING	-	-	-	-
LOOK IN	-	-	-	-
LOOK OUT	-	-	-	-
MINIGRID IN 1 HP	-	-	-	-
MINIGRID IN 1 REO	-	-	-	-
MINIGRID IN 2 HP	-	-	-	-
MINIGRID IN 2 REO	-	-	-	-
MINIGRID IN TRIMLESS 1 HP	-	-	-	-
MINIGRID IN TRIMLESS 1 REO	-	-	-	-
MINIGRID IN TRIMLESS 2 HP	-	-	-	-
MINIGRID IN TRIMLESS 2 REO	-	-	-	-
MINIGRID IN ZB 1 REO	-	-	-	-
MINIGRID IN ZB 2 REO	-	-	-	-
OREO	-	-	-	-
PUK XL	-	-	-	-
REO	-	-	-	-
REO 2 S	-	-	-	-
REO 2 S OK	-	-	-	-
REO D	-	-	-	-
REO HD	-	-	-	-
REO OK	-	-	-	-
REO S	-	-	-	-
REO S OK	-	-	-	-
REO X	-	-	-	-
SPOTNIC LED M10	-	-	-	-
TACTIC 2	-	-	-	-
TACTIC	-	-	-	-
TOPIX	-	-	-	-
TWEETER ST D REO	-	-	-	-
TWEETER TRIMLESS REO	-	-	-	-
YOU-TURN OPTO 20	0	0	1	1
YOU-TURN REO	-	-	-	-
YOU-TURN REO 20	0	0	1	1
YUPI X LED	-	-	-	-

LED Power Supply Multi-Power


Type			
LED POWER SUPPLY MULTI-POWER			
	300 90 914		
	CE 0,1 IP20		
Dimensions (L x W x H)	124,5 x 79 x 22		
Input	110-240V / 50-60Hz		
Output	**350mA / 25W / 74V-DC**	**500mA / 35W / 72V-DC**	**700mA / 50W / 70V-DC**
λ	> 0,9		
Dim	-		
B-SIDE LED	16	16	16
CARREE GT LED	3	-	-
CARREE ST L LED	3	-	-
CARREE ST LED	3	-	-
CARREE TRIMLESS LED	3	-	-
CARREE X LED	3	-	-
CREDO REO JAC	3	-	-
DEEP IRIS	16	16	-
DEEP RINGO LED	3	-	-
DEEP RINGO S LED	3	-	-
DIRO GT LED	3	-	-
DIRO LED +	3	3	-
DIRO ST OK LED	3	-	-
DIRO TRIMLESS LED	3	-	-
FLIP	3	-	-
FLIP PIN	3	-	-
FOX P 7	2	-	-
GRAND DIRO ST OPTO	-	1	-
GRAND DIRO TRIMLESS OPTO	-	1	-
GRID IN 1 OPTO	-	1	-
GRID IN 1 REO	-	1	-
GRID IN 2 OPTO	-	0,5	-
GRID IN 2 REO	-	0,5	-
GRID IN TRIMLESS 1 OPTO	-	1	-
GRID IN TRIMLESS 1 REO	-	1	-
GRID IN TRIMLESS 2 OPTO	-	0,5	-
GRID IN TRIMLESS 2 REO	-	0,5	-
GRID IN ZB 1 REO	-	1	-
GRID IN ZB 2 REO	-	0,5	-
HELI 1 LED	16	-	-
HELI 1 SCREEN LED	16	-	-
HELI X SCREEN LED	16	-	-
INDUSTRIAL S	16	16	16
INLET MS	16	-	-
INLET S	16	-	-
LEDS C R	16	-	-
LEDS C R ST	16	-	-
LEDS C S	16	-	-
LEDS GO IN FORTE	16	-	-
LEDS SWING	16	16	-
LOOK IN	16	-	-
LOOK OUT	16	-	-
MINIGRID IN 1 HP	-	1	-
MINIGRID IN 1 REO	3	-	-
MINIGRID IN 2 HP	-	0,5	-
MINIGRID IN 2 REO	1	-	-
MINIGRID IN TRIMLESS 1 HP	-	1	-
MINIGRID IN TRIMLESS 1 REO	3	-	-
MINIGRID IN TRIMLESS 2 HP	-	0,5	-
MINIGRID IN TRIMLESS 2 REO	1	-	-
MINIGRID IN ZB 1 REO	3	-	-
MINIGRID IN ZB 2 REO	1	-	-
OREO	3	-	-
PUK XL	4	-	-
REO	3	-	-
REO 2 S	1	-	-
REO 2 S OK	1	-	-
REO D	3	-	-
REO HD	3	-	-
REO OK	3	-	-
REO S	3	-	-
REO S OK	3	-	-
REO X	3	-	-
SPOTNIC LED M10	3	-	-
TACTIC 2	8	-	-
TACTIC	3	-	-
TOPIX	8	-	-
TWEETER ST D REO	3	-	-
TWEETER TRIMLESS REO	3	-	-
YOU-TURN OPTO 20	-	1	1
YOU-TURN REO	3	-	-
YOU-TURN REO 20	-	1	1
YUPI X LED	8	-	-

LED Power Supply Multi-Power DIM1

Type		
LED POWER SUPPLY MULTI-POWER DIM1		
	300 90 64	
	CE 0,1 IP20	
Dimensions (L x W x H)	103 x 67 x 21	
Input	120-240V / 50-60Hz	
Output	**350mA / 20W / 60V-DC**	**500mA / 25W / 50V-DC (120V / 15W / 30V-DC)**
λ	> 0,9	
Dim	1-10V	


B-SIDE LED	16	13 (8)
CARREE GT LED	2	-
CARREE ST L LED	2	-
CARREE ST LED	2	-
CARREE TRIMLESS LED	2	-
CARREE X LED	2	-
CREDO REO JAC	2	-
DEEP IRIS	16	13 (8)
DEEP RINGO LED	2	-
DEEP RINGO S LED	2	-
DIRO GT LED	2	-
DIRO LED +	2	2 (1)
DIRO ST OK LED	2	-
DIRO TRIMLESS LED	2	-
FLIP	2	-
FLIP PIN	2	-
FOX P 7	1	-
GRAND DIRO ST OPTO	-	1 (0)
GRAND DIRO TRIMLESS OPTO	-	1 (0)
GRID IN 1 OPTO	-	1 (0)
GRID IN 1 REO	-	1 (0)
GRID IN 2 OPTO	-	0,5 (0)
GRID IN 2 REO	-	0,5 (0)
GRID IN TRIMLESS 1 OPTO	-	1 (0)
GRID IN TRIMLESS 1 REO	-	1 (0)
GRID IN TRIMLESS 2 OPTO	-	0,5 (0)
GRID IN TRIMLESS 2 REO	-	0,5 (0)
GRID IN ZB 1 REO	-	1 (0)
GRID IN ZB 2 REO	-	0,5 (0)
HELI 1 LED	16	-
HELI 1 SCREEN LED	16	-
HELI X SCREEN LED	16	-
INDUSTRIAL S	16	13
INLET MS	16	-
INLET S	16	-
LEDS C R	16	-
LEDS C R ST	16	-
LEDS C S	16	-
LEDS GO IN FORTE	16	-
LEDS SWING	16	13 (8)
LOOK IN	16	-
LOOK OUT	16	-
MINIGRID IN 1 HP	-	1 (0)
MINIGRID IN 1 REO	2	-
MINIGRID IN 2 HP	-	0
MINIGRID IN 2 REO	1	-
MINIGRID IN TRIMLESS 1 HP	-	1 (0)
MINIGRID IN TRIMLESS 1 REO	2	-
MINIGRID IN TRIMLESS 2 HP	-	0
MINIGRID IN TRIMLESS 2 REO	1	-
MINIGRID IN ZB 1 REO	2	-
MINIGRID IN ZB 2 REO	1	-
OREO	2	-
PUK XL	4	-
REO	2	-
REO 2 S	1	-
REO 2 S OK	1	-
REO D	2	-
REO HD	2	-
REO OK	2	-
REO S	2	-
REO S OK	2	-
REO X	2	-
SPOTNIC LED M10	2	-
TACTIC 2	8	-
TACTIC	2	-
TOPIX	8	-
TWEETER ST D REO	2	2 (1)
TWEETER TRIMLESS REO	2	2 (1)
YOU-TURN OPTO 20	-	1 (0)
YOU-TURN REO	2	-
YOU-TURN REO 20	-	1 (0)
YUPI X LED	8	6 (4)

LED Power Supply Multi-Power DIM6

Type			
LED POWER SUPPLY MULTI-POWER DIM6			
	300 90 61		
	⧈ CE 0,1 IP20		
Dimensions (L x W x H)	165 x 47 x 35		
Input	220-240V / 50-60Hz		
Output	**350mA / 17W (110V: 15W) / 43V-DC**	**500mA / 24W (110V: 15W) / 43V-DC**	**700mA / 32W (110V: 15W) / 36V-DC**
λ	> 0,9		
Dim	Switch Dim / Falling edge dimming (30-100%)		


B-SIDE LED	12	11 (7)	9 (4)
CARREE GT LED	1	-	-
CARREE ST L LED	1	-	-
CARREE ST LED	1	-	-
CARREE TRIMLESS LED	1	-	-
CARREE X LED	1	-	-
CREDO REO JAC	1	-	-
DEEP IRIS	12	11 (7)	-
DEEP RINGO LED	1	-	-
DEEP RINGO S LED	1	-	-
DIRO GT LED	1	-	-
DIRO LED +	1	1 (0)	-
DIRO ST OK LED	1	-	-
DIRO TRIMLESS LED	1	-	-
FLIP	2	-	-
FLIP PIN	2	-	-
FOX P 7	1	-	-
GRAND DIRO ST OPTO	-	1 (0)	-
GRAND DIRO TRIMLESS OPTO	-	1 (0)	-
GRID IN 1 OPTO	-	1 (0)	-
GRID IN 1 REO	-	1 (0)	-
GRID IN 2 OPTO	-	0,5 (0)	-
GRID IN 2 REO	-	0,5 (0)	-
GRID IN TRIMLESS 1 OPTO	-	1 (0)	-
GRID IN TRIMLESS 1 REO	-	1 (0)	-
GRID IN TRIMLESS 2 OPTO	-	0,5 (0)	-
GRID IN TRIMLESS 2 REO	-	0,5 (0)	-
GRID IN ZB 1 REO	-	1 (0)	-
GRID IN ZB 2 REO	-	0,5 (0)	-
HELI 1 LED	13	-	-
HELI 1 SCREEN LED	12	-	-
HELI X SCREEN LED	12	-	-
INDUSTRIAL S	12	11 (7)	9 (4)
INLET MS	12	-	-
INLET S	12	-	-
LEDS C R	12	-	-
LEDS C R ST	12	-	-
LEDS C S	12	-	-
LEDS GO IN FORTE	12	-	-
LEDS SWING	12	11 (7)	-
LOOK IN	12	-	-
LOOK OUT	12	-	-
MINIGRID IN 1 HP	-	1 (0)	-
MINIGRID IN 1 REO	1	-	-
MINIGRID IN 2 HP	-	0,5 (0)	-
MINIGRID IN 2 REO	0,5	-	-
MINIGRID IN TRIMLESS 1 HP	-	1 (0)	-
MINIGRID IN TRIMLESS 1 REO	1	-	-
MINIGRID IN TRIMLESS 2 HP	-	0,5 (0)	-
MINIGRID IN TRIMLESS 2 REO	0,5	-	-
MINIGRID IN ZB 1 REO	1	-	-
MINIGRID IN ZB 2 REO	0,5	-	-
OREO	1	-	-
PUK XL	3	-	-
REO	1	-	-
REO 2 S	0,5	-	-
REO 2 S OK	0,5	-	-
REO D	1	-	-
REO HD	1	-	-
REO OK	1	-	-
REO S	1	-	-
REO S OK	1	-	-
REO X	1	-	-
SPOTNIC LED M10	1	-	-
TACTIC 2	6	-	-
TACTIC	2	-	-
TOPIX	6	-	-
TWEETER ST D REO	1	2 (1)	-
TWEETER TRIMLESS REO	1	2 (1)	-
YOU-TURN OPTO 20	-	1 (0)	0
YOU-TURN REO	1	-	-
YOU-TURN REO 20	-	1 (0)	0
YUPI X LED	6	5 (4)	-

LED Power Supply Multi-Power DIM7

Type			
LED POWER SUPPLY MULTI-POWER DIM7			
	300 90 60		
	CE 0,1 IP20		
Dimensions (L x W x H)	103 x 67 x 21		
Input	110-240V / 50-60Hz		
Output	**350mA / 15W / 43V-DC**	**500mA / 20W (110V: 15W) / 43V-DC**	**700mA / 25W (110V: 15W) / 36V-DC**
λ	> 0,9		
Dim	Switch Dim / 1-10V		

B-SIDE LED	12	11 (7)	8 (5)
CARREE GT LED	1	-	-
CARREE ST L LED	1	-	-
CARREE ST LED	1	-	-
CARREE TRIMLESS LED	1	-	-
CARREE X LED	1	-	-
CREDO REO JAC	1	-	-
DEEP IRIS	12	11 (7)	-
DEEP RINGO LED	1	-	-
DEEP RINGO S LED	1	-	-
DIRO GT LED	1	-	-
DIRO LED +	1	1	-
DIRO ST OK LED	1	-	-
DIRO TRIMLESS LED	1	-	-
FLIP	2	-	-
FLIP PIN	2	-	-
FOX P 7	1	-	-
GRAND DIRO ST OPTO	-	1 (0)	-
GRAND DIRO TRIMLESS OPTO	-	1 (0)	-
GRID IN 1 OPTO	-	1 (0)	-
GRID IN 1 REO	-	1 (0)	-
GRID IN 2 OPTO	-	0,5 (0)	-
GRID IN 2 REO	-	0,5 (0)	-
GRID IN TRIMLESS 1 OPTO	-	1 (0)	-
GRID IN TRIMLESS 1 REO	-	1 (0)	-
GRID IN TRIMLESS 2 OPTO	-	0,5 (0)	-
GRID IN TRIMLESS 2 REO	-	0,5 (0)	-
GRID IN ZB 1 REO	-	1 (0)	-
GRID IN ZB 2 REO	-	0,5 (0)	-
HELI 1 LED	12	-	-
HELI 1 SCREEN LED	12	-	-
HELI X SCREEN LED	12	-	-
INDUSTRIAL S	12	11 (7)	8 (5)
INLET MS	12	-	-
INLET S	12	-	-
LEDS C R	12	-	-
LEDS C R ST	12	-	-
LEDS C S	12	-	-
LEDS GO IN FORTE	12	-	-
LEDS SWING	12	11 (7)	-
LOOK IN	12	-	-
LOOK OUT	12	-	-
MINIGRID IN 1 HP	-	1 (0)	-
MINIGRID IN 1 REO	1	-	-
MINIGRID IN 2 HP	-	0,5 (0)	-
MINIGRID IN 2 REO	0,5	-	-
MINIGRID IN TRIMLESS 1 HP	-	1 (0)	-
MINIGRID IN TRIMLESS 1 REO	1	-	-
MINIGRID IN TRIMLESS 2 HP	-	0,5 (0)	-
MINIGRID IN TRIMLESS 2 REO	0,5	-	-
MINIGRID IN ZB 1 REO	1	-	-
MINIGRID IN ZB 2 REO	0,5	-	-
OREO	1	-	-
PUK XL	3	-	-
REO	1	-	-
REO 2 S	0,5	-	-
REO 2 S OK	0,5	-	-
REO D	1	-	-
REO HD	1	-	-
REO OK	1	-	-
REO S	1	-	-
REO S OK	1	-	-
REO X	1	-	-
SPOTNIC LED M10	1	-	-
TACTIC 2	6	-	-
TACTIC	2	-	-
TOPIX	6	-	-
TWEETER ST D REO	1	1 (0)	-
TWEETER TRIMLESS REO	1	1 (0)	-
YOU-TURN OPTO 20	-	1 (0)	0
YOU-TURN REO	1	-	-
YOU-TURN REO 20	-	1 (0)	0
YUPI X LED	6	5 (2)	-


LED Power Supply Multi-Power DIM9


Type			
LED POWER SUPPLY MULTI-POWER DIM9			
	300 90 63		
	CE 0,1 IP20		
Dimensions (L x W x H)	111 x 79 x 22		
Input	120-240V / 50-60Hz		
Output	**350mA / 25W / 74V-DC**	**500mA / 35W / 72V-DC**	**700mA / 50W / 70V-DC**
λ	> 0,9		
Dim	Switch Dim / 1-10V / Dali		


B-SIDE LED	16	16	16
CARREE GT LED	3	-	-
CARREE ST L LED	3	-	-
CARREE ST LED	3	-	-
CARREE TRIMLESS LED	3	-	-
CARREE X LED	3	-	-
CREDO REO JAC	3	-	-
DEEP IRIS	16	16	-
DEEP RINGO LED	3	-	-
DEEP RINGO S LED	3	-	-
DIRO GT LED	3	-	-
DIRO LED +	3	3	-
DIRO ST OK LED	3	-	-
DIRO TRIMLESS LED	3	-	-
FLIP	3	-	-
FLIP PIN	3	-	-
FOX P 7	2	-	-
GRAND DIRO ST OPTO	-	1	-
GRAND DIRO TRIMLESS OPTO	-	1	-
GRID IN 1 OPTO	-	1	-
GRID IN 1 REO	-	1	-
GRID IN 2 OPTO	-	0,5	-
GRID IN 2 REO	-	0,5	-
GRID IN TRIMLESS 1 OPTO	-	1	-
GRID IN TRIMLESS 1 REO	-	1	-
GRID IN TRIMLESS 2 OPTO	-	0,5	-
GRID IN TRIMLESS 2 REO	-	0,5	-
GRID IN ZB 1 REO	-	1	-
GRID IN ZB 2 REO	-	0,5	-
HELI 1 LED	16	-	-
HELI 1 SCREEN LED	16	-	-
HELI X SCREEN LED	16	-	-
INDUSTRIAL S	16	16	16
INLET MS	16	-	-
INLET S	16	-	-
LEDS C R	16	-	-
LEDS C R ST	16	-	-
LEDS C S	16	-	-
LEDS GO IN FORTE	16	-	-
LEDS SWING	16	16	-
LOOK IN	16	-	-
LOOK OUT	16	-	-
MINIGRID IN 1 HP	-	1	-
MINIGRID IN 1 REO	3	-	-
MINIGRID IN 2 HP	-	0,5	-
MINIGRID IN 2 REO	1	-	-
MINIGRID IN TRIMLESS 1 HP	-	1	-
MINIGRID IN TRIMLESS 1 REO	3	-	-
MINIGRID IN TRIMLESS 2 HP	-	0,5	-
MINIGRID IN TRIMLESS 2 REO	1	-	-
MINIGRID IN ZB 1 REO	3	-	-
MINIGRID IN ZB 2 REO	1	-	-
OREO	3	-	-
PUK XL	4	-	-
REO	3	-	-
REO 2 S	1	-	-
REO 2 S OK	1	-	-
REO D	3	-	-
REO HD	3	-	-
REO OK	3	-	-
REO S	3	-	-
REO S OK	3	-	-
REO X	3	-	-
SPOTNIC LED M10	3	-	-
TACTIC 2	8	-	-
TACTIC	3	-	-
TOPIX	8	-	-
TWEETER ST D REO	3	3	-
TWEETER TRIMLESS REO	3	3	-
YOU-TURN OPTO 20	-	1	1
YOU-TURN REO	3	-	-
YOU-TURN REO 20	-	1	1
YUPI X LED	8	8	-


Dimmable LED Power Supply - Installation Scheme

DIM1: 1-10V
DIM6: SWITCH DIM
DIM7: 1-10V + SWITCH DIM
DIM8: FALLING EDGE DIMMING
DIM9: 1-10V + SWITCH DIM + DALI

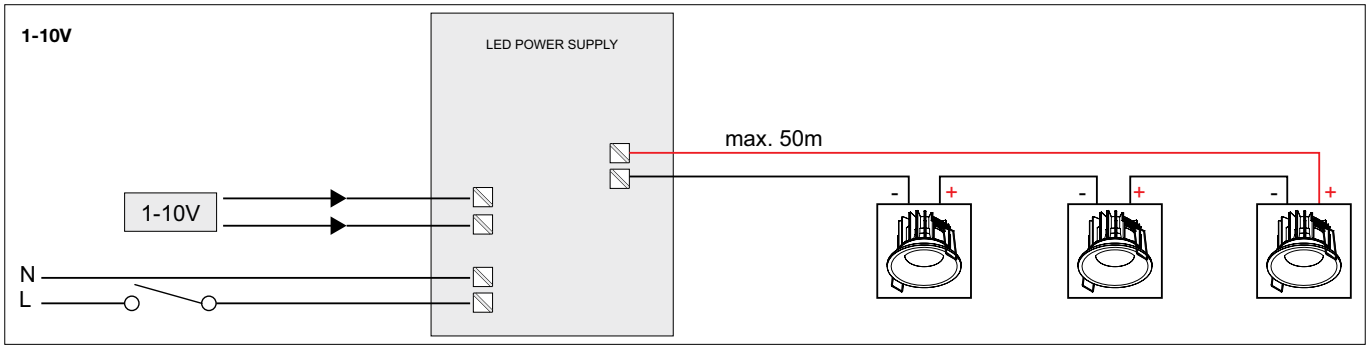





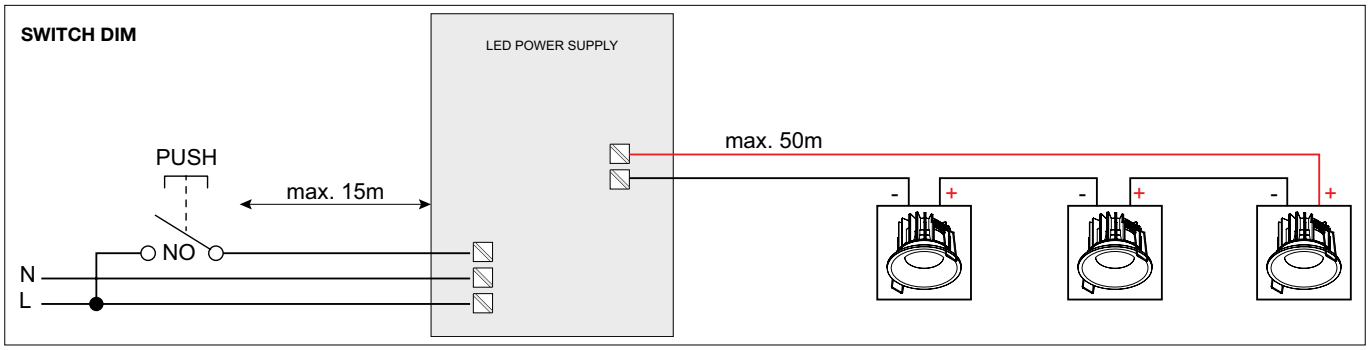


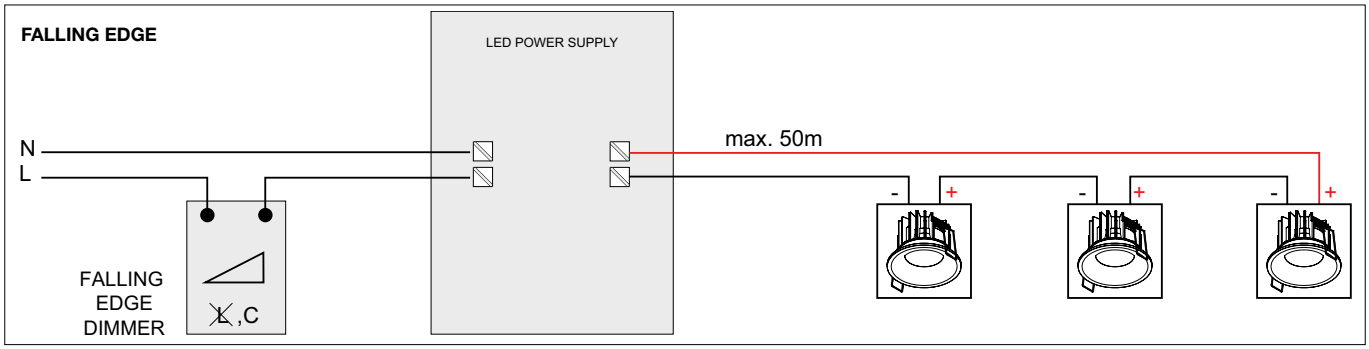

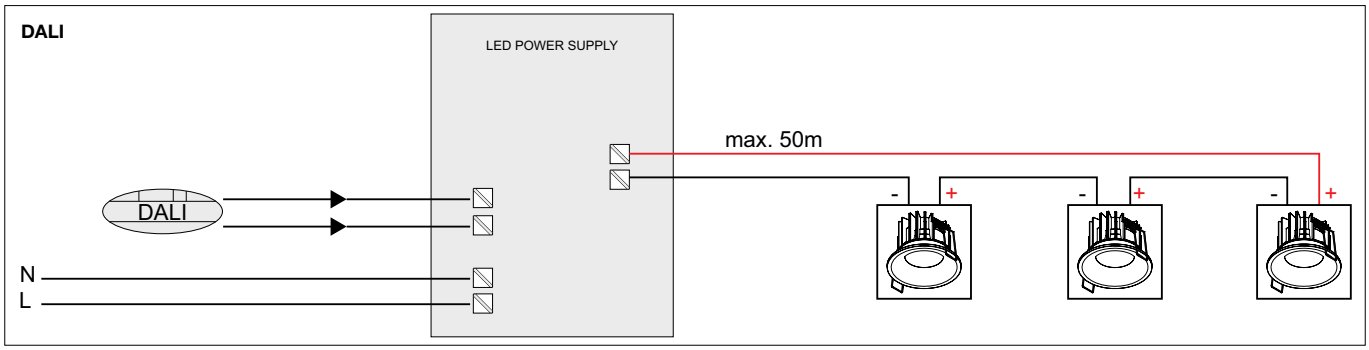

led


LED Power Supply 24V-DC

Type					
LED POWER SUPPLY...	**24V-DC / 20W**	**24V-DC / 40W**	**24V-DC / 60W**	**24V-DC / 80W**	**24V-DC / 150W**
	300 89 24 20	**300 89 24 40**	**300 89 24 60**	**300 89 24 80**	**300 89 24 150**
	□ CE 0,1 IP20	□ CE 0,1 IP67	□ CE 0,1 IP54	□ CE 0,3 IP67	□ CE 0,1 IP20
Dimensions (L x W x H)	146 x 55 x 19	242 x 46 x 36	215 x 44 x 31	250 x 50 x 34	260 x 60 x 49
Input	110-240V / 50-60Hz	100-240V / 50-60Hz	120-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Output	24V-DC / 20W	24V-DC / 40W	24V-DC / 60W	24V-DC / 80W	24V-DC / 150W
λ	0,55	> 0,95	0,99	> 0,90	0,98
Dim	-	-	-	DIM 1	-
LEDSTRIP					
LEDSTRIP xx F NW	max. 6	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP xx F WW	max. 6	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP xx F HW	max. 6	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP xx FP NW	max. 2	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP xx FP WW	max. 2	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP xx FP HW	max. 2	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP xx RGB	max. 2 *	max. 5 *	max. 7 *	-	max. 18 *
LEDSTRIP 50 F NW	max. 6	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP 50 F WW	max. 6	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP 50 F HW	max. 6	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP 50 FP NW	max. 2	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP 50 FP WW	max. 2	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP 50 FP HW	max. 2	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP 50 RGB	max. 2 *	max. 5 *	max. 7 *	-	max. 18
LEDFLEX					
LEDFLEX IN NW	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN WW	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN HW	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN FP NW	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP WW	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP HW	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN RGB	max. 2,4m *	max. 5m *	max. 7,36m *	-	max. 18,72m *
LEDFLEX OUT NW	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT WW	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT HW	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT FP NW	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP WW	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP HW	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT RGB	max. 2,4m *	max. 5m *	max. 7,36m *	-	max. 18,72m *
LEDFLEX IN NW 5m	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN WW 5m	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN HW 5m	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN FP NW 5m	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP WW 5m	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP HW 5m	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN HP WW 5m	max. 0,9m	max. 1,8m	max. 2,7m	max. 3,6m (max. 3m/powerline)	max. 6,9m (max. 3m/powerline)
LEDFLEX IN HP HW 5m	max. 0,9m	max. 1,8m	max. 2,7m	max. 3,6m (max. 3m/powerline)	max. 6,9m (max. 3m/powerline)
LEDFLEX IN RGB 5m	max. 2,4m *	max. 5m *	max. 7,36m *	-	max. 18,72m *
LEDFLEX OUT NW 5m	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT WW 5m	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT HW 5m	max. 4m	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT FP NW 5m	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP WW 5m	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP HW 5m	max. 1m	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT RGB 5m	max. 2,4m *	max. 5m *	max. 7,36m *	-	max. 18,72m *


* Use in combination with RGB Driver

LED Power Supply 24V-DC - Installation Scheme


LED STRIP WHITE

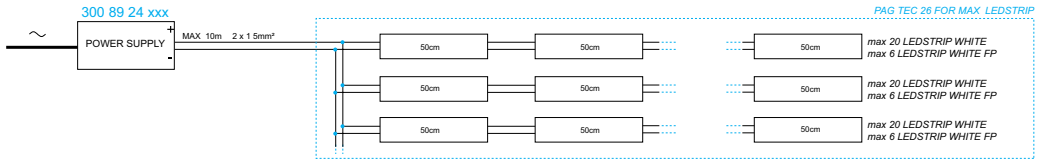


LED FLEX WHITE

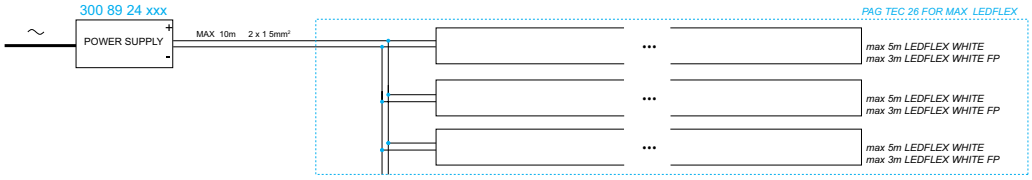


LED STRIP WHITE DIMMABLE

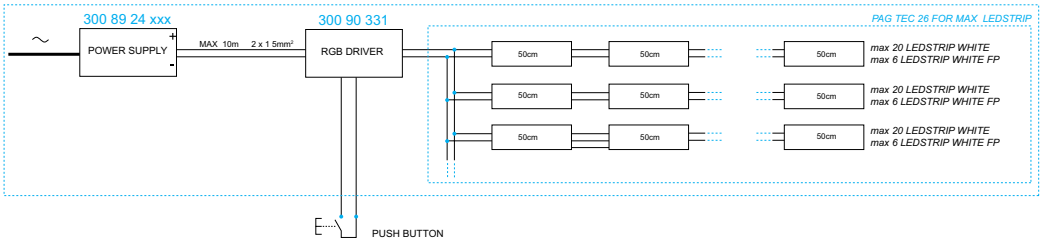


LED FLEX WHITE DIMMABLE

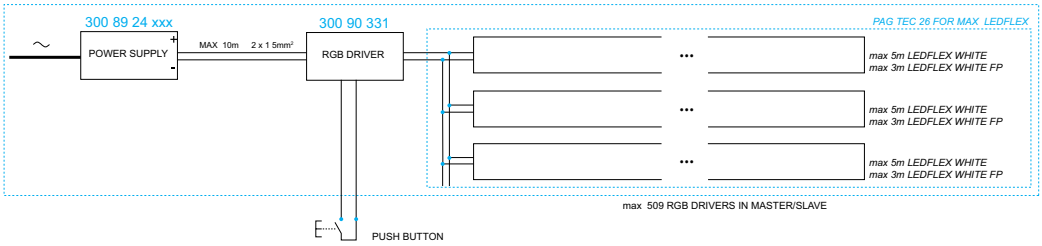

LED STRIP RGB

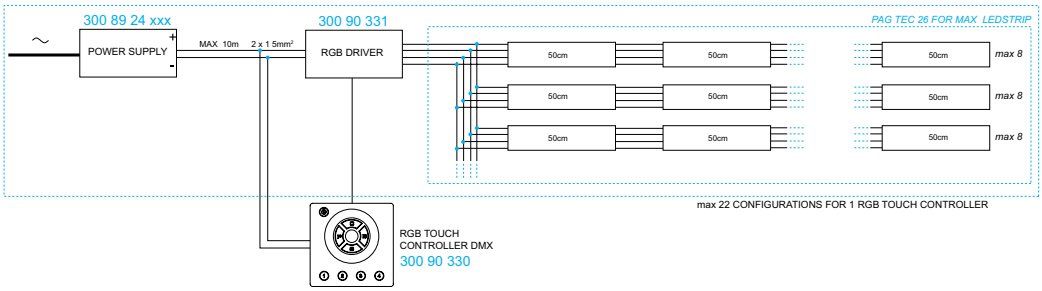

LED FLEX RGB

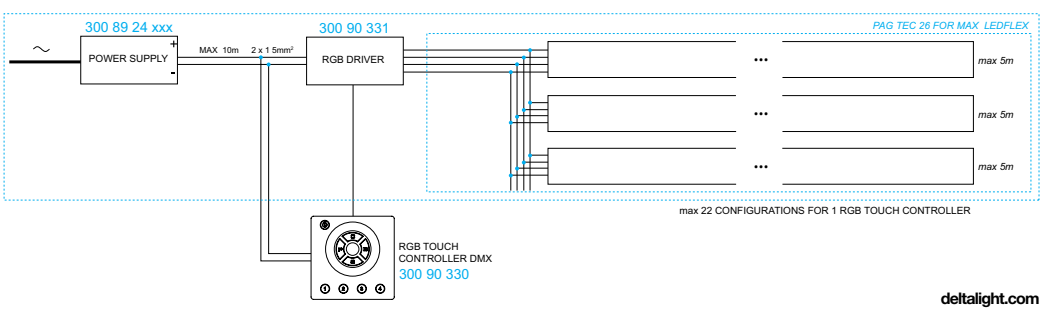



LED Power Supply 14V-DC / 12W

LED POWER SUPPLY 14V-DC / 12W
300 90 90
MAX.20 x PRODUCTS WITH
SMD LED / LED Ø5mm
220-240V / 50-60Hz

IP20

OPTIONS
LED PWM DIMMER 25W






	QUANTITY
HELA R	20
HELA R TRIMLESS	20
HELA S	20
HELA S TRIMLESS	20
HELI 1 LED	20
LEDS GO® 4Q ON	20
LEDS GO® IN	20
LEDS GO® IN R	20
PUK 4	20

RGB Touch Controller DMX

RGB TOUCH CONTROLLER DMX
300 90 330
EXCL.POWER SUPPLY 12V-DC / 24V-DC
DUAL MODE STATIC / DYNAMIC
INPUT 12V-DC / 24V-DC - DMX OUT

IP20






RGB Driver

RGB DRIVER
300 90 331
EXCL.POWER SUPPLY 12V-DC / 24V-DC
INPUT 12V-DC - OUTPUT RGB 75W
INPUT 24V-DC - OUTPUT RGB 150W
FOR COMMON CATHODE RGB LEDSTRIP / LEDFLEX
DUAL MODE DMX / STAND ALONE

IP20






LED RGB Kit 20 - Installation Scheme

LED RGB KIT 20
300 90 202
INCL.1 x LED POWER SUPPLY 24V-DC / 20W
INCL.1 x RGB DRIVER
EXCL.1 x RGB TOUCH CONTROLLER DMX
110-240V / 50-60Hz

CE 3,4 IP20

OPTIONS
RGB TOUCH CONTROLLER

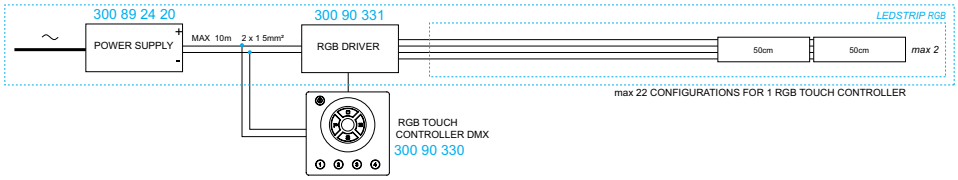


LED RGB Kit 60 - Installation Scheme

LED RGB KIT 60
300 90 206
INCL.1 x LED POWER SUPPLY 24V-DC / 60W
INCL.1 x RGB DRIVER
EXCL.1 x RGB TOUCH CONTROLLER DMX
120-277V / 50-60Hz

CE 3,4 IP20

OPTIONS
RGB TOUCH CONTROLLER

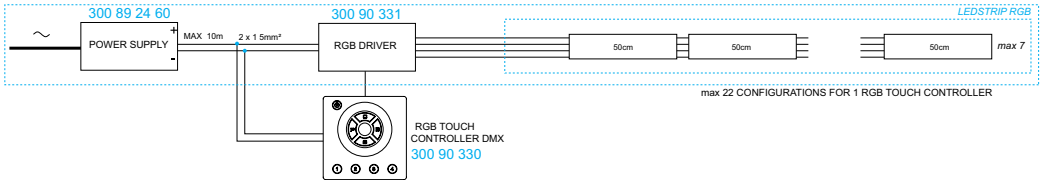


LED RGB Kit 150 - Installation Scheme

LED RGB KIT 150
300 90 215
INCL.1 x LED POWER SUPPLY 24V-DC / 150W
INCL.1 x RGB DRIVER
EXCL.1 x RGB TOUCH CONTROLLER DMX
220-240V / 50-60Hz

CE 3,4 IP20


OPTIONS
RGB TOUCH CONTROLLER

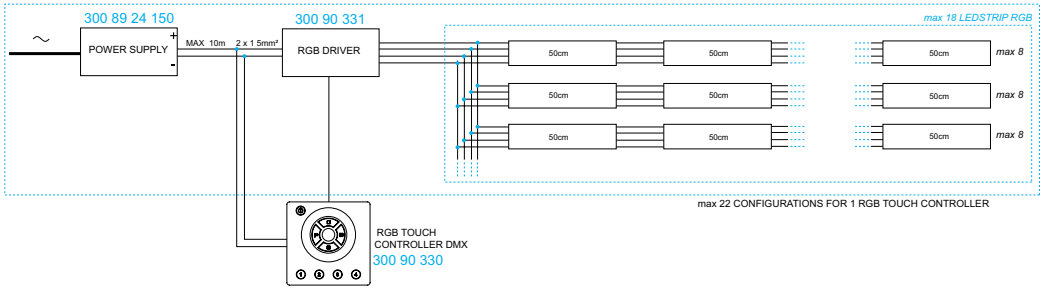

tech

OPTIONS

Transfo 50W




TRANSFO 50W
200 46 06

220-240V / 50-60Hz

CE 0,1 IP20

Transfo 100W




TRANSFO 100W
200 46 10

220-240V / 50-60Hz

CE 0,1 IP20

Transfo 50W IP67




TRANSFO 100W IP67
200 47 60

220-240V / 50-60Hz

CE 0,2 IP67

Transfo 100W IP67




TRANSFO 100W IP67
200 47 10

220-240V / 50-60Hz

CE 0,1 IP67

Ballastset C50 20




BALLASTSET C50 20 4,0 kV
200 44 21

IGNITION TENSION 4,0 kV
220-240V / 50-60Hz / 1 x 1~EVG

CE 0,3 IP20

Ballastset C50 35




BALLASTSET C50 35 4,0 kV
200 44 36

IGNITION TENSION 4,0 kV
220-240V / 50-60Hz / 1 x 1~EVG

CE 0,3 IP20

Ballastset HID 135




BALLASTSET HID 135
200 45 135

220-240V / 50-60Hz / 1 x 1~EVG

CE 0,5 IP20

Ballastset HID 170




BALLASTSET HID 170
200 45 170

220-240V / 50-60Hz / 1 x 1~EVG

CE 0,5 IP20

Dali Converter




DALI CONVERTER
385 610 ED5

100-240V / 50-60Hz
DALI CONVERTER
max. 10 x POWER SUPPLY DIM1/385 610 ED5

CE 0,1 IP20

Dali To 1-10V Converter




DALI CONVERTER
385 611 ED5

220-240V / 50-60Hz
DALI TO 1-10V CONVERTER
max. 10 x POWER SUPPLY DIM1/385 610 ED5

CE 0,2 IP20

LED Transfo 12V



LED TRANSFO 12V-70W
300 89 12 71

220-240V / 50-60Hz
1-70W FALLING EDGE DIMMABLE TRANSFO
OUTPUT 12V-AC

CE 0,1 IP20

tech

Application of Mounting Options

Suspended T-bar
& ceiling tiles (min. 8 mm)



APPLY: (replace tile by MDF)
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

MF (metal frame)
ceiling dry lined / Gyproc / MDF



APPLY:
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

Stucanet



APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
ZB BOX

Exposed concrete




APPLY:
EXPOSED CONCRETE PACK

Concrete + plaster



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

Concrete beam & block + plaster



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

Prefabricated concrete plate



APPLY:
EXPOSED CONCRETE PACK

Prefabricated
concrete plate + plaster



APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

Brick + plaster





APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

tech

Consult where used list
of mounting options per luminaire:
www.deltalight.com/mountingoptions

Plasterkit

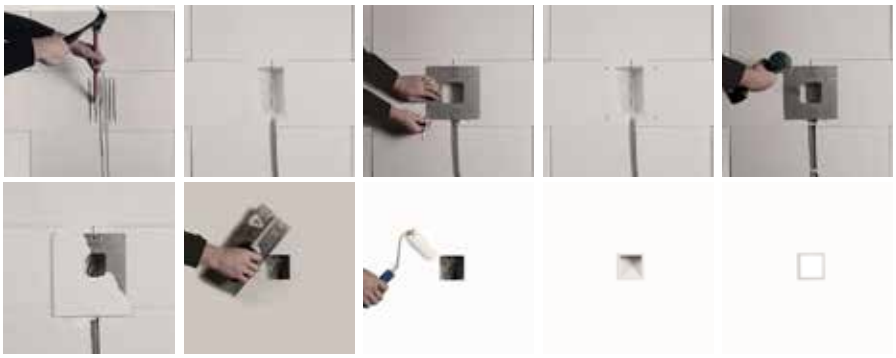




							S1	S2		
PLASTERKIT	**REFERENCE**	**A x B**	□	○	KG		min. - max.	min. - max.		**TYPE**
PLASTERKIT 101	202 11 19	205 x 205		77	0.1	80 x 180	195 - 205			3
PLASTERKIT 104	202 14 29	219 x 225		75 - 79 - 75	0.1	160 x 190				4
PLASTERKIT 108	202 20 19	185 x 185	63,5 x 70		0.1	75 x 80	120 - 150	100 - 150		1
PLASTERKIT 109	202 21 29	140 x 260	78 x 145		0.1	85 x 230				2
PLASTERKIT 110	202 21 59	140 x 260	78 x 110		0.1	85 x 120				2
PLASTERKIT 111	202 25 19	185 x 185	83 x 83		0.1	90 x 180	185	120 - 185		1
PLASTERKIT 115	202 31 99	150 x 150	64 x 70		0.1	75 x 75		100 - 150		1
PLASTERKIT 118	202 56 99 01	280 x 280		163	0.3	220 x 220				3
PLASTERKIT 120	202 62 99 01	260 x 230	166 x 161		0.2	190 x 170				2
PLASTERKIT 121	202 62 99 02	260 x 399	166 x 298		0.4	190 x 310				2
PLASTERKIT 122	202 62 99 03	260 x 537	166 x 440		0.5	190 x 450				2
PLASTERKIT 123	202 62 99 04	399 x 399	305 x 305		0.5	310 x 310				1
PLASTERKIT 124	202 62 99 04L	260 x 680	166 x 585		0.6	190 x 610				2
PLASTERKIT 126	202 72 99 01	215 x 215	112 x 112		0.3	120 x 120				1
PLASTERKIT 127	202 72 99 02	215 x 250	112 x 215		0.3	120 x 225				2
PLASTERKIT 128	202 72 99 03	215 x 350	112 x 313		0.4	120 x 330				2
PLASTERKIT 139	276 04 29	252 x 347	170 x 225		0.4	180 x 270				2
PLASTERKIT 144	302 21 19	135 x 135		38	0.1	110 x 120	120 - 135			3
PLASTERKIT 145	304 05 99	140 x 235	24 x 170		0.1	110 x 180				2
PLASTERKIT 150	278 62 99 00	500 x 500		365	0.6	440 x 440				3
PLASTERKIT 161	207 01 161	200 x 200	75 x 75		0.2	175 x 175	185 - 200	110 - 200		1
PLASTERKIT 162	207 01 162	200 x 200	64 x 64		0.1	155 x 155	165 - 200	90 - 200		1
PLASTERKIT 163	207 01 163	165 x 165	55 x 55		0.1	145 x 145	160 - 165	78 - 165		1
PLASTERKIT 164	207 01 164	230 x 230		105	0.2	200 x 200				3
PLASTERKIT 167	207 01 167	200 x 200	142 x 142		0.2	150 x 150				1
PLASTERKIT 168	207 01 168	180 x 349	142 x 282		0.2	150 x 290				2
PLASTERKIT 169	207 01 169	270 x 270		156	0.3	230 x 270	270			3
PLASTERKIT 170	207 01 170	230 x 230		98	0.3	100 x 220	220 - 230			3
PLASTERKIT 171	207 01 171	230 x 230		146	0.2	220 x 220	230			3
PLASTERKIT 172	207 01 172	390 x 390		260	0.7	275 x 275	275 - 390			3
PLASTERKIT 173	207 01 173	350 x 350	260 x 260		0.5	275 x 275				1
PLASTERKIT 174	207 01 174	280 x 280		216	0.5	220 x 260	270 x 280			3
PLASTERKIT 177	207 01 177	240 x 331	180 x 182		0.9	190 x 295				2
PLASTERKIT 178	207 01 178	169 x 559	108 x 341		0.8	115 x 520				2
PLASTERKIT 179	207 01 179	290 x 489	230 x 313		1.1	240 x 465				2
PLASTERKIT 180	207 01 180	190 x 355	130 x 169		0.6	155 x 325				2
PLASTERKIT 181	207 01 181	250 x 250		152	0.2	170 x 170				3
PLASTERKIT 182	207 01 182	220 x 220		133	0.2	180 x 180				3
PLASTERKIT 184	207 01 184	304 x 85	219 x 33		0.3	222 x 54				2
PLASTERKIT 185	207 01 185	200 x 200		121	0.2	170 x 170	133 - 152	133 - 152		3
PLASTERKIT 186	207 01 186	190 x 150	75 x 75		0.2	150 x 110		105 - 140		1
PLASTERKIT 188	207 01 188	230 x 256	64 x 110		0.2	80 x 115		170		2


Concrete Box




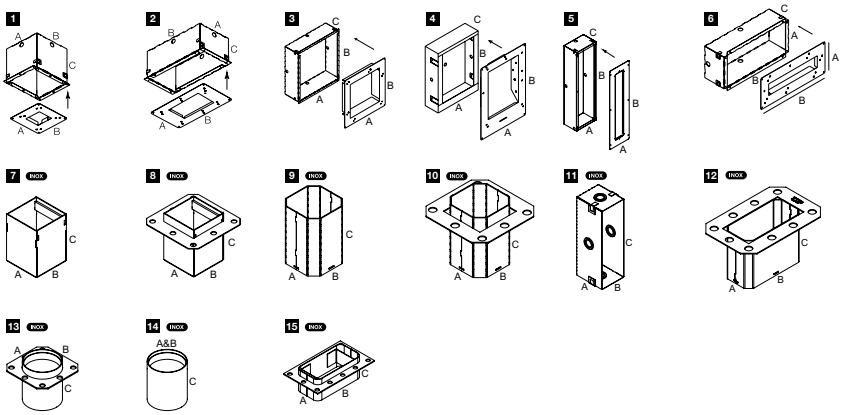

CONCRETE BOX	REFERENCE	A x B x C	KG			TYPE
CONCRETE BOX 108	202 20 18	185 x 185 x 160	0.4	190 x 190	170	1
CONCRETE BOX 109	202 21 28	140 x 260 x 120	0.5	145 x 265	130	2
CONCRETE BOX 110	202 21 58	140 x 260 x 120	0.5	145 x 265	130	2
CONCRETE BOX 111	202 25 18	185 x 185 x 160	0.4	190 x 190	170	1
CONCRETE BOX 115	202 31 98	150 x 150 x 80	0.1	155 x 155	90	3
CONCRETE BOX 120	202 62 98 01	230 x 260 x 120	1.3	235 x 265	130	1
CONCRETE BOX 121	202 62 98 02	260 x 399 x 120	2.2	265 x 405	130	2
CONCRETE BOX 122	202 62 98 03	260 x 537 x 120	3.0	265 x 538	130	2
CONCRETE BOX 123	202 62 98 04	399 x 399 x 120	3.7	405 x 405	130	1
CONCRETE BOX 124	202 62 98 04L	260 x 680 x 120	4.3	265 x 685	130	2
CONCRETE BOX 139	276 04 98	235 x 310 x 75	2.0	250 x 320	85	4
CONCRETE BOX 145	304 05 98	150 x 210 x 75	0.9	155 x 215	80	5
CONCRETE BOX 151	302 19 21	42 x 42 x 58	0.1	43 x 43	65	8
CONCRETE BOX TR 152	302 19 22	42 x 42 x 58	0.1	43 x 43	65	7
CONCRETE BOX 153	302 20 21	43 x 43 x 60	0.1	43 x 43	65	10
CONCRETE BOX TR 154	302 20 22	43 x 43 x 60	0.1	43 x 43	65	9
CONCRETE BOX 161	270 11 161	202 x 202 x 186	0.6	207 x 207	196	1
CONCRETE BOX 162	270 11 162	202 x 202 x 186	0.6	207 x 207	196	1
CONCRETE BOX 163	270 11 163	167 x 167 x 155	0.5	172 x 172	165	1
CONCRETE BOX 165	270 11 165	62 x 97 x 50	0.1	45 x 75	60	12
CONCRETE BOX 180	270 11 180	266 x 355 x 101	1.4	185 x 350	100	4
CONCRETE BOX 181	270 11 181	Ø50 x 68	0.1		70	13
CONCRETE BOX TR 182	270 11 182	Ø50 x 68	0.1		70	14
CONCRETE BOX 183	270 11 183	96 x 45 x 41	0.1	98 x 48	80	15
CONCRETE BOX 184	270 11 184	270 x 91 x 65	0.4	273 x 94	75	2
CONCRETE BOX 185	270 11 185	219 x 41 x 65	0.5	222 x 45	75	2
CONCRETE BOX 186	270 11 186	145 x 105 x 70	0.4	150 x 110	75	3
CONCRETE BOX 187	270 11 187	80 x 95 x 70	0.5	85 x 100	75	11


Concrete Pack

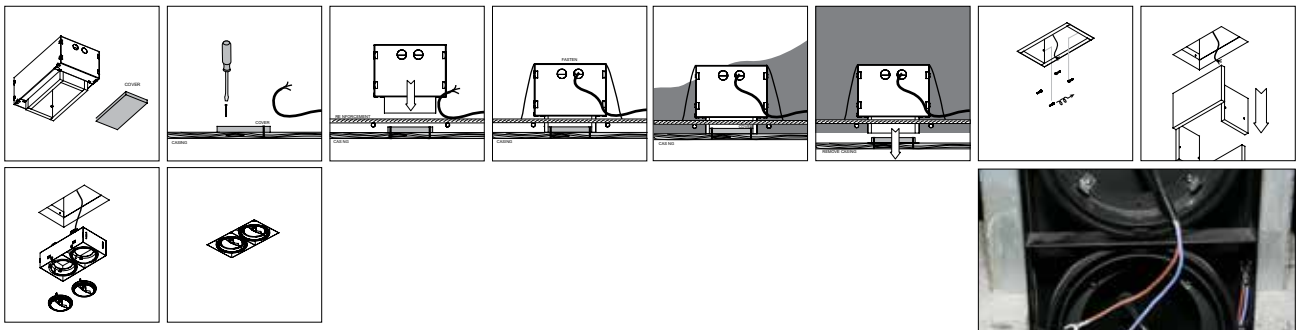





CONCRETE PACK	REFERENCE	A x B x C	KG			TYPE
CONCRETE PACK GIT 1	202 61 96 01	220 x 262 x 210	3.1	220 x 262	210	1
CONCRETE PACK GIT 2	202 61 96 02	220 x 401 x 210	6.5	220 x 401	210	2
CONCRETE PACK GIT 3	202 61 96 03	220 x 544 x 210	10.0	220 x 544	210	2
CONCRETE PACK GIT 4LINE	202 61 96 04L	220 x 684 x 210	13.0	220 x 684	210	2
CONCRETE PACK MGIT 1	202 71 96 01	133 x 160 x 133	1.5	160 x 160	140	1
CONCRETE PACK MGIT 2	202 71 96 02	234 x 160 x 133	2.1	260 x 160	140	2

CONCRETE PACK

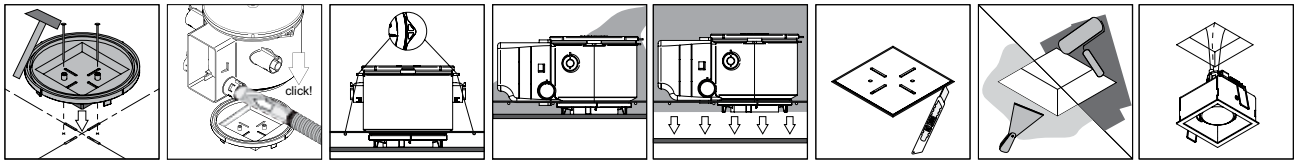


EXPOSED CONCRETE PACK

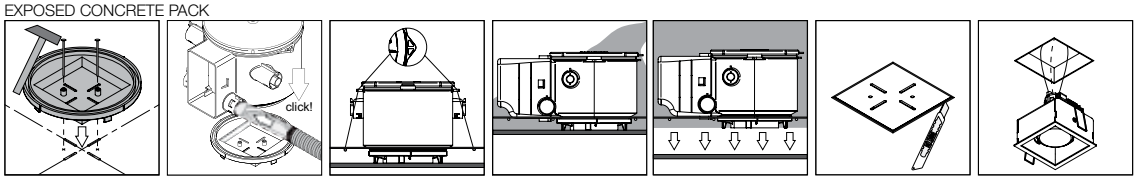


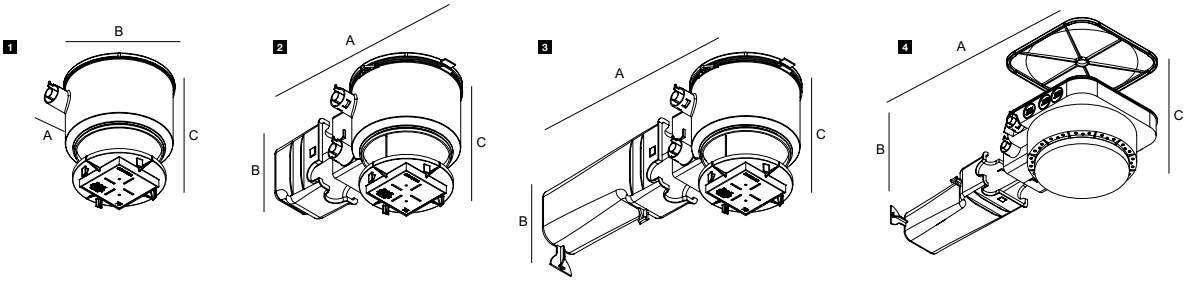

CONCRETE PACK	REFERENCE	A x B x C	KG			TYPE
CONCRETE PACK S75	207 02 9071	250 x 200 x 150	0.3	250 x 200	150	1
CONCRETE PACK C S75	207 02 9071 C	310 x 250 x 150	0.4	310 x 250	150	2
CONCRETE PACK T S75	207 02 9071 T	450 x 250 x 150	0.5	450 x 250	150	3
CONCRETE PACK T R76	207 02 9123 T	500 x 250 x 150	0.9	500 x 250	150	4
CONCRETE PACK TMK R82	207 02 9123 TMK	500 x 250 x 150	1	500 x 250	150	4
EXPOSED CONCRETE PACK S75	207 02 9093	250 x 200 x 150	0.3	250 x 200	150	1
EXPOSED CONCRETE PACK C S75	207 02 9093 C	310 x 250 x 150	0.4	310 x 250	150	2
EXPOSED CONCRETE PACK T S75	207 02 9093 T	450 x 250 x 150	0.5	450 x 250	150	3

Trimless Kit

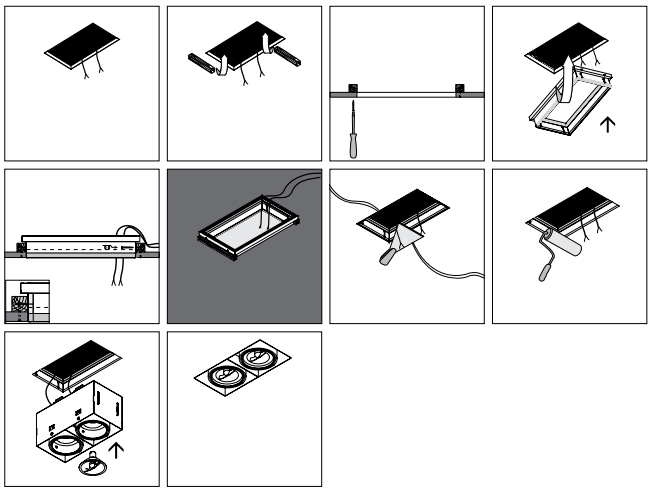




TRIMLESS KIT	REFERENCE	A x B x C	KG			TYPE
MINIGRID IN TRIMLESS 3 KIT	202 71 97 03	112 x 314 x 54	0.5	315 x 113	max.40	1

ZB Box




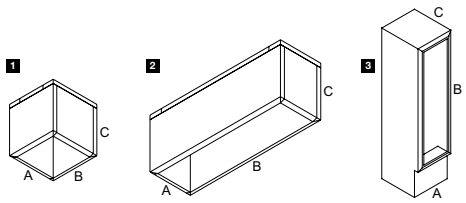

DEPTH ↕ MAY VARY ACCORDING TO THE LUMINAIRE USED
ALWAYS CHECK THE CORRECT DEPTH OF THE LUMINAIRE


ZB BOX	REFERENCE	A x B x C	KG		↕		TYPE
GRID IN ZB 1 BOX L	202 60 98 01	183 x 183 x 128	1.7	184 x 184	148		1
GRID IN ZB 1 LED BOX	202 601 98 01	183 x 183 x 100	1.5	184 x 184	120		1
GRID IN ZB 2 BOX L	202 60 98 02	183 x 336 x 128	2.4	184 x 337	148		2
GRID IN ZB 2 LED BOX	202 601 98 02	183 x 336 x 100	2.2	184 x 337	120		2
GRID IN ZB 3 BOX L	202 60 98 03	183 x 483 x 128	3.1	184 x 484	148		2
GRID IN ZB 4 BOX L	202 60 98 04	336 x 336 x 128	3.1	337 x 337	148 / 180		2
MINIGRID IN ZB 1 BOX L	202 70 98 01	140 x 140 x 128	1.2	141 x 141	148		1
MINIGRID IN ZB 2 BOX L	202 70 98 02	140 x 250 x 128	1.8	141 x 251	148		2
MINIGRID IN ZB 3 BOX L	202 70 98 03	140 x 357 x 128	2.4	141 x 358	148		2

Mounting Kit



MOUNTING KIT	REFERENCE	A x B x C	KG	Hollow material			Solid material	Option/ Requirement	TYPE
							min. - max.	O/R	
GRID IN TRIMLESS 1 MOUNTING KIT	202 61 95 01	171 x 171 x 55	0.40	173 x 173		max.25		O/R	1
GRID IN TRIMLESS 1 MOUNTING KIT HP	202 61 95 01 HP	171 x 171 x 55	0.40	173 x 173		max.25		R	1
GRID IN TRIMLESS 1 MOUNTING KIT LARGE	202 61 95 01L	293 x 293 x 55	0.70				Ø250	O/R	8
GRID IN TRIMLESS 2 MOUNTING KIT	202 61 95 02	171 x 310 x 55	0.70	312 x 173		max.25		O	2
GRID IN TRIMLESS 2 MOUNTING KIT HP	202 61 95 02 HP	171 x 310 x 55	0.70	312 x 173		max.25		R	2
GRID IN TRIMLESS 2 MOUNTING KIT LARGE	202 61 95 02L	432 x 293 x 55	0.90				Ø250 - 150 - Ø250	O	8
GRID IN TRIMLESS 3 MOUNTING KIT	202 61 95 03	453 x 171 x 55	0.90	455 x 173		max.20		O	2
GRID IN TRIMLESS 4 MOUNTING KIT	202 61 95 04	308 x 308 x 54	0.80	309 x 309		max.40		O	1
GRID IN TRIMLESS 4LINE MOUNTING KIT	202 61 95 04L	593 x 171 x 55	1.40	595 x 173		max.20		O	2
MINIGRID IN 1 MOUNTING KIT	202 71 95 01	129 x 129 x 100	0.50	130 x 130		max.25		O/R	5
MINIGRID IN 1 MOUNTING KIT HP	202 71 95 01 HP	129 x 129 x 100	0.50	130 x 130		max.25		R	5
MINIGRID IN 1 MOUNTING KIT LARGE	202 71 95 01L	245 x 245 x 100	0.90				Ø202	O/R	8
MINIGRID IN 2 MOUNTING KIT	202 71 95 02	129 x 232 x 100	0.80	130 x 233		max.25		O	6
MINIGRID IN 2 MOUNTING KIT HP	202 71 95 02 HP	129 x 232 x 100	0.80	130 x 233		max.25		R	6
MINIGRID IN 2 MOUNTING KIT LARGE	202 71 95 02L	342 x 245 x 100	1.00				Ø202 - 100 - Ø202	O	8
MOUNTING KIT 55	202 00 55	93 x 93 x 30	0.10		89	9 or 12		O	7
MOUNTING KIT 64	202 00 64	97 x 97 x 30	0.10		105	9 or 12		O	7
MOUNTING KIT 75	202 00 75	117 x 117 x 30	0.10		121	9 or 12		O	7
MOUNTING KIT 75 TRIMLESS	202 01 75	117 x 117 x 30	0.10		121	9 or 12		R	7
MOUNTING KIT 75 TRIMLESS O.F.A.	202 01 75 OFA	240 x 240 x 40	0.20				Ø182	R	8
MOUNTING KIT MINI DIRO II 12	202 41 58 12	65 x 120 x 57	0.10		66	12 or 24		R	9
MOUNTING KIT MINI DIRO II 15	202 41 58 15	65 x 120 x 57	0.10		66	max.15		R	9
MOUNTING KIT R143 TRIMLESS	202 15 61 97	91 x 214 x 125	0.40		152	max.25	Ø182	R	9
MOUNTING KIT R168 TRIMLESS	202 57 61 97	Ø184 x 124	0.40		186	max.20	Ø225	R	3
MOUNTING KIT R30 TRIMLESS	202 41 30 00	121 x 98 x 90	0.10		50		Ø52	R	9
MOUNTING KIT R82 TRIMLESS	202 11 82	95 x 168 x 43	0.10		105	max.22		R	9
MOUNTING KIT R82 TRIMLESS O.F.A.	202 11 82 OFA	200 x 200 x 44	0.20		122	max.25	Ø122	R	9
MOUNTING KIT SKELP TRIMLESS	202 15 61 972	214 x 125 x 70	0.40		152	max.25	Ø182	R	9
MOUNTING KIT TWEETER TRIMLESS	202 15 61 971	214 x 125 x 70	0.60		152	max.25	Ø182	R	9
SUPERNOVA 125 RECESSED KIT	274 94 1310	Ø1325 x 115	4.60		1335	max.25		R	3
SUPERNOVA 65 RECESSED KIT	274 94 0710	Ø725 x 115	3.10		735	max.25		R	3
SUPERNOVA 95 RECESSED KIT	274 94 1010	Ø1025 x 115	3.10		1035	max.25		R	3
SUPERNOVA XS RECESSED KIT 260	274 88 029	Ø299 x 126	1.10		301	max.25		R	3
SUPERNOVA XS RECESSED KIT 330	274 88 036	Ø369 x 126	1.40		371	max.25		R	3





tech


Mounting Kit



TYPE 6



TYPE 8

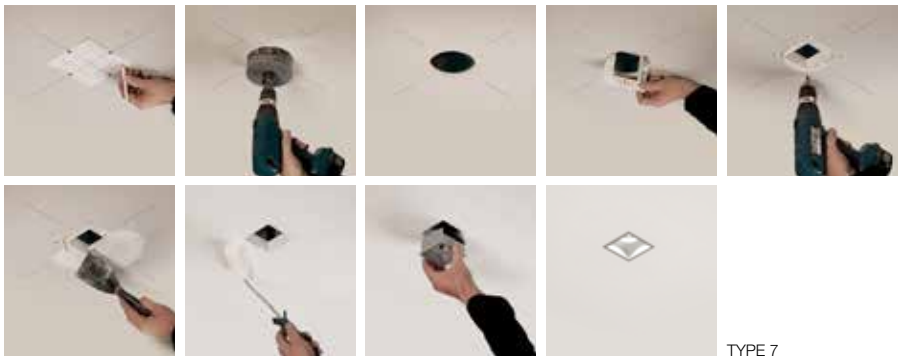


TYPE 7

OPTIONS

Carreepoint






16 x 60

CARREEPOINT ◇
203 10 02 ◇
◇ = A / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Daxpoint





58 x 45 max.12

DAXPOINT ◇
203 10 03 ◇
◇ = A / B / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Deltapoint Single




68 x 50 max.35

DELTAPOINT SINGLE ◇
203 20 01 ◇
◇ = A / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Flatpoint







16 x 60

FLATPOINT ◇
203 10 06 ◇
◇ = ALU
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Jackpoint

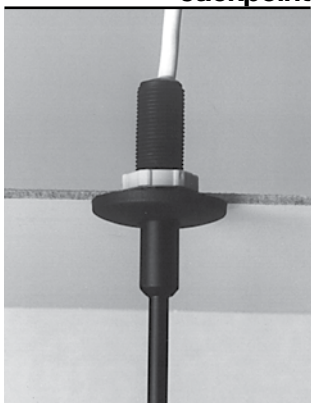



16 x 60


JACKPOINT ◇
203 10 01 ◇
◇ = A / B / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

new

Jackpoint trimless






60 x 80 max.25

JACKPOINT TRIMLESS
328 10 04
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,3 IP20

Sax 1






SAX 1 ◇
203 10 15 ◇
◇ = A / W
EXCL.1 x JAC ** ** *

0,1 IP20

Setpoint





105 x 75 max.22


SETPOINT ◇
203 10 27 ◇
◇ = PRIM
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,3 IP20

tech

Dax Clip






58 x 45 max.12

DAX CLIP ◇
203 05 06 ◇
◇ = A / B / W

0,1

Delta Clip + Rosas






DELTA CLIP + ROSAS ◇
203 05 04 ◇
◇ = A / B / W

0,1

OPTIONS
COVERSET R 90-100

Delta Fix





18

DELTA FIX ◇
203 05 10 ◇
◇ = A / B / W


0,1

OPTIONS
COVERSET R 62-90-100

new

Spotnic M10 trimless






60 x 80 max.25


SPOTNIC M10 TRIMLESS
328 10 05
EXCL.1 x SPOTNIC M10
EXCL.LED POWER SUPPLY 350mA/DC

III 0,3 IP20

new

Spotnic clip + rosas

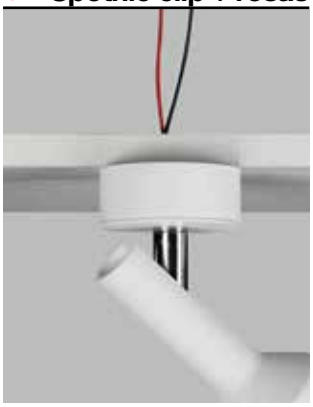




SPOTNIC CLIP + ROSAS ◇
203 05 041 ◇
◇ = W
EXCL.1 x SPOTNIC M10
EXCL.LED POWER SUPPLY 350mA/DC

III 0,3 IP20

new

Spotnic S1 clip





58 max.25

SPOTNIC S1 CLIP ◇
203 05 061 ◇
◇ = W
EXCL.1 x SPOTNIC M10
EXCL.LED POWER SUPPLY 350mA/DC


III 0,3 IP20

tech

OPTIONS

Suspension trimless





60 x 80 max.25


SUSPENSION TRIMLESS
328 10 01

INCL.1 x AUTOMATIC ADJUSTMENT

0,2

Suspension + connection trimless





60 x 80 max.25


SUSPENSION + CONNECTION TRIMLESS
328 10 02

INCL.1 x CONNECTOR max. 3x 2,5 mm²
INCL.1 x AUTOMATIC ADJUSTMENT
4A / 250V

0,2

Connection trimless





60 x 80 max.25

CONNECTION TRIMLESS
328 10 03

INCL.1 x CONNECTOR max. 3x 2,5 mm²
4A / 250V

0,2

Cable Base R






CABLE BASE R ◇
203 99 55 ◇
◇ = ANO / B / W

0,1

OPTIONS
COVERSET R 62-90-100

Cable Base S






CABLE BASE S ◇
203 99 56 ◇
◇ = ANO / B / W

0,1

OPTIONS
COVERSET S 62-80-90

Coverset R

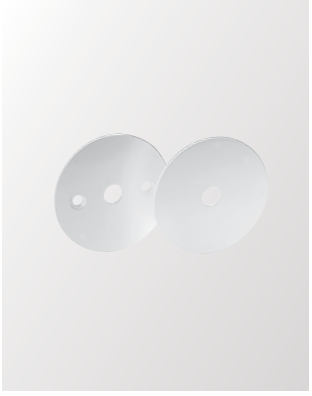



COVERSET R 100 ◇
204 00 100 ◇

COVERSET R 62 ◇
204 00 62 ◇

COVERSET R 90 ◇
204 00 90 ◇

◇ = ANO / W

0,1

Coverset S





COVERSET S 62 ◇
204 62 62 ◇

COVERSET S 80 ◇
204 80 80 ◇

COVERSET S 90 ◇
204 90 90 ◇


◇ = ANO / W

0,1

tech

CBox





142 x 142 x 300


CBOX
216 12 00

INCL.2 x PG13,5 / 1 x PG11

0,5 IP67

CBox 350 mA / 10W





142 x 142 x 300


CBOX 350 mA / 10W
216 14 35

INCL.2 x PG13,5 / 2 x PG11
INCL.LED POWER SUPPLY 350mA-DC / 10W
CURRENT CONTROLLED
220-240V / 50-60Hz

0,7 IP67

CBox T50





142 x 142 x 300


CBOX T50
216 12 50

INCL.2 x PG13,5 / 1 x PG11
220-240V / 50-60Hz / TE
1 x 12V / max.50W

0,7 IP67

CBox T100





142 x 142 x 300


CBOX T100
216 12 100


INCL.2 x PG13,5 / 2 x PG11
220-240V / 50-60Hz / TE
2 x 12V / 2 x max.50W

0,8 IP67

IP68 Connection Kit







IP68 CONNECTION KIT
216 12 01


CABLE Ø7,5-10 mm
MAX.3 x 4mm²
4A 250V

0,1 IP68

new

IP68 Connector 3P







IP68 CONNECTOR 3P
216 12 02

CABLE Ø7,5-12 mm
MAX.3 x 1,5mm²
4A 250V

0,1 IP68

Genie Box 80 S / 90 S

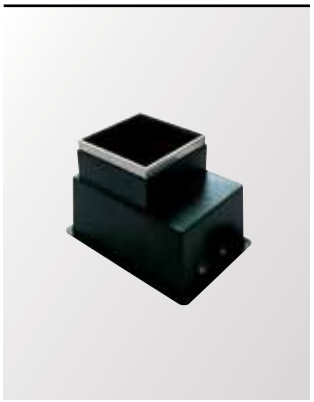



224 x 159 x 155


GENIE BOX 80 S / 90 S
213 19 08

INCL.1 x BASE PLATE
EXCL.TRANSFO
max.500kg

0,6

Genie Box 90 R





224 x 159 x 150

GENIE BOX 90 R
213 19 09


INCL.1 x BASE PLATE
EXCL.TRANSFO
max.500kg

0,6

tech

ACCESSORIES

Cone 50







CONE 50 ◇
201 31 50 ◇
◇ = ALU / W

ANGLE LIGHTSOURCE < 24°
◇ W = MAX. 20W

0,1

Cone 111






CONE 111 ◇
201 28 00 ◇
◇ = ALU / B / C / W

ANGLE LIGHTSOURCE < 24°

0,1

Clip 50






CLIP 50 ◇
201 30 98 ◇
◇ = A / B / W

0,1

Clip 111





CLIP 111 ◇
201 27 99 ◇
◇ = A / B / W

0,1

Cone 66






CONE 66 ◇
201 32 52 ◇
◇ = B

0,1

Ring 66





RING 66 ◇
201 32 50 ◇
◇ = A / W

0,1

Ring 109







RING 109 ◇
201 28 01 ◇
◇ = A / B / W

0,1

Lens 109







LENS 109
201 48 01

0,1

Lens 111





LENS 111
201 47 11

0,1

Dicroic Filter 50






DICROIC FILTER 50 BLUE
201 30 11
DICROIC FILTER 50 GREEN
201 30 12
DICROIC FILTER 50 RED
201 30 13
DICROIC FILTER 50 YELLOW
201 30 14

0,1 max. 20W

Dicroic Filter 100 Blue






DICROIC FILTER 100 BLUE
201 38 11

0,1

tech

Frontglass 109






FRONTGLASS 109
201 18 00

0,1

Frontglass 111





FRONTGLASS 111
201 17 00

0,1

Glass SBL 50






GLASS SBL 50
201 30 05
MAX.20W

0,1

UV-Filter






UV-FILTER C30
201 37 00

0,1

Colour Filter 66







COLOUR FILTER 66 BLUE
201 33 11
COLOUR FILTER 66 GREEN
201 33 12
COLOUR FILTER 66 RED
201 33 13
COLOUR FILTER 66 YELLOW
201 33 14
QR-C50 MAX.35W

0,1

Colour Filter 109







COLOUR FILTER 109 BLUE
201 28 11
COLOUR FILTER 109 GREEN
201 28 12
COLOUR FILTER 109 RED
201 28 13
COLOUR FILTER 109 YELLOW
201 28 14
QR-111 MAX.50W 24°

0,1

Colour Filter 111






COLOUR FILTER 111 BLUE
201 27 11
COLOUR FILTER 111 GREEN
201 27 12
COLOUR FILTER 111 RED
201 27 13
COLOUR FILTER 111 YELLOW
201 27 14
QR-111 MAX.50W 24°

0,1

Temperature

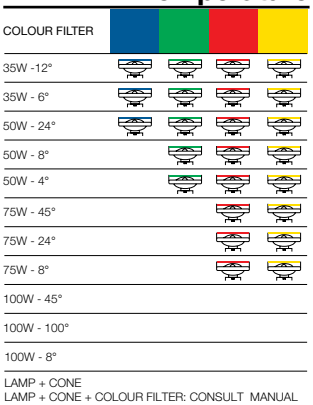

LAMP + CONE
LAMP + CONE + COLOUR FILTER: CONSULT MANUAL

tech

ACCESSORIES

Tube C





TUBE C ◇
202 02 05 ◇
◇ = B

0,1

Tube R






TUBE R ◇
202 02 08 ◇
◇ = B

0,1

Anti-Glare Tube







ANTI-GLARE TUBE ◇
201 34 00 ◇
◇ = B / W
max.20W

0,1

Raster 109






RASTER 109 ◇
201 28 02 ◇
◇ = B

0,1

Raster 66







RASTER 66 ◇
201 32 51 ◇
◇ = B

0,1

tech

Basic S Decorative Glass






BASIC S DECORATIVE GLASS
228 90 10

INCL.4 x DISTANCER FOR BASIC S
INCL.RUBBER SEAL

0,5

Basic S Glass SBL






BASIC S GLASS SBL
228 90 20

0,1

Basic R Glass SBL






BASIC R GLASS SBL
228 91 20

0,1

Basic S Raster






BASIC S RASTER ◇
228 90 59 ◇
◇ = INOX
INCL.4 x DISTANCER FOR BASIC S
INOX 316 L

0,2

Genie Raster





GENIE RASTER
213 19 01

0,1

tech

Cut-Out

PRODUCT	PAGE		36	41	53	63	66	70	74	76	79	82	89	98	105	121	146	152	156	160	216	222	260	365	652	685	952	985	1252	1285
DEEP IRIS	INT 78	36	•																											
MZ 35	INT 79	41		•																										
LEDS SWING	INT 78	53			•																									
RB 35	INT 79	53			•																									
RB 50	INT 79	63				•	•																							
REO S	INT 27	66					•																							
RINGO	INT 72	70						•																						
LUX	INT 77	74							•																					
LUX X	EXT 9	74							•																					
DEEP RINGO	INT 67	76								•																				
DEEP RINGO LED	INT 66	76								•																				
DIRO 130	INT 42	76								•																				
DIRO GT	INT 47/EXT 11	76								•																				
DIRO GT LED	INT 46/EXT 12	76								•																				
DIRO OK	INT 43	76								•																				
DIRO OK X	EXT 9	76								•																				
DIRO ST OK	INT 39	76								•																				
DIRO ST OK LED	INT 38	76								•																				
REO	INT 22	76								•																				
REO D	INT 23	76								•																				
REO HD	INT 23	76								•																				
REO X	EXT 8	76								•																				
LUXOR	INT 77	79									•																			
LUXOR X	EXT 9	79									•																			
CIRCLE	INT 73	82										•																		
CIRCLE S	INT 73	82										•																		
C-MAX	INT 65	82										•																		
CARREE RS	INT 112	89											•																	
CARREE RS OK	INT 113	89											•																	
OREO	INT 19	98												•																
REO OK	INT 21	98												•																
REO S OK	INT 26	98												•																
RODI 50	INT 58	98												•																
RODI S 50	INT 63	98												•																
DIRO ST OK	INT 39	105													•															
YOU-TURN 111	INT 83	121														•														
YOU-TURN H111	INT 83	121														•														
YOU-TURN HIT	INT 83	121														•														
YOU-TURN OPTO 20	INT 81	121														•														
YOU-TURN REO	INT 81	121														•														
YOU-TURN REO 20	INT 81	121														•														
RODI 111	INT 59	146															•													
RODI H111	INT 59	146															•													
RODI HIC	INT 59	146															•													
RODI S 111	INT 63	146															•													
RODI S H111	INT 63	146															•													
RODI S HIT	INT 63	146															•													
GRAND DIRO ST 111	INT 53	152																•												
GRAND DIRO ST D 111	INT 53	152																•												
GRAND DIRO ST OPTO	INT 52	152																•												
DIRO 126 SBL	INT 49	156																	•											
DIRO 126 SBL +	INT 49	156																	•											
DIRO LED +	INT 48	156																	•											
TWEETER ST D 111	INT 11	160																		•										
TWEETER ST D H111	INT 11	160																		•										
TWEETER ST D REO	INT 10	160																		•										
DIRO 226 SBL	INT 49	216																			•									
HOLE IN ONE R15	INT 93	222																				•								
ULTRA SPY HIC	INT 89	222																				•								
DOWNFORCE R	INT 197	260																					•							
CIRCA 55	INT 203	365																						•						
CIRCA 55 RGB	INT 203	365																						•						
CIRCA 5505	INT 203	365																						•						
CIRCA 5505 RGB	INT 203	365																						•						
SUPERNOVA SEMI 65	INT 211	652																							•					
SUPERNOVA TRIMLESS 65	INT 209	685																								•				
SUPERNOVA TRIMLESS 6528	INT 209	685																								•				
SUPERNOVA SEMI 95	INT 211	952																									•			
SUPERNOVA TRIMLESS 95	INT 209	985																										•		
SUPERNOVA TRIMLESS 9528	INT 209	985																										•		
SUPERNOVA SEMI 125	INT 211	1252																											•	
SUPERNOVA TRIMLESS 125	INT 209	1285																												•
SUPERNOVA TRIMLESS 12528	INT 209	1285																												•





Lamp Index

LIGHTSOURCE	LAMP	FITTING	VOLTAGE	OUTPUT (W)
	A60	E27Ls	100-240V / 50-60Hz	15-25-40-60
	QR-CBC35	G4	12V	20-35
	QR-51 ALU	GX5.3	12V	20-35-50
	QR-C51	GX5.3	12V	20-35-50
	QR-CBC51	GX5.3	12V	20-35-50
	QR-CB51	GX5.3	12V	20-35-50
	QR-LP70	BA15d	12V	20-50
	QR-LP111	G53	12V	35-50-75-100
	QT9	G4	12V	5-10-20
	QT12	GY6.35	12V	20-35-50
	QT14	G9	100-240V / 50-60Hz	25-40-60
	QT32	E27Ls	100-240V / 50-60Hz	70
	QT-DE12	R7s	100-240V / 50-60Hz	150
	QT-DE12s	R7s	100-240V / 50-60Hz	100-150
	QPAR51	GU10	100-240V / 50-60Hz	35-50
	QPAR30	E27Ls	100-240V / 50-60Hz	75
	HIT-TC	G8.5	220-240V / 50-60Hz	35-50-70
	HIT-TC CE	PGJ5	220-240V / 50-60Hz	20
	HIT	G12	220-240V / 50-60Hz	35-70-150
	HIT-CE-od	PGZ18	220-240V / 50-60Hz	210
	HIT-DE	RX7s	220-240V / 50-60Hz	70-150
	HIPAR51	GX10	220-240V / 50-60Hz	20-35
	HIPAR20	E27Hs	220-240V / 50-60Hz	35
	HIPAR30	E27Hs	220-240V / 50-60Hz	35-70
	HIR- CE111	GX8.5	220-240V / 50-60Hz	35-70
	T16	G5	220-240V / 50-60Hz	8 14-21-28-35 24-39-49-54-80
	T16-S	G5	220-240V / 50-60Hz	24-39-54
	T16-R	2GX13	220-240V / 50-60Hz	22-55-60
	TC-S	G23	220-240V / 50-60Hz	9
	TC-D	G24d-1 G24d-3	220-240V / 50-60Hz	10 26
	TC-DEL	G24q-1 G24q-2 G24q-3	220-240V / 50-60Hz	13 18 26
	TC-T	GX24d-2	220-240V / 50-60Hz	18
	TC-TEL	GX24q-2 GX24q-3 GX24q-4	220-240V / 50-60Hz	18 26-32 42
	TC-L	2G11	220-240V / 50-60Hz	18-24-36-55
	T2-MLF	GX53	220-240V / 50-60Hz	9
	TC-DSE	E14	100-240V / 50-60Hz	11-12
	TC-TSE	E27Ls	100-240V / 50-60Hz	15-20-23
	TCA-SE	E27Ls	100-240V / 50-60Hz	5-7-10-15-20
	TC-SB	E27Ls	100-240V / 50-60Hz	9-12-16

Legenda

◇	KLEUR	COULEUR	COLOUR	FARBE	COLOR	COLORE
A	ALU GRIJS	ALU GRIS	ALU GREY	ALU GRAU	ALU GRIS	ALU GRIGIO
ALU	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIO	ALUMINIO
ANO	GEANODISEERD ALU	ALU ANODISE	ALU ANODISED	ALU ELOXIERT	ALU ANODIZADO	ALU ANODIZZATO
B	ZWART RAL 9005	NOIR RAL 9005	BLACK RAL 9005	SCHWARZ RAL 9005	NEGRO RAL 9005	NERO RAL 9005
C	CHROOM	CHROME	CHROMED	CHROM	CROMO	CROMATO
G	GRIJS BRUIN	GRIS BRUN	GREY BROWN	GRAU BRAUN	GRIS MARRON	GRIGIO BRUNO
INOX	ROESTVRIJ STAAL	ACIER INOXYDABLE	STAINLESS STEEL	ROSTFREIER STAHL	ACERO INOXIDABLE	ACCIAIO INOSSIDABILE
M	VERGULD	DORE	GOLD	VERGOLDET	ORO	ORO
N	DONKERGRIJS	GRIS FONCE	DARK GREY	DUNKELGRAU	GRIS OSCURO	GRIGIO SCURO
MMAT	VERGULD MAT	LAITON DEPOLI	GOLD MAT	VERGOLDET MAT	ORO MATE	ORO OPACO
PRIM	GRONDLAAG	APPRET	PRIMER	GRUNDIERUNG	PINTURA DE FONDO	MESTICA
RAL	KLEUR RAL	COULEUR RAL	COLOUR RAL	FARBE RAL	COLOR RAL	COLORE RAL
W	WIT RAL 9003	BLANC RAL 9003	WHITE RAL 9003	WEIß RAL 9003	BLANCO RAL 9003	BIANCO RAL 9003
	TOESTEL KLASSE 1	APPAREIL CLASSE 1	FIXTURE CLASS 1	GERÄT KLASSE 1	APARATO CLASE 1	APPARECCHIO CLASSE 1
	TOESTEL KLASSE 2	APPAREIL CLASSE 2	FIXTURE CLASS 2	GERÄT KLASSE 2	APARATO CLASE 2	APPARECCHIO CLASSE 2
	TOESTEL KLASSE 3	APPAREIL CLASSE 3	FIXTURE CLASS 3	GERÄT KLASSE 3	APARATO CLASE 3	APPARECCHIO CLASSE 3
CE	NORM 01.96 EMC 89 / 336 / EEC	NORM 01.97. LV 73 / 23 / EEC				
0,5	NETTO GEWICHT KG	POIDS NET KG	NET WEIGHT KG	NETTO GEWICHT KG	PESO NETO KG	PESO NETTO KG
IP..	BESCHERMINGSINDICATIE	INDICE DE PROTECTION	PROTECTION LEVEL	SCHUTZKLASSE	CLASE DE PROTECCIÓN	CLASSE DI PROTEZIONE
	RONDE OPENING DIAMETER x MIN. INBOUWDIEPTE	DECOUPE RONDE DIAMETRE x PROFONDEUR NECESSAIRE POUR ENCASTREMENT	ROUND OPENING DIAMETER x MIN. DEPTH FOR RECESSING	RUNDE ÖFFNUNG DIAMETER x MIN. TIEFE FÜR EINBAU	ABERTURA REDONDA DIAMETRO x DISTANCIA MINIMA DE EMPOTRAMIENTO	FORO TONDO DIAMETRO x SPESSORE MINIMO RICHIESTO PER L'INCASSO
	RECHTHOEKIGE OPENING LENGTE x BREEDTE x MIN. INBOUWDIEPTE	DECOUPE RECTANGULAIRE LO.x LA.x PRO. NECESSAIRE POUR ENCASTREMENT	RECTANGULAR OPENING LENGTH x WIDTH x MINIMUM DEPTH FOR RECESSING	RECHTECKIGE ÖFFNUNG LÄNGE x BREITE x MINIMUM TIEFE EINBAU	ABERTURA RECTANGULAR LARGO x ANCHO x DISTANCIA MINIMA DE EMPOTRAMIENTO	FORO RETTANGOLARE LUNGHEZZA x LARGHEZZA x SPESSORE M NIMO RICHIESTO PER L' NCASSO
	MAX. DIKTE MONTAGEOPPERVLAK	EPAISSEUR MAX.DE LA SURFACE DE MONTAGE	MAX.THICKNESS OF THE MOUNTING SURFACE	MAXIMALE STÄRKE DER BEFESTIGUNGSFLÄCHE	ESPESOR MÁXIMO DE LA SUPERFICIE DE MONTAJE	SPESSORE MASSIMO DELLA SUPERFICIE DI MONTAGGIO
0,5	MIN. AFSTAND (M) LAMP - OBJECT	DISTANCE MIN. (M) AMPOULE - OBJET	MIN. DISTANCE (M) LAMP - OBJECT	MIN. DISTANZ (M) LAMPE - OBJEKT	DISTANCIA MINIMA (M) LÁMPARA - OBJETO	DISTANZA MIN. (M) LAMPADA - OGGETTO
	BEVESTIGING VLOER - WAND - PLAFOND OPBOUW	MONTAGE SOL - MUR - PLAFOND APPLIQUE	FIXATION FLOOR - WALL - CEILING SURFACE MOUNTED	MONTAGE BODEN - WAND - DECKE AUFGEBAUT	MONTAJE SUELO - PARED-TECHO MONTADO AL SUPERFICIE	MONTAGGIO PAV MENTO-PARETE - SOFFITTO MONTATO A SUPERFICIE
	BEVESTIGING VLOER - WAND - PLAFOND INBOUW	MONTAGE SOL - MUR - PLAFOND ENCASTRE	FIXATION FLOOR - WALL - CEILING RECESSED	MONTAGE BODEN - WAND - DECKE EINGEBAUT	MONTAJE SUELO - PARED-TECHO EMPOTRADO	MONTAGGIO PAVIMENTO-PARETE - SOFFITTO-INCASSO
	BEVESTIGING PLAFOND GEPENDELD	MONTAGE PLAFOND SUSPENDU	FIXATION CEILING SUSPENDED	MONTAGE DECKE GEPENDELT	MONTAJE TECHO SUSPENDIDO	MONTAGGIO SOFFITTO SOSPESO
	STAND ALONE	STAND ALONE	STAND ALONE	STAND ALONE	STAND ALONE	STAND ALONE
	GESCHIKT VOOR BINNEN- EN BUITENGEBRUIK	CONVIENT A USAGE INTERIEUR ET EXTERIEUR	SUITABLE FOR INDOOR AND OUTDOOR USE	EIGNET SICH FUR INNEN- UND AUßENBEREICH	APTO PARA USO INTERIOR Y EXTERIOR	PER UTILIZZO SIA IN IN INTERNI CHE DA ESTERNI
S1	VEREN VOOR HOLLE WAND	RESSORTS PRECONISES POUR FAUX-PLAFONDS	SPRINGS FOR HOLLOW SURFACES	FEDERN FÜR HOHL RAUMDECKE	MUELLES PARA UT LIZAR EN FALSOS TECHOS DE ESCAYOLA Y PLADUR	SISTEMA DI FISSAGGIO PER CONTRO-SOFFITTI IN LASTRE O PANNELLI
S2	VEREN VOOR VOLLE WAND	RESSORTS PRECONISES POUR PLAFONDS STANDARDS	SPRINGS FOR SOLID SURFACES	FEDERN FÜR VOLL MATERIAL	MUELLES PARA UTILIZAR EN HORMIGON	SISTEMA DI FISSAGGIO PER VANI CHIUSI REALIZZATI NELLA MURATURA
BAP	LAAGLUMINANTIERASTER	DIFFUSEUR ANTI - REFLETS SPECIAL INFORMATIQUE	CATEGORY II LOUVER	BAP RASTER	REFLECTOR DE BAJA LUMINANCIA	RIFLETTORE A BASSA LUMINENZA
TE	ELEKTRONISCHE TRANSFORMATOR	TRANSFORMATEUR ELECTRONIQUE	ELECTRONIC TRANSFORMER	ELEKTRONISCHER TRANSFORMATOR	TRANSFORMADOR ELECTRÓNICO	TRASFORMATOR E ELETTRONICO
EXCL.TRANSFO	EXCL.TRANSFORMATOR	EXCL.TRANSFORMATEUR	EXCL.TRANSFORMER	EXKL.TRANSFORMATOR	EXCL.TRANSFORMADOR	ESCL.TRASFORMATORE
EVG	ELEKTRONISCHE VOORSCHAKELAPPARATUUR	BALLAST ELECTRONIQUE	ELECTRONIC BALLAST	ELEKTRONISCHES VORSCHALTGERÄT	BALASTRO ELECTRONICO	REATTORE ELETTRONICO
EVG **DIMMABLE**	DIMBAAR ELEKTRONISCHE VOORSCHAKELAPPARATUUR	BALLAST ELECTRONIQUE DIMMABLE	ELECTRONIC DIMMABLE BALLAST	ELEKTRONISCHES DIMBARES VORSCHALTGERÄT	BALASTRO ELECTRONICO REGULABLE	REATTORE ELETTRONICO DIMMERABILE
λ	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9
FE	DIMBAAR FASE AFSNIJD NG	COUPE PHASE DESCENDANTE	FALLING EDGE DIMMABLE	PHASENABSCHNITT DIMMUNG	REGULACION DE CORTE DESCENDENTE	REGOLAZIONE CON DIMMER A TAGLIO DI FASE
SBL	GEZANDSTRAALD	SABLE	SANDBLASTED	GESANDSTRAHLTES	SATINADO	SATINATO
ESG	VEILIGHEIDSGLAS	VERRE DE SECURITE	SAFETY GLASS	EINSCHEIBEN SICHERHEITSGLAS	CRISTAL DE SEGUR DAD	VETRO DI SICUREZZA
95	AFMETINGEN IN MM	DIMENSIONS EN MM	DIMENSIONS IN MM	ABMESSUNGEN IN MM	DIMENSIONES EN MM	DIMENSIONI IN MM
TOL. DIN	TOLERANTIE VOLGENS DIN-NORMEN	TOLERANCE CONFORME AUX NORMES DIN	TOLERANCE ACCORDING TO DIN-SPECIFICATIONS	TOLERANZ NACH DIN-NORMEN	TOLERANCIA SEGUN LAS NORMAS DIN	TOLLERANZE A NORME DIN
DIN EN12020-2	TOLERANTIES EXTRUSIE	TOLERANCES EXTRUSION	TOLERANCES EXTRUSION	TOLERANZEN EXTRUSION	TOLERANCIA EXTRUSION	TOLLERANZA ESTRUSIONE
DIN 17.611	TOLERANTIES ANODISATIE	TOLERANCES ANODISATION	TOLERANCES ANODISATION	TOLERANZEN ELOXIERUNG	TOLERANCIA ANODIZADO	TOLLERANZA ANODIZZATO
DIN 55.928	TOLERANTIES LAKWERK	TOLERANCES LAQUAGE	TOLERANCES COATING	TOLERANZEN LACKIERUNG	TOLERANCIA LACA	TOLLERANZA LACCA
	GEREGISTREERD DESIGN	MODÈLE DÉPOSÉ	REGISTERED DESIGN	REGISTRIERTES DESIGN	DISEÑO REGISTRADO	MODELLO DEPOSITATO
led	LED TOESTEL	LUMINAIRE À LED	LED LUMINAIRE	LED LEUCHTE	FUENTE LED	APPARECCHIO ALIMENTATO A LED
	GESCHIKT VOOR TOEPASSING IN BADKAMERS (**)	APPLICABLE POUR SALLES DE BAINS (**)	SUITABLE FOR USE IN BATHROOM (**)	GEEIGNET FÜR INSTALLATION IM BADEZIMMER (**)	ILUMINACIÓN APTO PARA USO EN BAÑOS (**)	ILLUMINAZIONE ADATTA PER L'AMBIENTE BAGNO (**)

PRODUCT DESIGN AWARD NDUSTRIE FORUM HANNOVER MESSE

PRODUCT DESIGN PLUS AWARD FRANKFURT

LIGHTS OF THE FUTURE AWARD

BEST PRODUCT AWARD DESIGN BRUSSELS

DESIGNPREIS NOMINEE

RED DOT DESIGN AWARD

Interior nnovat on Award

Good Des gn Award

Green Good Design Award

tech

) CEBEC IS THE BELGIAN CERTIFICAT ON BODY IN THE FIELD OF ELECTR CAL EQUIPMENT
T IS PARTICIPATING IN THE CB SCHEME SINCE T IS ACCREDITED AS A CERTIFICATION BODY FOR THE CERTIFICATION OF PRODUCTS ACCORDING TO EN 45011 AND THE CERTIFICATION OF QUAL TY SYSTEMS ACCORD NG TO THE STANDARD EN 45012

:) CHECK COMPLIANCE WITH LOCAL REGULATIONS

?PRODUCTS MANUFACTURED ACCORDING TO IEC/EN 60598 1 AND THE APPLICABLE SECTIONS OF IEC/EN 60598 2



index

Index by Name

NAME	PAG
A	
ANTI-GLARE TUBE	TEC 44
AULA 26 WW	EXT 147
AULA 60 WW	EXT 147
AYA DOWN-UP Hi	EXT 79
AYA Hi	EXT 79
B	
BACKSPACE 26 EVG	INT 496
BACKSPACE 36 EVG	INT 496
BALLASTSET C50 20 4,0 kV	TEC 30
BALLASTSET C50 35 4,0 kV	TEC 30
BALLASTSET HID 135	TEC 30
BALLASTSET HID 170	TEC 30
BAMBO COVER	INT 400
BAMBO HIT C	INT 401
BAMBO HIT RGB C	INT 401
BAMBO RGB	INT 401
BAMBO SUSPENSION SET	INT 400
BASIC BRA 50 T50	EXT 113
BASIC BRI 50 T50	EXT 113
BASIC BSI 50 T50	EXT 115
BASIC BSRA 50 T50	EXT 113
BASIC BSRI 50 T50	EXT 113
BASIC LRA 50	EXT 113
BASIC LRA 50 Hi	EXT 113
BASIC LRI 50	EXT 113
BASIC LRI 50 Hi	EXT 113
BASIC LSI 50	EXT 115
BASIC LSI 50 Hi	EXT 115
BASIC LSRA 50	EXT 113
BASIC LSRA 50 Hi	EXT 113
BASIC LSRI 50	EXT 113
BASIC LSRI 50 Hi	EXT 113
BASIC R GLASS SBL	EXT 112/TEC 45
BASIC S DECORATIVE GLASS	EXT 114/TEC 45
BASIC S GLASS SBL	EXT 114/TEC 45
BASIC S RASTER	EXT 114/TEC 45
BAZIL 121	EXT 127
BAZIL 123	EXT 127
BAZIL 126	EXT 127
BAZIL 127	EXT 127
BAZIL 63	EXT 127
BAZIL 66	EXT 127
BAZIL W 60	EXT 91
BE COOL 154	INT 391/509
BE COOL 155	INT 509
BE COOL 254	INT 391/509
BE COOL 254 EVG DIM 2	INT 391/509
BE COOL C 254	INT 391
BE COOL C 254 EVG DIM 2	INT 391
BE COOL X 114	EXT 93
BE COOL X 128	EXT 93
B-FLEX DH2 NW	INT 451
B-FLEX DH2 WW	INT 451
B-FLEX H2 NW	INT 451
B-FLEX H2 WW	INT 451
B-FLEX V2 NW	INT 451
B-FLEX V2 WW	INT 451
BICEP P1254	INT 413
BICEP P1254 DOWN-UP	INT 413
BL - PROFILE	PRO 42
B-LINER 65 P630	INT 411
B-LINER 70 430	INT 219
BLN 65 - PROFILE	PRO 112
BLN 70 - PROFILE	PRO 112
BOOSTER HIC-35 FL28	INT 275
BOOSTER HIC-35 FL28 AD	INT 549
BOOSTER HIC-35 SP18	INT 275
BOOSTER HIC-35 SP18 AD	INT 549
BOOSTER HIC-35 WFL52	INT 275
BOOSTER HIC-35 WFL52 AD	INT 549
BOOSTER HIC-50 FL28	INT 275
BOOSTER HIC-50 FL28 AD	INT 549
BOOSTER HIC-50 SP18	INT 275
BOOSTER HIC-50 SP18 AD	INT 549
BOOSTER HIC-50 WFL52	INT 275
BOOSTER HIC-50 WFL52 AD	INT 549
BOOSTER HIC-70 FL28	INT 275
BOOSTER HIC-70 FL28 AD	INT 549
BOOSTER HIC-70 SP18	INT 275
BOOSTER HIC-70 SP18 AD	INT 549
BOOSTER HIC-70 WFL52	INT 275
BOOSTER HIC-70 WFL52 AD	INT 549
BOOSTER HP 3020	INT 274
BOOSTER HP 3020 AD	INT 548
BOOSTER HP 3027	INT 274
BOOSTER HP 3027 AD	INT 548
BOOSTER HP 3040	INT 274
BOOSTER HP 3040 AD	INT 548
BOOSTER HP 3050	INT 274
BOOSTER HP 3050 AD	INT 548
BOTANIC 24 WW	EXT 161
BOTANIC 54 WW	EXT 161
BOXTER 1 50	INT 241
BOXTER 1 LED 2733	INT 240
BOXTER 1 LED 2733-9	INT 240
BOXTER 1 LED 3033	INT 240
BOXTER 1 LED 3033-9	INT 240
BOXTER 2 50	INT 241
BOXTER 2 LED 2733	INT 240
BOXTER 2 LED 2733-9	INT 240
BOXTER 2 LED 3033	INT 240
BOXTER 2 LED 3033-9	INT 240
BOXY	INT 245
BOXY +	INT 245/EXT 27
BOXY + 12V	INT 245/EXT 27
BOXY 2 L+ LED 2733	INT 244
BOXY 2 L+ LED 2733-9	INT 244
BOXY 2 L+ LED 3033	INT 244
BOXY 2 L+ LED 3033	INT 244/EXT 25
BOXY 2 L+ LED 3033	INT 244/EXT 27
BOXY 2 L+ LED 3033-9	INT 244
BOXY L+ LED 2733	INT 244
BOXY L+ LED 2733-9	INT 244
BOXY L+ LED 3033	INT 244
BOXY L+ LED 3033	INT 244/EXT 25
BOXY L+ LED 3033-9	INT 244
BOXY WL+ LED 2733	INT 491
BOXY WL+ LED 3033	INT 491
B-SIDE LED NW	INT 450
B-SIDE LED WW	INT 450
C	
CABLE BASE R	TEC 40
CABLE BASE S	TEC 40
CAMUS	INT 483
CAMUS 10 LED WW	INT 483
CANVAS	INT 485
CANVAS 122	INT 485
CARREE 145 S1	INT 113
CARREE 235 S1	INT 113
CARREE GT Hi S1	INT 111
CARREE GT LED 2733 S1	INT 110
CARREE GT LED 3033 S1	INT 110
CARREE GT S1	INT 111
CARREE II Hi S1	INT 108
CARREE II OK Hi S1	INT 109
CARREE II OK Hi S2	INT 109
CARREE II OK S1	INT 109
CARREE II OK S2	INT 109
CARREE II S1	INT 108
CARREE II S2	INT 108
CARREE II X S1	EXT 15
CARREE II X S2	EXT 15
CARREE MAX Hi S1	INT 111
CARREE MAX Hi S2	INT 111
CARREE MAX S1	INT 111
CARREE MAX S2	INT 111
CARREE Rs50 Hi S1	INT 112
CARREE Rs50 Hi S2	INT 112
CARREE Rs50 OK	INT 113
CARREE Rs50 OK Hi	INT 113
CARREE Rs50 S1	INT 112
CARREE Rs50 S2	INT 112
CARREE ST L LED 2733 S1	INT 105
CARREE ST L LED 2733-9 S1	INT 105
CARREE ST L LED 3033 S1	INT 105
CARREE ST L LED 3033-9 S1	INT 105
CARREE ST LED 2733 S1	INT 105
CARREE ST LED 2733-9 S1	INT 105
CARREE ST LED 3033 S1	INT 105
CARREE ST LED 3033-9 S1	INT 105
CARREE ST OK C50 S1	INT 107
CARREE ST OK S1	INT 107
CARREE ST OK S2	INT 107
CARREE ST S1	INT 107
CARREE TRIMLESS LED 2733 S1	INT 102
CARREE TRIMLESS LED 2733-9 S1	INT 102
CARREE TRIMLESS LED 3033 S1	INT 102
CARREE TRIMLESS LED 3033-9 S1	INT 102
CARREE TRIMLESS OK S1	INT 103
CARREE X LED 3033 S1	EXT 15
CARREEPOINT	TEC 38
CASTAR HP	EXT 75
CBOX	TEC 41
CBOX 350 mA / 10W	TEC 41
CBOX T100	TEC 41
CBOX T50	TEC 41
CIRCA 55	INT 203
CIRCA 55 RGB	INT 203
CIRCA 5505	INT 203
CIRCA 5505 RGB	INT 203
CIRCA ON	INT 277
CIRCLE Hi S1	INT 73
CIRCLE Hi S2	INT 73
CIRCLE S Hi S1	INT 73
CIRCLE S Hi S2	INT 73
CIRCLE S S1	INT 73
CIRCLE S S2	INT 73
CIRCLE S1	INT 73
CIRCLE S2	INT 73
CITYSCAN 453 LED	EXT 131
CITYSCAN 456 LED	EXT 131
CITYSCAN 643 QT	EXT 131
CITYSCAN 643 T18	EXT 131
CITYSCAN 646 QT	EXT 131
CITYSCAN 646 T18	EXT 131
CLIP 111	TEC 42
CLIP 50	TEC 42
CLUB 111 JAC	INT 329
CLUB 50 JAC	INT 329
CLUB 70 JAC	INT 329
CLUB C 1211 T50	INT 331
CLUB C 1411 T50	INT 331
CLUB DISC	INT 330
CLUB S 1111 T50	INT 331
CLUB S 1211 T50	INT 331
CLUB S 1411 T50	INT 331
C-MAX Hi S1	INT 65
C-MAX Hi S2	INT 65
C-MAX S1	INT 65
C-MAX S2	INT 65
COLOUR FILTER 109 BLUE	TEC 43
COLOUR FILTER 109 GREEN	TEC 43
COLOUR FILTER 109 RED	TEC 43
COLOUR FILTER 109 YELLOW	TEC 43
COLOUR FILTER 111 BLUE	TEC 43
COLOUR FILTER 111 GREEN	TEC 43
COLOUR FILTER 111 RED	TEC 43
COLOUR FILTER 111 YELLOW	TEC 43
COLOUR FILTER 66 BLUE	TEC 43
COLOUR FILTER 66 GREEN	TEC 43
COLOUR FILTER 66 RED	TEC 43
COLOUR FILTER 66 YELLOW	TEC 43
CONCRETE BOX 108	TEC 33
CONCRETE BOX 109	TEC 33
CONCRETE BOX 110	TEC 33
CONCRETE BOX 111	TEC 33
CONCRETE BOX 115	TEC 33
CONCRETE BOX 120	TEC 33
CONCRETE BOX 121	TEC 33
CONCRETE BOX 122	TEC 33
CONCRETE BOX 123	TEC 33
CONCRETE BOX 124	TEC 33
CONCRETE BOX 139	TEC 33

Index by Name

NAME	PAG
CONCRETE BOX 145	TEC 33
CONCRETE BOX 151	TEC 33
CONCRETE BOX 153	TEC 33
CONCRETE BOX 161	TEC 33
CONCRETE BOX 162	TEC 33
CONCRETE BOX 163	TEC 33
CONCRETE BOX 165	TEC 33
CONCRETE BOX 180	TEC 33
CONCRETE BOX 181	TEC 33
CONCRETE BOX 183	TEC 33
CONCRETE BOX 184	TEC 33
CONCRETE BOX 185	TEC 33
CONCRETE BOX 186	TEC 33
CONCRETE BOX 187	TEC 33
CONCRETE BOX TR 152	TEC 33
CONCRETE BOX TR 154	TEC 33
CONCRETE BOX TR 182	TEC 33
CONCRETE PACK C S75	TEC 34
CONCRETE PACK GIT 1	TEC 34
CONCRETE PACK GIT 2	TEC 34
CONCRETE PACK GIT 3	TEC 34
CONCRETE PACK GIT 4LINE	TEC 34
CONCRETE PACK MGIT 1	TEC 34
CONCRETE PACK MGIT 2	TEC 34
CONCRETE PACK S75	TEC 34
CONCRETE PACK T R76	TEC 34
CONCRETE PACK T S75	TEC 34
CONCRETE PACK TMK R82	TEC 34
CONE 111	TEC 42
CONE 50	TEC 42
CONE 66	TEC 42
CONNECT-A 224	INT 505
CONNECT-A 254	INT 505
CONNECT-A 254 EVG DIM 2	INT 505
CONNECTION TRIMLESS	TEC 40
COVERSET R 100	TEC 40
COVERSET R 62	TEC 40
COVERSET R 90	TEC 40
COVERSET S 62	TEC 40
COVERSET S 80	TEC 40
COVERSET S 90	TEC 40
CREDO 111 JAC	INT 323
CREDO 50 JAC	INT 323
CREDO 70 JAC	INT 323
CREDO REO 2733 JAC	INT 322
CREDO REO 2733-9 JAC	INT 322
CREDO REO 3033 JAC	INT 322
CREDO REO 3033-9 JAC	INT 322
CUMULUS 155-111 C	INT 397
CUMULUS 255 C	INT 397
CUMULUS 255 C EVG DIM 6	INT 397
CUMULUS RGB C	INT 397

D

DALI CONVERTOR	TEC 30
DAX CLIP	TEC 39
DAXPOINT	TEC 38
DEEP IRIS S1 BLUE	INT 78
DEEP IRIS S1 NW	INT 78
DEEP IRIS S1 WW	INT 78
DEEP RINGO LED 2733	INT 66
DEEP RINGO LED 2733-9	INT 66
DEEP RINGO LED 3033	INT 66
DEEP RINGO LED 3033-9	INT 66
DEEP RINGO S LED 2733 S1	INT 69
DEEP RINGO S LED 2733 S2	INT 69
DEEP RINGO S LED 2733-9 S1	INT 69
DEEP RINGO S LED 2733-9 S2	INT 69
DEEP RINGO S LED 3033 S1	INT 69
DEEP RINGO S LED 3033 S2	INT 69
DEEP RINGO S LED 3033-9 S1	INT 69
DEEP RINGO S LED 3033-9 S2	INT 69
DEEP RINGO S1	INT 67
DELTA CLIP + ROSAS	TEC 39
DELTA FIX	TEC 39
DELTAPOINT SINGLE	TEC 38
DICROIC FILTER 100 BLUE	TEC 42
DICROIC FILTER 50 BLUE	TEC 42
DICROIC FILTER 50 GREEN	TEC 42
DICROIC FILTER 50 RED	TEC 42
DICROIC FILTER 50 YELLOW	TEC 42
DIRO 126 SBL	INT 49
DIRO 126 SBL + S1	INT 49
DIRO 130 S1	INT 42
DIRO 226 SBL	INT 49
DIRO DUO S1	INT 43
DIRO DUO ST S1	INT 39
DIRO GT	INT 47/EXT 13
DIRO GT LED 2733	INT 46
DIRO GT LED 3033	INT 46/EXT 12
DIRO LED + S1 HW	INT 48
DIRO LED + S1 WW	INT 48
DIRO OK Hi S2	INT 43
DIRO OK S1	INT 43
DIRO OK S2	INT 43
DIRO OK X S1	EXT 9
DIRO ST OK C50 S1	INT 39
DIRO ST OK LED 2733	INT 38
DIRO ST OK LED 2733-9	INT 38
DIRO ST OK LED 3033	INT 38
DIRO ST OK LED 3033-9	INT 38
DIRO ST OK QR S1	INT 39
DIRO ST OK S1	INT 39
DIRO TRIMLESS LED 2733 S1	INT 34
DIRO TRIMLESS LED 2733-9 S1	INT 34
DIRO TRIMLESS LED 3033 S1	INT 34
DIRO TRIMLESS LED 3033-9 S1	INT 34
DIRO TRIMLESS OK S1	INT 35
DIRO TRIMLESS S1	INT 35
DOWNFORCE R	INT 197
DOWNFORCE R COVER	INT 197
DOWNFORCE R EVG DIM 2	INT 197
DOWNFORCE R GLASS	INT 197
DOWNFORCE S	INT 199
DOWNFORCE S COVER	INT 199
DOWNFORCE S EVG DIM 2	INT 199
DOWNFORCE S GLASS	INT 199
DOWNFORCE S GLASS SBL	INT 199
DOWNFORCE S RASTER	INT 199
DOX 100	EXT 87
DOX 100 DOWN-UP	EXT 87
DOX 100 S	EXT 23
DOX 2 DOWN-UP T50	EXT 85
DOX 2 ORIENTABLE T50	EXT 85
DOX 2 PIN	EXT 143
DOX 2 PIN T 20	EXT 143
DOX 2 PIN T 30	EXT 143
DOX 2 PIN T 30 READY	EXT 143
DOX 2 PIN T 60	EXT 143
DOX 2 T50	EXT 85

E

END30 - PROFILE	PRO 74
END30+ - PROFILE	PRO 80
ENDLESS 124	INT 419
ENDLESS 154	INT 419
ENDLESS 30 LED WW	INT 420
ENDLESS 30 P1154	INT 421
ENDLESS 30 P2154	INT 421
ENDLESS 30+ P1154	INT 421
ENDLESS 30+ P2154	INT 421
EXPOSED CONCRETE PACK C S75	TEC 34
EXPOSED CONCRETE PACK S75	TEC 34
EXPOSED CONCRETE PACK T S75	TEC 34

F

FEMTOLINE 145 NW	INT 437/EXT 41
FEMTOLINE 145 WW	INT 437/EXT 41
FLATPOINT	TEC 38
FLATSCREEN 236	INT 497
FLATSCREEN 255	INT 497
FLIP 15	EXT 133
FLIP 25	EXT 133
FLIP 40	EXT 133
FLIP P 50	EXT 133
FLIP P 70	EXT 133
FLIP PIN 80	EXT 133
FLIP SET 15	EXT 117
FLIP SET 25	EXT 117
FLIP SET 40	EXT 117
FLIP TWIN SET 25	EXT 117
FLIP TWIN SET 40	EXT 117
FORUM 1	INT 307
FORUM 2	INT 307
FOX P 73020	EXT 137
FOYER BLACK	INT 479
FOYER BLACK-GOLD	INT 479
FOYER WHITE	INT 479
FRONTGLASS 109	TEC 43
FRONTGLASS 111	TEC 43

G

GALA	INT 473
GALA L LED WW	EXT 67
GALA L LED WW	INT 473
GALA L OK LED WW	EXT 67
GALA L OK LED WW	INT 472
GALA LED WW	INT 473
GENIE 90 R O P	EXT 109
GENIE 90 R P	EXT 109
GENIE 90 R P SBL	EXT 109
GENIE 90 S	EXT 109
GENIE 90 S O	EXT 109
GENIE 90 S SBL	EXT 109
GENIE BOX 80 S / 90 S	EXT 109/TEC 41
GENIE BOX 90 R	EXT 109/TEC 41
GENIE RASTER	TEC 45
GLASS SBL 50	TEC 43
GRAFITI 211 T50	EXT 95
GRAFITI 411 T50	EXT 95
GRAND CAFE FT50	INT 521
GRAND CARREE 111	INT 119
GRAND CARREE 126 SBL	INT 119
GRAND CARREE 211	INT 119
GRAND DIRO ST 111	INT 53
GRAND DIRO ST D 111	INT 53
GRAND DIRO ST OPTO 202710	INT 52
GRAND DIRO ST OPTO 202710-9	INT 52
GRAND DIRO ST OPTO 202720	INT 52
GRAND DIRO ST OPTO 202720-9	INT 52
GRAND DIRO ST OPTO 202745	INT 52
GRAND DIRO ST OPTO 202745-9	INT 52
GRAND DIRO ST OPTO 203010	INT 52
GRAND DIRO ST OPTO 203010-9	INT 52
GRAND DIRO ST OPTO 203020	INT 52
GRAND DIRO ST OPTO 203020-9	INT 52
GRAND DIRO ST OPTO 203045	INT 52
GRAND DIRO ST OPTO 203045-9	INT 52
GRAND DIRO TRIMLESS 111	INT 51
GRAND DIRO TRIMLESS D 111	INT 51
GRAND DIRO TRIMLESS OPTO 202710	INT 50
GRAND DIRO TRIMLESS OPTO 202710-9	INT 50
GRAND DIRO TRIMLESS OPTO 202720	INT 50
GRAND DIRO TRIMLESS OPTO 202720-9	INT 50
GRAND DIRO TRIMLESS OPTO 202745	INT 50
GRAND DIRO TRIMLESS OPTO 202745-9	INT 50
GRAND DIRO TRIMLESS OPTO 203010	INT 50
GRAND DIRO TRIMLESS OPTO 203010-9	INT 50
GRAND DIRO TRIMLESS OPTO 203020	INT 50
GRAND DIRO TRIMLESS OPTO 203020-9	INT 50
GRAND DIRO TRIMLESS OPTO 203045	INT 50
GRAND DIRO TRIMLESS OPTO 203045-9	INT 50
GRAND PRIX RC 211 T50	INT 357
GRAND PRIX RC 411 T50	INT 357
GRAND PRIX SC 411 T50	INT 357
GRID IN 1 H111	INT 176
GRID IN 1 HIC FL24	INT 176
GRID IN 1 HIC SP15	INT 176
GRID IN 1 HIC WFL43	INT 176
GRID IN 1 HP 303027	INT 175
GRID IN 1 HP 303027-9	INT 175
GRID IN 1 HP 303050	INT 175
GRID IN 1 HP 303050-9	INT 175
GRID IN 1 OPTO 202715	INT 173
GRID IN 1 OPTO 202715-9	INT 173
GRID IN 1 OPTO 202733	INT 173

Index by Name

NAME	PAG
GRID IN 1 OPTO 202733-9	INT 173
GRID IN 1 OPTO 202755	INT 173
GRID IN 1 OPTO 202755-9	INT 173
GRID IN 1 OPTO 203015	INT 173
GRID IN 1 OPTO 203015-9	INT 173
GRID IN 1 OPTO 203033	INT 173
GRID IN 1 OPTO 203033-9	INT 173
GRID IN 1 OPTO 203055	INT 173
GRID IN 1 OPTO 203055-9	INT 173
GRID IN 1 QR	INT 176
GRID IN 1 REO 202733	INT 171
GRID IN 1 REO 202733-9	INT 171
GRID IN 1 REO 203033	INT 171
GRID IN 1 REO 203033-9	INT 171
GRID IN 2 CR FL24	INT 177
GRID IN 2 CR SP15	INT 177
GRID IN 2 CR WFL43	INT 177
GRID IN 2 H111	INT 177
GRID IN 2 HIC FL24	INT 177
GRID IN 2 HIC SP15	INT 177
GRID IN 2 HIC WFL43	INT 177
GRID IN 2 HP 303027	INT 175
GRID IN 2 HP 303027-9	INT 175
GRID IN 2 HP 303050	INT 175
GRID IN 2 HP 303050-9	INT 175
GRID IN 2 OPTO 202715	INT 173
GRID IN 2 OPTO 202715-9	INT 173
GRID IN 2 OPTO 202733	INT 173
GRID IN 2 OPTO 202733-9	INT 173
GRID IN 2 OPTO 202755	INT 173
GRID IN 2 OPTO 202755-9	INT 173
GRID IN 2 OPTO 203015	INT 173
GRID IN 2 OPTO 203015-9	INT 173
GRID IN 2 OPTO 203033	INT 173
GRID IN 2 OPTO 203033-9	INT 173
GRID IN 2 OPTO 203055	INT 173
GRID IN 2 OPTO 203055-9	INT 173
GRID IN 2 QR	INT 177
GRID IN 2 REO 202733	INT 171
GRID IN 2 REO 202733-9	INT 171
GRID IN 2 REO 203033	INT 171
GRID IN 2 REO 203033-9	INT 171
GRID IN 3 CR FL24	INT 178
GRID IN 3 CR SP15	INT 178
GRID IN 3 CR WFL43	INT 178
GRID IN 3 HIC FL24	INT 178
GRID IN 3 HIC SP15	INT 178
GRID IN 3 HIC WFL43	INT 178
GRID IN 3 QR	INT 178
GRID IN 4 QR	INT 179
GRID IN 4LINE QR	INT 179
GRID IN TRIMLESS 1 H111	INT 160
GRID IN TRIMLESS 1 HIC FL24	INT 160
GRID IN TRIMLESS 1 HIC SP15	INT 160
GRID IN TRIMLESS 1 HIC WFL43	INT 160
GRID IN TRIMLESS 1 HP 303027	INT 159
GRID IN TRIMLESS 1 HP 303027-9	INT 159
GRID IN TRIMLESS 1 HP 303050	INT 159
GRID IN TRIMLESS 1 HP 303050-9	INT 159
GRID IN TRIMLESS 1 MOUNTING KIT	TEC 36
GRID IN TRIMLESS 1 MOUNTING KIT HP	TEC 36
GRID IN TRIMLESS 1 MOUNTING KIT LARGE	TEC 36
GRID IN TRIMLESS 1 OPTO 202715	INT 157
GRID IN TRIMLESS 1 OPTO 202715-9	INT 157
GRID IN TRIMLESS 1 OPTO 202733	INT 157
GRID IN TRIMLESS 1 OPTO 202733-9	INT 157
GRID IN TRIMLESS 1 OPTO 202755	INT 157
GRID IN TRIMLESS 1 OPTO 202755-9	INT 157
GRID IN TRIMLESS 1 OPTO 203015	INT 157
GRID IN TRIMLESS 1 OPTO 203015-9	INT 157
GRID IN TRIMLESS 1 OPTO 203033	INT 157
GRID IN TRIMLESS 1 OPTO 203033-9	INT 157
GRID IN TRIMLESS 1 OPTO 203055	INT 157
GRID IN TRIMLESS 1 OPTO 203055-9	INT 157
GRID IN TRIMLESS 1 QR	INT 160
GRID IN TRIMLESS 1 REO 202733	INT 155
GRID IN TRIMLESS 1 REO 202733-9	INT 155
GRID IN TRIMLESS 1 REO 203033	INT 155
GRID IN TRIMLESS 1 REO 203033-9	INT 155
GRID IN TRIMLESS 2 CR FL24	INT 161
GRID IN TRIMLESS 2 CR SP15	INT 161
GRID IN TRIMLESS 2 CR WFL43	INT 161
GRID IN TRIMLESS 2 H111	INT 161
GRID IN TRIMLESS 2 HIC FL24	INT 161
GRID IN TRIMLESS 2 HIC SP15	INT 161
GRID IN TRIMLESS 2 HIC WFL43	INT 161
GRID IN TRIMLESS 2 HP 303027	INT 159
GRID IN TRIMLESS 2 HP 303027-9	INT 159
GRID IN TRIMLESS 2 HP 303050	INT 159
GRID IN TRIMLESS 2 HP 303050-9	INT 159
GRID IN TRIMLESS 2 MOUNTING KIT	TEC 36
GRID IN TRIMLESS 2 MOUNTING KIT HP	TEC 36
GRID IN TRIMLESS 2 MOUNTING KIT LARGE	TEC 36
GRID IN TRIMLESS 2 OPTO 202715	INT 157
GRID IN TRIMLESS 2 OPTO 202715-9	INT 157
GRID IN TRIMLESS 2 OPTO 202733	INT 157
GRID IN TRIMLESS 2 OPTO 202733-9	INT 157
GRID IN TRIMLESS 2 OPTO 202755	INT 157
GRID IN TRIMLESS 2 OPTO 202755-9	INT 157
GRID IN TRIMLESS 2 OPTO 203015	INT 157
GRID IN TRIMLESS 2 OPTO 203015-9	INT 157
GRID IN TRIMLESS 2 OPTO 203033	INT 157
GRID IN TRIMLESS 2 OPTO 203033-9	INT 157
GRID IN TRIMLESS 2 OPTO 203055	INT 157
GRID IN TRIMLESS 2 OPTO 203055-9	INT 157
GRID IN TRIMLESS 2 QR	INT 161
GRID IN TRIMLESS 2 REO 202733	INT 155
GRID IN TRIMLESS 2 REO 202733-9	INT 155
GRID IN TRIMLESS 2 REO 203033	INT 155
GRID IN TRIMLESS 2 REO 203033-9	INT 155
GRID IN TRIMLESS 3 CR FL24	INT 162
GRID IN TRIMLESS 3 CR SP15	INT 162
GRID IN TRIMLESS 3 CR WFL43	INT 162
GRID IN TRIMLESS 3 HIC FL24	INT 162
GRID IN TRIMLESS 3 HIC SP15	INT 162
GRID IN TRIMLESS 3 HIC WFL43	INT 162
GRID IN TRIMLESS 3 MOUNTING KIT	TEC 36
GRID IN TRIMLESS 3 QR	INT 162
GRID IN TRIMLESS 4 MOUNTING KIT	TEC 36
GRID IN TRIMLESS 4 QR	INT 163
GRID IN TRIMLESS 4LINE MOUNTING KIT	TEC 36
GRID IN TRIMLESS 4LINE QR	INT 163
GRID IN ZB 1 BOX L	TEC 35
GRID IN ZB 1 LED BOX	TEC 35
GRID IN ZB 1 QR	INT 148
GRID IN ZB 1 REO 202733	INT 147
GRID IN ZB 1 REO 202733-9	INT 147
GRID IN ZB 1 REO 203033	INT 147
GRID IN ZB 1 REO 203033-9	INT 147
GRID IN ZB 2 BOX L	TEC 35
GRID IN ZB 2 LED BOX	TEC 35
GRID IN ZB 2 QR	INT 149
GRID IN ZB 2 REO 202733	INT 147
GRID IN ZB 2 REO 202733-9	INT 147
GRID IN ZB 2 REO 203033	INT 147
GRID IN ZB 2 REO 203033-9	INT 147
GRID IN ZB 3 BOX L	TEC 35
GRID IN ZB 3 QR	INT 149
GRID IN ZB 4 BOX L	TEC 35
GRID IN ZB 4 QR	INT 149
GRID ON 1 H111-35	INT 249
GRID ON 1 H111-70	INT 249
GRID ON 1 QR	INT 249
GRID ON 2 H111-35	INT 249
GRID ON 2 H111-70	INT 249
GRID ON 2 QR	INT 249

H

HALOLED 111 - 24° HW	TEC 4
HALOLED 111 - 45° HW	TEC 4
HALOLED 51 - 36° (20W) WW	TEC 4
HALOLED 51 - 36° (35W) WW	TEC 4
HALOLED E27 - 360° (60W) WW	TEC 4
HALOLED Hi - 36° (35W) WW	TEC 4
HALOSUN 15cm JAC	INT 327
HALOSUN 15cm M10	INT 327
HALOSUN 30cm JAC	INT 327
HALOSUN 30cm M10	INT 327
HALOSUN 7.5cm JAC	INT 327
HALOSUN 7.5cm M10	INT 327
HDL75 - PROFILE	PRO 116
HDL95 - PROFILE	PRO 116
HEADLINER 75 P1154	INT 411
HEADLINER 75 P412	INT 411
HEADLINER 95 1154	INT 219
HELI 1 LED NW	INT 430
HELI 1 LED WW	INT 430
HELI 1 SCREEN	INT 431
HELI 1 SCREEN LED NW	INT 430
HELI 1 SCREEN LED WW	INT 430
HELI 1 WHITE	INT 431
HELI X SCREEN LED NW	EXT 39
HELI X SCREEN LED WW	EXT 39
HOLE IN ONE R15	INT 93
HOLE IN ONE R15 PLATE	INT 89/093
HOLE IN ONE S15	INT 93
HUSK	INT 277
HUSK	INT 369

I

i-BEAM 124	INT 499
i-LINER 124	INT 499
INDUSTRIAL S NW	EXT 29/081/141
INDUSTRIAL S WW	EXT 29/081/141
INLET MS BLUE	INT 435
INLET MS NW	INT 435
INLET MS WW	INT 435
INLET S BLUE	INT 435
INLET S HW	INT 435
INLET S NW	INT 435
INLET S WW	INT 435
IP68 CONNECTION KIT	TEC 41
IP68 CONNECTOR 3P	TEC 41

J

JACKPOINT	TEC 38
JACKPOINT TRIMLESS	TEC 38
JETI L 124	INT 383/507
JETI LUSTER	INT 389
JETI LUSTER EVG DIM 2	INT 389
JETI PLANO H 260 C	INT 383
JETI PLANO L 160	INT 383/507
JETI PLANO L 218	INT 382/506
JETI PLANO L 424	INT 383/507
JETI S	INT 382
JETI SW	INT 506
JETI TOWER	INT 527

K

KING TEAK	EXT 171
KIX 3011	EXT 83/137
KIX 3030	EXT 83/137
KIX 3055	EXT 83/137
KIX PIN 3011	EXT 137
KIX PIN 3030	EXT 137
KIX PIN 3055	EXT 137
KODO 226	INT 279
KODO LED	INT 279
KUBIC	INT 493

L

LABYRINTH	EXT 165
LAY OUT 124	INT 425
LAY OUT 154	INT 425
LAY OUT 254	INT 425
LED POWER SUPPLY 14V-DC / 12W	TEC 28
LED POWER SUPPLY 240mA-DC / 10W	INT 33
LED POWER SUPPLY 24V-DC / 150W	TEC 26
LED POWER SUPPLY 24V-DC / 20W	TEC 26
LED POWER SUPPLY 24V-DC / 40W	TEC 26
LED POWER SUPPLY 24V-DC / 60W	TEC 26
LED POWER SUPPLY 24V-DC / 80W DIM 1	TEC 26
LED POWER SUPPLY 350mA-DC / 15W	TEC 17
LED POWER SUPPLY 350mA-DC / 16W DIM8	TEC 17
LED POWER SUPPLY 350mA-DC / 17W	TEC 17

Index by Name

NAME	PAG
LED POWER SUPPLY 350mA-DC / 18W	TEC 17
LED POWER SUPPLY 350mA-DC / 6W	TEC 17
LED POWER SUPPLY 500mA-DC / 20W	TEC 18
LED POWER SUPPLY 500mA-DC / 32W DIM8	TEC 18
LED POWER SUPPLY 500mA-DC / 6W	TEC 18
LED POWER SUPPLY 700mA-DC / 12W	TEC 19
LED POWER SUPPLY 700mA-DC / 17W	TEC 19
LED POWER SUPPLY 700mA-DC / 32W DIM8	TEC 19
LED POWER SUPPLY 700mA-DC / 36W DIM8	TEC 19
LED POWER SUPPLY MULTI-POWER	TEC 20
LED POWER SUPPLY MULTI-POWER DIM1	TEC 21
LED POWER SUPPLY MULTI-POWER DIM6	TEC 22
LED POWER SUPPLY MULTI-POWER DIM7	TEC 23
LED POWER SUPPLY MULTI-POWER DIM9	TEC 24
LED RGB KIT 150	TEC 29
LED RGB KIT 20	TEC 29
LED RGB KIT 60	TEC 29
LED TRANSFO 12V / 1-70W	TEC 30
LEDFLEX IN CONNECTION CLIP SET	TEC 9
LEDFLEX IN CONNECTION SET	TEC 9
LEDFLEX IN FP CONNECTION CLIP SET	TEC 9
LEDFLEX IN FP CONNECTION SET	TEC 9
LEDFLEX IN FP HW 5m	TEC 8
LEDFLEX IN FP NW 5m	TEC 8
LEDFLEX IN FP SUPPLY CABLE SET	TEC 9
LEDFLEX IN FP WW 5m	TEC 8
LEDFLEX IN HP HW 5m	TEC 8
LEDFLEX IN HP WW 5m	TEC 8
LEDFLEX IN HW 5m	TEC 8
LEDFLEX IN NW 5m	TEC 8
LEDFLEX IN RGB 5m	TEC 8
LEDFLEX IN RGB CONNECTION CLIP SET	TEC 9
LEDFLEX IN RGB CONNECTION SET	TEC 9
LEDFLEX IN RGB SUPPLY CABLE SET	TEC 9
LEDFLEX IN SUPPLY CABLE SET	TEC 9
LEDFLEX IN WW 5m	TEC 8
LEDFLEX OUT FP HW 5m	TEC 8
LEDFLEX OUT FP NW 5m	TEC 8
LEDFLEX OUT FP WW 5m	TEC 8
LEDFLEX OUT HW 5m	TEC 8
LEDFLEX OUT NW 5m	TEC 8
LEDFLEX OUT RGB 5m	TEC 8
LEDFLEX OUT WW 5m	TEC 8
LEDS C R BLUE	INT 433/EXT 37
LEDS C R NW	INT 433/EXT 37
LEDS C R ST NW	INT 433/EXT 37/100
LEDS C R ST WW	INT 433/EXT 37/100
LEDS C R WW	INT 433/EXT 37
LEDS C S BLUE	INT 433/EXT 37
LEDS C S NW	INT 433/EXT 37
LEDS C S WW	INT 433/EXT 37
LEDS GO 4Q ON S2 BLUE	INT 432
LEDS GO 4Q ON S2 NW	INT 432
LEDS GO 4Q ON S2 WW	INT 432
LEDS GO IN BLUE	EXT 35/101
LEDS GO IN FORTE NW	EXT 35/101
LEDS GO IN FORTE WW	EXT 35/101
LEDS GO IN NW	EXT 35/101
LEDS GO IN R NW	EXT 35/101
LEDS GO IN R WW	EXT 35/101
LEDS GO IN WW	EXT 35/101
LEDS SWING S1 NW	INT 78
LEDS SWING S1 WW	INT 78
LEDSTRIP 11 F HW	PRO 49
LEDSTRIP 11 F NW	PRO 49
LEDSTRIP 11 F WW	PRO 49
LEDSTRIP 11 FP HW	PRO 49
LEDSTRIP 11 FP NW	PRO 49
LEDSTRIP 11 FP WW	PRO 49
LEDSTRIP 11 RGB	PRO 49
LEDSTRIP 12 F HW	PRO 63/069
LEDSTRIP 12 F NW	PRO 63/069
LEDSTRIP 12 F WW	PRO 63/069
LEDSTRIP 12 FP HW	PRO 63/069
LEDSTRIP 12 FP NW	PRO 63/069
LEDSTRIP 12 FP WW	PRO 63/069
LEDSTRIP 12 RGB	PRO 63/069
LEDSTRIP 13 F HW	PRO 93/107
LEDSTRIP 13 F NW	PRO 93/107
LEDSTRIP 13 F WW	PRO 93/107
LEDSTRIP 13 FP HW	PRO 93/107
LEDSTRIP 13 FP NW	PRO 93/107
LEDSTRIP 13 FP WW	PRO 93/107
LEDSTRIP 13 RGB	PRO 93/107
LEDSTRIP 14 F HW	PRO 87
LEDSTRIP 14 F NW	PRO 87
LEDSTRIP 14 F WW	PRO 87
LEDSTRIP 14 FP HW	PRO 87
LEDSTRIP 14 FP NW	PRO 87
LEDSTRIP 14 FP WW	PRO 87
LEDSTRIP 14 RGB	PRO 87
LEDSTRIP 50 HW F	TEC 6
LEDSTRIP 50 HW FP	TEC 6
LEDSTRIP 50 NW F	TEC 6
LEDSTRIP 50 NW FP	TEC 6
LEDSTRIP 50 RGB	TEC 6
LEDSTRIP 50 WW F	TEC 6
LEDSTRIP 50 WW FP	TEC 6
LEDSTRIP CONNECTION SET	TEC 7
LEDSTRIP FP CONNECTION SET	TEC 7
LEDSTRIP FP SUPPLY CABLE SET	TEC 7
LEDSTRIP SUPPLY CABLE SET	TEC 7
LENS 109	TEC 42
LENS 111	TEC 42
LINK 1 226	INT 253
LINK 1 REO 2733	INT 252
LINK 1 REO 2733-9	INT 252
LINK 1 REO 3033	INT 252
LINK 1 REO 3033-9	INT 252
LINK 111	INT 253
LINK 2 REO 2733	INT 256
LINK 2 REO 2733-9	INT 256
LINK 2 REO 3033	INT 256
LINK 2 REO 3033-9	INT 256
LINK 211	INT 257
LINK 3 226-211	INT 259
LINK 3 REO 2733	INT 258
LINK 3 REO 2733-9	INT 258
LINK 3 REO 3033	INT 258
LINK 3 REO 3033-9	INT 258
LINK 311	INT 259
LOGIC R 3011	EXT 103
LOGIC R 3030	EXT 103
LOGIC R 3055	EXT 103
LOGIC R A 3011	EXT 103
LOGIC R A 3030	EXT 103
LOGIC R A 3055	EXT 103
LOGIC S 3011	EXT 103
LOGIC S 3030	EXT 103
LOGIC S 3055	EXT 103
LOOK IN NW	INT 459
LOOK IN WW	INT 459
LOOK OUT NW	EXT 53
LOOK OUT WW	EXT 53
LUX S1	INT 77
LUX S2	INT 77
LUX X S1	EXT 9
LUXOR Hi S1	INT 77
LUXOR Hi S2	INT 77
LUXOR S1	INT 77
LUXOR S2	INT 77
LUXOR X S1	EXT 9

M

NAME	PAG
MAC160 - PROFILE	PRO 156
MAC180 - PROFILE	PRO 156
MAESTRO R224	INT 184
MAESTRO R224-211	INT 184
MAESTRO S224	INT 185
MAESTRO S224-211	INT 185
MAESTRO S226	INT 185
MAGMA	INT 267
MAGMA	INT 275
McDelta	INT 359
METRONOME	INT 373
METRONOME H	INT 373
METRONOME L	INT 377
METRONOME XXL	INT 379
MIC30 - PROFILE	PRO 92
MIC30+ - PROFILE	PRO 106
MIC50 - PROFILE	PRO 86
MICROLINE 30+ P1124	INT 409
MICROLINE 30+ P1154	INT 409
MICROLINE 30+ P2154	INT 409
MICROLINE 30+ P310	INT 409
MICROLINE 30+ WALL 124	INT 501
MICROLINE 30+ WALL 154	INT 501
MICROLINE 50 1154	INT 218
MID 100L - PROFILE	PRO 148
MID 80L - PROFILE	PRO 148
MINI CARREE II OK S1	INT 101
MINI CARREE ST OK S1	INT 101
MINI DIRO II	INT 33
MINI DIRO LED	INT 33
MINIGRID IN 1 50	INT 143
MINIGRID IN 1 50 Hi	INT 143
MINIGRID IN 1 HP 2715-9	INT 141
MINIGRID IN 1 HP 2717	INT 141
MINIGRID IN 1 HP 2737	INT 141
MINIGRID IN 1 HP 2737-9	INT 141
MINIGRID IN 1 HP 2760	INT 141
MINIGRID IN 1 HP 2760-9	INT 141
MINIGRID IN 1 HP 3015-9	INT 141
MINIGRID IN 1 HP 3017	INT 141
MINIGRID IN 1 HP 3037	INT 141
MINIGRID IN 1 HP 3037-9	INT 141
MINIGRID IN 1 HP 3060	INT 141
MINIGRID IN 1 HP 3060-9	INT 141
MINIGRID IN 1 MOUNTING KIT	TEC 36
MINIGRID IN 1 MOUNTING KIT HP	TEC 36
MINIGRID IN 1 MOUNTING KIT LARGE	TEC 36
MINIGRID IN 1 QR	INT 143
MINIGRID IN 1 REO 2733	INT 139
MINIGRID IN 1 REO 2733-9	INT 139
MINIGRID IN 1 REO 3033	INT 139
MINIGRID IN 1 REO 3033-9	INT 139
MINIGRID IN 2 50	INT 143
MINIGRID IN 2 50 Hi	INT 143
MINIGRID IN 2 HP 2715-9	INT 141
MINIGRID IN 2 HP 2717	INT 141
MINIGRID IN 2 HP 2737	INT 141
MINIGRID IN 2 HP 2737-9	INT 141
MINIGRID IN 2 HP 2760	INT 141
MINIGRID IN 2 HP 2760-9	INT 141
MINIGRID IN 2 HP 3015-9	INT 141
MINIGRID IN 2 HP 3017	INT 141
MINIGRID IN 2 HP 3037	INT 141
MINIGRID IN 2 HP 3037-9	INT 141
MINIGRID IN 2 HP 3060	INT 141
MINIGRID IN 2 HP 3060-9	INT 141
MINIGRID IN 2 MOUNTING KIT	TEC 36
MINIGRID IN 2 MOUNTING KIT HP	TEC 36
MINIGRID IN 2 MOUNTING KIT LARGE	TEC 36
MINIGRID IN 2 QR	INT 143
MINIGRID IN 2 REO 2733	INT 139
MINIGRID IN 2 REO 2733-9	INT 139
MINIGRID IN 2 REO 3033	INT 139
MINIGRID IN 2 REO 3033-9	INT 139
MINIGRID IN 3 50	INT 143
MINIGRID IN 3 QR	INT 143
MINIGRID IN TRIMLESS 1 50	INT 135
MINIGRID IN TRIMLESS 1 50 Hi	INT 135
MINIGRID IN TRIMLESS 1 HP 2715-9	INT 131
MINIGRID IN TRIMLESS 1 HP 2717	INT 131
MINIGRID IN TRIMLESS 1 HP 2737	INT 131
MINIGRID IN TRIMLESS 1 HP 2737-9	INT 131
MINIGRID IN TRIMLESS 1 HP 2760	INT 131
MINIGRID IN TRIMLESS 1 HP 2760-9	INT 131
MINIGRID IN TRIMLESS 1 HP 3015-9	INT 131
MINIGRID IN TRIMLESS 1 HP 3017	INT 131
MINIGRID IN TRIMLESS 1 HP 3037	INT 131
MINIGRID IN TRIMLESS 1 HP 3037-9	INT 131
MINIGRID IN TRIMLESS 1 HP 3060	INT 131
MINIGRID IN TRIMLESS 1 HP 3060-9	INT 131
MINIGRID IN TRIMLESS 1 QR	INT 135
MINIGRID IN TRIMLESS 1 REO 2733	INT 129
MINIGRID IN TRIMLESS 1 REO 2733-9	INT 129
MINIGRID IN TRIMLESS 1 REO 3033	INT 129
MINIGRID IN TRIMLESS 1 REO 3033-9	INT 129

NAME	PAG
MINIGRID IN TRIMLESS 2 50	INT 135
MINIGRID IN TRIMLESS 2 50 Hi	INT 135
MINIGRID IN TRIMLESS 2 HP 2715-9	INT 131
MINIGRID IN TRIMLESS 2 HP 2717	INT 131
MINIGRID IN TRIMLESS 2 HP 2737	INT 131
MINIGRID IN TRIMLESS 2 HP 2737-9	INT 131
MINIGRID IN TRIMLESS 2 HP 2760	INT 131
MINIGRID IN TRIMLESS 2 HP 2760-9	INT 131
MINIGRID IN TRIMLESS 2 HP 3015-9	INT 131
MINIGRID IN TRIMLESS 2 HP 3017	INT 131
MINIGRID IN TRIMLESS 2 HP 3037	INT 131
MINIGRID IN TRIMLESS 2 HP 3037-9	INT 131
MINIGRID IN TRIMLESS 2 HP 3060	INT 131
MINIGRID IN TRIMLESS 2 HP 3060-9	INT 131
MINIGRID IN TRIMLESS 2 QR	INT 135
MINIGRID IN TRIMLESS 2 REO 2733	INT 129
MINIGRID IN TRIMLESS 2 REO 2733-9	INT 129
MINIGRID IN TRIMLESS 2 REO 3033	INT 129
MINIGRID IN TRIMLESS 2 REO 3033-9	INT 129
MINIGRID IN TRIMLESS 3 50	INT 135
MINIGRID IN TRIMLESS 3 KIT	TEC 35
MINIGRID IN TRIMLESS 3 QR	INT 135
MINIGRID IN ZB 1 50	INT 127
MINIGRID IN ZB 1 50 Hi	INT 127
MINIGRID IN ZB 1 BOX L	TEC 35
MINIGRID IN ZB 1 QR	INT 127
MINIGRID IN ZB 1 REO 2733	INT 125
MINIGRID IN ZB 1 REO 2733-9	INT 125
MINIGRID IN ZB 1 REO 3033	INT 125
MINIGRID IN ZB 1 REO 3033-9	INT 125
MINIGRID IN ZB 2 50	INT 127
MINIGRID IN ZB 2 50 Hi	INT 127
MINIGRID IN ZB 2 BOX L	TEC 35
MINIGRID IN ZB 2 QR	INT 127
MINIGRID IN ZB 2 REO 2733	INT 125
MINIGRID IN ZB 2 REO 2733-9	INT 125
MINIGRID IN ZB 2 REO 3033	INT 125
MINIGRID IN ZB 2 REO 3033-9	INT 125
MINIGRID IN ZB 3 50	INT 127
MINIGRID IN ZB 3 BOX L	TEC 35
MINIGRID IN ZB 3 QR	INT 127
MOHOW LED 2715 AD	INT 551
MOHOW LED 2733 AD	INT 551
MOHOW LED 2745 AD	INT 551
MOHOW LED 3015 AD	INT 551
MOHOW LED 3033 AD	INT 551
MOHOW LED 3045 AD	INT 551
MOMBA DOWN-UP LED WW	EXT 59
MOMBA LED WW	EXT 59
MONO	EXT 62
MONO DOWN-UP	EXT 63
MONO DOWN-UP LED WW	EXT 61
MONO LED WW	EXT 61
MONO X DOWN-UP T50	EXT 63
MONO X T50	EXT 63
MONOPOL 26 LED WW	EXT 157
MONOPOL 70 LED WW	EXT 157
MONOPOL 70 T50	EXT 157
MONOSTEP 26	EXT 159
MONOSTEP 26 T50	EXT 159
MONOSTEP 70 T50	EXT 159
MOUNTING KIT 55	TEC 36
MOUNTING KIT 64	TEC 36
MOUNTING KIT 75	TEC 36
MOUNTING KIT 75 TRIMLESS	TEC 36
MOUNTING KIT 75 TRIMLESS O.F.A.	TEC 36
MOUNTING KIT MINI DIRO II 12	TEC 36
MOUNTING KIT MINI DIRO II 15	TEC 36
MOUNTING KIT R143 TRIMLESS	TEC 36
MOUNTING KIT R168 TRIMLESS	TEC 36
MOUNTING KIT R30 TRIMLESS	TEC 36
MOUNTING KIT R82 TRIMLESS	TEC 36
MOUNTING KIT R82 TRIMLESS O.F.A.	TEC 36
MOUNTING KIT SKELP TRIMLESS	TEC 36
MOUNTING KIT TWEETER TRIMLESS	TEC 36
Mr. JUNIOR X	EXT 169
Mr. SENIOR 155	EXT 169
Mr. SENIOR 159	EXT 169
M-T 1	INT 440
M-T 1 INSERT LED WW	INT 440
M-T 2	INT 441
M-T 2 INSERT Hi	INT 441
M-T 2 INSERT LED WW	INT 441
M-T 3	INT 441
M-T 3 INSERT R7s	INT 441
M-T 3 INSERT TC	INT 441
MZ 35 S1	INT 79

N

NAME	PAG
NAUTILOO	INT 525
NB140 - PROFILE	PRO 164
NB200 - PROFILE	PRO 172
NB300 - PROFILE	PRO 182
NEBEL	INT 393
NEBEL EVG DIM 2	INT 393
NEBEL RGB	INT 393
NEBEL RGB RC M	INT 393
NEBEL RGB RC S	INT 393
NEC+ULTRA 250 Hi	INT 467
NICE 2C	INT 523
NICE 2C C	INT 365
NoBody 200 P1254	INT 415
NoBody 200 P1254 BAP	INT 415
NoBody 200 P1254L	INT 415
NoBody 300 P1254	INT 416
NoBody 300 P1254L	INT 417
NoBody 300 P2254	INT 417
NoBody 300 P2254L	INT 417
NOX Hi	EXT 51
NOX LED WW	EXT 51
NYX WW	INT 361

O

NAME	PAG
O2OXYGEN 44	INT 403
O2OXYGEN 44 RGB	INT 402
O2OXYGEN 44 RGB RC M	INT 402
O2OXYGEN 44 RGB RC S	INT 402
O2OXYGEN 64	INT 403
O2OXYGEN 64 RGB	INT 402
O2OXYGEN 64 RGB RC M	INT 402
O2OXYGEN 64 RGB RC S	INT 402
OBLIX 40	EXT 149
OBLIX 70	EXT 149
OFFICER	INT 516
OFFICER ED	INT 516
OFFICER EDL	INT 516
OFFICER S	INT 517
OFFICER SL	INT 517
ORBIT	INT 492
OREO 2733 S1	INT 19
OREO 2733-9 S1	INT 19
OREO 3033 S1	INT 19
OREO 3033-9 S1	INT 19
OUTFIT L 211 T50	INT 351
OUTFIT L 411 T50	INT 351
OUTFIT P 254-411	INT 355
OUTFIT U 211 T50	INT 350
OUTFIT U 411 T50	INT 351

P

NAME	PAG
PHANTOM II 15cm JAC	INT 327
PHANTOM II 15cm M10	INT 327
PHANTOM II 30cm JAC	INT 327
PHANTOM II 30cm M10	INT 327
PHANTOM II 7.5cm JAC	INT 327
PHANTOM II 7.5cm M10	INT 327
PIN 1	EXT 155/157/159
PIN 11	EXT 123/125/127/129/132
PIN 12	EXT 149/151/152
PIN 13	EXT 152
PIN 14	EXT 161
PIN 15	EXT 147
PIN 3	EXT 127/131
PIN 7	EXT 141
PITCH 260	INT 281
PLASTERKIT 101	TEC 32
PLASTERKIT 104	TEC 32
PLASTERKIT 108	TEC 32
PLASTERKIT 109	TEC 32
PLASTERKIT 110	TEC 32
PLASTERKIT 111	TEC 32
PLASTERKIT 115	TEC 32
PLASTERKIT 118	TEC 32
PLASTERKIT 120	TEC 32
PLASTERKIT 121	TEC 32
PLASTERKIT 122	TEC 32
PLASTERKIT 123	TEC 32
PLASTERKIT 124	TEC 32
PLASTERKIT 126	TEC 32
PLASTERKIT 127	TEC 32
PLASTERKIT 128	TEC 32
PLASTERKIT 139	TEC 32
PLASTERKIT 144	TEC 32
PLASTERKIT 145	TEC 32
PLASTERKIT 150	TEC 32
PLASTERKIT 161	TEC 32
PLASTERKIT 162	TEC 32
PLASTERKIT 163	TEC 32
PLASTERKIT 164	TEC 32
PLASTERKIT 167	TEC 32
PLASTERKIT 168	TEC 32
PLASTERKIT 169	TEC 32
PLASTERKIT 170	TEC 32
PLASTERKIT 171	TEC 32
PLASTERKIT 172	TEC 32
PLASTERKIT 173	TEC 32
PLASTERKIT 174	TEC 32
PLASTERKIT 177	TEC 32
PLASTERKIT 178	TEC 32
PLASTERKIT 179	TEC 32
PLASTERKIT 180	TEC 32
PLASTERKIT 181	TEC 32
PLASTERKIT 184	TEC 32
PLASTERKIT 185	TEC 32
PLASTERKIT 186	TEC 32
PLASTERKIT 188	TEC 32
PLATE 1	EXT 155/157/159
PLATE 3	EXT 169
PLATE 5	EXT 165
PLATE 7	EXT 115/151/152
PLATE 8	EXT 152
PLATE 9	EXT 163
PUK 4 BLUE	INT 461
PUK 4 NW	INT 461
PUK 4 WW	INT 461
PUK XL	EXT 53
PUT 111 CENTER	INT 94
PUT 111 CLICK	INT 95
PUT 50 CLICK	INT 95
PUT C20 CENTER	INT 95
PUT C20 CLICK	INT 95
PUT C30 CENTER	INT 94
PUT CLICKPLATE	INT 94

Q

NAME	PAG
QUAD 111 JAC	INT 321
QUAD 50 JAC	INT 321
QUEEN TEAK	EXT 171

R

NAME	PAG
RAND 1 REO 2733	INT 341
RAND 1 REO 2733-9	INT 341
RAND 1 REO 2750	INT 341
RAND 1 REO 2750-9	INT 341
RAND 1 REO 3033	INT 341
RAND 1 REO 3033-9	INT 341
RAND 1 REO 3050	INT 341
RAND 1 REO 3050-9	INT 341
RAND 111 JAC	INT 339
RAND 111 T50	INT 342
RAND 2 REO 2733	INT 341
RAND 2 REO 2733-9	INT 341
RAND 2 REO 2750	INT 341
RAND 2 REO 2750-9	INT 341
RAND 2 REO 3033	INT 341

Index by Name

NAME	PAG
RAND 2 REO 3033-9	INT 341
RAND 2 REO 3050	INT 341
RAND 2 REO 3050-9	INT 341
RAND 211 T50	INT 342
RAND 311 T50	INT 343
RAND 411 T50	INT 343
RAND 511 T50	INT 343
RAND XL 111 JAC	INT 339
RAND XL 111 T50	INT 344
RAND XL 211 T50	INT 344
RAND XL 2H111-35	INT 345
RAND XL 2H111-70	INT 345
RAND XL 311 T50	INT 344
RAND XL H111 CLIP	INT 339
RAND XL H111-35	INT 345
RAND XL H111-70	INT 345
RANDOM 118 EVG	INT 407
RANDOM 124	INT 407
RANDOM 154	INT 407
RANDOM 211 T50	INT 406
RANDOM 254	INT 407
RANDOM C 154	INT 407
RANDOM C 254	INT 407
RASTER 109	TEC 44
RASTER 66	TEC 44
RATIO 111 JAC	INT 311
RATIO 50 JAC	INT 311
RB 35 S1	INT 79
RB 50 S1	INT 79
REAKTOR 105 WW	EXT 163
REAKTOR 25 WW	EXT 163
REAKTOR 75 WW	EXT 163
REO 111 2733	TEC 4
REO 111 2733-9	TEC 4
REO 111 2750	TEC 4
REO 111 2750-9	TEC 4
REO 111 3033	TEC 4
REO 111 3033-9	TEC 4
REO 111 3050	TEC 4
REO 111 3050-9	TEC 4
REO 2 S 2733 S1	INT 27
REO 2 S 2733-9 S1	INT 27
REO 2 S 2750 S1	INT 27
REO 2 S 2750-9 S1	INT 27
REO 2 S 3033 S1	INT 27
REO 2 S 3033-9 S1	INT 27
REO 2 S 3050 S1	INT 27
REO 2 S 3050-9 S1	INT 27
REO 2 S 4033 S1	INT 27
REO 2 S 4050 S1	INT 27
REO 2 S OK 2733 S1	INT 26
REO 2 S OK 2733-9 S1	INT 26
REO 2 S OK 2750 S1	INT 26
REO 2 S OK 2750-9 S1	INT 26
REO 2 S OK 3033 S1	INT 26
REO 2 S OK 3033-9 S1	INT 26
REO 2 S OK 3050 S1	INT 26
REO 2 S OK 3050-9 S1	INT 26
REO 2 S OK 4033 S1	INT 26
REO 2 S OK 4050 S1	INT 26
REO 2733 S1	INT 22
REO 2733 S2	INT 22
REO 2733-9 S1	INT 22
REO 2733-9 S2	INT 22
REO 2750 S1	INT 22
REO 2750 S2	INT 22
REO 2750-9 S1	INT 22
REO 2750-9 S2	INT 22
REO 3033 S1	INT 22
REO 3033 S2	INT 22
REO 3033-9 S1	INT 22
REO 3033-9 S2	INT 22
REO 3050 S1	INT 22
REO 3050 S2	INT 22
REO 3050-9 S1	INT 22
REO 3050-9 S2	INT 22
REO 4033 S1	INT 22
REO 4033 S2	INT 22
REO 4050 S1	INT 22
REO 4050 S2	INT 22
REO D 2733 S1	INT 23
REO D 2733-9 S1	INT 23
REO D 3033 S1	INT 23
REO D 3033-9 S1	INT 23
REO D 4033 S1	INT 23
REO HD 2733 S1	INT 23
REO HD 2733-9 S1	INT 23
REO HD 3033 S1	INT 23
REO HD 3033-9 S1	INT 23
REO HD 4033 S1	INT 23
REO OK 2733 S1	INT 21
REO OK 2733 S2	INT 21
REO OK 2733-9 S1	INT 21
REO OK 2733-9 S2	INT 21
REO OK 2750 S1	INT 21
REO OK 2750 S2	INT 21
REO OK 2750-9 S1	INT 21
REO OK 2750-9 S2	INT 21
REO OK 3033 S1	INT 21
REO OK 3033 S2	INT 21
REO OK 3033-9 S1	INT 21
REO OK 3033-9 S2	INT 21
REO OK 3050 S1	INT 21
REO OK 3050 S2	INT 21
REO OK 3050-9 S1	INT 21
REO OK 3050-9 S2	INT 21
REO OK 4033 S1	INT 21
REO OK 4033 S2	INT 21
REO OK 4050 S1	INT 21
REO OK 4050 S2	INT 21
REO S 2733 S1	INT 27
REO S 2733-9 S1	INT 27
REO S 2750 S1	INT 27
REO S 2750-9 S1	INT 27
REO S 3033 S1	INT 27
REO S 3033-9 S1	INT 27
REO S 3050 S1	INT 27
REO S 3050-9 S1	INT 27
REO S 4033 S1	INT 27
REO S 4050 S1	INT 27
REO S OK 2733 S1	INT 26
REO S OK 2733-9 S1	INT 26
REO S OK 2750 S1	INT 26
REO S OK 2750-9 S1	INT 26
REO S OK 3033 S1	INT 26
REO S OK 3033-9 S1	INT 26
REO S OK 3050 S1	INT 26
REO S OK 3050-9 S1	INT 26
REO S OK 4033 S1	INT 26
REO S OK 4050 S1	INT 26
REO X 3033 S1	EXT 8
REO X 3033 S2	EXT 8
RGB DRIVER	TEC 28
RGB REMOTE CONTROL	INT 392/402
RGB TOUCH CONTROLLER DMX	TEC 28
RING 109	TEC 42
RING 66	TEC 42
RINGO Hi S1	INT 72
RINGO Hi S2	INT 72
RINGO S1	INT 72
RINGO S2	INT 72
RODI 111 S1	INT 59
RODI 50 Hi S1	INT 58
RODI 50 S1	INT 58
RODI H111 S1	INT 59
RODI HIC S1 FL24	INT 59
RODI HIC S1 SP15	INT 59
RODI HIC S1 WFL43	INT 59
RODI S 111 S1	INT 63
RODI S 50 S1	INT 63
RODI S H111 S1	INT 63
RODI S HIT S1	INT 63
RV - PROFILE	PRO 48

S

SAX 1	TEC 38
SETPOINT	TEC 38
SKELP LED WW	INT 439
SKELP ON LED WW	INT 463
SKELP TRIMLESS LED WW	INT 439
SKELP X P 54	EXT 151
SKELP X P 57	EXT 151
SONAR 101 HP	EXT 75
SPATIO 111 JAC	INT 313
SPATIO 111 T50	INT 315
SPATIO 111 T50 AD	INT 555
SPATIO 50 JAC	INT 313
SPATIO 50 T50	INT 315
SPATIO 50 T50 AD	INT 555
SPATIO 70 JAC	INT 313
SPATIO H111-35	INT 317
SPATIO H111-35 AD	INT 557
SPATIO H111-70	INT 317
SPATIO H111-70 AD	INT 557
SPATIO HIT-150 AD FL28	INT 557
SPATIO HIT-150 AD SP15	INT 557
SPATIO HIT-150 AD WFL55	INT 557
SPATIO HIT-150 AD WFL80	INT 557
SPATIO HIT-150 FL28	INT 317
SPATIO HIT-150 SP15	INT 317
SPATIO HIT-150 WFL55	INT 317
SPATIO HIT-150 WFL80	INT 317
SPATIO HIT-35 AD FL28	INT 557
SPATIO HIT-35 AD SP15	INT 557
SPATIO HIT-35 AD WFL55	INT 557
SPATIO HIT-35 AD WFL80	INT 557
SPATIO HIT-35 FL28	INT 317
SPATIO HIT-35 SP15	INT 317
SPATIO HIT-35 WFL55	INT 317
SPATIO HIT-35 WFL80	INT 317
SPATIO HIT-70 AD FL28	INT 557
SPATIO HIT-70 AD SP15	INT 557
SPATIO HIT-70 AD WFL55	INT 557
SPATIO HIT-70 AD WFL80	INT 557
SPATIO HIT-70 FL28	INT 317
SPATIO HIT-70 SP15	INT 317
SPATIO HIT-70 WFL55	INT 317
SPATIO HIT-70 WFL80	INT 317
SPATIO REO 2733	INT 314
SPATIO REO 2733 AD	INT 554
SPATIO REO 2733-9	INT 314
SPATIO REO 2733-9 AD	INT 554
SPATIO REO 2750	INT 314
SPATIO REO 2750 AD	INT 554
SPATIO REO 2750-9	INT 314
SPATIO REO 2750-9 AD	INT 554
SPATIO REO 3033	INT 314
SPATIO REO 3033 AD	INT 554
SPATIO REO 3033-9	INT 314
SPATIO REO 3033-9 AD	INT 554
SPATIO REO 3050	INT 314
SPATIO REO 3050 AD	INT 554
SPATIO REO 3050-9	INT 314
SPATIO REO 3050-9 AD	INT 554
SPATIO W HP	INT 481
SPATIO W R7s	INT 481
SPL25 - PROFILE	PRO 32
SPL29 - PROFILE	PRO 18
SPL51 - PROFILE	PRO 32
SPL52 - PROFILE	PRO 24
SPOTNIC 1 3033	INT 303
SPOTNIC 1 T50	INT 303
SPOTNIC 2 3033	INT 303
SPOTNIC 2 T50	INT 303
SPOTNIC 50 JAC	INT 303
SPOTNIC CLIP + ROSAS	TEC 39
SPOTNIC LED 3033 M10	INT 302
SPOTNIC M10 TRIMLESS	TEC 39
SPOTNIC S1 CLIP	TEC 39
SPT - PROFILE	PRO 38
SPYKER 143	EXT 129
SPYKER 146	EXT 129
SPYKER 85	EXT 129
SPYKER 87	EXT 129
STREAMER L EVG DIM 1	INT 193
STREAMER M EVG DIM 1	INT 193
STREAMER TRIMLESS L EVG DIM 1	INT 192
STREAMER TRIMLESS M EVG DIM 1	INT 192
STREAMER TRIMLESS W L350 EVG DIM 1	INT 188

Index by Name

NAME	PAG
STREAMER TRIMLESS W L500 EVG DIM 1	INT 188
STREAMER TRIMLESS W M EVG DIM 1	INT 188
STREAMER W L 350 EVG DIM 1	INT 189
STREAMER W L 500 EVG DIM 1	INT 189
STREAMER W M EVG DIM 1	INT 189
STREAMER W S EVG DIM 1	INT 189
STRIPER	EXT 155
SUNSET 1	INT 309
SUNSET 2	INT 309
SUNSET 3	INT 309
SUNSET 4	INT 309
SUPERNOVA 125	INT 213/287
SUPERNOVA 125 DOWN-UP	INT 289
SUPERNOVA 125 DOWN-UP EVG DIM 2	INT 289
SUPERNOVA 125 EVG DIM 2	INT 213/287
SUPERNOVA 125 RECESSED KIT	INT 212 / TEC 36
SUPERNOVA 12528 EVG DIM 1	INT 213/287
SUPERNOVA 65	INT 213/287
SUPERNOVA 65 DOWN-UP	INT 289
SUPERNOVA 65 DOWN-UP EVG DIM 2	INT 289
SUPERNOVA 65 EVG DIM 2	INT 213/287
SUPERNOVA 65 RECESSED KIT	INT 212 / TEC 36
SUPERNOVA 6528 EVG DIM 1	INT 213/287
SUPERNOVA 95	INT 213/287
SUPERNOVA 95 DOWN-UP	INT 289
SUPERNOVA 95 DOWN-UP EVG DIM 2	INT 289
SUPERNOVA 95 EVG DIM 2	INT 213/287
SUPERNOVA 95 RECESSED KIT	INT 212 / TEC 36
SUPERNOVA 9528 EVG DIM 1	INT 213/287
SUPERNOVA F	INT 515
SUPERNOVA L 255	INT 301
SUPERNOVA L 280	INT 301
SUPERNOVA SEMI 125	INT 211
SUPERNOVA SEMI 65	INT 211
SUPERNOVA SEMI 95	INT 211
SUPERNOVA SR 254	INT 295
SUPERNOVA SR 254 DOWN-UP	INT 297
SUPERNOVA SR 254 DOWN-UP EVG DIM 2	INT 297
SUPERNOVA SR 254 EVG DIM 2	INT 295
SUPERNOVA SR 424	INT 295
SUPERNOVA SR 424 DOWN-UP	INT 297
SUPERNOVA SR 424 DOWN-UP EVG DIM 2	INT 297
SUPERNOVA SR 424 EVG DIM 2	INT 295
SUPERNOVA SR 654	INT 295
SUPERNOVA SR 654 DOWN-UP	INT 297
SUPERNOVA SR 654 DOWN-UP EVG DIM 2	INT 297
SUPERNOVA SR 654 EVG DIM 2	INT 295
SUPERNOVA TRIMLESS 125	INT 209
SUPERNOVA TRIMLESS 125 EVG DIM 2	INT 209
SUPERNOVA TRIMLESS 12528 EVG DIM 1	INT 209
SUPERNOVA TRIMLESS 65	INT 209
SUPERNOVA TRIMLESS 65 EVG DIM 2	INT 209
SUPERNOVA TRIMLESS 6528 EVG DIM 1	INT 209
SUPERNOVA TRIMLESS 95	INT 209
SUPERNOVA TRIMLESS 95 EVG DIM 2	INT 209
SUPERNOVA TRIMLESS 9528 EVG DIM 1	INT 209
SUPERNOVA XS 260	INT 285
SUPERNOVA XS 330	INT 285
SUPERNOVA XS PIVOT 260	INT 285
SUPERNOVA XS PIVOT 260 AD	INT 553
SUPERNOVA XS PIVOT 330	INT 285
SUPERNOVA XS PIVOT 330 AD	INT 553
SUPERNOVA XS RECESSED 260	INT 207
SUPERNOVA XS RECESSED 330	INT 207
SUPERNOVA XS RECESSED KIT 260	INT 207 / TEC 36
SUPERNOVA XS RECESSED KIT 330	INT 207 / TEC 36
SUSPENSION + CONNECTION TRIMLESS	TEC 40
SUSPENSION CHAIN 3,0	INT 379
SUSPENSION CHAIN 6,0	INT 379
SUSPENSION SET 17 2x0.75 1.6m	INT 420
SUSPENSION SET 17 3x0.75 1.6m	INT 420
SUSPENSION SET 18 3m	INT 286/294/300
SUSPENSION SET 18 EVG DIM 1 3m	INT 286
SUSPENSION SET 18 EVG DIM 2 3m	INT 286/294
SUSPENSION SET 2 1,6m	INT 392
SUSPENSION SET 21 2x0.75 1.6m	INT 409
SUSPENSION SET 21 3x0.75 1.6m	INT 409
SUSPENSION SET 22 3x0.75 1.6m	INT 410
SUSPENSION SET 4 1,6m	INT 392
SUSPENSION TRIMLESS	TEC 40

T

NAME	PAG
T FLOR 2 - 224	INT 505
T FLOR 2 - 224 EVG DIM 6	INT 505
T FLOR 2 - 254	INT 505
T FLOR 2 - 254 EVG DIM 6	INT 505
T16 SEAMLESS 14W 3000K	TEC 5
T16 SEAMLESS 14W 3000K - 25pc box	TEC 5
T16 SEAMLESS 21W 3000K	TEC 5
T16 SEAMLESS 21W 3000K - 25pc box	TEC 5
T16 SEAMLESS 24W 3000K	TEC 5
T16 SEAMLESS 24W 3000K - 25pc box	TEC 5
T16 SEAMLESS 28W 3000K	TEC 5
T16 SEAMLESS 28W 3000K - 25pc box	TEC 5
T16 SEAMLESS 39W 3000K	TEC 5
T16 SEAMLESS 39W 3000K - 25pc box	TEC 5
T16 SEAMLESS 54W 3000K	TEC 5
T16 SEAMLESS 54W 3000K - 25pc box	TEC 5
TACTIC 2 HW	EXT 107
TACTIC 2 NW	EXT 107
TACTIC 2 WW	EXT 107
TACTIC 3020	EXT 102
TACTIC BOX 60 R	EXT 102
TAFI 30	EXT 125
TAFI 60	EXT 125
TIGA LED 2724	INT 489
TIGA LED 3024	INT 489
TIGA LED 3024	INT 489/EXT 69
TIGA LED BS 2724	INT 489
TIGA LED BS 3024	INT 489
TIGA LED BS 3024	INT 489/EXT 69
T-LINER 100 DOWN-UP WW	INT 503
T-LINER 100 WW	INT 503
T-LINER 50 DOWN-UP WW	INT 503
T-LINER 50 WW	INT 503
TOPIX BLUE	INT 455
TOPIX L X	EXT 55
TOPIX L X WW	EXT 55
TOPIX NW	INT 455
TOPIX WW	INT 455
TOURNESOL NW	EXT 145
TOURNESOL WW	EXT 145
TRACK 1m	INT 532
TRACK 2m	INT 532
TRACK 3m	INT 532
TRACK BENDING TOOL	INT 533
TRACK CORNER 180°	INT 532
TRACK CORNER 60° - 300°	INT 532
TRACK CORNER 90° IN	INT 532
TRACK CORNER 90° OUT	INT 532
TRACK CURRENT SUPPLY 5 x 0,75mm² 3,0m	INT 533
TRACK DIRECT FIXATION	INT 533
TRACK END CAP	INT 532
TRACK END SUPPLY 11	INT 532
TRACK END SUPPLY 12	INT 532
TRACK MIDDLE SUPPLY	INT 532
TRACK SUSPENSION 3,0	INT 533
TRANSFO 100W	TEC 30
TRANSFO 100W IP67	TEC 30
TRANSFO 50W	TEC 30
TRANSFO 50W IP67	TEC 30
TRANSIT	INT 493
TUBE C	TEC 44
TUBE R	TEC 44
TWEETER ON 1 REO 2733	INT 227
TWEETER ON 1 REO 2733-9	INT 227
TWEETER ON 1 REO 2750	INT 227
TWEETER ON 1 REO 2750-9	INT 227
TWEETER ON 1 REO 3033	INT 227
TWEETER ON 1 REO 3033-9	INT 227
TWEETER ON 1 REO 3050	INT 227
TWEETER ON 1 REO 3050-9	INT 227
TWEETER ON 2 REO 2733	INT 227
TWEETER ON 2 REO 2733-9	INT 227
TWEETER ON 2 REO 2750	INT 227
TWEETER ON 2 REO 2750-9	INT 227
TWEETER ON 2 REO 3033	INT 227
TWEETER ON 2 REO 3033-9	INT 227
TWEETER ON 2 REO 3050	INT 227
TWEETER ON 2 REO 3050-9	INT 227
TWEETER ST D 111 S1	INT 11
TWEETER ST D H111 S1	INT 11
TWEETER ST D REO 2733 S1	INT 10
TWEETER ST D REO 2733-9 S1	INT 10
TWEETER ST D REO 2750 S1	INT 10
TWEETER ST D REO 2750-9 S1	INT 10
TWEETER ST D REO 3033 S1	INT 10
TWEETER ST D REO 3033-9 S1	INT 10
TWEETER ST D REO 3050 S1	INT 10
TWEETER ST D REO 3050-9 S1	INT 10
TWEETER TRIMLESS 111	INT 9
TWEETER TRIMLESS REO 2733	INT 8
TWEETER TRIMLESS REO 2733-9	INT 8
TWEETER TRIMLESS REO 2750	INT 8
TWEETER TRIMLESS REO 2750-9	INT 8
TWEETER TRIMLESS REO 3033	INT 8
TWEETER TRIMLESS REO 3033-9	INT 8
TWEETER TRIMLESS REO 3050	INT 8
TWEETER TRIMLESS REO 3050-9	INT 8
TWEETER X P 30	EXT 123
TWEETER X P 60	EXT 123
TWEETER X W	EXT 49

U

NAME	PAG
ULTRA C 40	INT 269
ULTRA C 60	INT 269
ULTRA C D 2733	INT 267
ULTRA C D 2733-9	INT 267
ULTRA C D 3033	INT 267
ULTRA C D 3033-9	INT 267
ULTRA II S	INT 265
ULTRA IN TRIMLESS 111	INT 89
ULTRA S D 2733	INT 264
ULTRA S D 2733-9	INT 264
ULTRA S D 3033	INT 264
ULTRA S D 3033-9	INT 264
ULTRA S REO 2733	INT 264
ULTRA S REO 2733-9	INT 264
ULTRA S REO 3033	INT 264
ULTRA S REO 3033-9	INT 264
ULTRA SPY HIC FL30	INT 89
ULTRA SPY HIC SP10	INT 89
ULTRA SPY HIC WFL46	INT 89
ULTRA TW HP	INT 467
ULTRA TWIN 50	INT 271
ULTRA TWIN 50 AD	INT 545
ULTRA TWIN C50-20	INT 271
ULTRA TWIN C50-20 AD	INT 545
ULTRA TWIN HIC-35	INT 271
ULTRA TWIN HIC-35 AD	INT 545
ULTRA TWIN HIC-35 AD SP10	INT 545
ULTRA TWIN HIC-35 AD WFL46	INT 545
ULTRA TWIN HIC-35 SP10	INT 271
ULTRA TWIN HIC-35 WFL46	INT 271
ULTRA TWIN HIC-70	INT 271
ULTRA TWIN HIC-70 AD	INT 545
ULTRA TWIN HIC-70 AD SP10	INT 545
ULTRA TWIN HIC-70 AD WFL46	INT 545
ULTRA TWIN HIC-70 SP10	INT 271
ULTRA TWIN HIC-70 WFL46	INT 271
ULTRA TWIN LED 2733	INT 270
ULTRA TWIN LED 2733 AD	INT 544
ULTRA TWIN LED 2733-9	INT 270
ULTRA TWIN LED 2733-9 AD	INT 544
ULTRA TWIN LED 2750	INT 270
ULTRA TWIN LED 2750 AD	INT 544
ULTRA TWIN LED 2750-9	INT 270
ULTRA TWIN LED 2750-9 AD	INT 544
ULTRA TWIN LED 3033	INT 270
ULTRA TWIN LED 3033 AD	INT 544
ULTRA TWIN LED 3033-9	INT 270
ULTRA TWIN LED 3033-9 AD	INT 544
ULTRA TWIN LED 3050	INT 270
ULTRA TWIN LED 3050 AD	INT 544
ULTRA TWIN LED 3050-9	INT 270
ULTRA TWIN LED 3050-9 AD	INT 544
ULTRA TWIN LED AD FL40	INT 544
ULTRA TWIN LED AD SP20	INT 544

Index by Name

NAME	PAG
ULTRA TWIN LED FL40	INT 270
ULTRA TWIN LED SP20	INT 270
ULTRA W	INT 467
ULTRA X	EXT 77
ULTRA X DOWN-UP LED WW	INT 465
ULTRA X DOWN-UP LED WW	INT 465/EXT 77
ULTRA X LED WW	INT 465
ULTRA X LED WW	INT 465/EXT 77
UNI T - PROFILE	PRO 137
UNI TR - PROFILE	PRO 136
UNI TRT - PROFILE	PRO 136
UNI W - PROFILE	PRO 137
UNI70 - PROFILE	PRO 137
UNI85 - PROFILE	PRO 136
UV-FILTER C30	TEC 43

V

VICE VERSA F LED	INT 445
VICE VERSA F R7S	INT 445
VICE VERSA S R7s	INT 445
VICE VERSA S TC	INT 445
VIKTOR	EXT 47
VIKTOR	INT 463
VINCE	INT 487
VISA	INT 471
VISA LED WW	INT 471
VISA X LED WW	EXT 69
VISION	INT 475
VISION LED NW	INT 475
VISION LED WW	INT 475
VISION OUT LED NW	EXT 71
VISION OUT LED WW	EXT 71
VISION S LED WW	INT 474
VISION S OUT LED NW	EXT 71
VISION S OUT LED WW	EXT 71
VISION S OUT RGB	EXT 71
VISION S RGB	INT 475
VISIONAIR	EXT 173

W

WALKER 53 LED WW	EXT 153
WALKER 55 LED WW	EXT 153
WALKER 63 TC	EXT 153
WALKER 67 TC	EXT 153
WALKER 67L TC	EXT 153
WALLSCAN 45 LED	EXT 89

X

XILO 111 JAC	INT 333
XILO C 211 T50	INT 333
XILO C 411 T50	INT 333
XILO CL 150 Hi	INT 337
XILO CL 450 Hi	INT 337
XILO S 211 T50	INT 333
XILO S 411 T50	INT 333
XILO W 250 Hi	INT 479

Y

YOU-TURN 111	INT 83
YOU-TURN H111	INT 83
YOU-TURN HIT FL24	INT 83
YOU-TURN HIT SP15	INT 83
YOU-TURN HIT WFL43	INT 83
YOU-TURN ON 111 T50	INT 233
YOU-TURN ON 111 T50 AD	INT 535
YOU-TURN ON H111-35	INT 235
YOU-TURN ON H111-35 AD	INT 537
YOU-TURN ON H111-70	INT 235
YOU-TURN ON H111-70 AD	INT 537
YOU-TURN ON HIT-35 AD FL24	INT 537
YOU-TURN ON HIT-35 AD SP15	INT 537
YOU-TURN ON HIT-35 AD WFL43	INT 537
YOU-TURN ON HIT-35 FL24	INT 235
YOU-TURN ON HIT-35 SP15	INT 235
YOU-TURN ON HIT-35 WFL43	INT 235
YOU-TURN ON HIT-70 AD FL24	INT 537
YOU-TURN ON HIT-70 AD SP15	INT 537
YOU-TURN ON HIT-70 AD WFL43	INT 537
YOU-TURN ON HIT-70 FL24	INT 235
YOU-TURN ON HIT-70 SP15	INT 235
YOU-TURN ON HIT-70 WFL43	INT 235
YOU-TURN ON OPTO 202715	INT 234
YOU-TURN ON OPTO 202715 AD	INT 536
YOU-TURN ON OPTO 202715-9	INT 234
YOU-TURN ON OPTO 202715-9 AD	INT 536
YOU-TURN ON OPTO 202733	INT 234
YOU-TURN ON OPTO 202733 AD	INT 536
YOU-TURN ON OPTO 202733-9	INT 234
YOU-TURN ON OPTO 202733-9 AD	INT 536
YOU-TURN ON OPTO 202755	INT 234
YOU-TURN ON OPTO 202755 AD	INT 536
YOU-TURN ON OPTO 202755-9	INT 234
YOU-TURN ON OPTO 202755-9 AD	INT 536
YOU-TURN ON OPTO 203015	INT 234
YOU-TURN ON OPTO 203015 AD	INT 536
YOU-TURN ON OPTO 203015-9	INT 234
YOU-TURN ON OPTO 203015-9 AD	INT 536
YOU-TURN ON OPTO 203033	INT 234
YOU-TURN ON OPTO 203033 AD	INT 536
YOU-TURN ON OPTO 203033-9	INT 234
YOU-TURN ON OPTO 203033-9 AD	INT 536
YOU-TURN ON OPTO 203055	INT 234
YOU-TURN ON OPTO 203055 AD	INT 536
YOU-TURN ON OPTO 203055-9	INT 234
YOU-TURN ON OPTO 203055-9 AD	INT 536
YOU-TURN ON OPTO 2715	INT 232
YOU-TURN ON OPTO 2715 AD	INT 534
YOU-TURN ON OPTO 2715-9	INT 232
YOU-TURN ON OPTO 2715-9 AD	INT 534
YOU-TURN ON OPTO 2733	INT 232
YOU-TURN ON OPTO 2733 AD	INT 534
YOU-TURN ON OPTO 2733-9	INT 232
YOU-TURN ON OPTO 2733-9 AD	INT 534
YOU-TURN ON OPTO 2755	INT 232
YOU-TURN ON OPTO 2755 AD	INT 534
YOU-TURN ON OPTO 2755-9	INT 232
YOU-TURN ON OPTO 2755-9 AD	INT 534
YOU-TURN ON OPTO 3015	INT 232
YOU-TURN ON OPTO 3015 AD	INT 534
YOU-TURN ON OPTO 3015-9	INT 232
YOU-TURN ON OPTO 3015-9 AD	INT 534
YOU-TURN ON OPTO 3033	INT 232
YOU-TURN ON OPTO 3033 AD	INT 534
YOU-TURN ON OPTO 3033-9	INT 232
YOU-TURN ON OPTO 3033-9 AD	INT 534
YOU-TURN ON OPTO 3055	INT 232
YOU-TURN ON OPTO 3055 AD	INT 534
YOU-TURN ON OPTO 3055-9	INT 232
YOU-TURN ON OPTO 3055-9 AD	INT 534
YOU-TURN ON REO 202733	INT 234
YOU-TURN ON REO 202733 AD	INT 536
YOU-TURN ON REO 202733-9	INT 234
YOU-TURN ON REO 202733-9 AD	INT 536
YOU-TURN ON REO 202750	INT 234
YOU-TURN ON REO 202750 AD	INT 536
YOU-TURN ON REO 202750-9	INT 234
YOU-TURN ON REO 202750-9 AD	INT 536
YOU-TURN ON REO 203033	INT 234
YOU-TURN ON REO 203033 AD	INT 536
YOU-TURN ON REO 203033-9	INT 234
YOU-TURN ON REO 203033-9 AD	INT 536
YOU-TURN ON REO 203050	INT 234
YOU-TURN ON REO 203050 AD	INT 536
YOU-TURN ON REO 203050-9	INT 234
YOU-TURN ON REO 203050-9 AD	INT 536
YOU-TURN ON REO 2733	INT 232
YOU-TURN ON REO 2733 AD	INT 534
YOU-TURN ON REO 2733-9	INT 232
YOU-TURN ON REO 2733-9 AD	INT 534
YOU-TURN ON REO 2750	INT 232
YOU-TURN ON REO 2750 AD	INT 534
YOU-TURN ON REO 2750-9	INT 232
YOU-TURN ON REO 2750-9 AD	INT 534
YOU-TURN ON REO 3033	INT 232
YOU-TURN ON REO 3033 AD	INT 534
YOU-TURN ON REO 3033-9	INT 232
YOU-TURN ON REO 3033-9 AD	INT 534
YOU-TURN ON REO 3050	INT 232
YOU-TURN ON REO 3050 AD	INT 534
YOU-TURN ON REO 3050-9	INT 232
YOU-TURN ON REO 3050-9 AD	INT 534
YOU-TURN OPTO 202715	INT 81
YOU-TURN OPTO 202715-9	INT 81
YOU-TURN OPTO 202733	INT 81
YOU-TURN OPTO 202733-9	INT 81
YOU-TURN OPTO 202755	INT 81
YOU-TURN OPTO 202755-9	INT 81
YOU-TURN OPTO 203015	INT 81
YOU-TURN OPTO 203015-9	INT 81
YOU-TURN OPTO 203033	INT 81
YOU-TURN OPTO 203033-9	INT 81
YOU-TURN OPTO 203055	INT 81
YOU-TURN OPTO 203055-9	INT 81
YOU-TURN REO 202733	INT 81
YOU-TURN REO 202733-9	INT 81
YOU-TURN REO 202750	INT 81
YOU-TURN REO 202750-9	INT 81
YOU-TURN REO 203033	INT 81
YOU-TURN REO 203033-9	INT 81
YOU-TURN REO 203050	INT 81
YOU-TURN REO 203050-9	INT 81
YOU-TURN REO 2733	INT 81
YOU-TURN REO 2733-9	INT 81
YOU-TURN REO 2750	INT 81
YOU-TURN REO 2750-9	INT 81
YOU-TURN REO 3033	INT 81
YOU-TURN REO 3033-9	INT 81
YOU-TURN REO 3050	INT 81
YOU-TURN REO 3050-9	INT 81
YUPI	INT 493
YUPI X	EXT 57
YUPI X LED WW	INT 493/EXT 57

Index by Reference

REFERENCE	PAG
200 00 01	INT 533
200 01 02	INT 533
200 01 11	INT 532
200 01 12	INT 532
200 01 13	INT 533
200 01 14	INT 532
200 01 21	INT 532
200 01 24	INT 532
200 01 34	INT 532
200 01 35	INT 532
200 01 41	INT 532
200 01 410	INT 532
200 01 420	INT 532
200 01 430	INT 532
200 44 21	TEC 30
200 44 36	TEC 30
200 45 135	TEC 30
200 45 170	TEC 30
200 46 06	TEC 30
200 46 10	TEC 30
200 47 10	TEC 30
200 47 60	TEC 30
200 99 53	INT 533
201 17 00	TEC 43
201 18 00	TEC 43
201 27 11	TEC 43
201 27 12	TEC 43
201 27 13	TEC 43
201 27 14	TEC 43
201 27 99	TEC 42
201 28 00	TEC 42
201 28 01	TEC 42
201 28 02	TEC 44
201 28 11	TEC 43
201 28 12	TEC 43
201 28 13	TEC 43
201 28 14	TEC 43
201 30 05	TEC 43
201 30 11	TEC 42
201 30 12	TEC 42
201 30 13	TEC 42
201 30 14	TEC 42
201 30 98	TEC 42
201 31 50	TEC 42
201 32 50	TEC 42
201 32 51	TEC 44
201 32 52	TEC 42
201 33 11	TEC 43
201 33 12	TEC 43
201 33 13	TEC 43
201 33 14	TEC 43
201 34 00	TEC 44
201 37 00	TEC 43
201 38 11	TEC 42
201 47 11	TEC 42
201 48 01	TEC 42
202 00 55	TEC 36
202 00 64	TEC 36
202 00 75	TEC 36
202 01 05	INT 79
202 01 06	INT 79
202 01 08	INT 79
202 01 10	INT 73
202 01 1010	INT 73
202 01 13	INT 72
202 01 1310	INT 72
202 01 14	INT 77
202 01 15	INT 77
202 01 24	INT 77
202 01 40	INT 73
202 01 4010	INT 73
202 01 75	TEC 36
202 01 75 OFA	TEC 36
202 02 05	TEC 44
202 02 08	TEC 44
202 04 12	INT 430
202 04 14	INT 430
202 04 22	EXT 39
202 04 24	EXT 39
202 04 32	INT 430
202 04 34	INT 430
202 11 10	INT 73
202 11 1010	INT 73
202 11 13	INT 72
202 11 1310	INT 72
202 11 14	INT 77
202 11 15	INT 77
202 11 16	INT 67
202 11 19	TEC 32
202 11 24	INT 77
202 11 40	INT 73
202 11 4010	INT 73
202 11 82	TEC 36
202 11 82 OFA	TEC 36
202 13 14	EXT 9
202 13 15	EXT 9
202 14 11	INT 43
202 14 12	INT 43
202 14 1210	INT 43
202 14 13	EXT 9
202 14 21	INT 43
202 14 28122	INT 34
202 14 28123	INT 34
202 14 29	TEC 32
202 14 29122	INT 34
202 14 29123	INT 34
202 14 61	INT 39
202 14 71	INT 39
202 14 80	INT 42
202 14 90	INT 35
202 14 91	INT 35
202 141 28122	INT 27
202 141 28123	INT 27
202 141 28124	INT 27
202 141 28132	INT 27
202 141 28133	INT 27
202 141 28134	INT 27
202 141 28222	INT 27
202 141 28223	INT 27
202 141 28224	INT 27
202 141 28232	INT 27
202 141 28233	INT 27
202 141 28234	INT 27
202 141 29122	INT 27
202 141 29123	INT 27
202 141 29132	INT 27
202 141 29133	INT 27
202 141 29222	INT 27
202 141 29223	INT 27
202 141 29232	INT 27
202 141 29233	INT 27
202 142 28122	INT 23
202 142 28123	INT 23
202 142 28124	INT 23
202 142 29122	INT 23
202 142 29123	INT 23
202 143 28122	INT 23
202 143 28123	INT 23
202 143 28124	INT 23
202 143 29122	INT 23
202 143 29123	INT 23
202 15 61 00	INT 51
202 15 61 01	INT 51
202 15 61 20112	INT 50
202 15 61 20113	INT 50
202 15 61 20122	INT 50
202 15 61 20123	INT 50
202 15 61 20132	INT 50
202 15 61 20133	INT 50
202 15 61 209112	INT 50
202 15 61 209113	INT 50
202 15 61 209122	INT 50
202 15 61 209123	INT 50
202 15 61 209132	INT 50
202 15 61 209133	INT 50
202 15 61 97	TEC 36
202 15 61 971	TEC 36
202 15 61 972	TEC 36
202 15 62 00	INT 53
202 15 62 01	INT 53
202 15 62 20112	INT 52
202 15 62 20113	INT 52
202 15 62 20122	INT 52
202 15 62 20123	INT 52
202 15 62 20132	INT 52
202 15 62 20133	INT 52
202 15 62 209112	INT 52
202 15 62 209113	INT 52
202 15 62 209122	INT 52
202 15 62 209123	INT 52
202 15 62 209132	INT 52
202 15 62 209133	INT 52
202 19 24	INT 101
202 19 41	INT 101
202 20 06	INT 112
202 20 07	INT 112
202 20 16	INT 112
202 20 161	INT 113
202 20 17	INT 112
202 20 171	INT 113
202 20 18	TEC 33
202 20 19	TEC 32
202 20 28122	EXT 15
202 20 31	INT 108
202 20 32	INT 108
202 20 33	INT 108
202 20 41	EXT 15
202 20 42	EXT 15
202 21 15	INT 113
202 21 20	INT 113
202 21 28	TEC 33
202 21 29	TEC 32
202 21 31	INT 109
202 21 32	INT 109
202 21 33	INT 109
202 21 34	INT 109
202 21 58	TEC 33
202 21 59	TEC 32
202 22 05	INT 111
202 22 15	INT 111
202 22 25	INT 111
202 22 35	INT 111
202 23 05	INT 65
202 23 15	INT 65
202 23 25	INT 65
202 23 35	INT 65
202 24 11	INT 119
202 24 21	INT 119
202 25 18	TEC 33
202 25 19	TEC 32
202 25 28122	EXT 8
202 252 28122	EXT 8
202 26 28122	INT 22
202 26 28123	INT 22
202 26 28124	INT 22
202 26 28132	INT 22
202 26 28133	INT 22
202 26 28134	INT 22
202 26 29122	INT 22
202 26 29123	INT 22
202 26 29132	INT 22
202 26 29133	INT 22
202 262 28122	INT 22
202 262 28123	INT 22
202 262 28124	INT 22
202 262 28132	INT 22
202 262 28133	INT 22
202 262 28134	INT 22
202 262 29122	INT 22
202 262 29123	INT 22
202 262 29132	INT 22
202 262 29133	INT 22
202 272 28122	INT 66
202 272 28123	INT 66
202 272 29122	INT 66
202 272 29123	INT 66
202 28 26	INT 119
202 28 28122	INT 69
202 28 28123	INT 69
202 282 28122	INT 69
202 282 28123	INT 69
202 282 29122	INT 69
202 282 29123	INT 69
202 29 226	INT 49
202 29 26	INT 49
202 29 27	INT 49
202 29 28102	INT 48
202 29 28103	INT 48
202 29 29122	INT 69
202 29 29123	INT 69
202 292 28122	INT 38
202 292 28123	INT 38
202 292 29122	INT 38
202 292 29123	INT 38
202 31 00	INT 431
202 31 10	INT 431
202 31 98	TEC 33
202 31 99	TEC 32
202 32 51	INT 39
202 34 12	INT 47/EXT 13
202 342 28122	INT 46/EXT 12
202 342 28123	INT 46
202 36 52	INT 39
202 37 12	INT 59
202 37 17 FL24	INT 59
202 37 17 SP15	INT 59
202 37 17 WFL43	INT 59
202 37 19	INT 59
202 37 20	INT 58
202 37 21	INT 58
202 37 28122	INT 21
202 37 28123	INT 21
202 37 28124	INT 21
202 37 28132	INT 21
202 37 28133	INT 21
202 37 28134	INT 21
202 37 29122	INT 21
202 37 29123	INT 21
202 37 29132	INT 21
202 37 29133	INT 21
202 372 28122	INT 21
202 372 28123	INT 21
202 372 28124	INT 21
202 372 28132	INT 21
202 372 28133	INT 21
202 372 28134	INT 21
202 372 29122	INT 21
202 372 29123	INT 21
202 372 29132	INT 21
202 372 29133	INT 21
202 38 12	INT 63
202 38 16	INT 63
202 38 19	INT 63
202 38 20	INT 63
202 38 28122	INT 26
202 38 28123	INT 26
202 38 28124	INT 26
202 38 28132	INT 26
202 38 28133	INT 26
202 38 28134	INT 26
202 38 28222	INT 26
202 38 28223	INT 26
202 38 28224	INT 26
202 38 28232	INT 26
202 38 28233	INT 26
202 38 28234	INT 26
202 38 29122	INT 26
202 38 29123	INT 26
202 38 29132	INT 26
202 38 29133	INT 26
202 38 29222	INT 26
202 38 29223	INT 26
202 38 29232	INT 26
202 38 29233	INT 26
202 41 30 00	TEC 36
202 41 30 15102	INT 33
202 41 58 12	TEC 36
202 41 58 15	TEC 36
202 41 58 51	INT 33
202 42 00	INT 197

Index by Reference

REFERENCE	PAG
202 42 04	INT 197
202 42 23	INT 197
202 42 23 ED2	INT 197
202 43 00	INT 199
202 43 04	INT 199
202 43 04 SBL	INT 199
202 43 07	INT 199
202 43 23	INT 199
202 43 23 ED2	INT 199
202 47 51	INT 107
202 49 28122	INT 110
202 49 28123	INT 110
202 50 11	INT 111
202 50 28122	INT 105
202 50 28123	INT 105
202 50 29122	INT 105
202 50 29123	INT 105
202 50 50	INT 107
202 50 51	INT 107
202 50 53	INT 107
202 51 28122	INT 102
202 51 28123	INT 102
202 51 29122	INT 102
202 51 29123	INT 102
202 51 51	INT 103
202 52 11	INT 111
202 53 28122	INT 105
202 53 28123	INT 105
202 53 29122	INT 105
202 53 29123	INT 105
202 54 24 00	INT 185
202 54 24 11	INT 185
202 54 26 00	INT 185
202 55 24 00	INT 184
202 55 24 11	INT 184
202 56 99 01	TEC 32
202 57 61 00	INT 89
202 57 61 97	TEC 36
202 581 212 ED1	INT 192
202 581 312 ED1	INT 192
202 582 212 ED1	INT 193
202 582 312 ED1	INT 193
202 591 212 ED1	INT 188
202 591 312 ED1	INT 188
202 591 322 ED1	INT 188
202 592 112 ED1	INT 189
202 592 212 ED1	INT 189
202 592 312 ED1	INT 189
202 592 322 ED1	INT 189
202 60 00 01	INT 148
202 60 00 02	INT 149
202 60 00 03	INT 149
202 60 00 04	INT 149
202 60 98 01	TEC 35
202 60 98 02	TEC 35
202 60 98 03	TEC 35
202 60 98 04	TEC 35
202 600 20122	INT 147
202 600 20123	INT 147
202 600 20222	INT 147
202 600 20223	INT 147
202 600 209122	INT 147
202 600 209123	INT 147
202 600 209222	INT 147
202 600 209223	INT 147
202 601 98 01	TEC 35
202 601 98 02	TEC 35
202 61 00 01	INT 160
202 61 00 02	INT 161
202 61 00 03	INT 162
202 61 00 04	INT 163
202 61 00 04L	INT 163
202 61 060 12 FL24	INT 161
202 61 060 12 SP15	INT 161
202 61 060 12 WFL43	INT 161
202 61 060 13 FL24	INT 162
202 61 060 13 SP15	INT 162
202 61 060 13 WFL43	INT 162
202 61 660 01 FL24	INT 160
202 61 660 01 SP15	INT 160
202 61 660 01 WFL43	INT 160
202 61 660 02 FL24	INT 161
202 61 660 02 SP15	INT 161
202 61 660 02 WFL43	INT 161
202 61 660 03 FL24	INT 162
202 61 660 03 SP15	INT 162
202 61 660 03 WFL43	INT 162
202 61 88 01	INT 160
202 61 88 02	INT 161
202 61 95 01	TEC 36
202 61 95 01 HP	TEC 36
202 61 95 01L	TEC 36
202 61 95 02	TEC 36
202 61 95 02 HP	TEC 36
202 61 95 02L	TEC 36
202 61 95 03	TEC 36
202 61 95 04	TEC 36
202 61 95 04L	TEC 36
202 61 96 01	TEC 34
202 61 96 02	TEC 34
202 61 96 03	TEC 34
202 61 96 04L	TEC 34
202 62 00 01	INT 176
202 62 00 02	INT 177
202 62 00 03	INT 178
202 62 00 04	INT 179
202 62 00 04L	INT 179
202 62 060 12 FL24	INT 177
202 62 060 12 SP15	INT 177
202 62 060 12 WFL43	INT 177
202 62 060 13 FL24	INT 178
202 62 060 13 SP15	INT 178
202 62 060 13 WFL43	INT 178
202 62 660 01 FL24	INT 176
202 62 660 01 SP15	INT 176
202 62 660 01 WFL43	INT 176
202 62 660 02 FL24	INT 177
202 62 660 02 SP15	INT 177
202 62 660 02 WFL43	INT 177
202 62 660 03 FL24	INT 178
202 62 660 03 SP15	INT 178
202 62 660 03 WFL43	INT 178
202 62 88 01	INT 176
202 62 88 02	INT 177
202 62 98 01	TEC 33
202 62 98 02	TEC 33
202 62 98 03	TEC 33
202 62 98 04	TEC 33
202 62 98 04L	TEC 33
202 62 99 01	TEC 32
202 62 99 02	TEC 32
202 62 99 03	TEC 32
202 62 99 04	TEC 32
202 62 99 04L	TEC 32
202 67 00 01	INT 249
202 67 00 02	INT 249
202 67 88 01	INT 249
202 67 88 02	INT 249
202 67 89 01	INT 249
202 67 89 02	INT 249
202 680 20122	INT 155
202 680 20123	INT 155
202 680 20222	INT 155
202 680 20223	INT 155
202 680 209122	INT 155
202 680 209123	INT 155
202 680 209222	INT 155
202 680 209223	INT 155
202 681 20112	INT 157
202 681 20113	INT 157
202 681 20122	INT 157
202 681 20123	INT 157
202 681 20132	INT 157
202 681 20133	INT 157
202 681 20212	INT 157
202 681 20213	INT 157
202 681 20222	INT 157
202 681 20223	INT 157
202 681 20232	INT 157
202 681 20233	INT 157
202 681 209112	INT 157
202 681 209113	INT 157
202 681 209122	INT 157
202 681 209123	INT 157
202 681 209132	INT 157
202 681 209133	INT 157
202 681 209212	INT 157
202 681 209213	INT 157
202 681 209222	INT 157
202 681 209223	INT 157
202 681 209232	INT 157
202 681 209233	INT 157
202 682 20122	INT 159
202 682 20132	INT 159
202 682 20222	INT 159
202 682 20232	INT 159
202 682 209122	INT 159
202 682 209132	INT 159
202 682 209222	INT 159
202 682 209232	INT 159
202 690 20122	INT 171
202 690 20123	INT 171
202 690 20222	INT 171
202 690 20223	INT 171
202 690 209122	INT 171
202 690 209123	INT 171
202 690 209222	INT 171
202 690 209223	INT 171
202 691 20112	INT 173
202 691 20113	INT 173
202 691 20122	INT 173
202 691 20123	INT 173
202 691 20132	INT 173
202 691 20133	INT 173
202 691 20212	INT 173
202 691 20213	INT 173
202 691 20222	INT 173
202 691 20223	INT 173
202 691 20232	INT 173
202 691 20233	INT 173
202 691 209112	INT 173
202 691 209113	INT 173
202 691 209122	INT 173
202 691 209123	INT 173
202 691 209132	INT 173
202 691 209133	INT 173
202 691 209212	INT 173
202 691 209213	INT 173
202 691 209222	INT 173
202 691 209223	INT 173
202 691 209232	INT 173
202 691 209233	INT 173
202 692 20122	INT 175
202 692 20132	INT 175
202 692 20222	INT 175
202 692 20232	INT 175
202 692 209122	INT 175
202 692 209132	INT 175
202 692 209222	INT 175
202 692 209232	INT 175
202 70 00 01	INT 127
202 70 00 02	INT 127
202 70 00 03	INT 127
202 70 28122	INT 125
202 70 28123	INT 125
202 70 28222	INT 125
202 70 28223	INT 125
202 70 29122	INT 125
202 70 29123	INT 125
202 70 29222	INT 125
202 70 29223	INT 125
202 70 55 01	INT 127
202 70 55 02	INT 127
202 70 55 03	INT 127
202 70 66 01	INT 127
202 70 66 02	INT 127
202 70 98 01	TEC 35
202 70 98 02	TEC 35
202 70 98 03	TEC 35
202 71 00 01	INT 135
202 71 00 02	INT 135
202 71 00 03	INT 135
202 71 55 01	INT 135
202 71 55 02	INT 135
202 71 55 03	INT 135
202 71 66 01	INT 135
202 71 66 02	INT 135
202 71 95 01	TEC 36
202 71 95 01 HP	TEC 36
202 71 95 01L	TEC 36
202 71 95 02	TEC 36
202 71 95 02 HP	TEC 36
202 71 95 02L	TEC 36
202 71 96 01	TEC 34
202 71 96 02	TEC 34
202 71 97 03	TEC 35
202 72 00 01	INT 143
202 72 00 02	INT 143
202 72 00 03	INT 143
202 72 55 01	INT 143
202 72 55 02	INT 143
202 72 55 03	INT 143
202 72 66 01	INT 143
202 72 66 02	INT 143
202 72 99 01	TEC 32
202 72 99 02	TEC 32
202 72 99 03	TEC 32
202 73 28122	INT 129
202 73 28123	INT 129
202 73 28222	INT 129
202 73 28223	INT 129
202 73 29122	INT 129
202 73 29123	INT 129
202 73 29222	INT 129
202 73 29223	INT 129
202 731 20112	INT 131
202 731 20113	INT 131
202 731 20122	INT 131
202 731 20123	INT 131
202 731 20132	INT 131
202 731 20133	INT 131
202 731 20212	INT 131
202 731 20213	INT 131
202 731 20222	INT 131
202 731 20223	INT 131
202 731 20232	INT 131
202 731 20233	INT 131
202 731 209112	INT 131
202 731 209113	INT 131
202 731 209122	INT 131
202 731 209123	INT 131
202 731 209132	INT 131
202 731 209133	INT 131
202 731 209212	INT 131
202 731 209213	INT 131
202 731 209222	INT 131
202 731 209223	INT 131
202 731 209232	INT 131
202 731 209233	INT 131
202 74 28122	INT 139
202 74 28123	INT 139
202 74 28222	INT 139
202 74 28223	INT 139
202 74 29122	INT 139
202 74 29123	INT 139
202 74 29222	INT 139
202 74 29223	INT 139
202 741 20112	INT 141
202 741 20113	INT 141
202 741 20122	INT 141
202 741 20123	INT 141
202 741 20132	INT 141
202 741 20133	INT 141
202 741 20212	INT 141
202 741 20213	INT 141
202 741 20222	INT 141
202 741 20223	INT 141
202 741 20232	INT 141
202 741 20233	INT 141
202 741 209112	INT 141

Index by Reference

REFERENCE	PAG
202 741 209113	INT 141
202 741 209122	INT 141
202 741 209123	INT 141
202 741 209132	INT 141
202 741 209133	INT 141
202 741 209212	INT 141
202 741 209213	INT 141
202 741 209222	INT 141
202 741 209223	INT 141
202 741 209232	INT 141
202 741 209233	INT 141
202 78 55 01	INT 241
202 78 55 02	INT 241
202 78 8122	INT 240
202 78 8123	INT 240
202 78 8222	INT 240
202 78 8223	INT 240
202 78 89122	INT 240
202 78 89123	INT 240
202 78 89222	INT 240
202 78 89223	INT 240
202 91 01 11	INT 94
202 91 01 20	INT 95
202 91 01 30	INT 94
202 91 02 05	INT 95
202 91 02 11	INT 95
202 91 02 20	INT 95
202 91 04 00	INT 94
202 91 10 66	INT 89
202 91 10 66 SP10	INT 89
202 91 10 66 WFL46	INT 89
202 91 98 01	INT 93
202 91 98 11	INT 93
202 93 01	INT 89/093
203 05 04	TEC 39
203 05 041	TEC 39
203 05 06	TEC 39
203 05 061	TEC 39
203 05 10	TEC 39
203 10 01	TEC 38
203 10 02	TEC 38
203 10 03	TEC 38
203 10 06	TEC 38
203 10 15	TEC 38
203 10 27	TEC 38
203 20 01	TEC 38
203 99 55	TEC 40
203 99 56	TEC 40
204 00 100	TEC 40
204 00 62	TEC 40
204 00 90	TEC 40
204 62 62	TEC 40
204 80 80	TEC 40
204 90 90	TEC 40
205 05 455 E	INT 516
205 05 455 ED	INT 516
205 05 455 S	INT 517
205 06 455 EDL	INT 516
205 06 455 SL	INT 517
206 06 28122	INT 19
206 06 28123	INT 19
206 06 29122	INT 19
206 06 29123	INT 19
206 11 11	INT 11
206 11 28122	INT 10
206 11 28123	INT 10
206 11 28132	INT 10
206 11 28133	INT 10
206 11 29122	INT 10
206 11 29123	INT 10
206 11 29132	INT 10
206 11 29133	INT 10
206 11 88	INT 11
206 21 11	INT 9
206 21 28122	INT 8
206 21 28123	INT 8
206 21 28132	INT 8
206 21 28133	INT 8
206 21 29122	INT 8
206 21 29123	INT 8
206 21 29132	INT 8
206 21 29133	INT 8
206 31 12122	INT 227
206 31 12123	INT 227
206 31 12132	INT 227
206 31 12133	INT 227
206 31 12222	INT 227
206 31 12223	INT 227
206 31 12232	INT 227
206 31 12233	INT 227
206 31 129122	INT 227
206 31 129123	INT 227
206 31 129132	INT 227
206 31 129133	INT 227
206 31 129222	INT 227
206 31 129223	INT 227
206 31 129232	INT 227
206 31 129233	INT 227
206 40 12	EXT 49
206 43 12	EXT 123
206 46 12	EXT 123
207 01 161	TEC 32
207 01 162	TEC 32
207 01 163	TEC 32
207 01 164	TEC 32
207 01 167	TEC 32
207 01 168	TEC 32
207 01 169	TEC 32
207 01 170	TEC 32
207 01 171	TEC 32
207 01 172	TEC 32
207 01 173	TEC 32
207 01 174	TEC 32
207 01 177	TEC 32
207 01 178	TEC 32
207 01 179	TEC 32
207 01 180	TEC 32
207 01 181	TEC 32
207 01 184	TEC 32
207 01 185	TEC 32
207 01 186	TEC 32
207 01 188	TEC 32
207 02 9071	TEC 34
207 02 9071 C	TEC 34
207 02 9071 T	TEC 34
207 02 9093	TEC 34
207 02 9093 C	TEC 34
207 02 9093 T	TEC 34
207 02 9123 T	TEC 34
207 02 9123 TMK	TEC 34
213 11 05	EXT 109
213 11 21	EXT 109
213 12 05	EXT 109
213 12 21	EXT 109
213 15 05	EXT 109
213 15 21	EXT 109
213 19 01	TEC 45
213 19 08	EXT 109/TEC 41
213 19 09	EXT 109/TEC 41
213 19 10	EXT 102
213 42 22	EXT 107
213 42 32	EXT 107
213 42 42	EXT 107
213 45 18122	EXT 102
213 47 18112	EXT 103
213 47 18122	EXT 103
213 47 18132	EXT 103
213 48 18112	EXT 103
213 48 18122	EXT 103
213 48 18132	EXT 103
213 49 18112	EXT 103
213 49 18122	EXT 103
213 49 18132	EXT 103
214 52 73	EXT 131
214 52 76	EXT 131
214 52 83 E	EXT 131
214 52 86 E	EXT 131
215 02 11	EXT 95
215 04 11	EXT 95
216 12 00	TEC 41
216 12 01	TEC 41
216 12 02	TEC 41
216 12 100	TEC 41
216 12 50	TEC 41
216 14 35	TEC 41
217 60 15 18102	EXT 133
217 60 25 18102	EXT 133
217 60 40 18102	EXT 133
217 61 15 4102	EXT 117
217 61 25 4102	EXT 117
217 61 25 4202	EXT 117
217 61 40 4102	EXT 117
217 61 40 4202	EXT 117
217 62 25 4102	EXT 133
217 62 40 4102	EXT 133
217 63 80 18102	EXT 133
217 64 25 12	EXT 129
217 64 40 12	EXT 129
219 16 01	EXT 143
219 16 52	EXT 143
219 16 53	EXT 143
219 16 56	EXT 143
219 26 53	EXT 143
219 31 51	EXT 85
219 31 55	EXT 85
219 51 51	EXT 85
220 10 36	EXT 165
220 53 4102	EXT 153
220 55 4102	EXT 153
220 63 18	EXT 153
220 67 18	EXT 153
220 68 18	EXT 153
220 74 12	EXT 149
220 77 12	EXT 149
222 121 12	EXT 127
222 123 12	EXT 127
222 126 12	EXT 127
222 127 12	EXT 127
222 40 12	EXT 89
222 43 12	EXT 131
222 46 12	EXT 131
222 600 62	EXT 91
222 603 62	EXT 127
222 606 62	EXT 127
222 613 12	EXT 129
222 616 12	EXT 129
222 623 12	EXT 125
222 626 12	EXT 125
223 00 02	EXT 159
223 00 12	EXT 155
223 00 52	EXT 159
223 00 57	EXT 159
223 10 57	EXT 157
223 11 01	EXT 62
223 11 4102	EXT 61
223 12 51	EXT 63
223 16 4102	EXT 157
223 17 4102	EXT 157
223 51 01	EXT 63
223 51 4102	EXT 61
223 52 51	EXT 63
223 65 40	EXT 75
223 70 40	EXT 75
223 751 8102	INT 489
223 751 8102	INT 489/EXT 69
223 751 8103	INT 489
223 752 8102	INT 489
223 752 8102	INT 489/EXT 69
223 752 8103	INT 489
223 80 12	EXT 47
223 80 12	INT 463
225 11 15	EXT 51
225 11 4102	EXT 51
225 20 18102	EXT 59
225 20 18202	EXT 59
225 31 15	EXT 79
225 51 15	EXT 79
226 11 37	EXT 171
226 12 37	EXT 171
226 21 17	EXT 169
226 23 57	EXT 169
226 23 97	EXT 169
228 111 01 10	EXT 113
228 111 11 11	EXT 113
228 112 01 10	EXT 113
228 112 11 11	EXT 113
228 151 01 10	EXT 113
228 151 11 11	EXT 113
228 152 01 10	EXT 113
228 152 11 11	EXT 113
228 171 01 10	EXT 115
228 171 11 11	EXT 115
228 311 01 15	EXT 113
228 312 01 15	EXT 113
228 351 01 15	EXT 113
228 352 01 15	EXT 113
228 371 01 15	EXT 115
228 90 10	EXT 114/TEC 45
228 90 20	EXT 114/TEC 45
228 90 59	EXT 114/TEC 45
228 91 20	EXT 112/TEC 45
229 01 01	EXT 155/157/159
229 01 03	EXT 127/131
229 01 07	EXT 141
229 01 11	EXT 123/125/127/129/132
229 01 12	EXT 149/151/152
229 01 13	EXT 152
229 01 14	EXT 161
229 01 15	EXT 147
229 02 01	EXT 155/157/159
229 02 03	EXT 169
229 02 05	EXT 165
229 02 07	EXT 115/151/152
229 02 08	EXT 152
229 02 09	EXT 163
232 01 07	EXT 23
232 02 07	EXT 87
232 03 07	EXT 87
232 10 18112	EXT 83/137
232 10 18122	EXT 83/137
232 10 18132	EXT 83/137
232 11 18112	EXT 137
232 11 18122	EXT 137
232 11 18132	EXT 137
250 11 10	INT 309
250 11 20	INT 309
250 11 30	INT 309
250 11 40	INT 309
250 13 10	INT 307
250 13 20	INT 307
250 16 10	INT 303
250 16 20	INT 303
250 16 28122	INT 303
250 16 28222	INT 303
251 67 20	INT 245
251 67 43	INT 245/EXT 27
251 67 44	INT 245/EXT 27
251 67 8122	INT 244
251 67 8122	INT 244/EXT 25
251 67 8123	INT 244
251 67 8222	INT 244
251 67 8222	INT 244/EXT 25
251 67 8222	INT 244/EXT 27
251 67 8223	INT 244
251 67 89122	INT 244
251 67 89123	INT 244
251 67 89222	INT 244
251 67 89223	INT 244
251 69 8122	INT 491
251 69 8123	INT 491
268 00 00	PRO 182
268 02 88	INT 416
268 02 885	INT 417
268 02 89	INT 417
268 02 895	INT 417
268 03 01	PRO 182
268 06 01	PRO 182
268 06 05	PRO 182
268 06 06	PRO 182
268 06 10	PRO 182

Index by Reference

REFERENCE	PAG
268 52 24	PRO 185
268 52 39	PRO 185
268 52 54	PRO 185
268 52 80	PRO 185
268 61 10	PRO 183
268 61 15	PRO 183
268 61 201	PRO 183
268 61 202	PRO 183
268 61 224 E	PRO 184
268 61 224 ED1	PRO 184
268 61 224 ED2	PRO 184
268 61 231	PRO 183
268 61 232	PRO 183
268 61 233	PRO 183
268 61 235 E	PRO 184
268 61 235 ED1	PRO 184
268 61 235 ED2	PRO 184
268 61 239 E	PRO 184
268 61 239 ED1	PRO 184
268 61 239 ED2	PRO 184
268 61 254 E	PRO 184
268 61 254 EB	PRO 184
268 61 254 ED1	PRO 184
268 61 254 ED1B	PRO 184
268 61 254 ED2	PRO 184
268 61 254 ED2B	PRO 184
268 61 280 E	PRO 184
268 61 280 ED1	PRO 184
268 61 280 ED2	PRO 184
268 62 224 E	PRO 185
268 62 224 ED1	PRO 185
268 62 224 ED2	PRO 185
268 62 235 E	PRO 185
268 62 235 ED1	PRO 185
268 62 235 ED2	PRO 185
268 62 239 E	PRO 185
268 62 239 ED1	PRO 185
268 62 239 ED2	PRO 185
268 62 254 E	PRO 185
268 62 254 ED1	PRO 185
268 62 254 ED2	PRO 185
268 62 280 E	PRO 185
268 62 280 ED1	PRO 185
268 62 280 ED2	PRO 185
268 62 424 E	PRO 185
268 62 424 ED1	PRO 185
268 62 424 ED2	PRO 185
268 62 435 E	PRO 185
268 62 435 ED1	PRO 185
268 62 435 ED2	PRO 185
268 62 439 E	PRO 185
268 62 439 ED1	PRO 185
268 62 439 ED2	PRO 185
268 62 454 E	PRO 185
268 62 454 ED1	PRO 185
268 62 454 ED2	PRO 185
268 62 480 E	PRO 185
268 62 480 ED1	PRO 185
268 62 480 ED2	PRO 185
268 63 224 E	PRO 186
268 63 224 ED1	PRO 186
268 63 224 ED1L	PRO 186
268 63 224 ED2	PRO 186
268 63 224 ED2L	PRO 186
268 63 224 EL	PRO 186
268 63 235 E	PRO 186
268 63 235 ED1	PRO 186
268 63 235 ED1L	PRO 186
268 63 235 ED2	PRO 186
268 63 235 ED2L	PRO 186
268 63 235 EL	PRO 186
268 63 239 E	PRO 186
268 63 239 ED1	PRO 186
268 63 239 ED1L	PRO 186
268 63 239 ED2	PRO 186
268 63 239 ED2L	PRO 186
268 63 239 EL	PRO 186
268 63 254 E	PRO 186
268 63 254 EB	PRO 186
268 63 254 ED1	PRO 186
268 63 254 ED1B	PRO 186
268 63 254 ED1L	PRO 186
268 63 254 ED2	PRO 186
268 63 254 ED2B	PRO 186
268 63 254 ED2L	PRO 186
268 63 254 EL	PRO 186
268 63 280 E	PRO 186
268 63 280 ED1	PRO 186
268 63 280 ED1L	PRO 186
268 63 280 ED2	PRO 186
268 63 280 ED2L	PRO 186
268 63 280 EL	PRO 186
268 98 51	PRO 182
268 98 56	PRO 182
268 99 51	PRO 182
268 99 56	PRO 182
270 11 161	TEC 33
270 11 162	TEC 33
270 11 163	TEC 33
270 11 165	TEC 33
270 11 180	TEC 33
270 11 181	TEC 33
270 11 182	TEC 33
270 11 183	TEC 33
270 11 184	TEC 33
270 11 185	TEC 33
270 11 186	TEC 33
270 11 187	TEC 33
270 50 24	INT 505
270 50 24 ED6	INT 505
270 50 54	INT 505
270 50 54 ED6	INT 505
270 60 052	INT 503
270 60 102	INT 503
270 61 052	INT 503
270 61 102	INT 503
271 11 40	INT 492
271 41 80	INT 493
271 51 124	INT 383/507
271 52 160	INT 383/507
271 52 218	INT 382/506
271 52 424	INT 383/507
271 54 260	INT 383
271 61 21	INT 382
271 61 23	INT 506
271 64 21	INT 389
271 64 21 ED2	INT 389
271 64 25 ED	INT 527
271 71 21	INT 365
271 71 25	INT 523
273 41 27	INT 479
273 41 27 BK	INT 479
273 41 27 BK-GD	INT 479
274 14 24	INT 505
274 14 54	INT 505
274 14 54 ED2	INT 505
274 24 114	EXT 93
274 24 128	EXT 93
274 25 154	INT 391/509
274 25 254	INT 391/509
274 25 254 ED2	INT 391/509
274 25 55	INT 509
274 26 254	INT 391
274 26 254 ED2	INT 391
274 55 24	INT 499
274 72 211	INT 406
274 74 154	INT 407
274 74 254	INT 407
274 75 118 E	INT 407
274 75 124	INT 407
274 75 154	INT 407
274 75 254	INT 407
274 80 26 E	INT 496
274 80 36 E	INT 496
274 84 3224	INT 515
274 85 236	INT 497
274 85 2515	INT 281
274 85 255	INT 497
274 86 2515	INT 207
274 86 3224	INT 207
274 87 2515	INT 285
274 87 3224	INT 285
274 88 029	INT 207 / TEC 36
274 88 036	INT 207 / TEC 36
274 88 120	INT 211
274 88 2515	INT 285
274 88 2515 AD	INT 553
274 88 3224	INT 285
274 88 3224 AD	INT 553
274 88 60	INT 211
274 88 90	INT 211
274 89 120	INT 209
274 89 120 ED2	INT 209
274 89 12528 ED1	INT 209
274 89 60	INT 209
274 89 60 ED2	INT 209
274 89 6528 ED1	INT 209
274 89 90	INT 209
274 89 90 ED2	INT 209
274 89 9528 ED1	INT 209
274 90 226	INT 279
274 90 3224	INT 279
274 92 0312	INT 295
274 92 0312 ED2	INT 295
274 92 0606	INT 295
274 92 0606 ED2	INT 295
274 92 1212	INT 295
274 92 1212 ED2	INT 295
274 93 0312	INT 297
274 93 0312 ED2	INT 297
274 93 0606	INT 297
274 93 0606 ED2	INT 297
274 93 1212	INT 297
274 93 1212 ED2	INT 297
274 94 0710	INT 212 / TEC 36
274 94 1010	INT 212 / TEC 36
274 94 1310	INT 212 / TEC 36
274 95 120	INT 213/287
274 95 120 ED2	INT 213/287
274 95 12528 ED1	INT 213/287
274 95 60	INT 213/287
274 95 60 ED2	INT 213/287
274 95 6528 ED1	INT 213/287
274 95 90	INT 213/287
274 95 90 ED2	INT 213/287
274 95 9528 ED1	INT 213/287
274 96 120	INT 289
274 96 120 ED2	INT 289
274 96 60	INT 289
274 96 60 ED2	INT 289
274 96 90	INT 289
274 96 90 ED2	INT 289
275 01 01	INT 483
275 03 40	INT 493
275 04 01	INT 473
275 04 18202	EXT 67
275 04 18202	INT 472
275 04 24	INT 473
275 04 52	EXT 67
275 04 52	INT 473
275 05 01	INT 481
275 05 40	INT 481
275 06 24	EXT 69
275 07 24	INT 471
275 07 42	INT 471
275 08 4102	INT 483
275 10 12	INT 487
276 04 21	INT 445
276 04 25	INT 445
276 04 29	TEC 32
276 04 98	TEC 33
276 07 01	INT 445
276 07 12	INT 445
276 10 01	INT 440
276 10 02	INT 441
276 10 03	INT 441
276 11 02	INT 440
276 12 12	INT 441
276 12 13	INT 441
276 13 21	INT 441
276 13 25	INT 441
276 64 24	INT 499
278 24 22	INT 474
278 24 33	INT 475
278 25 22	INT 475
278 25 24	INT 475
278 25 40	INT 475
278 26 22	EXT 71
278 26 24	EXT 71
278 26 33	EXT 71
278 27 22	EXT 71
278 27 24	EXT 71
278 28 00	EXT 173
278 62 33 00	INT 203
278 62 33 52	INT 203
278 62 55 00	INT 203
278 62 55 52	INT 203
278 62 99 00	TEC 32
278 64 55 00	INT 277
279 51 40	INT 467
279 52 62	INT 467
279 61 18102	INT 465
279 61 18102	INT 465/EXT 77
279 61 18202	INT 465
279 61 18202	INT 465/EXT 77
279 61 40	EXT 77
279 71 8122	INT 264
279 71 8123	INT 264
279 71 89122	INT 264
279 71 89123	INT 264
279 72 20	INT 265
279 72 28122	INT 264
279 72 28123	INT 264
279 72 29122	INT 264
279 72 29123	INT 264
279 73 28122	INT 267
279 73 28123	INT 267
279 73 29122	INT 267
279 73 29123	INT 267
279 74 100	INT 269
279 76 100	INT 269
279 81 40	INT 467
279 91 22	INT 493/EXT 57
279 91 40	EXT 57
279 92 40	INT 493
280 30 211	INT 357
280 30 411	INT 357
280 31 411	INT 357
282 70 211	INT 333
282 70 411	INT 333
282 71 155	INT 337
282 71 211	INT 333
282 71 411	INT 333
282 71 455	INT 337
282 80 255	INT 479
284 21 1111	INT 331
284 21 1211	INT 331
284 21 1411	INT 331
284 29 99	INT 330
284 51 1211	INT 331
284 51 1411	INT 331
285 00 180	INT 525
285 51 11	INT 342
285 51 12	INT 344
285 52 12	INT 344
285 52 21	INT 342
285 52 8122	INT 341
285 52 8123	INT 341
285 52 8132	INT 341
285 52 8133	INT 341
285 52 8222	INT 341
285 52 8223	INT 341
285 52 8232	INT 341
285 52 8233	INT 341
285 52 89122	INT 341
285 52 89123	INT 341
285 52 89132	INT 341
285 52 89133	INT 341
285 52 89222	INT 341
285 52 89223	INT 341

Index by Reference

REFERENCE	PAG
285 52 89232	INT 341
285 52 89233	INT 341
285 53 12	INT 344
285 53 31	INT 343
285 54 41	INT 343
285 55 51	INT 343
285 60 66	INT 339
285 61 35	INT 345
285 61 70	INT 345
285 62 35	INT 345
285 62 70	INT 345
286 45 22	INT 485
286 45 42	INT 485
286 51 155 11	INT 397
286 51 255	INT 397
286 51 255 ED6	INT 397
286 51 300	INT 397
286 61 254	INT 393
286 61 254 ED2	INT 393
286 61 33	INT 393
286 61 33 RC M	INT 393
286 61 33 RC S	INT 393
286 65 27	INT 277
286 65 27	INT 369
286 66 27	INT 267
286 66 27	INT 275
286 68 28102	INT 361
286 69 28122	INT 359
286 70 27	INT 373
286 70 28	INT 373
286 71 03	INT 379
286 71 06	INT 379
286 71 427	INT 377
286 71 727	INT 379
287 31 35	INT 521
294 00 00	PRO 156
294 02 05 SBL	PRO 158
294 03 01	PRO 156
294 06 10	PRO 156
294 91 1401	PRO 158
294 91 1403	PRO 158
294 91 2101	PRO 158
294 91 2103	PRO 158
294 91 2801	PRO 158
294 91 2803	PRO 158
294 98 51	PRO 156
294 98 56	PRO 156
294 99 51	PRO 156
294 99 56	PRO 156
295 00 00	PRO 156
295 03 01	PRO 156
295 06 01	PRO 156
295 06 05	PRO 156
295 06 06	PRO 156
295 14 01	PRO 156
295 61 16	PRO 157
295 61 231	PRO 157
295 61 232	PRO 157
295 61 254 EB	PRO 158
295 61 254 ED1B	PRO 158
295 61 254 ED2B	PRO 158
295 61 48 E	PRO 157
295 61 48 E SP10	PRO 157
295 61 49 E	PRO 157
295 61 49 E SP10	PRO 157
295 71 224 E	PRO 158
295 71 224 ED1	PRO 158
295 71 224 ED2	PRO 158
295 71 235 E	PRO 158
295 71 235 ED1	PRO 158
295 71 235 ED2	PRO 158
295 71 254 E	PRO 158
295 71 254 ED1	PRO 158
295 71 254 ED2	PRO 158
295 71 280 E	PRO 158
295 71 280 ED1	PRO 158
295 71 280 ED2	PRO 158
296 00 00	PRO 92
296 02 05 SBL	PRO 87/088/093/094
296 03 01	PRO 92
296 06 01	PRO 92
296 06 05	PRO 92
296 06 06	PRO 92
296 06 10	PRO 92/106
296 61 10	PRO 93
296 61 124 E	PRO 95
296 61 124 ED1	PRO 95
296 61 124 ED2	PRO 95
296 61 139 E	PRO 95
296 61 139 ED1	PRO 95
296 61 139 ED2	PRO 95
296 61 154 E	PRO 95
296 61 154 EB	PRO 95
296 61 154 ED1	PRO 95
296 61 154 ED1B	PRO 95
296 61 154 ED2	PRO 95
296 61 154 ED2B	PRO 95
296 61 16	PRO 93
296 61 180 E	PRO 95
296 61 180 ED1	PRO 95
296 61 180 ED2	PRO 95
296 61 224 E	PRO 95
296 61 224 ED1	PRO 95
296 61 224 ED2	PRO 95
296 61 239 E	PRO 95
296 61 239 ED1	PRO 95
296 61 239 ED2	PRO 95
296 61 254 E	PRO 95
296 61 254 EB	PRO 95
296 61 254 ED1	PRO 95
296 61 254 ED1B	PRO 95
296 61 254 ED2	PRO 95
296 61 254 ED2B	PRO 95
296 76 114 E	PRO 94
296 76 121 E	PRO 94
296 76 128 E	PRO 94
296 98 51	PRO 92/106
296 98 56	PRO 92/106
296 99 51	PRO 92/106
296 99 56	PRO 92/106
297 00 00	PRO 86
297 01 154	INT 218
297 03 01	PRO 86
297 06 01	PRO 86
297 06 05	PRO 86
297 06 06	PRO 86
297 14 01	PRO 86
297 61 01	PRO 92
297 61 10	PRO 87
297 61 154 EB	PRO 88
297 61 154 ED1B	PRO 88
297 61 154 ED2B	PRO 88
297 61 16	PRO 87
297 61 254 EB	PRO 88
297 61 254 ED1B	PRO 88
297 61 254 ED2B	PRO 88
297 71 124 E	PRO 88
297 71 124 ED1	PRO 88
297 71 124 ED2	PRO 88
297 71 139 E	PRO 88
297 71 139 ED1	PRO 88
297 71 139 ED2	PRO 88
297 71 154 E	PRO 88
297 71 154 ED1	PRO 88
297 71 154 ED2	PRO 88
297 71 180 E	PRO 88
297 71 180 ED1	PRO 88
297 71 180 ED2	PRO 88
297 71 235 E	PRO 88
297 71 235 ED1	PRO 88
297 71 235 ED2	PRO 88
297 71 239 E	PRO 88
297 71 239 ED1	PRO 88
297 71 239 ED2	PRO 88
297 71 254 E	PRO 88
297 71 254 ED1	PRO 88
297 71 254 ED2	PRO 88
298 02 05 SBL	PRO 150
298 98 51	PRO 112/148
298 98 56	PRO 112/148
298 99 51	PRO 112/148
298 99 56	PRO 112/148
300 89 12 71	TEC 30
300 89 24 150	TEC 26
300 89 24 20	TEC 26
300 89 24 40	TEC 26
300 89 24 60	TEC 26
300 89 24 80	TEC 26
300 90 104	TEC 17
300 90 112	TEC 17
300 90 123	TEC 19
300 90 202	TEC 29
300 90 206	TEC 29
300 90 215	TEC 29
300 90 22 U	TEC 18
300 90 250	INT 33
300 90 310	INT 392/402
300 90 3112	TEC 17
300 90 330	TEC 28
300 90 331	TEC 28
300 90 43	TEC 19
300 90 5120	TEC 18
300 90 60	TEC 23
300 90 61	TEC 22
300 90 63	TEC 24
300 90 64	TEC 21
300 90 7120	TEC 19
300 90 90	TEC 28
300 90 91	TEC 17
300 90 913	TEC 17
300 90 914	TEC 20
300 90 92	TEC 18
300 90 93	TEC 19
300 91 10 11 F HW	PRO 49
300 91 10 11 F NW	PRO 49
300 91 10 11 F WW	PRO 49
300 91 10 11 FP HW	PRO 49
300 91 10 11 FP NW	PRO 49
300 91 10 11 FP WW	PRO 49
300 91 10 12 F HW	PRO 63/069
300 91 10 12 F NW	PRO 63/069
300 91 10 12 F WW	PRO 63/069
300 91 10 12 FP HW	PRO 63/069
300 91 10 12 FP NW	PRO 63/069
300 91 10 12 FP WW	PRO 63/069
300 91 10 13 F HW	PRO 93/107
300 91 10 13 F NW	PRO 93/107
300 91 10 13 F WW	PRO 93/107
300 91 10 13 FP HW	PRO 93/107
300 91 10 13 FP NW	PRO 93/107
300 91 10 13 FP WW	PRO 93/107
300 91 10 14 F HW	PRO 87
300 91 10 14 F NW	PRO 87
300 91 10 14 F WW	PRO 87
300 91 10 14 FP HW	PRO 87
300 91 10 14 FP NW	PRO 87
300 91 10 14 FP WW	PRO 87
300 91 33 11	PRO 49
300 91 33 12	PRO 63/069
300 91 33 13	PRO 93/107
300 91 33 14	PRO 87
300 91 52 02	PRO 43/049/055/059/063/069
300 91 52 03	PRO 43/049/055/059/063/069
300 91 52 04	PRO 43/049/055/059/063/069
300 91 52 33	PRO 43/049/055/059/063/069
300 91 53 02	PRO 43/049/055/059/063/069
300 91 53 03	PRO 43/049/055/059/063/069
300 91 53 04	PRO 43/049/055/059/063/069
300 91 62 02	PRO 43/049/055/059/063/069
300 91 62 03	PRO 43/049/055/059/063/069
300 91 62 04	PRO 43/049/055/059/063/069
300 91 62 33	PRO 43/049/055/059/063/069
300 91 63 02	PRO 43/049/055/059/063/069
300 91 63 03	PRO 43/049/055/059/063/069
300 91 63 04	PRO 43/049/055/059/063/069
300 92 00 12 F	TEC 6
300 92 00 12 FP	TEC 6
300 92 00 13 F	TEC 6
300 92 00 13 FP	TEC 6
300 92 00 14 F	TEC 6
300 92 00 14 FP	TEC 6
300 92 00 33	TEC 6
300 92 52 02	TEC 8
300 92 52 03	TEC 8
300 92 52 04	TEC 8
300 92 52 33	TEC 8
300 92 53 02	TEC 8
300 92 53 03	TEC 8
300 92 53 04	TEC 8
300 92 54 02	TEC 8
300 92 54 03	TEC 8
300 92 62 02	TEC 8
300 92 62 03	TEC 8
300 92 62 04	TEC 8
300 92 62 33	TEC 8
300 92 63 02	TEC 8
300 92 63 03	TEC 8
300 92 63 04	TEC 8
300 92 91 01	TEC 7
300 92 91 02	TEC 7
300 92 92 01	TEC 7
300 92 92 02	TEC 7
300 92 93 01	TEC 9
300 92 93 02	TEC 9
300 92 93 03	TEC 9
300 92 93 04	TEC 9
300 92 93 05	TEC 9
300 92 93 06	TEC 9
300 92 93 07	TEC 9
300 92 93 08	TEC 9
300 92 93 09	TEC 9
300 93 17 3014	TEC 5
300 93 17 3014-25	TEC 5
300 93 17 3021	TEC 5
300 93 17 3021-25	TEC 5
300 93 17 3024	TEC 5
300 93 17 3024-25	TEC 5
300 93 17 3028	TEC 5
300 93 17 3028-25	TEC 5
300 93 17 3039	TEC 5
300 93 17 3039-25	TEC 5
300 93 17 3054	TEC 5
300 93 17 3054-25	TEC 5
301 00 04 BL	INT 461
301 00 05	INT 461
301 00 44	INT 461
301 01 41	EXT 53
302 10 11 BL	EXT 35/101
302 10 12	EXT 35/101
302 10 14	EXT 35/101
302 10 22 BL	INT 432
302 10 24	INT 432
302 10 32	EXT 35/101
302 10 34	EXT 35/101
302 10 44	INT 432
302 11 12	EXT 35/101
302 11 14	EXT 35/101
302 19 21	TEC 33
302 19 22	TEC 33
302 20 10	INT 433/EXT 37
302 20 11 BL	INT 433/EXT 37
302 20 12	INT 433/EXT 37
302 20 21	TEC 33
302 20 22	TEC 33
302 20 32	INT 433/EXT 37/100
302 20 34	INT 433/EXT 37/100
302 20 41 BL	INT 433/EXT 37
302 20 42	INT 433/EXT 37
302 20 44	INT 433/EXT 37
302 21 19	TEC 32
302 22 01 BL	INT 78
302 22 02	INT 78
302 22 04	INT 78
302 23 02	INT 78
302 23 04	INT 78
303 13 12	INT 451
303 13 14	INT 451
303 14 22	INT 451
303 14 24	INT 451
303 23 12	INT 451

Index by Reference

REFERENCE	PAG
303 23 14	INT 451
304 05 11 BL	INT 435
304 05 12	INT 435
304 05 13	INT 435
304 05 14	INT 435
304 05 98	TEC 33
304 05 99	TEC 32
304 13 02	INT 459
304 13 04	INT 459
304 13 12	EXT 53
304 13 14	EXT 53
304 16 02	INT 450
304 16 04	INT 450
304 17 01 BL	INT 455
304 17 02	INT 455
304 17 04	INT 455
304 17 51	EXT 55
304 17 52	EXT 55
304 18 11 BL	INT 435
304 18 12	INT 435
304 18 14	INT 435
306 01 02	EXT 29/081/141
306 01 04	EXT 29/081/141
306 34 7122	EXT 137
307 44 11	INT 403
307 44 14	INT 402
307 44 14 RC M	INT 402
307 44 14 RC S	INT 402
307 64 11	INT 403
307 64 16	INT 402
307 64 16 RC M	INT 402
307 64 16 RC S	INT 402
308 00 00	INT 400
308 01 00 210	INT 401
308 01 06	INT 400
308 01 33	INT 401
308 01 33 210	INT 401
309 106 38 22	TEC 4
309 106 38 32	TEC 4
309 107 38 32	TEC 4
309 108 00 02	TEC 4
309 111 28122	TEC 4
309 111 28123	TEC 4
309 111 28132	TEC 4
309 111 28133	TEC 4
309 111 29122	TEC 4
309 111 29123	TEC 4
309 111 29132	TEC 4
309 111 29133	TEC 4
309 155 24 12	TEC 4
309 155 45 12	TEC 4
311 10 105	INT 315
311 10 105 AD	INT 555
311 10 111	INT 315
311 10 111 AD	INT 555
311 11 135 E	INT 317
311 11 135 E AD	INT 557
311 11 170 E	INT 317
311 11 170 E AD	INT 557
311 12 1150 E	INT 317
311 12 1150 E AD	INT 557
311 12 1150 E AD SP15	INT 557
311 12 1150 E AD WFL55	INT 557
311 12 1150 E AD WFL80	INT 557
311 12 1150 E SP15	INT 317
311 12 1150 E WFL55	INT 317
311 12 1150 E WFL80	INT 317
311 12 135 E	INT 317
311 12 135 E AD	INT 557
311 12 135 E AD SP15	INT 557
311 12 135 E AD WFL55	INT 557
311 12 135 E AD WFL80	INT 557
311 12 135 E SP15	INT 317
311 12 135 E WFL55	INT 317
311 12 135 E WFL80	INT 317
311 12 170 E	INT 317
311 12 170 E AD	INT 557
311 12 170 E AD SP15	INT 557
311 12 170 E AD WFL55	INT 557
311 12 170 E AD WFL80	INT 557
311 12 170 E SP15	INT 317
311 12 170 E WFL55	INT 317
311 12 170 E WFL80	INT 317
311 13 8122	INT 314
311 13 8122 AD	INT 554
311 13 8123	INT 314
311 13 8123 AD	INT 554
311 13 8132	INT 314
311 13 8132 AD	INT 554
311 13 8133	INT 314
311 13 8133 AD	INT 554
311 13 89122	INT 314
311 13 89122 AD	INT 554
311 13 89123	INT 314
311 13 89123 AD	INT 554
311 13 89132	INT 314
311 13 89132 AD	INT 554
311 13 89133	INT 314
311 13 89133 AD	INT 554
313 01 12	INT 83
313 01 130 FL24	INT 83
313 01 130 SP15	INT 83
313 01 130 WFL43	INT 83
313 01 19	INT 83
313 01 28122	INT 81
313 01 28123	INT 81
313 01 28132	INT 81
313 01 28133	INT 81
313 01 29122	INT 81
313 01 29123	INT 81
313 01 29132	INT 81
313 01 29133	INT 81
313 010 20122	INT 81
313 010 20123	INT 81
313 010 20132	INT 81
313 010 20133	INT 81
313 010 209122	INT 81
313 010 209123	INT 81
313 010 209132	INT 81
313 010 209133	INT 81
313 011 20112	INT 81
313 011 20113	INT 81
313 011 20122	INT 81
313 011 20123	INT 81
313 011 20132	INT 81
313 011 20133	INT 81
313 011 209112	INT 81
313 011 209113	INT 81
313 011 209122	INT 81
313 011 209123	INT 81
313 011 209132	INT 81
313 011 209133	INT 81
313 02 12	INT 233
313 02 12 AD	INT 535
313 02 133 AD FL24	INT 537
313 02 133 AD SP15	INT 537
313 02 133 AD WFL43	INT 537
313 02 133 FL24	INT 235
313 02 133 SP15	INT 235
313 02 133 WFL43	INT 235
313 02 137 AD FL24	INT 537
313 02 137 AD SP15	INT 537
313 02 137 AD WFL43	INT 537
313 02 137 FL24	INT 235
313 02 137 SP15	INT 235
313 02 137 WFL43	INT 235
313 02 1935	INT 235
313 02 1935 AD	INT 537
313 02 1970	INT 235
313 02 1970 AD	INT 537
313 020 12122	INT 232
313 020 12122 AD	INT 534
313 020 12123	INT 232
313 020 12123 AD	INT 534
313 020 12132	INT 232
313 020 12132 AD	INT 534
313 020 12133	INT 232
313 020 12133 AD	INT 534
313 020 129122	INT 232
313 020 129122 AD	INT 534
313 020 129123	INT 232
313 020 129123 AD	INT 534
313 020 129132	INT 232
313 020 129132 AD	INT 534
313 020 129133	INT 232
313 020 129133 AD	INT 534
313 020 20122	INT 234
313 020 20122 AD	INT 536
313 020 20123	INT 234
313 020 20123 AD	INT 536
313 020 20132	INT 234
313 020 20132 AD	INT 536
313 020 20133	INT 234
313 020 20133 AD	INT 536
313 020 209122	INT 234
313 020 209122 AD	INT 536
313 020 209123	INT 234
313 020 209123 AD	INT 536
313 020 209132	INT 234
313 020 209132 AD	INT 536
313 020 209133	INT 234
313 020 209133 AD	INT 536
313 021 12112	INT 232
313 021 12112 AD	INT 534
313 021 12113	INT 232
313 021 12113 AD	INT 534
313 021 12122	INT 232
313 021 12122 AD	INT 534
313 021 12123	INT 232
313 021 12123 AD	INT 534
313 021 12132	INT 232
313 021 12132 AD	INT 534
313 021 12133	INT 232
313 021 12133 AD	INT 534
313 021 129112	INT 232
313 021 129112 AD	INT 534
313 021 129113	INT 232
313 021 129113 AD	INT 534
313 021 129122	INT 232
313 021 129122 AD	INT 534
313 021 129123	INT 232
313 021 129123 AD	INT 534
313 021 129132	INT 232
313 021 129132 AD	INT 534
313 021 129133	INT 232
313 021 129133 AD	INT 534
313 021 20112	INT 234
313 021 20112 AD	INT 536
313 021 20113	INT 234
313 021 20113 AD	INT 536
313 021 20122	INT 234
313 021 20122 AD	INT 536
313 021 20123	INT 234
313 021 20123 AD	INT 536
313 021 20132	INT 234
313 021 20132 AD	INT 536
313 021 20133	INT 234
313 021 20133 AD	INT 536
313 021 209112	INT 234
313 021 209112 AD	INT 536
313 021 209113	INT 234
313 021 209113 AD	INT 536
313 021 209122	INT 234
313 021 209122 AD	INT 536
313 021 209123	INT 234
313 021 209123 AD	INT 536
313 021 209132	INT 234
313 021 209132 AD	INT 536
313 021 209133	INT 234
313 021 209133 AD	INT 536
313 12 121	PRO 27
313 12 133 FL24	PRO 27
313 12 133 SP15	PRO 27
313 12 133 WFL43	PRO 27
313 12 137 FL24	PRO 27
313 12 137 SP15	PRO 27
313 12 137 WFL43	PRO 27
313 12 1935	PRO 27
313 12 1970	PRO 27
313 120 20122	PRO 26
313 120 20123	PRO 26
313 120 20132	PRO 26
313 120 20133	PRO 26
313 120 209122	PRO 26
313 120 209123	PRO 26
313 120 209132	PRO 26
313 120 209133	PRO 26
313 121 20112	PRO 26
313 121 20113	PRO 26
313 121 20122	PRO 26
313 121 20123	PRO 26
313 121 20132	PRO 26
313 121 20133	PRO 26
313 121 209112	PRO 26
313 121 209113	PRO 26
313 121 209122	PRO 26
313 121 209123	PRO 26
313 121 209132	PRO 26
313 121 209133	PRO 26
313 22 1935-18	INT 275
313 22 1935-18 AD	INT 549
313 22 1935-28	INT 275
313 22 1935-28 AD	INT 549
313 22 1935-52	INT 275
313 22 1935-52 AD	INT 549
313 22 1950-18	INT 275
313 22 1950-18 AD	INT 549
313 22 1950-28	INT 275
313 22 1950-28 AD	INT 549
313 22 1950-52	INT 275
313 22 1950-52 AD	INT 549
313 22 1970-18	INT 275
313 22 1970-18 AD	INT 549
313 22 1970-28	INT 275
313 22 1970-28 AD	INT 549
313 22 1970-52	INT 275
313 22 1970-52 AD	INT 549
313 22 28122	INT 274
313 22 28122 AD	INT 548
313 22 28132	INT 274
313 22 28132 AD	INT 548
313 22 48122	INT 274
313 22 48122 AD	INT 548
313 22 48132	INT 274
313 22 48132 AD	INT 548
314 16 26	EXT 145
314 16 46	EXT 145
315 11 00	INT 253
315 11 00 CE	PRO 101
315 12 00	INT 257
315 12 00 CE	PRO 101
315 12 00 CM	PRO 97
315 13 00	INT 259
315 13 00 CE	PRO 101
315 226 00	INT 253
315 226 00 CE	PRO 100
315 226 12	INT 259
315 226 12 CE	PRO 100
315 41 8122	INT 252
315 41 8122 CE	PRO 99
315 41 8123	INT 252
315 41 8123 CE	PRO 99
315 41 8222	INT 256
315 41 8222 CE	PRO 99
315 41 8222 CM	PRO 96
315 41 8223	INT 256
315 41 8223 CE	PRO 99
315 41 8223 CM	PRO 96
315 41 8322	INT 258
315 41 8322 CE	PRO 99
315 41 8323	INT 258
315 41 8323 CE	PRO 99
315 41 89122	INT 252
315 41 89122 CE	PRO 99
315 41 89123	INT 252
315 41 89123 CE	PRO 99
315 41 89222	INT 256
315 41 89222 CE	PRO 99
315 41 89222 CM	PRO 96
315 41 89223	INT 256

Index by Reference

REFERENCE	PAG
315 41 89223 CE	PRO 99
315 41 89223 CM	PRO 96
315 41 89322	INT 258
315 41 89322 CE	PRO 99
315 41 89323	INT 258
315 41 89323 CE	PRO 99
316 06 05	INT 271
316 06 05 AD	INT 545
316 06 44 20	INT 271
316 06 44 20 AD	INT 545
316 06 8122	INT 270
316 06 8122 AD	INT 544
316 06 8123	INT 270
316 06 8123 AD	INT 544
316 06 8132	INT 270
316 06 8132 AD	INT 544
316 06 8133	INT 270
316 06 8133 AD	INT 544
316 06 89122	INT 270
316 06 89122 AD	INT 544
316 06 89123	INT 270
316 06 89123 AD	INT 544
316 06 89132	INT 270
316 06 89132 AD	INT 544
316 06 89133	INT 270
316 06 89133 AD	INT 544
316 08 32	INT 270
316 08 32 AD	INT 544
316 08 34	INT 270
316 08 34 AD	INT 544
316 08 66 35	INT 271
316 08 66 35 AD	INT 545
316 08 66 35 AD SP10	INT 545
316 08 66 35 AD WFL46	INT 545
316 08 66 35 SP10	INT 271
316 08 66 35 WFL46	INT 271
316 08 66 70	INT 271
316 08 66 70 AD	INT 545
316 08 66 70 AD SP10	INT 545
316 08 66 70 AD WFL46	INT 545
316 08 66 70 SP10	INT 271
316 08 66 70 WFL46	INT 271
317 12 22	EXT 161
317 15 22	EXT 161
317 210 42	EXT 163
317 22 42	EXT 163
317 27 42	EXT 163
318 14 4102	EXT 147
318 17 4102	EXT 147
319 01 12312 AD	INT 551
319 01 12313 AD	INT 551
319 01 12322 AD	INT 551
319 01 12323 AD	INT 551
319 01 12332 AD	INT 551
319 01 12333 AD	INT 551
320 01 12	INT 439
320 02 12	INT 439
320 03 12	INT 463
320 23 12	EXT 151
320 26 12	EXT 151
328 10 01	TEC 40
328 10 02	TEC 40
328 10 03	TEC 40
328 10 04	TEC 38
328 10 05	TEC 39
328 12 01	PRO 137/148/156/164/172/182
328 12 06	PRO 137/148/156/164/172/182
328 13 01	PRO 92/106
328 13 06	PRO 92/106
328 15 21	INT 392
328 15 41	INT 392
328 16 01	PRO 137
328 16 06	PRO 137
328 17 01	PRO 74
328 17 06	PRO 74
328 17 212	INT 420
328 17 213	INT 420
328 18 43	INT 286/294/300
328 18 43 ED1	INT 286
328 18 43 ED2	INT 286/294
328 21 212	INT 409
328 21 213	INT 409
328 22 01	PRO 156/164/172
328 22 22	INT 410
328 22 22 ED1	INT 410
328 90 01	PRO 13
330 00 00	PRO 164
330 03 01	PRO 164
330 06 01	PRO 164
330 06 05	PRO 164
330 06 06	PRO 164
330 06 10	PRO 164
330 52 24	PRO 166
330 52 39	PRO 166
330 52 54	PRO 166
330 52 80	PRO 166
330 61 10	PRO 165
330 61 16	PRO 165
330 61 201	PRO 165
330 61 202	PRO 165
330 61 224 E	PRO 166
330 61 224 ED1	PRO 166
330 61 224 ED2	PRO 166
330 61 235 E	PRO 166
330 61 235 ED1	PRO 166
330 61 235 ED2	PRO 166
330 61 239 E	PRO 166
330 61 239 ED1	PRO 166
330 61 239 ED2	PRO 166
330 61 254 E	PRO 166
330 61 254 EB	PRO 166
330 61 254 ED1	PRO 166
330 61 254 ED1B	PRO 166
330 61 254 ED2	PRO 166
330 61 254 ED2B	PRO 166
330 61 280 E	PRO 166
330 61 280 ED1	PRO 166
330 61 280 ED2	PRO 166
330 62 224 E	PRO 166
330 62 224 ED1	PRO 166
330 62 224 ED2	PRO 166
330 62 235 E	PRO 166
330 62 235 ED1	PRO 166
330 62 235 ED2	PRO 166
330 62 239 E	PRO 166
330 62 239 ED1	PRO 166
330 62 239 ED2	PRO 166
330 62 254 E	PRO 166
330 62 254 ED1	PRO 166
330 62 254 ED2	PRO 166
330 62 280 E	PRO 166
330 62 280 ED1	PRO 166
330 62 280 ED2	PRO 166
330 63 224 E	PRO 167
330 63 224 ED1	PRO 167
330 63 224 ED2	PRO 167
330 63 235 E	PRO 167
330 63 235 ED1	PRO 167
330 63 235 ED2	PRO 167
330 63 239 E	PRO 167
330 63 239 ED1	PRO 167
330 63 239 ED2	PRO 167
330 63 254 E	PRO 167
330 63 254 EB	PRO 167
330 63 254 ED1	PRO 167
330 63 254 ED1B	PRO 167
330 63 254 ED2	PRO 167
330 63 254 ED2B	PRO 167
330 63 280 E	PRO 167
330 63 280 ED1	PRO 167
330 63 280 ED2	PRO 167
330 91 1401	PRO 167/175/186
330 91 1403	PRO 167/175/186
330 91 2401	PRO 167/175/186
330 91 2403	PRO 167/175/186
330 98 51	PRO 164/172
330 98 56	PRO 164/172
330 99 51	PRO 164/172
330 99 56	PRO 164/172
331 00 00	PRO 172
331 02 88	INT 415
331 02 88 B	INT 415
331 02 885	INT 415
331 03 01	PRO 172
331 06 01	PRO 172
331 06 05	PRO 172
331 06 06	PRO 172
331 06 10	PRO 172
331 52 24	PRO 175
331 52 39	PRO 175
331 52 54	PRO 175
331 52 80	PRO 175
331 61 01	PRO 172
331 61 10	PRO 174
331 61 16	PRO 174
331 61 201	PRO 173
331 61 202	PRO 173
331 61 224 E	PRO 174
331 61 224 ED1	PRO 174
331 61 224 ED2	PRO 174
331 61 231	PRO 173
331 61 232	PRO 173
331 61 235 E	PRO 174
331 61 235 ED1	PRO 174
331 61 235 ED2	PRO 174
331 61 239 E	PRO 174
331 61 239 ED1	PRO 174
331 61 239 ED2	PRO 174
331 61 254 E	PRO 174
331 61 254 EB	PRO 174
331 61 254 ED1	PRO 174
331 61 254 ED1B	PRO 174
331 61 254 ED2	PRO 174
331 61 254 ED2B	PRO 174
331 61 280 E	PRO 174
331 61 280 ED1	PRO 174
331 61 280 ED2	PRO 174
331 61 8122	PRO 173
331 61 8123	PRO 173
331 61 8132	PRO 173
331 61 8133	PRO 173
331 61 8222	PRO 173
331 61 8223	PRO 173
331 61 8232	PRO 173
331 61 8233	PRO 173
331 61 89122	PRO 173
331 61 89123	PRO 173
331 61 89132	PRO 173
331 61 89133	PRO 173
331 61 89222	PRO 173
331 61 89223	PRO 173
331 61 89232	PRO 173
331 61 89233	PRO 173
331 62 224 E	PRO 174
331 62 224 ED1	PRO 174
331 62 224 ED2	PRO 174
331 62 235 E	PRO 174
331 62 235 ED1	PRO 174
331 62 235 ED2	PRO 174
331 62 239 E	PRO 174
331 62 239 ED1	PRO 174
331 62 239 ED2	PRO 174
331 62 254 E	PRO 174
331 62 254 ED1	PRO 174
331 62 254 ED2	PRO 174
331 62 280 E	PRO 174
331 62 280 ED1	PRO 174
331 62 280 ED2	PRO 174
331 63 224 E	PRO 175
331 63 224 ED1	PRO 175
331 63 224 ED2	PRO 175
331 63 235 E	PRO 175
331 63 235 ED1	PRO 175
331 63 235 ED2	PRO 175
331 63 239 E	PRO 175
331 63 239 ED1	PRO 175
331 63 239 ED2	PRO 175
331 63 254 E	PRO 175
331 63 254 EB	PRO 175
331 63 254 ED1	PRO 175
331 63 254 ED1B	PRO 175
331 63 254 ED2	PRO 175
331 63 254 ED2B	PRO 175
331 63 280 E	PRO 175
331 63 280 ED1	PRO 175
331 63 280 ED2	PRO 175
333 00 00	PRO 48
333 06 01	PRO 48
333 06 06	PRO 48
333 06 10	PRO 48
333 06 16	PRO 48
338 01 124	INT 425
338 01 154	INT 425
338 01 254	INT 425
345 01 21	INT 351
345 01 41	INT 351
345 02 21	INT 350
345 02 41	INT 351
345 13 63	INT 355
346 00 00	PRO 106
346 021 124	INT 409
346 021 154	INT 409
346 021 254	INT 409
346 021 310	INT 409
346 03 01	PRO 106
346 06 01	PRO 106
346 06 05	PRO 106
346 06 06	PRO 106
346 61 124 E	PRO 108
346 61 124 ED1	PRO 108
346 61 124 ED2	PRO 108
346 61 139 E	PRO 108
346 61 139 ED1	PRO 108
346 61 139 ED2	PRO 108
346 61 154 E	PRO 108
346 61 154 ED1	PRO 108
346 61 154 ED2	PRO 108
346 61 180 E	PRO 108
346 61 180 ED1	PRO 108
346 61 180 ED2	PRO 108
346 61 224 E	PRO 108
346 61 224 ED1	PRO 108
346 61 224 ED2	PRO 108
346 61 235 E	PRO 108
346 61 235 ED1	PRO 108
346 61 235 ED2	PRO 108
346 61 239 E	PRO 108
346 61 239 ED1	PRO 108
346 61 239 ED2	PRO 108
346 61 254 E	PRO 108
346 61 254 ED1	PRO 108
346 61 254 ED2	PRO 108
346 61 280 E	PRO 108
346 61 280 ED1	PRO 108
346 61 280 ED2	PRO 108
346 75 124 E	PRO 108
346 75 139 E	PRO 108
346 75 139 ED1	PRO 108
346 75 139 ED2	PRO 108
346 75 154 E	PRO 108
346 75 154 ED1	PRO 108
346 75 154 ED2	PRO 108
346 75 239 E	PRO 108
346 75 239 ED1	PRO 108
346 75 239 ED2	PRO 108
346 75 254 E	PRO 108
346 75 254 ED1	PRO 108
346 75 254 ED2	PRO 108
347 02 124	INT 501
347 02 154	INT 501
350 07 01	INT 301
350 15 80	INT 301
351 00 00	PRO 137
351 03 01	PRO 137
351 06 10	PRO 137
351 98 51	PRO 137
351 98 56	PRO 137
351 99 51	PRO 137
351 99 56	PRO 137
352 00 00	PRO 136

Index by Reference

REFERENCE	PAG
352 02 05 SBL	PRO 138
352 02 06 SBL	PRO 138
352 03 01	PRO 136
352 06 01	PRO 136/137/148
352 06 05	PRO 136/137/148
352 06 06	PRO 136/137/148
352 14 01	PRO 136
352 61 10	PRO 138
352 61 154 EB	PRO 138
352 61 154 ED1B	PRO 138
352 61 154 ED2B	PRO 138
352 61 16	PRO 138
352 610 22 ED1	PRO 138
352 610 42 ED1	PRO 138
352 75 124 E	PRO 139
352 75 139 E	PRO 139
352 75 139 ED1	PRO 139
352 75 139 ED2	PRO 139
352 75 154 E	PRO 139
352 75 154 ED1	PRO 139
352 75 154 ED2	PRO 139
352 75 239 E	PRO 139
352 75 239 ED1	PRO 139
352 75 239 ED2	PRO 139
352 75 254 E	PRO 139
352 75 254 ED1	PRO 139
352 75 254 ED2	PRO 139
352 79 001 E	PRO 139
352 79 001 ED1	PRO 139
352 79 001 ED2	PRO 139
352 79 002 E	PRO 139
352 79 002 ED1	PRO 139
352 79 002 ED2	PRO 139
352 79 003 E	PRO 139
352 79 003 ED1	PRO 139
352 79 003 ED2	PRO 139
352 79 004 E	PRO 139
352 79 004 ED1	PRO 139
352 79 004 ED2	PRO 139
352 79 005 E	PRO 139
352 79 005 ED1	PRO 139
352 79 005 ED2	PRO 139
352 79 006 E	PRO 139
352 79 006 ED1	PRO 139
352 79 006 ED2	PRO 139
352 79 007 E	PRO 139
352 79 007 ED1	PRO 139
352 79 007 ED2	PRO 139
352 79 008 E	PRO 139
352 79 008 ED1	PRO 139
352 79 008 ED2	PRO 139
352 79 009 E	PRO 139
352 79 009 ED1	PRO 139
352 79 009 ED2	PRO 139
352 79 010 E	PRO 139
352 79 010 ED1	PRO 139
352 79 010 ED2	PRO 139
352 79 011 E	PRO 139
352 79 011 ED1	PRO 139
352 79 011 ED2	PRO 139
352 79 012 E	PRO 139
352 79 012 ED1	PRO 139
352 79 012 ED2	PRO 139
352 79 013 E	PRO 139
352 79 013 ED1	PRO 139
352 79 013 ED2	PRO 139
352 79 014 E	PRO 139
352 79 014 ED1	PRO 139
352 79 014 ED2	PRO 139
352 79 015 E	PRO 139
352 79 015 ED1	PRO 139
352 79 015 ED2	PRO 139
352 79 016 E	PRO 139
352 79 016 ED1	PRO 139
352 79 016 ED2	PRO 139
352 79 017 E	PRO 139
352 79 017 ED1	PRO 139
352 79 017 ED2	PRO 139
352 79 018 E	PRO 139
352 79 018 ED1	PRO 139
352 79 018 ED2	PRO 139
352 79 019 E	PRO 139
352 79 019 ED1	PRO 139
352 79 019 ED2	PRO 139
352 79 020 E	PRO 139
352 79 020 ED1	PRO 139
352 79 020 ED2	PRO 139
352 79 021 E	PRO 139
352 79 021 ED1	PRO 139
352 79 021 ED2	PRO 139
353 00 00	PRO 137
353 03 01	PRO 137
353 06 01	PRO 137
353 06 05	PRO 137
353 06 06	PRO 137
353 06 10	PRO 137
353 98 51	PRO 137
353 98 56	PRO 137
353 99 51	PRO 137
353 99 56	PRO 137
354 00 00	PRO 137
354 06 10	PRO 137
355 00 00	PRO 136
355 01 124	INT 419
355 01 154	INT 419
355 03 01	PRO 136
355 14 01	PRO 136
358 00 00 CL	PRO 68
358 00 00 SBL	PRO 68
358 03 01	PRO 68
360 00 00	PRO 148
360 03 01	PRO 148
360 06 10	PRO 148
361 00 00	PRO 148
361 03 01	PRO 148
361 14 01	PRO 148
361 61 10	PRO 149
361 61 150	PRO 149
361 61 16	PRO 149
361 61 250	PRO 149
361 71 224 E	PRO 150
361 71 224 ED1	PRO 150
361 71 224 ED2	PRO 150
361 71 235 E	PRO 150
361 71 235 ED1	PRO 150
361 71 235 ED2	PRO 150
361 71 254 E	PRO 150
361 71 254 ED1	PRO 150
361 71 254 ED2	PRO 150
361 75 224 E	PRO 150
361 75 239 E	PRO 150
361 75 239 ED1	PRO 150
361 75 239 ED2	PRO 150
361 75 254 E	PRO 150
361 75 254 ED1	PRO 150
361 75 254 ED2	PRO 150
364 00 00 CL	PRO 62
364 00 00 SBL	PRO 62
364 03 01	PRO 62
364 06 11	PRO 58/062
366 00 00 CL	PRO 62
366 00 00 SBL	PRO 62
368 00 00	PRO 136
368 03 01	PRO 136
368 14 01	PRO 136
369 00 00	PRO 74
369 01 154	INT 421
369 01 254	INT 421
369 01 342	INT 420
369 03 01	PRO 74
369 06 01	PRO 74
369 61 42	PRO 75
369 75 124 E	PRO 75
369 75 139 E	PRO 75
369 75 139 ED1	PRO 75
369 75 139 ED2	PRO 75
369 75 154 E	PRO 75
369 75 154 ED1	PRO 75
369 75 154 ED2	PRO 75
369 75 239 E	PRO 75
369 75 239 ED1	PRO 75
369 75 239 ED2	PRO 75
369 75 254 E	PRO 75
369 75 254 ED1	PRO 75
369 75 254 ED2	PRO 75
369 98 51	PRO 74
369 98 56	PRO 74
369 99 51	PRO 74
369 99 56	PRO 74
371 00 00	PRO 42
371 06 01	PRO 42
371 06 06	PRO 42
371 06 16	PRO 42
372 00 00	PRO 38
372 00 06 01	PRO 38
372 00 06 06	PRO 38
372 00 06 16	PRO 38
372 00 61 1135 E	PRO 39
372 00 61 1170 E	PRO 39
372 00 61 231	PRO 39
372 25 00	PRO 32
372 25 03 01	PRO 32
372 25 06 01	PRO 32
372 25 06 06	PRO 32
372 25 51 06 L	PRO 32
372 25 51 06 R	PRO 32
372 25 61 01	PRO 33
372 29 00	PRO 18
372 29 03 01	PRO 18
372 29 06 01	PRO 18
372 29 06 06	PRO 18
372 29 14 01	PRO 18
372 29 61 01	PRO 19
372 29 61 42	PRO 19
372 29 75 124 E	PRO 19
372 29 75 124 ED1	PRO 19
372 29 75 124 ED2	PRO 19
372 29 75 139 E	PRO 19
372 29 75 139 ED1	PRO 19
372 29 75 139 ED2	PRO 19
372 29 75 154 E	PRO 19
372 29 75 154 ED1	PRO 19
372 29 75 154 ED2	PRO 19
372 29 75 239 E	PRO 19
372 29 75 239 ED1	PRO 19
372 29 75 239 ED2	PRO 19
372 29 75 254 E	PRO 19
372 29 75 254 ED1	PRO 19
372 29 75 254 ED2	PRO 19
372 51 00	PRO 32
372 51 03 01	PRO 32
372 51 06 01	PRO 32
372 51 06 06	PRO 32
372 52 00	PRO 24
372 52 03 01	PRO 24
372 52 06 01	PRO 24
372 52 06 06	PRO 24
372 52 61 01	PRO 24
372 52 61 8122	PRO 25
372 52 61 8122 D	PRO 25
372 52 61 8123	PRO 25
372 52 61 8123 D	PRO 25
372 52 61 8132	PRO 25
372 52 61 8133	PRO 25
372 52 61 8222	PRO 25
372 52 61 8222 D	PRO 25
372 52 61 8223	PRO 25
372 52 61 8223 D	PRO 25
372 52 61 8232	PRO 25
372 52 61 8233	PRO 25
372 52 61 8322	PRO 25
372 52 61 8322 D	PRO 25
372 52 61 8323	PRO 25
372 52 61 8323 D	PRO 25
372 52 61 8332	PRO 25
372 52 61 8333	PRO 25
372 52 61 89122	PRO 25
372 52 61 89122 D	PRO 25
372 52 61 89123	PRO 25
372 52 61 89123 D	PRO 25
372 52 61 89132	PRO 25
372 52 61 89133	PRO 25
372 52 61 89222	PRO 25
372 52 61 89222 D	PRO 25
372 52 61 89223	PRO 25
372 52 61 89223 D	PRO 25
372 52 61 89232	PRO 25
372 52 61 89233	PRO 25
372 52 61 89322	PRO 25
372 52 61 89322 D	PRO 25
372 52 61 89323	PRO 25
372 52 61 89323 D	PRO 25
372 52 61 89332	PRO 25
372 52 61 89333	PRO 25
372 52 63 8122	PRO 25
372 52 63 8123	PRO 25
372 52 63 8132	PRO 25
372 52 63 8133	PRO 25
372 52 63 8222	PRO 25
372 52 63 8223	PRO 25
372 52 63 8232	PRO 25
372 52 63 8233	PRO 25
372 52 63 89122	PRO 25
372 52 63 89123	PRO 25
372 52 63 89132	PRO 25
372 52 63 89133	PRO 25
372 52 63 89222	PRO 25
372 52 63 89223	PRO 25
372 52 63 89232	PRO 25
372 52 63 89233	PRO 25
372 61 42	PRO 33
372 61 8122	PRO 33
372 61 8123	PRO 33
372 61 8132	PRO 33
372 61 8133	PRO 33
372 61 8222	PRO 33
372 61 8223	PRO 33
372 61 8232	PRO 33
372 61 8233	PRO 33
372 61 8322	PRO 33
372 61 8323	PRO 33
372 61 8332	PRO 33
372 61 8333	PRO 33
372 61 89122	PRO 33
372 61 89123	PRO 33
372 61 89132	PRO 33
372 61 89133	PRO 33
372 61 89222	PRO 33
372 61 89223	PRO 33
372 61 89232	PRO 33
372 61 89233	PRO 33
372 61 89322	PRO 33
372 61 89323	PRO 33
372 61 89332	PRO 33
372 61 89333	PRO 33
372 75 124 E	PRO 34
372 75 139 E	PRO 34
372 75 139 ED1	PRO 34
372 75 139 ED2	PRO 34
372 75 154 E	PRO 34
372 75 154 ED1	PRO 34
372 75 154 ED2	PRO 34
372 75 239 E	PRO 34
372 75 239 ED1	PRO 34
372 75 239 ED2	PRO 34
372 75 254 E	PRO 34
372 75 254 ED1	PRO 34
372 75 254 ED2	PRO 34
374 00 00	PRO 80
374 01 154	INT 421
374 01 254	INT 421
374 03 01	PRO 80
374 61 42	PRO 81
374 75 124 E	PRO 81
374 75 139 E	PRO 81
374 75 139 ED1	PRO 81
374 75 139 ED2	PRO 81
374 75 154 E	PRO 81
374 75 154 ED1	PRO 81
374 75 154 ED2	PRO 81

Index by Reference

REFERENCE	PAG
374 75 239 E	PRO 81
374 75 239 ED1	PRO 81
374 75 239 ED2	PRO 81
374 75 254 E	PRO 81
374 75 254 ED1	PRO 81
374 75 254 ED2	PRO 81
375 00 00	PRO 54
375 03 01	PRO 54
375 06 06	PRO 54
376 00 00	PRO 54
376 01 242	INT 437/EXT 41
376 01 244	INT 437/EXT 41
376 03 01	PRO 54
376 06 06	PRO 54
376 14 01	PRO 54
377 00 00	PRO 116
377 01 154	INT 411
377 022 412 ED1	INT 411
377 03 01	PRO 116
377 03 01	PRO 116/128
377 06 10	PRO 112/116/128
377 12 00	PRO 112/116/128
377 20 124 E	PRO 129
377 20 124 ED1	PRO 129
377 20 124 ED2	PRO 129
377 20 124 R E	PRO 129
377 20 124 R ED1	PRO 129
377 20 124 R ED2	PRO 129
377 20 139 E	PRO 129
377 20 139 ED1	PRO 129
377 20 139 ED2	PRO 129
377 20 139 R E	PRO 129
377 20 139 R ED1	PRO 129
377 20 139 R ED2	PRO 129
377 20 149 E	PRO 129
377 20 149 ED1	PRO 129
377 20 149 ED2	PRO 129
377 20 149 R E	PRO 129
377 20 149 R ED1	PRO 129
377 20 149 R ED2	PRO 129
377 20 154 E	PRO 129
377 20 154 ED1	PRO 129
377 20 154 ED2	PRO 129
377 20 154 R E	PRO 129
377 20 154 R ED1	PRO 129
377 20 154 R ED2	PRO 129
377 20 21	PRO 112/116/128
377 20 249 E	PRO 129
377 20 249 ED1	PRO 129
377 20 249 ED2	PRO 129
377 20 249 R E	PRO 129
377 20 249 R ED1	PRO 129
377 20 249 R ED2	PRO 129
377 20 254 E	PRO 129
377 20 254 ED1	PRO 129
377 20 254 ED2	PRO 129
377 20 254 R E	PRO 129
377 20 254 R ED1	PRO 129
377 20 254 R ED2	PRO 129
377 20 26	PRO 112/116/128
377 20 349 E	PRO 129
377 20 349 ED1	PRO 129
377 20 349 ED2	PRO 129
377 20 349 R E	PRO 129
377 20 349 R ED1	PRO 129
377 20 349 R ED2	PRO 129
377 20 354 E	PRO 129
377 20 354 ED1	PRO 129
377 20 354 ED2	PRO 129
377 20 354 R E	PRO 129
377 20 354 R ED1	PRO 129
377 20 354 R ED2	PRO 129
377 21 124 E	PRO 129
377 21 124 ED1	PRO 129
377 21 124 ED2	PRO 129
377 21 124 R E	PRO 129
377 21 124 R ED1	PRO 129
377 21 124 R ED2	PRO 129
377 21 139 E	PRO 129
377 21 139 ED1	PRO 129
377 21 139 ED2	PRO 129
377 21 139 R E	PRO 129
377 21 139 R ED1	PRO 129
377 21 139 R ED2	PRO 129
377 21 149 E	PRO 129
377 21 149 ED1	PRO 129
377 21 149 ED2	PRO 129
377 21 149 R E	PRO 129
377 21 149 R ED1	PRO 129
377 21 149 R ED2	PRO 129
377 21 154 E	PRO 129
377 21 154 ED1	PRO 129
377 21 154 ED2	PRO 129
377 21 154 R E	PRO 129
377 21 154 R ED1	PRO 129
377 21 154 R ED2	PRO 129
377 21 249 E	PRO 129
377 21 249 ED1	PRO 129
377 21 249 ED2	PRO 129
377 21 249 R E	PRO 129
377 21 249 R ED1	PRO 129
377 21 249 R ED2	PRO 129
377 21 254 E	PRO 129
377 21 254 ED1	PRO 129
377 21 254 ED2	PRO 129
377 21 254 R E	PRO 129
377 21 254 R ED1	PRO 129
377 21 254 R ED2	PRO 129
377 21 349 E	PRO 129
377 21 349 ED1	PRO 129
377 21 349 ED2	PRO 129
377 21 349 R E	PRO 129
377 21 349 R ED1	PRO 129
377 21 349 R ED2	PRO 129
377 21 354 E	PRO 129
377 21 354 ED1	PRO 129
377 21 354 ED2	PRO 129
377 21 354 R E	PRO 129
377 21 354 R ED1	PRO 129
377 21 354 R ED2	PRO 129
377 30 149 E	PRO 130
377 30 149 ED1	PRO 130
377 30 149 ED2	PRO 130
377 30 149 R E	PRO 130
377 30 149 R ED1	PRO 130
377 30 149 R ED2	PRO 130
377 30 154 E	PRO 130
377 30 154 ED1	PRO 130
377 30 154 ED2	PRO 130
377 30 154 R E	PRO 130
377 30 154 R ED1	PRO 130
377 30 154 R ED2	PRO 130
377 30 249 E	PRO 130
377 30 249 ED1	PRO 130
377 30 249 ED2	PRO 130
377 30 249 R E	PRO 130
377 30 249 R ED1	PRO 130
377 30 249 R ED2	PRO 130
377 30 254 E	PRO 130
377 30 254 ED1	PRO 130
377 30 254 ED2	PRO 130
377 30 254 R E	PRO 130
377 30 254 R ED1	PRO 130
377 30 254 R ED2	PRO 130
377 30 349 E	PRO 130
377 30 349 ED1	PRO 130
377 30 349 ED2	PRO 130
377 30 349 R E	PRO 130
377 30 349 R ED1	PRO 130
377 30 349 R ED2	PRO 130
377 30 354 E	PRO 130
377 30 354 ED1	PRO 130
377 30 354 ED2	PRO 130
377 30 354 R E	PRO 130
377 30 354 R ED1	PRO 130
377 30 354 R ED2	PRO 130
377 31 149 E	PRO 130
377 31 149 ED1	PRO 130
377 31 149 ED2	PRO 130
377 31 149 R E	PRO 130
377 31 149 R ED1	PRO 130
377 31 149 R ED2	PRO 130
377 31 154 E	PRO 130
377 31 154 ED1	PRO 130
377 31 154 ED2	PRO 130
377 31 154 R E	PRO 130
377 31 154 R ED1	PRO 130
377 31 154 R ED2	PRO 130
377 31 249 E	PRO 130
377 31 249 ED1	PRO 130
377 31 249 ED2	PRO 130
377 31 249 R E	PRO 130
377 31 249 R ED1	PRO 130
377 31 249 R ED2	PRO 130
377 31 254 E	PRO 130
377 31 254 ED1	PRO 130
377 31 254 ED2	PRO 130
377 31 254 R E	PRO 130
377 31 254 R ED1	PRO 130
377 31 254 R ED2	PRO 130
377 31 349 E	PRO 130
377 31 349 ED1	PRO 130
377 31 349 ED2	PRO 130
377 31 349 R E	PRO 130
377 31 349 R ED1	PRO 130
377 31 349 R ED2	PRO 130
377 31 354 E	PRO 130
377 31 354 ED1	PRO 130
377 31 354 ED2	PRO 130
377 31 354 R E	PRO 130
377 31 354 R ED1	PRO 130
377 31 354 R ED2	PRO 130
377 40 224 E	PRO 131
377 40 224 ED1	PRO 131
377 40 224 ED2	PRO 131
377 40 224 R E	PRO 131
377 40 224 R ED1	PRO 131
377 40 224 R ED2	PRO 131
377 40 239 E	PRO 131
377 40 239 ED1	PRO 131
377 40 239 ED2	PRO 131
377 40 239 R E	PRO 131
377 40 239 R ED1	PRO 131
377 40 239 R ED2	PRO 131
377 41 224 E	PRO 131
377 41 224 ED1	PRO 131
377 41 224 ED2	PRO 131
377 41 224 R E	PRO 131
377 41 224 R ED1	PRO 131
377 41 224 R ED2	PRO 131
377 41 239 E	PRO 131
377 41 239 ED1	PRO 131
377 41 239 ED2	PRO 131
377 41 239 R E	PRO 131
377 41 239 R ED1	PRO 131
377 41 239 R ED2	PRO 131
377 98 51	PRO 116
377 98 56	PRO 116
377 99 51	PRO 116
377 99 56	PRO 116
378 00 00	PRO 116
378 01 154	INT 219
378 02 05 SBL	PRO 118
378 02 06 PR	PRO 118
378 03 01	PRO 116
378 03 01	PRO 116/124
378 06 01	PRO 116
378 06 018	PRO 124/128
378 06 06	PRO 116
378 14 01	PRO 116
378 20 124 E	PRO 125
378 20 124 ED1	PRO 125
378 20 124 ED2	PRO 125
378 20 124 R E	PRO 125
378 20 124 R ED1	PRO 125
378 20 124 R ED2	PRO 125
378 20 139 E	PRO 125
378 20 139 ED1	PRO 125
378 20 139 ED2	PRO 125
378 20 139 R E	PRO 125
378 20 139 R ED1	PRO 125
378 20 139 R ED2	PRO 125
378 20 149 E	PRO 125
378 20 149 ED1	PRO 125
378 20 149 ED2	PRO 125
378 20 149 R E	PRO 125
378 20 149 R ED1	PRO 125
378 20 149 R ED2	PRO 125
378 20 154 E	PRO 125
378 20 154 ED1	PRO 125
378 20 154 ED2	PRO 125
378 20 154 R E	PRO 125
378 20 154 R ED1	PRO 125
378 20 154 R ED2	PRO 125
378 20 249 E	PRO 125
378 20 249 ED1	PRO 125
378 20 249 ED2	PRO 125
378 20 249 R E	PRO 125
378 20 249 R ED1	PRO 125
378 20 249 R ED2	PRO 125
378 20 254 E	PRO 125
378 20 254 ED1	PRO 125
378 20 254 ED2	PRO 125
378 20 254 R E	PRO 125
378 20 254 R ED1	PRO 125
378 20 254 R ED2	PRO 125
378 20 349 E	PRO 125
378 20 349 ED1	PRO 125
378 20 349 ED2	PRO 125
378 20 349 R E	PRO 125
378 20 349 R ED1	PRO 125
378 20 349 R ED2	PRO 125
378 20 354 E	PRO 125
378 20 354 ED1	PRO 125
378 20 354 ED2	PRO 125
378 20 354 R E	PRO 125
378 20 354 R ED1	PRO 125
378 20 354 R ED2	PRO 125
378 21 124 E	PRO 125
378 21 124 ED1	PRO 125
378 21 124 ED2	PRO 125
378 21 124 R E	PRO 125
378 21 124 R ED1	PRO 125
378 21 124 R ED2	PRO 125
378 21 139 E	PRO 125
378 21 139 ED1	PRO 125
378 21 139 ED2	PRO 125
378 21 139 R E	PRO 125
378 21 139 R ED1	PRO 125
378 21 139 R ED2	PRO 125
378 21 149 E	PRO 125
378 21 149 ED1	PRO 125
378 21 149 ED2	PRO 125
378 21 149 R E	PRO 125
378 21 149 R ED1	PRO 125
378 21 149 R ED2	PRO 125
378 21 154 E	PRO 125
378 21 154 ED1	PRO 125
378 21 154 ED2	PRO 125
378 21 154 R E	PRO 125
378 21 154 R ED1	PRO 125
378 21 154 R ED2	PRO 125
378 21 249 E	PRO 125
378 21 249 ED1	PRO 125
378 21 249 ED2	PRO 125
378 21 249 R E	PRO 125
378 21 249 R ED1	PRO 125
378 21 249 R ED2	PRO 125
378 21 254 E	PRO 125
378 21 254 ED1	PRO 125
378 21 254 ED2	PRO 125
378 21 254 R E	PRO 125
378 21 254 R ED1	PRO 125
378 21 254 R ED2	PRO 125
378 21 349 E	PRO 125
378 21 349 ED1	PRO 125
378 21 349 ED2	PRO 125
378 21 349 R E	PRO 125
378 21 349 R ED1	PRO 125
378 21 349 R ED2	PRO 125

Index by Reference

REFERENCE	PAG
378 21 354 E	PRO 125
378 21 354 ED1	PRO 125
378 21 354 ED2	PRO 125
378 21 354 R E	PRO 125
378 21 354 R ED1	PRO 125
378 21 354 R ED2	PRO 125
378 30 149 E	PRO 126
378 30 149 ED1	PRO 126
378 30 149 ED2	PRO 126
378 30 149 R E	PRO 126
378 30 149 R ED1	PRO 126
378 30 149 R ED2	PRO 126
378 30 154 E	PRO 126
378 30 154 ED1	PRO 126
378 30 154 ED2	PRO 126
378 30 154 R E	PRO 126
378 30 154 R ED1	PRO 126
378 30 154 R ED2	PRO 126
378 30 249 E	PRO 126
378 30 249 ED1	PRO 126
378 30 249 ED2	PRO 126
378 30 249 R E	PRO 126
378 30 249 R ED1	PRO 126
378 30 249 R ED2	PRO 126
378 30 254 E	PRO 126
378 30 254 ED1	PRO 126
378 30 254 ED2	PRO 126
378 30 254 R E	PRO 126
378 30 254 R ED1	PRO 126
378 30 254 R ED2	PRO 126
378 30 349 E	PRO 126
378 30 349 ED1	PRO 126
378 30 349 ED2	PRO 126
378 30 349 R E	PRO 126
378 30 349 R ED1	PRO 126
378 30 349 R ED2	PRO 126
378 30 354 E	PRO 126
378 30 354 ED1	PRO 126
378 30 354 ED2	PRO 126
378 30 354 R E	PRO 126
378 30 354 R ED1	PRO 126
378 30 354 R ED2	PRO 126
378 31 149 E	PRO 126
378 31 149 ED1	PRO 126
378 31 149 ED2	PRO 126
378 31 149 R E	PRO 126
378 31 149 R ED1	PRO 126
378 31 149 R ED2	PRO 126
378 31 154 E	PRO 126
378 31 154 ED1	PRO 126
378 31 154 ED2	PRO 126
378 31 154 R E	PRO 126
378 31 154 R ED1	PRO 126
378 31 154 R ED2	PRO 126
378 31 249 E	PRO 126
378 31 249 ED1	PRO 126
378 31 249 ED2	PRO 126
378 31 249 R E	PRO 126
378 31 249 R ED1	PRO 126
378 31 249 R ED2	PRO 126
378 31 254 E	PRO 126
378 31 254 ED1	PRO 126
378 31 254 ED2	PRO 126
378 31 254 R E	PRO 126
378 31 254 R ED1	PRO 126
378 31 254 R ED2	PRO 126
378 31 349 E	PRO 126
378 31 349 ED1	PRO 126
378 31 349 ED2	PRO 126
378 31 349 R E	PRO 126
378 31 349 R ED1	PRO 126
378 31 349 R ED2	PRO 126
378 31 354 E	PRO 126
378 31 354 ED1	PRO 126
378 31 354 ED2	PRO 126
378 31 354 R E	PRO 126
378 31 354 R ED1	PRO 126
378 31 354 R ED2	PRO 126
378 40 224 E	PRO 127
378 40 224 ED1	PRO 127
378 40 224 ED2	PRO 127
378 40 224 R E	PRO 127
378 40 224 R ED1	PRO 127
378 40 224 R ED2	PRO 127
378 40 239 E	PRO 127
378 40 239 ED1	PRO 127
378 40 239 ED2	PRO 127
378 40 239 R E	PRO 127
378 40 239 R ED1	PRO 127
378 40 239 R ED2	PRO 127
378 41 224 E	PRO 127
378 41 224 ED1	PRO 127
378 41 224 ED2	PRO 127
378 41 224 R E	PRO 127
378 41 224 R ED1	PRO 127
378 41 224 R ED2	PRO 127
378 41 239 E	PRO 127
378 41 239 ED1	PRO 127
378 41 239 ED2	PRO 127
378 41 239 R E	PRO 127
378 41 239 R ED1	PRO 127
378 41 239 R ED2	PRO 127
378 52 124	PRO 119
378 52 139	PRO 119
378 52 154	PRO 119
378 61 01	PRO 117
378 61 154 EB	PRO 119
378 61 154 ED1B	PRO 119
378 61 154 ED2B	PRO 119
378 61 8122	PRO 117
378 61 8123	PRO 117
378 61 8132	PRO 117
378 61 8133	PRO 117
378 61 8222	PRO 117
378 61 8223	PRO 117
378 61 8232	PRO 117
378 61 8233	PRO 117
378 61 89122	PRO 117
378 61 89123	PRO 117
378 61 89132	PRO 117
378 61 89133	PRO 117
378 61 89222	PRO 117
378 61 89223	PRO 117
378 61 89232	PRO 117
378 61 89233	PRO 117
378 610 22 ED1	PRO 118
378 610 42 ED1	PRO 118
378 75 124 E	PRO 118
378 75 139 E	PRO 118
378 75 139 ED1	PRO 118
378 75 139 ED2	PRO 118
378 75 154 E	PRO 118
378 75 154 ED1	PRO 118
378 75 154 ED2	PRO 118
378 75 239 E	PRO 118
378 75 239 ED1	PRO 118
378 75 239 ED2	PRO 118
378 75 254 E	PRO 118
378 75 254 ED1	PRO 118
378 75 254 ED2	PRO 118
378 98 05	PRO 116/124/128
380 01 254	INT 413
380 02 254	INT 413
381 00 00	PRO 58
381 03 01	PRO 58
382 00 00	PRO 58
382 03 01	PRO 58
384 00 00	PRO 112
384 01 62 ED1	INT 411
384 03 01	PRO 112
384 620 22 ED1	PRO 113
384 620 42 ED1	PRO 113
385 00 00	PRO 112
385 01 42 ED1	INT 219
385 03 01	PRO 112
385 06 01	PRO 112
385 06 06	PRO 112
385 14 01	PRO 112
385 610 22 ED1	PRO 113
385 610 42 ED1	PRO 113
385 610 ED5	TEC 30
JAC 04 01	INT 327
JAC 04 15	INT 327
JAC 04 30	INT 327
JAC 20 01	INT 327
JAC 20 15	INT 327
JAC 20 30	INT 327
JAC 61 00	INT 323
JAC 62 00	INT 323
JAC 62 28122	INT 322
JAC 62 28123	INT 322
JAC 62 29122	INT 322
JAC 62 29123	INT 322
JAC 63 00	INT 323
JAC 67 00	INT 329
JAC 68 00	INT 329
JAC 69 00	INT 329
JAC 73 00	INT 339
JAC 73 01	INT 339
JAC 74 00	INT 333
JAC 81 00	INT 313
JAC 82 00	INT 313
JAC 83 00	INT 313
JAC 85 00	INT 311
JAC 86 00	INT 311
JAC 87 00	INT 321
JAC 88 00	INT 321
JAC 89 00	INT 303
M10 04 01	INT 327
M10 04 15	INT 327
M10 04 30	INT 327
M10 20 01	INT 327
M10 20 15	INT 327
M10 20 30	INT 327
M10 89 28122	INT 302





DELTALIGHT®

pure lighting **pleasure**.



-

The lighting industry is evolving and growing at very high speed.
As a family run business we have a personal stake in keeping our clients happy. As such we are committed to making a difference through original designs, outstanding service levels, eye for detail and personal contact, striving to be the best in all we do.

Our product development process is based on a combination of creativity and technological innovation. It's our mission to present the world a portfolio of lighting designs that satisfy people's desires and needs, creating a perfect symbiosis between architecture, function and atmosphere.

Delta Light®'s success is built on the determination, passion and talent of our global team.
We hereby thank all our colleagues and partners for their invaluable work.

-



photo by Stephan Vanfleteren

a family business.



Innovative use of combined heat and power technology when printing this product reduced CO_2 emissions by up to 52% in comparison to conventional methods in Germany.

minus 52% CO_2

PEFC™
PEFC/04-31-1033



Manufacturer Delta Light® nv

Product Design - Research - Development: Delta Light® Team & Nice 2C
Coordination - Concept: Delta Light® Team & Nice 2C
Graphic Design - Realisation: Delta Light® Team & Nice 2C

Finally, to everyone who contributed in some way
to the realisation of The Lighting Bible® 10... **Thanks.**
www.deltalight.com/credits

Copyright © Delta Light® nv
First Edition 04-2013
Second Edition 04-2014

DOC GE / 245

Made in Belgium

For further technical info or errata, please visit **www.deltalight.com**

All information in this catalog is without engagement, replaces all preceding information and can always be modified.
All Delta Light® products are supplied without lamps.
Lamp data are given as example.
Delta Light® n.v. has the right to change at any time the technical aspects of its products without foregoing communication.
The Delta Light® n.v. terms and conditions are always applicable.
No part of this catalog may be copied without written authorisation of Delta Light® n.v.

DELTALIGHT®

worldwide.

SERVICING CUSTOMERS WORLDWIDE

CONTACT DETAILS
www.deltalight.com/contacts

Headquarters
Delta Light® nv
Muizelstraat 2
B-8560 Wevelgem (Moorsele)
Belgium
Phone: +32 (0)56 435 735
Fax: +32 (0)56 435 736
E-mail: info@deltalight.com
www.deltalight.com



ANTIGUA AND BARBUDA
ARGENTINA
ARMENIA
ARUBA
AUSTRALIA
AZERBAIJAN
BAHRAIN
BELARUS
BELGIE
BOSNIA AND HERZEGOVINA
BRAZIL
BULGARIA
CAMBODIA
CANADA
CHILE
COLOMBIA
CONGO
COSTA RICA
CÔTE D'IVOIRE
CROATIA
CYPRUS
CZECH REPUBLIC
DENMARK
DEUTSCHLAND
DOMINICAN REPUBLIC
EGYPT
EL SALVADOR
ESTONIA
ETHIOPIA
FINLAND
FRANCE
GEORGIA
GHANA
GREECE
GUADELOUPE
GUATEMALA
HONG KONG
HUNGARY
ICELAND
INDIA
INGUSHETIA
IRAN
ISRAEL
ITALIA
JAPAN
JORDAN
KAZAKSTAN
KENYA
KOSOVO
KUWAIT
KYRGYSTAN
LATVIA
LEBANON
LITHUANIA
LUXEMBOURG
MACEDONIE
MALAYSIA
MALDIVES
MALTA
MAURITIUS
MEXICO
MOLDOVA
MONTENEGRO
MOROCCO
NETHERLANDS
NETHERLANDS ANTILLES
NEW CALEDONIA
NEW ZEALAND
NIGERIA
NORWAY
OMAN
PAKISTAN
PALESTINA
PANAMA
PERU
PHILIPPINES
POLAND
PORTUGAL
PUERTO RICO
QATAR
ROMANIA
RUSSIA
SAINT VINCENT AND
THE GRENADINES
SAUDI ARABIA
SERBIA
SINGAPORE
SLOVAKIA
SLOVENIA
SOUTH AFRICA
SOUTH KOREA
SPAIN
SRI LANKA
SURINAME
SWEDEN
SWITZERLAND
SYRIA
TAIWAN
TAJIKISTAN
TANZANIA
THAILAND
TUNISIA
TURKEY
UKRAINE
UNITED ARAB EMIRATES
UNITED KINGDOM
UNITED STATES
URUGUAY
VENEZUELA
VIETNAM
YEMEN

offices

Asia
Delta Light Asia Ltd.
Mobile: +852 5501 7809
E-mail: asia@deltalight.com
www.deltalight.com

Belgium / Luxembourg
Delta Light® nv
Phone: +32 (0)56 435 735
Fax: +32 (0)56 435 736
E-mail: info@deltalight.be
www.deltalight.be

Canada
Delta Light Canada Inc.
Phone: +1 905 813 6130
Fax: +1 905 813 7073
E-mail: canada@deltalight.com
www.deltalight.ca

Czech Republic
Delta Light Czech s.r.o.
Phone: +420 241 740 775
+420 241 740 776
Fax: +420 241 740 687
E-mail: info@deltalight.cz
www.deltalight.cz

Denmark
Delta Light Denmark Aps
Phone: +45 3311 4429
E-mail: info@deltalight.dk
www.deltalight.dk

France
Delta Light France SA
Phone: +33 (0)4 72 90 45 45
Fax: +33 (0)4 72 90 45 44
E-mail: dlinfo@deltalight.fr
www.deltalight.fr

Germany / Austria
DELTA LINE + LIGHT GmbH
Phone: +49 (0)2451 4090-0
Fax: +49 (0)2451 4090-200
E-mail: info@deltalight.de
www.deltalight.de

Italy
Delta Light Italia S.r.l.
Phone: +39 0 571 82226
+39 0 571 93541
Fax: +39 0 571 83594
E-mail: info@deltalight.it
www.deltalight.it

Latin America
Delta Light Latin America
Phone: +57 1 749 5307
Mobile: + 57 321 202 5501
Mobile: + 57 314 449 4015
E-mail: info@deltalight-latin.com
www.deltalight-latin.com

Middle East & North Africa
Delta Light Mena
Phone: +961 1 491 175
Fax: +961 1 491 173
E-mail: sales@deltalight-mena.com
www.deltalight-mena.com

Poland
Delta Light Poland
Phone: +48 698 33 00 03
E-mail: poland@deltalight.com
www.deltalight.pl

Slovakia
Delta Light Slovakia s.r.o.
Phone: +421 2 6353 0180
Fax: +421 2 6353 0181
E-mail: info@deltalight.sk
www.deltalight.sk

Russia, Eastern Europe, Middle Asia
Delta Light REEMA
reema@deltalight.com
Moscow:
Phone: +7 926 03 888 93
Saint-Petersburg:
Phone: +7 921 79 183 88
www.deltalight.ru

Spain
Iluminación Delta Light España S.A.
Phone: +34 (0)93 586 19 00
Fax: +34 (0)93 697 95 00
E-mail: marketing@deltalight.es
www.deltalight.es

Switzerland
Delta Light AG
Phone: +41 (0)61 485 99 10
Fax: +41 (0)61 485 99 11
E-mail: info@deltalight.ch
www.deltalight.ch

The Netherlands
Delta Light Nederland B.V.
Phone: +31 (0)88 80 40 600
Fax: +31 (0)88 80 40 699
E-mail: info@deltalight.nl
www.deltalight.nl

United Kingdom
Delta Light UK LTD
Phone: +44 (0)870 757 7087
Fax: +44 (0)207 620 0985
E-mail: info@deltalight.co.uk
www.deltalight.co.uk

USA
Delta Light USA, LLC.
Phone: +1 (954) 677 9800
Fax: +1 (954) 677 1007
E-mail: info@deltalight.us
www.deltalight.us

DELTALIGHT®

deltalight.com