



BEL LIGHTING
COLLECTION 2015

Catalogue edition 10/2014

The data in this catalogue are provided in good faith and only for your information. This data may not be used against BEL LIGHTING & SENICO, who reserves the right to alter all product data any time, without any notice. The general BEL LIGHTING & SENICO conditions of sale are always applicable. Nothing in this catalogue may be reproduced without permission in writing from the BEL LIGHTING company.



Bel Lighting offers you the possibility to extend the initial legal guarantee of 2 years from most of our lights in adding 3 more years. You should get, in total, 5 years guarantee !

To have access to the service, fill in the document online or send us back the card that you will find included in the product's packing in the 3 months after your purchase.


More informations on www.bel-lighting.com/en/extended-warranty/email.html




We provide you a photometric database of our products for use in RELUX. With this, you can simulate the rendering of our lights in your projects before they are ordered, thus ensuring you made the right choice.

More informations on www.relux.biz

INTERIOR LIGHTING

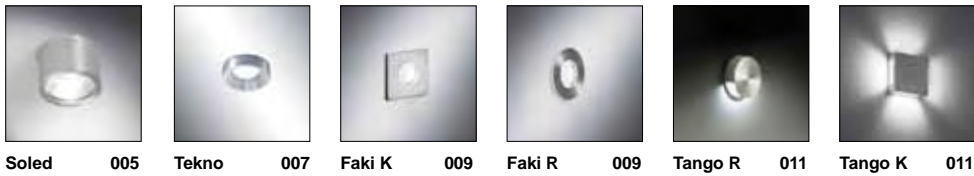

EXTERIOR LIGHTING

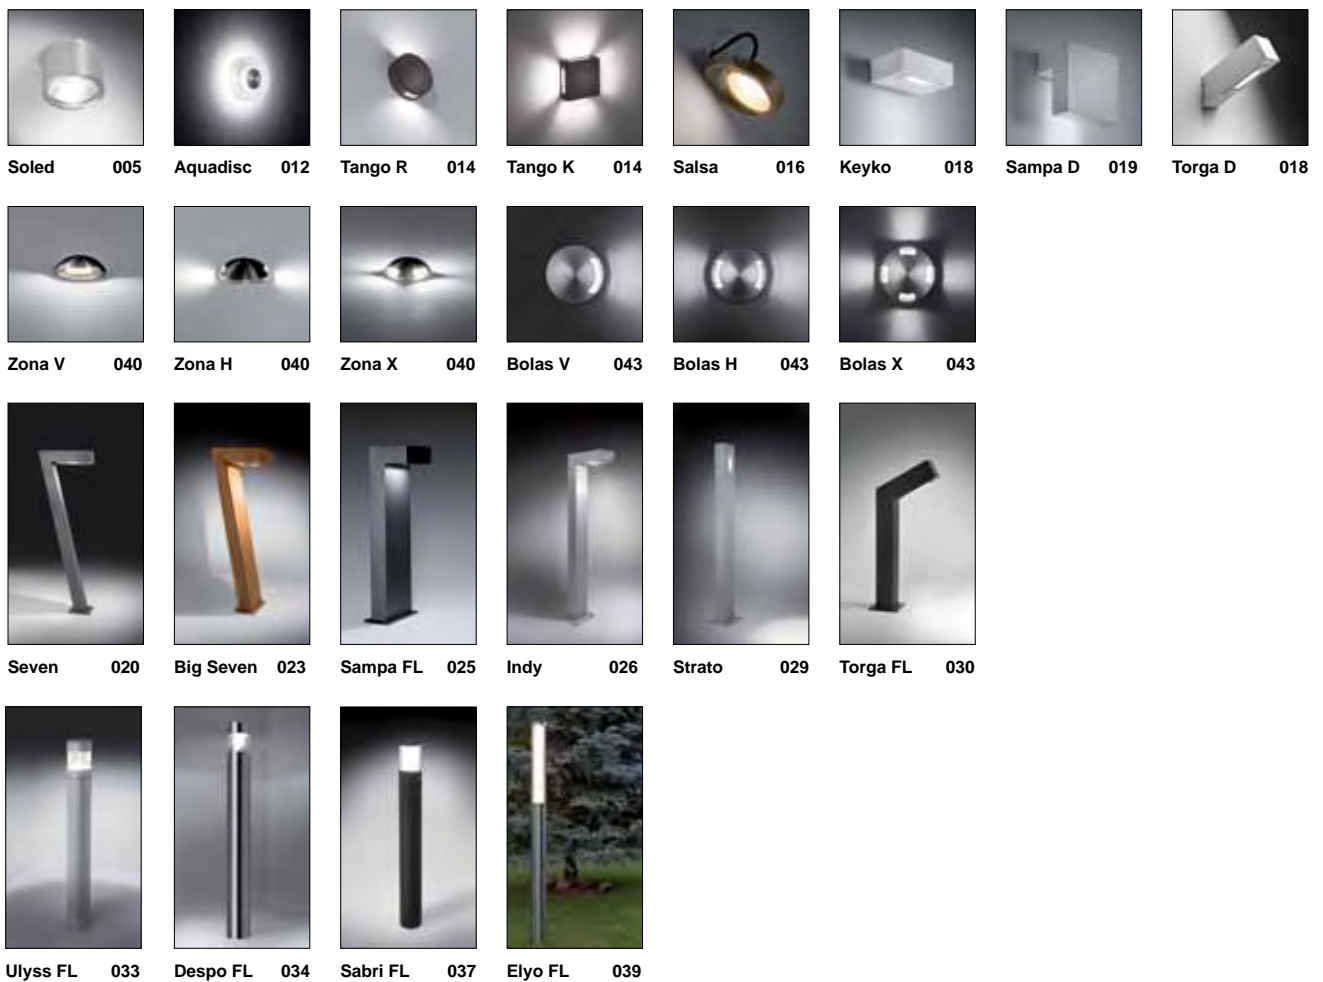

ACCESSORIES



efficacy
72lm/W
-2

Typical luminous flux (lm)		
	6W	13W
2700 K		800
3000 K	430	800
4000 K		800



Soled




DESCRIPTION

Body made in profile aluminum
 Degree of protection IP65
 Safety clear glass
 Led 230V incorporated

ON REQUEST

Other RAL colors
 Other materials (stainless steel, ...)
 Sandblasted glass
 Only for led 13W : 2700K
 Other dimensions (customized)





code: 8090. XX X . XX



LED

- W2** 6W - Warm white 3000K
- N3** 13W - Neutral white 4000K
- W3** 13W - Warm white 3000K

°ANGLE

- 1** Reflector 16° 
- 2** Reflector 40° 

COLOR

- 01** White
- 02** Black
- 32** Anodised aluminum




efficacy
120lm/W
D30

Typical luminous flux (lm)		
	1,2W	3,2W
2700 K	90	305
3000 K		325
4000 K		340
5000 K		385
5600 K	125	

code: 8083R. XXX . XX
 led color

LED

- D10** 1,2W - Daylight 5600K°
- W10** 1,2W - Warm white 2700K°
- D30** 3,2W - Daylight white 5000K°
- W30** 3,2W - Warm white 2700K°



COLOR

- 00** Natural brushed aluminum
- 01** White
- 39** Grey
- 48** Dark Grey (RAL 7016 structured)



DESCRIPTION

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP40
Safety sandblasted plexiglass
Led 1,2W or 3,2W 350mA incorporated

ACCESSORIES

Recessed box - Pop 9
Led driver 350mA CC

ON REQUEST

Other RAL colors
Other materials (brass / copper / stainless steel)
Only for led 3,2W : 3000K / 4000K
Other dimensions (customized)



IP40

350mA

IK09



Tekno



DESCRIPTION

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP40
Safety sandblasted plexiglass
Led 1,2W 350mA incorporated

ACCESSORIES

Recessed box - Pop 9
Led driver 350mA CC

ON REQUEST

Other RAL colors
Other materials (brass / copper / ...)
Safety clear plexiglass
Led 3,2W - 350mA : 3000K / 4000K
Other dimensions (customized)

ALSO FOR CEILING



IP40

350mA

IK09





8082R.W10.00

Faki R



8082K.W10.00

Faki K

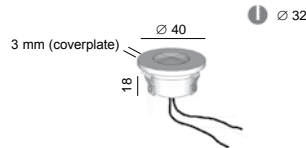

efficacy
104lm/W
D10

	Typical luminous flux (lm)	
	1,2W	3,2W
2700 K	90	305
3000 K		325
4000 K		340
5000 K		385
5600 K	125	

code: 8082R. XXX . XX
 led color



code: 8082K. XXX . XX
 led color



LED


- D10** 1,2W - Daylight 5600K
- W10** 1,2W - Warm white 2700K
- D30** 3,2W - Daylight 5000K
- W30** 3,2W - Warm white 2700K

COLOR

- 00** Natural brushed aluminum
- 01** White
- 22** Brown
- 39** Grey
- 48** Dark Grey (RAL 7016 structured)



8086V.W30.00

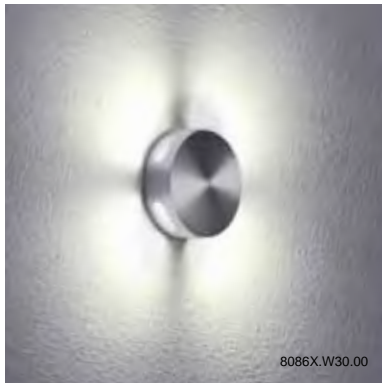

8086X.W30.00

Tango R



IP40

350mA

IK10




code: 8086V. XXX . XX



code: 8086H. XXX . XX



code: 8086X. XXX . XX
led color



efficacy
120lm/W
D30

Typical luminous flux (lm)	
	3,2W
2700 K	305
3000 K	325
4000 K	340
5000 K	385

LED

- D30** 3,2W - Daylight 5000K
- W30** 3,2W - Warm white 2700K

COLOR

- 00** Natural brushed aluminum
- 01** White
- 22** Brown
- 39** Grey
- 48** Dark Grey (RAL 7016 structured)



DESCRIPTION


Body made in profile aluminum
 Screws in stainless steel
 Degree of protection IP40
 Safety clear plexiglass
 Led 3,2W - 350mA incorporated








ACCESSORIES


Recessed box - Pop 9
 Led driver 350mA CC

ON REQUEST

Other RAL colors
 Other materials (brass / ...)
 Other led colors : 3000K / 4000K
 Other dimensions (customized)



-  LED
-  IP40
-  350mA
-  IK10
-  0,20
-  CE
-  5

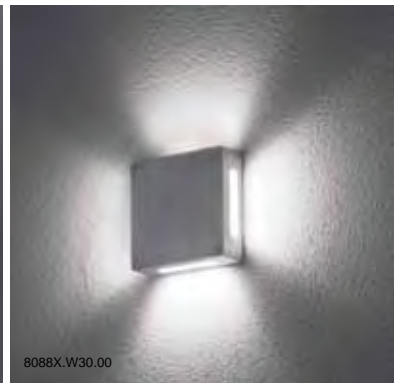


Tango K



code: 8089.D30. **XX**
color

efficacy
120lm/W

COLOR

- WP White plexiglass
- RP Red plexiglass



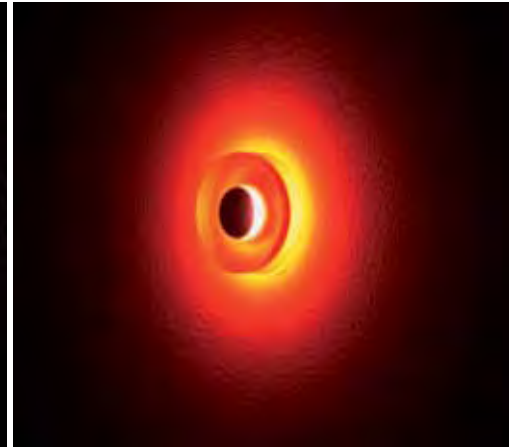

Aquadisc



DESCRIPTION


Body made in profile aluminum
 Screws in stainless steel
 Degree of protection IP67
 Safety plexiglass
 Led 3,2W - 350mA - 385lm incorporated

ACCESSORIES

Recessed box - Pop 9
 Led driver 350mA CC


ON REQUEST

Other colors
 Led 1,2W - 350mA - 125lm
 Other dimensions (customized)

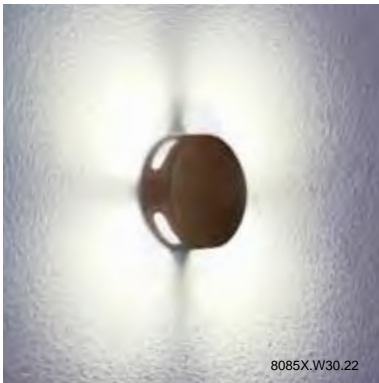

-
-
- IP67
- 350mA
- IK10
-
-
-

- code: 8085V. XXX . XX**
- code: 8085H. XXX . XX**
- code: 8085X. XXX . XX**
led color




Tango R



-
-
- IP67
- 350mA
- IK10
-
-
-

- code: 8087V. XXX . XX**
- code: 8087H. XXX . XX**
- code: 8087X. XXX . XX**
led color



Tango K

efficacy
120lm/W
D30

Typical luminous flux (lm)	
3,2W	
2700 K	305
3000 K	325
4000 K	340
5000 K	385

LED	
D30	3,2W - Daylight 5000K
W30	3,2W - Warm white 2700K

COLOR	
01	White
22	Brown
39	Grey
48	Dark Grey (RAL 7016 structured)



DESCRIPTION

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP67
Safety plexiglass
Led 3,2W - 350mA incorporated

ACCESSORIES

Recessed box - Pop 9
Led driver 350mA CC

ON REQUEST


Other RAL colors
Other materials (brass / ...)
Other led colors : 3000K / 4000K
Other dimensions (customized)



Salsa

DESCRIPTION

Body made in brass
Screws in stainless steel
Degree of protection IP65
Safety sandblasted glass
Led 230V incorporated
Provided with 1m cable



ACCESSORIES

Spike for ground fixing - Ecopic

ON REQUEST

RAL colors
Other materials (aluminum / copper / ...)
Led 13W : 2700K / 3000K / 4000K

efficacy
72lm/W
W2

	Typical luminous flux (lm)	
	6W	13W
2700 K		800
3000 K	430	800
4000 K		800

code: **8091. W2 . 07**
led color

LED

W2 6W - Warm white 3000K


COLOR

07 Natural brushed brass





Keyko



DESCRIPTION

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65
Safety clear plexiglass
Led driver 230V & led incorporated

ON REQUEST

Available for G9 bulb (QT14 max. 25W)
Other RAL colors
Other led colors : 3000K / 4000K
Led 9,5W : 2700K / 3000K /
4000K / 5000K
Other dimensions (customized)


code: 8056.1 XXX . XX
 led color

LED

D37 6,5W - Daylight 5000K
W37 6,5W - Warm white 2700K

efficacy 11.4lm/W D37

	Typical luminous flux (lm)	
	6,5W	9,5W
2700 K	615	845
3000 K	635	870
4000 K	670	920
5000 K	740	1015




COLOR

01 White
02 Black
39 Grey



Torga D



DESCRIPTION

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65
Safety clear plexiglass
Led driver 230V & led incorporated

ON REQUEST

Available for G9 bulb (QT14 max. 25W)
Other RAL colors
Other led colors : 3000K / 4000K
Led 9,5W : 2700K / 3000K /
4000K / 5000K
Other dimensions (customized)


code: 8008.1 XXX . XX
 led color

LED

D37 6,5W - Daylight 5000K
W37 6,5W - Warm white 2700K

efficacy 11.4lm/W D37

	Typical luminous flux (lm)	
	6,5W	9,5W
2700 K	615	845
3000 K	635	870
4000 K	670	920
5000 K	740	1015



COLOR

02 Black
39 Grey

DESCRIPTION

Body made in profile aluminum
 Screws in stainless steel
 Degree of protection IP65
 Safety clear plexiglass
 Led driver 230V & led incorporated

ON REQUEST

Available for G9 bulb (QT14 max. 25W)
 Other RAL colors
 Other led colors : 3000K / 4000K
 Led 9,5W : 2700K / 3000K /
 4000K / 5000K
 Other dimensions (customized)

efficacy
 114lm/W
 D37

	Typical luminous flux (lm)	
	6,5W	9,5W
2700 K	615	845
3000 K	635	870
4000 K	670	920
5000 K	740	1015



IK09


IP65

230V



Sampa D

code: 8036.1 XXX . XX
 led color



LED

D37 6,5W - Daylight 5000K
W37 6,5W - Warm white 2700K

COLOR

02 Black
39 Grey



Seven

**do not use version rusty iron on tiling, paving, wood, ...*



IP65

230V

IK09




code: 8065. XX . XX
led color

LED

- D1 9,5W - Daylight 5000K
- W1 9,5W - Warm white 2700K

205

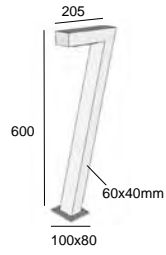

Weight (kg)	
600mm	
02,39,48	1,90
40	2,35

COLOR

- 02 Black
- 39 Grey
- 40 Rusty Iron
- 48 Dark Grey (RAL 7016 structured)



DESCRIPTION

Body made in profile aluminum or iron
 Screws in stainless steel
 Degree of protection IP65
 Safety clear plexiglass
 Led driver 230V & led incorporated

ACCESSORIES

IP68 connection - Connex 2 / Connex 3
 Spike for ground fixing - Pic 2

ON REQUEST

Available for G9 bulb (QT14 max. 25W)
 Other RAL colors
 Other led colors : 3000K / 4000K
 Led 6,5W : 2700K / 3000K /
 4000K / 5000K
 Other dimensions (customized)

efficacy
 107lm/W
 D1

	Typical luminous flux (lm)	
	6,5W	9,5W
2700 K	615	845
3000 K	635	870
4000 K	670	920
5000 K	740	1015





DESCRIPTION

Body made in profile aluminum or iron
 Screws in stainless steel
 Degree of protection IP65
 Safety clear plexiglass
 Led driver 230V & led incorporated

ACCESSORIES

IP68 connection - Connex 2 / Connex 3
 Spike for ground fixing - Pic 2



ON REQUEST


Available for G9 bulb (QT14 max. 25W)
 Other RAL colors
 Other led colors : 3000K / 4000K
 Other dimensions (customized)

efficacy
107lm/W
D-

	Typical luminous flux (lm)	
	9,5W	19W
2700 K	845	1690
3000 K	870	1740
4000 K	920	1840
5000 K	1015	2030



Weight (kg)	
	600mm
02,39,48	 2,90
40	 6,85

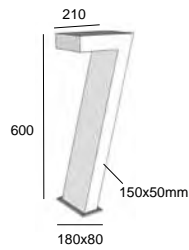

code: 8064. XX . XX
 led color

LED

- D1 9,5W - Daylight 5000K
- W1 9,5W - Warm white 2700K
- D2 19W - Daylight 5000K
- W2 19W - Warm white 2700K

COLOR

- 02 Black
- 39 Grey
- 40 Rusty Iron
- 48 Dark Grey (RAL 7016 structured)




- 
-  IP65
- 230V
- IK09
- 
- 

Big Seven

*do not use version rusty iron on tiling, paving, wood, ...



code: 8037. X XXX . XX



HEIGHT

- 1 150mm
- 2 500mm

LED

- D37** 6,5W - Daylight 5000K
- W37** 6,5W - Warm white 2700K

COLOR

- 02** Black
- 39** Grey
- 40** Rusty Iron
- 48** Dark Grey (RAL 7016 structured)

DESCRIPTION


Body made in profile aluminum or iron
 Screws in stainless steel
 Degree of protection IP65
 Safety clear plexiglass
 Led driver 230V & led incorporated

ACCESSORIES

IP68 connection - Connex 2 / Connex 3
 Spike for ground fixing - Pic 2





ON REQUEST

Available for G9 bulb (QT14 max. 25W)
 Other RAL colors
 Other led colors : 3000K / 4000K
 Led 9,5W : 2700K / 3000K /
 4000K / 5000K
 Other dimensions (customized)



efficacy
114lm/W
D37

Typical luminous flux (lm)	Typical luminous flux (lm)	
	6,5W	9,5W
2700 K	615	845
3000 K	635	870
4000 K	670	920
5000 K	740	1015

Weight (kg)	Weight (kg)	
	150mm	500mm
02,39,48		
40		



IP65

230V

IK09



Sampa FL

*do not use version rusty iron on tiling, paving, wood, ...


code: **8066. XX . XX**
led color



LED

- D1** 9,5W - Daylight 5000K
- W1** 9,5W - Warm white 2700K

COLOR

- 02** Black
- 39** Grey
- 40** Rusty Iron
- 48** Dark Grey (RAL 7016 structured)



Weight (kg)	
600mm	
02,39,48	 2,10
40	 5,30

	Typical luminous flux (lm)	
	6,5W	9,5W
2700 K	615	845
3000 K	635	870
4000 K	670	920
5000 K	740	1015

efficacy
107lm/W
D1



DESCRIPTION

Body made in profile aluminum or iron
Screws in stainless steel
Degree of protection IP65
Safety clear plexiglass
Led driver 230V & led incorporated

ACCESSORIES

IP68 connection - Connex 2 / Connex 3
Spike for ground fixing - Pic 2

ON REQUEST

Available for G9 bulb (QT14 max. 25W)
Other RAL colors
Other led colors : 3000K / 4000K
Led 6,5W : 2700K / 3000K /
4000K / 5000K
Other dimensions (customized)



IP65

230V

IK09



Indy

**do not use version rusty iron on tiling, paving, wood, ...*



IP65

230V

IK09



Strato

DESCRIPTION

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65
Safety clear plexiglass
Led driver 230V & led incorporated

ACCESSORIES

IP68 connection - Connex 2 / Connex 3
Spike for ground fixing - Pic 2


ON REQUEST

Other RAL colors
Other led colors : 3000K / 4000K
Other dimensions (customized)

code: 8067. X XX . XX
 height led color

HEIGHT

- 1 200mm
- 2 600mm

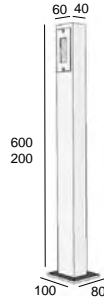

Weight (kg)	
200mm	600mm
0,75	1,65

Typical luminous flux (lm)	
6,5W	
2700 K	615
3000 K	635
4000 K	670
5000 K	740

efficacy
114lm/W
D1

LED

- D1 6,5W - Daylight 5000K
- W1 6,5W - Warm white 2700K

COLOR

- 02 Black
- 22 Brown
- 39 Grey
- 48 Dark Grey (RAL 7016 structured)





Torga FL

DESCRIPTION

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65
Safety clear plexiglass
Led driver 230V & led incorporated

ACCESSORIES

IP68 connection - Connex 2 / Connex 3
Spike for ground fixing - Pic 1

ON REQUEST


Available for G9 bulb (QT14 max. 25W)
Other RAL colors
Other led colors : 3000K / 4000K
Led 9,5W : 2700K / 3000K /
4000K / 5000K
Other dimensions (customized)



IP65

230V

IK09



code: 8009.1 XXX . XX
 led color

LED

D37 6,5W - Daylight 5000K
W37 6,5W - Warm white 2700K

COLOR

02 Black
39 Grey

efficacy
114lm/W
D37

	Typical luminous flux (lm)	
	6,5W	9,5W
2700 K	615	845
3000 K	635	870
4000 K	670	920
5000 K	740	1015





Ulyss FL

DESCRIPTION


Body made in profile aluminum or stainless steel
 Screws in stainless steel
 Degree of protection IP65
 Safety clear polycarbonate
 Led driver 230V & led incorporated

ACCESSORIES


Spike for ground fixing - Pic 1
 Base plate Ø 200mm in stainless steel - Stic

ON REQUEST

Other RAL colors
 Other led colors : 3000K
 Led 9,5W : 2700K / 3000K / 4000K / 5000K
 Other dimensions (customized)

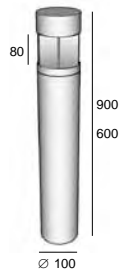

Weight (kg)		
	600mm	900mm
02,39	3,15	4,95
04	4,75	7,15

- 
-  0,5
- IP65
- 230V
- IK09
- 
- 

	Typical luminous flux (lm)	
	9,5W	16,5W
2700 K	940	1640
3000 K	975	1700
4000 K	1030	1790
5000 K	1135	1970

efficacy
 119lm/W
 D4



code: 969 **XX** . **XX** . **XX**
 | | |
 led height color

LED	
D4	16,5W - Daylight 5000K
N4	16,5W - Neutral white 4000K
W4	16,5W - Warm white 2700K

HEIGHT	
60	600mm
90	900mm

COLOR	
02	Black
04	Brushed stainless steel
39	Grey



DESCRIPTION

Body made in profile aluminum or stainless steel
 Screws in stainless steel
 Degree of protection IP65
 Safety clear polycarbonate
 Led driver 230V & led incorporated

ACCESSORIES

Spike for ground fixing - Pic 1
 Base plate Ø 200mm in stainless steel - Stic

ON REQUEST


Available for metal halide bulb (HCI-TC 20W/35W)
 Other RAL colors
 Other led colors : 3000K
 Led 9,5W : 2700K / 3000K / 4000K / 5000K
 Other dimensions (customized)



IP65

230V

IK09

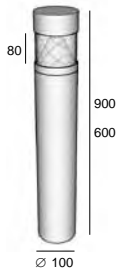

	Weight (kg)	
	600mm	900mm
02,39	3,15	4,95
04	4,75	7,15

code: 994 **XX** . **XX** . **XX**
 led height color

LED

- D4** 16,5W - Daylight 5000K
- N4** 16,5W - Neutral white 4000K
- W4** 16,5W - Warm white 2700K

HEIGHT

- 60** 600mm
- 90** 900mm

COLOR

- 02** Black
- 04** Brushed stainless steel
- 39** Grey



efficacy
119lm/W
D4

	Typical luminous flux (lm)	
	9,5W	16,5W
2700 K	940	1640
3000 K	975	1700
4000 K	1030	1790
5000 K	1135	1970



	Typical luminous flux (lm)	
	22W	26W
2700 K	1440	1800
3000 K		1800
4000 K	1440	1800

efficacy
69lm/W
G24q-3



Sabri FL

DESCRIPTION


Body made in profile aluminum or stainless steel
 Reflector made in aluminum
 Screws in stainless steel
 Degree of protection IP65
 Safety clear polycarbonate
 Bulb not included
 Electronic ballast 230V included (only for G24q-3)

ACCESSORIES

Spike for ground fixing - Pic 1
 Base plate Ø 200mm in stainless steel - Stic

ON REQUEST

Other RAL colors
 Other dimensions (customized)

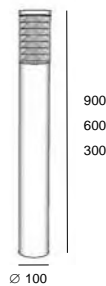



	Weight (kg)		
	300mm	600mm	900mm
02,39	1,55	3,00	4,50
04	2,65	4,45	5,75

code: 212. X X . XX
 height bulb color

HEIGHT

- 1 300mm
- 2 600mm
- 3 900mm

BULB

- 1 TC-TSE E27 - max. 22W 
- 2 FLUO G24q-3 - 26W 
Electronic ballast included

COLOR

- 02 Black
- 04 Brushed stainless steel
- 39 Grey



Elyo FL

DESCRIPTION

Body made in profile aluminum or stainless steel
 Reflector made in aluminum
 Screws in stainless steel
 Degree of protection IP65
 Safety clear polycarbonate
 Bulb not included
 Electronic ballast 230V included

ACCESSORIES

Spike for ground fixing - Pic 1 (not for 2000mm)
 Base plate Ø 200mm in stainless steel - Stic

ON REQUEST

Other RAL colors
 Other dimensions (customized)



IP65

230V

IK09



efficacy
87lm/W

	Typical luminous flux (lm)		
	40W	55W	80W
2700 K	3500	4800	
3000 K	3500	4800	6500
4000 K	3500	4800	6500

code: 217. X X . XX
 ↑
 height
 bulb
 color

HEIGHT

- 1 900mm
- 2 1500mm
- 3 2000mm


BULB



- 1 FLUO 2G11 - 40W
- 2 FLUO 2G11 - 55W
- 3 FLUO 2G11 - 80W

COLOR



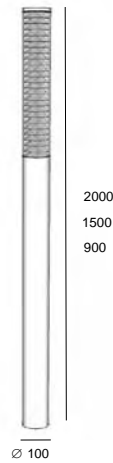


- 02 Black
- 04 Brushed stainless steel
- 39 Grey





Weight (kg)			
	900mm	1500mm	2000mm
02,39	3,40	5,50	7,30
04	4,90	9,40	13,20








Zona V


- 
- 
- IP68
- 350mA
- IK10
- 
- 
- 

 code: 8084V. XXX . 16








Zona H


- 
- 
- IP68
- 350mA
- IK10
- 
- 
- 

 code: 8084H. XXX . 16



Zona X

- 
- 
- IP68
- 350mA
- IK10
- 
- 
- 

 code: 8084X. XXX . 16
led color

LED	
D30	3,2W - Daylight 5000K
W30	3,2W - Warm white 2700K

COLOR	
16	Brushed stainless steel 316L



DESCRIPTION

Body made in stainless steel 316L
 max. 1500kg
 Degree of protection IP68
 Safety clear plexiglass
 Led 3,2W - 350mA incorporated
 Provided with 1m cable

ACCESSORIES

Recessed box - Pop 9
 Led driver 350mA CC

ON REQUEST

RAL colors
 Other materials (brass / aluminum / ...)
 Other led colors : 3000K / 4000K
 Other dimensions (customized)

efficacy
 120lm/W
 D30

Typical luminous flux (lm)	
3,2W	
2700 K	305
3000 K	325
4000 K	340
5000 K	385





-
-
- IP67
- IK10
-
-



Bolas V



Bolas H



Bolas X

efficacy
119lm/W
D-

	Typical luminous flux (lm)			
	6,0W	9,5W	16,5W	24,0W
2700 K		940	1640	2170
3000 K	430	975	1700	2260
4000 K		1030	1790	2380
5000 K		1135	1970	2620



DESCRIPTION


Body made in profile aluminum
 max. 1500kg
 Degree of protection IP67
 Safety clear glass
 Led 350/ 500 or 700mA incorporated
 (available with led 6W 230V incorporated)
 Provided with 1m cable

ACCESSORIES

Recessed box - Pop 8b
 Led driver 350/500 or 700mA CC

ON REQUEST


Other RAL colors
 Other material (brass / copper / ...)
 Degree of protection IP68

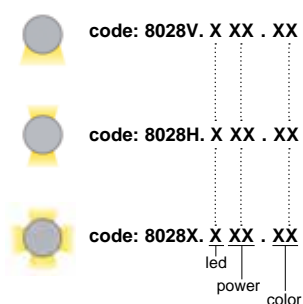

0,55 **6,0W or 9,5W** ∅ 78



0,75 **16,5W or 24,0W** ∅ 78



LED

- D Daylight 5000K
- N Neutral white 4000K
- W Warm white 2700K

POWER

- 13 9,5W - 350mA
- 23 16,5W - 500mA
- 33 24,0W - 700mA

COLOR

- 02 Black
- 32 Anodised aluminum
- 39 Grey











LED







- W Warm white 3000K

POWER











- 63 6,0W - 230V

LED Power Supply 350mA Constant Current


					
LED DRIVER	350mA 1,2W	350mA 1-3W	350mA 1-6W	350mA 1-12W	350mA 3-18W
CODE	X021	X020	X022	X014	X032
					
Dimensions: L x W x H (mm)	32 x 34 x 25	32 x 34 x 25	45 x 45 x 25	81 x 35 x 23	133 x 40 x 30
Input	100-240V 50-60Hz	220-240V 50-60Hz	120-240V 50-60Hz	120-240V 50-60Hz	220-240V 50-60Hz
Output	2-6V DC	3-10V DC	2-20V DC	2-35V DC	4-52V DC
Dim	no	no	no	no	yes (100% → 35%)*

					
LED DRIVER	350mA 25-37W	350mA 10-60W	350mA 30-90W		
CODE	X073	X074	X075		
					
Dimensions: L x W x H (mm)	128 x 60 x 32	189 x 62 x 37	236 x 68 x 39		
Input	220-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz		
Output	70-108V DC	18-186V DC	29-285V DC		
Dim	no	yes (100% → 60%)**	yes (100% → 60%)**		











LED Power Supply 500mA Constant Current

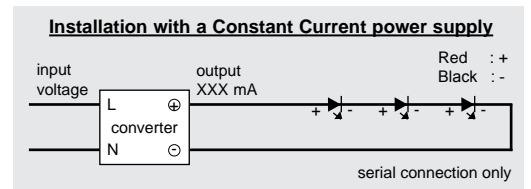					
LED DRIVER	500mA 1-12W	500mA 6-26W	500mA 35-54W	500mA 10-60W	500mA 60-135W
CODE	X030	X033	X076	X077	X078
					
Dimensions: L x W x H (mm)	81 x 35 x 23	133 x 40 x 30	128 x 60 x 32	189 x 62 x 37	245 x 68 x 39
Input	120-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz
Output	2-26V DC	12-52V DC	70-108V DC	13-130V DC	30-300V DC
Dim	no	yes (100% → 25%)*	no	yes (100% → 60%)**	yes (100% → 60%)**







- * Dimmable with Trailing Edge dimmers
- ** Dimmable with 1 -10VDC , PWM signal or resistance
- *** Dimmable with PWM signal













LED Power Supply 700mA Constant Current

					
LED DRIVER	700mA 1-12W	700mA 10-36W	700mA 35-60W	700mA 30-90W	700mA 60-135W
CODE	X031	X034	X086	X087	X088
	 CE $\frac{0,17}{0,17}$ IP67	 CE $\frac{0,28}{0,28}$ IP67	 CE $\frac{0,24}{0,24}$ IP30	 CE $\frac{1,18}{1,18}$ IP67	 CE $\frac{1,24}{1,24}$ IP67
Dimensions: L x W x H (mm)	81 x 35 x 23	133 x 40 x 30	128 x 60 x 32	236 x 68 x 39	245 x 68 x 39
Input	120-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz
Output	2-18V DC	4-52V DC	50-86V DC	15-142V DC	21-215V DC
Dim	no	yes (100% → 25%)*	no	yes (100% → 60%)**	yes (100% → 60%)**


LED Power Supply - Other solutions on 12 / 24 / 36 / 48V DC Constant Voltage

					
LED DRIVER	350mA 1-11W Input 12V DC: 1- 4W 24V DC: 1- 8W 36V DC: 1- 11W	500mA 1-23W Input 24V DC: 1- 11W 36V DC: 1- 17W 48V DC: 1- 23W	700mA 1-31W Input 24V DC: 1- 15W 36V DC: 1- 24W 48V DC: 1- 31W		
CODE	DRI.010	DRI.011	DRI.012		
	 CE $\frac{0,01}{0,01}$ IP67	 CE $\frac{0,02}{0,02}$ IP67	 CE $\frac{0,02}{0,02}$ IP67		
Dimensions: L x W x H (mm)	23 x 10 x 9	32 x 20 x 12	32 x 20 x 12		
Input	9-36V DC	9-56V DC	9-56V DC		
Output	2-32V DC	2-52V DC	2-52V DC		
Dim	yes (100% → 25%***)	yes (100% → 25%***)	yes (100% → 25%***)		

					
LED DRIVER	24V DC 55W	24V DC 90W	36V DC 90W	48V DC 90W	48V DC 135W
CODE	DRI.24060	DRI.24100	DRI.36100	DRI.48100	DRI.48150
	 CE $\frac{0,40}{0,40}$ IP67	 CE $\frac{0,63}{0,63}$ IP67	 CE $\frac{0,63}{0,63}$ IP67	 CE $\frac{0,63}{0,63}$ IP67	 CE $\frac{0,74}{0,74}$ IP67
Dimensions: L x W x H (mm)	163 x 43 x 32	190 x 52 x 37	190 x 52 x 37	190 x 52 x 37	190 x 61 x 37
Input	90-264V 50-60Hz	180-305V 50-60Hz	180-305V 50-60Hz	180-305V 50-60Hz	180-305V 50-60Hz
Output	24V DC / 0-2,5A	24V DC / 0-4,2A	36V DC / 0-2,8A	48V DC / 0-2,1A	48V DC / 0-3,2A
Dim	no	no	no	no	no

- * Dimmable with Trailing Edge dimmers
- ** Dimmable with 1 -10VDC , PWM signal or resistance
- *** Dimmable with PWM signal

Installation with a Constant Voltage power supply

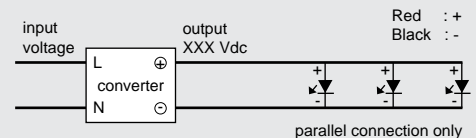



BEL LIGHTING

Zoning industriel de Saintes, Avenue Ernest Solvay 42
BE 1480 Saintes (Tubize) - Belgium

tel: + 32 (0)2 3552428 fax: + 32 (0)2 3550396

web: www.bel-lighting.com
email: info@bel-lighting.com